



**Orbitrade**



**SPARE PARTS FROM SWEDEN**







## Orbitrade har reservdelar till de populäraste motorerna

Orbitrade är specialist på **ersättningsdelar** till de vanligaste marinmotorerna och dreven. Vi har tillverkat och marknadsfört delar av absolut högsta kvalitet i mer än 40 år. Vår specialitet är bland annat servicesatser, impellrar, filter, anoder, avgaskrökar, drivremmar och bälgsatser.

Vårt marinsortiment växer kontinuerligt och i årets katalog finns flertalet nyheter presenterade. Håll även utkik på [www.frigus.se](http://www.frigus.se), gå in på Orbitrade och klicka på "nya artiklar". Där finner ni de senast inkomna artiklarna samt anskaffningsartiklar.

Våra distributörer finns nu i 34 länder runt om i hela världen och vi söker ständigt efter nya affärspartners över hela världen.

**Alla originalnummer från motortillverkare i denna katalog är endast upptagna för jämförelse och får ej användas i kontakt med konsument.**

**Vi ansvarar ej för eventuella felaktigheter i denna katalog.**

**Kopiering av hela eller delar av katalogen samt websidan är förbjuden.**

© Frigus AB



## Orbitrade spare parts for the most popular marine engines

Orbitrade is a specialist in aftermarket spare parts for marine engines and drives. We have manufactured and marketed high quality spare parts for more than 40 years. We supply complete service kits, impellers, filters, anodes, exhaust manifolds, drive belts, bellow kits plus much more.

The Orbitrade Marine assortment is growing. This year you will find several new parts and accessories for a wide range of marine engines. Please check out [www.frigus.se](http://www.frigus.se), surf to Orbitrade and click on "New parts". There you will find our latest items as well as our orderable non stock items.

Our distributors are located in more than 34 countries world wide. As the business is growing we are always looking for new business partners in selected countries. If you are interested in becoming a distributor for Orbitrade.

Marine, please contact us at **All original part numbers in this catalogue are mentioned for comparison reasons only and should not be used in contacts with end consumers.**

**We take no responsibility for any errors in this catalogue.**

**Reproduction in whole or in part from this catalogue or website is not permitted.**

© Frigus AB

# Allmänna affärsvillkor



## Alla inköp från Frigus AB ska ske i enlighet med villkoren i detta dokument.

Detta dokument innehåller de villkor under vilka Frigus AB, nedan kallad Leverantören, ska leverera specificerade varor till Kunden. Villkoren gäller för alla leveranser efter det att priset har godkänts.

### Priser och villkor

Priser och villkor kan ändras utan föregående meddelande. Beställningar accepteras baserat på aktuella priser på leveransdatumet. Obehöriga avdrag vid betalning är inte tillåtet. Alla avdrag vid betalning ska hänvisas till kreditfaktura utgiven av Leverantören.

### Restorder

Produkter som inte finns i lager skickas vanligtvis med nästa beställning om inte annat avtalats.

### Betalningsvillkor

Kunder med tillfredsställande kreditbetyg får 30 dagars kredit om inte annat har avtalats. Annars gäller förskott. Nya kunder betalar alltid i förskott under en period av 6 månader. Därefter utvärderas huruvida en 30-dagars kredit kommer att utfärdas.

### Fraktpolicy

Leverantörens leveransvillkor är EXW – Ex Works Västra Frölunda (Incoterms 2010) om inte annat avtalats. Leverantören gör alltid sitt yttersta för att skicka sändningen enligt Kundens önskemål.

### Skadat, saknat innehåll eller förlorade föremål

Kontrollera försändelsen innan du accepterar sändningen. Om skada uppstått under transporten, måste detta meddelas av mottagaren till transportören. Eventuella produkter som saknas måste meddelas Leverantören inom 10 dagar efter mottagandet av transporten (mottagningsdatumet är det som anges av transportföretagets mottagningskvitto). Leverantören tar inget ansvar för saknade produkter som har kommit till leverantörens kännedom 10 dagar efter leveransens mottagande.

### Garanti

Leverantörens garantiperiod upphör 24 månader efter att produkten köpts av slutkund. Detta måste verifieras med en faktura/kvitto. Undantag från detta måste uttryckligen godkännas/undertecknas av auktoriserad person hos Leverantören. Om inte annat anges kommer Leverantören normalt att leverera en ny enhet utan kostnad eller en kreditfaktura. Leverantören är inte ansvarig för eventuella indirekta skador eller följdförluster. Garantiärenden ska meddelas Leverantören utan otillbörligt dröjsmål (0 km och fältkrav). Underlåtenhet att göra det kommer att minska det ansvar som accepteras av Leverantören. Kunden måste redovisa alla eller en rimlig andel av det totala antalet levererade varor som sagts inte uppfylla specifikationerna för varan. Dessa ska skickas tillbaka till Leverantören. Leverantören förbehåller sig rätten att inte acceptera garantiärenden som inte kan undersökas på detta sätt.

### Reklamationsanspråk

Meddela alltid Leverantören och fyll i Reklamationsformuläret innan produkter returneras. Reklamationsformuläret finns på [www.frigus.se](http://www.frigus.se). Reklamationer som inte godkänts av Leverantören kommer att aviseras och ingen kreditfaktura kommer att utfärdas.

Ett reklamationsanspråk till Leverantören måste uppfylla följande kriterier:

- Varan har köpts från Leverantören.
- Klagomålet görs inom två år från fakturadatumet.
- Fullständigt ifyllt reklamationsformulär måste bifogas den reklamerade produkten samt fakturanumret.
- Fraketikett för retur av reklamerade produkter måste erhållas från Leverantören.
- Vid en godkänd reklamation är Leverantören ansvarig för fraktkostnader. Om inte, kommer fraktkostnaden att debiteras kunden efteråt.
- En godkänd reklamation ersätts vanligen med en ny produkt eller en kreditfaktura.
- Reklamationsanspråk som inte uppfyller alla ovanstående kriterier kan returneras till Kunden eller behållas av Leverantören mot ett returavdrag på minst 15%.

### Returer

Rapportera alltid till Leverantören innan du returnerar produkter och fyll i returformuläret, tillgängligt på [www.frigus.se](http://www.frigus.se). Retur av varor som inte godkänts av Leverantören kommer att aviseras och ingen kreditfaktura kommer att utfärdas.

En retur till Leverantören måste uppfylla följande kriterier:

- Varan har köpts från Leverantören.
- Retur sker inom 30 dagar från leverantörens leveransdatum.
- Fullständigt ifyllt returformulär måste bifogas den returnerade produkten samt fakturanumret.
- Produkten måste vara i originalskick, oanvänd och oskadad.
- Alla föremål måste vara i originalförpackning. Andra etiketter och prislappar än Leverantörens accepteras inte.
- Leverantören accepterar inte returer av utgående eller avvecklade produkter.
- Alla returavgifter betalas av avsändaren.
- Beställningar som gjorts på Kundens begäran har ingen retur rätt.
- Ett avdrag på minst 15% görs om returen inte uppfyller alla ovanstående kriterier.

### Försäkring

Leverantören ansvarar inte för produkterna efter att de lämnats över till transportören om inte annat avtalats.

### Reservation

Originalnumren angivna i katalogen är vägledande och refererar inte till originaldelar. Leverantören reserverar mot tryckfel och fel i rekommendationstabeller etc. Leverantören är inte ansvarig för förseningar (inklusive leverans och garanti) orsakad av omständigheter som överstiger Leverantörens rimliga kontroll, så kallad Force Majeure.

### Skattepliktiga skyldigheter

Varje part ansvarar för sina egna skattemässiga åtaganden.

### Överlåtelse

Parterna är överens om att inte överlåta hela eller någon del av avtalet till tredje part utan föregående skriftligt samtycke från den andra parten.

### Tillämplig lag och skiljeförfarande

Parternas rättigheter och skyldigheter enligt detta avtal regleras helt och hållet av svensk lag.

### Tillägg

Ändringar av dessa villkor gäller endast när de är skriftliga och undertecknade av båda parter.

# General Terms and Conditions of Business



## All purchases from Frigus AB shall be in accordance with the conditions issued in this document.

*This document comprises the terms and conditions under which Frigus AB, hereafter referred to as Supplier, shall deliver specified goods to Customer. The conditions are valid for all deliveries after the price offer has been accepted.*

### Prices and terms

Prices and terms are subject to change without notice. Orders are accepted based on current prices on delivery date. Unauthorized deductions upon payment will not be allowed. All deductions upon payment shall refer to the credit note issued by Supplier.

### Back orders

Items not in stock are usually shipped with the next order unless otherwise agreed.

### Payment terms

Customers with a satisfactory credit rating will receive a 30 days credit unless other has been agreed. Otherwise, pre-payment applies. New customers always pay in advance for a period of 6 months. Thereafter, it is evaluated whether a 30-day credit will be issued.

### Shipping Policy

Supplier's delivery terms are EXW - Ex Works Västra Frölunda (Incoterms 2010) unless otherwise agreed. Supplier always makes every effort to send the shipment according to the customer's request.

### Damaged, missing content or lost items

Inspect the shipment before accepting the shipment. If damage has occurred during transport, this must be notified by the recipient to the carrier.

Any missing products must be notified to Supplier within 10 days of receipt of the transport (receipt date shown by the carrier's receipt). The Supplier takes no responsibility for missing products that have come to the Supplier's notice 10 days after receipt of the delivery.

### Warranty

Supplier's warranty period ends 24 months after the product is purchased. This needs to be verified by an invoice/receipt. Exceptions from this must be explicitly agreed/signed by authorized person at Supplier. Unless otherwise stated, the Supplier will normally accept to supply a new unit free of charge. Supplier is not liable for any indirect damages or consequential losses. Warranty claims are to be presented to Supplier without undue delay (0-km and field claims). Failure to do so will reduce the responsibility accepted by Supplier.

Customer must present all or a reasonable percentage of the total amount of articles delivered said not to have met the specifications to Supplier for inspection. Supplier reserves the right not to accept claims that cannot be examined in this manner.

### Warranty claim

Always report to Supplier before returning any goods and fill in the Warranty claim form, available at [www.frigus.se](http://www.frigus.se). Claims not approved by Supplier will be rejected and a credit note will not be issued.

*A Warranty claim to Supplier must meet the following criteria:*

- The item has been purchased from Supplier.
- The complaint is made within two years from the invoice date.
- Fully filled in Warranty claim form must accompany the returned item, as well as the invoice number.
- Freight label for return of advertised goods must be obtained from Supplier.
- In case of an approved warranty claim, Supplier is responsible for shipping costs. If not, the shipping cost will be charged the customer afterwards.
- An approved warranty claim is usually replaced with a credit note.
- Claims received to Supplier that do not meet all of the above criteria may be returned to the customer, or a return deduction of at least 15%.

### Returns

Always report to Supplier before returning any goods and fill in the return goods form, available at [www.frigus.se](http://www.frigus.se)

Return of goods not approved by Supplier will be rejected and a credit note will not be issued.

*A return to Supplier must meet the following criteria:*

- The item has been purchased from Supplier.
- Return takes place within 30 days from suppliers delivery date.
- Fully filled in return goods form must accompany the returned item, as well as the invoice number.
- The product must be in original condition, unused and undamaged.
- All items must be in original packaging. Other labels and price tags than Suppliers will not be accepted.
- Supplier does not accept returns of outbound or discontinued products.
- All return shipping is paid by the sender.
- Orders made at customer's request have no right of return.
- A return deduction of at least 15% are due to returns that do not meet all of the above criteria.

### Insurance

The Supplier is not responsible for the products after being transferred to the carrier unless otherwise agreed.

### Reservation

The original numbers shown in the directory is for guidance and does not refer to original parts. Supplier reserves against print errors and errors in recommendation tables etc.

Supplier is not responsible for delays (including delivery and warranty) caused by circumstances beyond Supplier's reasonable control, known as Force Majeure.

### Fiscal obligations

Each party is responsible for its own fiscal obligations.

### Assignment

The parties agree not to assign the whole or any part of the agreement to third parties without the prior written consent of the other party.

### Applicable law and arbitration

The parties' rights and obligations according to this agreement are entirely governed by Swedish law.

### Amendments

Amendments to these conditions are only valid when made in writing and signed by both parties.





# Innehållsförteckning



## **Smörjmedel & Underhåll**

- Motorolja	26-27
- 2-taktsolja	28
- Transmissionsolja	29-30
- Kompressorolja	30
- ATF-olja	31
- Monteringspasta	31
- Propelleraxelfett	32
- Marinfett	32
- Aerosoler	33
- Glykol	34
- Rengöringsdukar	34
- Absorbentduk	35
- Avtappningskran bag-in-box	35

## **Ersättningsdelar**

### **Volvo Penta**

#### **Interna motordelar**

- Kolvar	36
- Kolringssatser	37-39
- Cylinderfodersatser	40-41
- Packningssatser cylinderfoder	41
- Ramlagersatser & ramlager	42-43
- Vevlagersatser & vevlager	44-46
- Trycklager & tryckbricksatser	47
- Stödlager vevaxel	47
- Vevstaxsbultar & muttrar	48
- Kamaxlar	48
- Kamaxelbricka	49
- Tätbricka kamaxel	49
- Ombyggnadssats vevaxeltätning	49
- Ventiler	50-51
- Ventilknaster	52
- Ventiljusteringssats	52
- Ventiltätningar	53
- Ventilstyrningar	54-55
- Ventilsäten	55
- Ventilfjädrar	56-57
- Ventilyftare	59
- Bultar topplock	58
- Flänsmutter	58
- Oljepumpar	59
- Oljeavtappningspluggar	59

#### **Externa motordelar**

- Gummikudde motorupphängning	60-62
- Pinnbultsats gummikudde	62
- Svängningsdämpare	64-65
- Reparationssats svänghjulskåpa	66-68
- Låsringar	68
- Stödlager	69
- Gummiplugg motorkåpa	69
- Packbox sköld	69
- Drivremmar	70-82
- Kamremmar	83
- Spännrullar	84

#### **Packningar & packningssatser**

- Topplockspackningar	85-89
- Ventilåpspackningar	90-93
- Justershims cylinderfot	93
- Oljetrågspackningar	94-95
- Tätningssmassa tub	95
- Vevaxeltätningar	96-97
- Packningar MS-backslag	98
- Packningssats insugningsrör	99
- Sotningssatser	101-107
- Tilläggsatser	108-112

#### **Bränslesystem**

- Bränslepumpar	113-116
- Packningssats bränslepumpar	116
- Reparationssats förgasare	117
- Förgasarmembran	117
- Spridarhylssatser	118-119
- Spridarspetsar	120-121
- Packningssatser spridare	121
- Bricksatser bränslesystem	123-126
- Luftskruvsats bränslesystem	127

#### **Filter**

- Servicesatser motor	128-131
- Oljefilter	132-138
- Bränslefilter	140-147
- CAV-filter	148-149
- Bränslefiltersats CAV	148
- Vattenavskiljande bränslefilter	148
- CAV reservdelar och tillbehör	150-151

# Innehållsförteckning



- Racor vattenavskiljande bränslefilter	152	- Monteringsatts avgaskrök	245
- Luftfilter	154-156	- Gavellock	245
- Vevhusfilter	157-158	- Packningar avgaskrök	246-248
<b>Kyl- och avgassystem</b>	<b>159-256</b>	- Turboaggregat	248-249
- Termostater	159-166	- Packningssats Turboanslutning	249-251
- Impellersatser	167-175	- Ljuddämpare	252
- Impellerfett	175	- Skarvrör	253
- Impeller verktygssats	176	- Avgasslangar AQ-drev	254-256
- Impellerverktyg	177	<b>Elsystem</b>	<b>259-289</b>
- Sjövattenpumpar	178-185	- Startmotorer	259-262
- Reparationssatser sjövattenpumpar	186-192	- Generatorer	263-265
- Lock till sjövattenpump	193	- Motorreläer	265
- Medbringare	193	- Fördelarlock	266-268
- Monteringsklack	194	- Tändkabelsats	269-270
- Skruvsatser impellerlock	194-196	- Tändstift	271-272
- Stödbricka	196	- Rotorer	273-274
- Axel sjövattenpump	196-197	- Brytarspetsar	275-276
- Packningssatser sjövattenpumpar	198-200	- Kondensatorer	276-277
- Lockpackningar	200-202	- Tändspolar	277-278
- Slangklämmor	202	- Tändmodul	278-279
- Pin-Wing skruvsatser	203-204	- Spolar	279
- Cirkulationspumpar vattenpumpar	205-206	- Glödstift	280
- Reparationssatser cirkulationspump	207-208	- Huvudströmbrytare	280
- Packningssatser cirkulationspump	208-209	- Laddningsregulatorer	281
- Kylvattenslangar	210-213	- Laddningsfördelare	281
- Packningssatser kylvattenrör	214-216	- Reservdelar instrumentpanel	281
- Packningssatser värmeväxlare	218-222	- Reläer	282
- Packningssats oljefilterhus - värmeväxlare	223	- Oljetryckskontakter	284
- Packningssatser mellankylare	223	- Oljetrycksgivare	285-287
- Packningssats laddluftkylare	224	- Temperaturgivare	285
- Packningssatser oljekylare	225-227	- Varvtalsgivare	288
- Anoder internt kylsystem	228-229	<b>Drevdelar</b>	<b>290-377</b>
- Vakuumentiler	230	- Sprängskiss övre växel	290-299
- Packningssats vakuumentil	231	- Sprängskiss nedre växel	300-323
- Sjövattenintagsats S-drev	231	- Packningssatser kompletta S-drev	326
- Expansionspluggar	231	- Packningssatser kompletta AQ-drev	327-329
- Avtappningskranar & dräneringsplugg	232	- Packningssatser övre växel S-drev	329
- Trycklock	233	- Packningssatser övre växel AQ-drev	330-331
- Locksats sjövattenfilter	233	- Packningssatser nedre växel	332-333
- Avgaslimpor	234	- Packningssatser övre växel-mellanhus	334
- Packningar avgaslimpor	235-238	- Packningssatser mellanhus-nedre växel	334
- Bultsatser avgaslimpor	238-239	- Packningssatser propelleraxel	335
- Avgaskrökar	240-244		

# Innehållsförteckning



- Packningssatser växelmekanism	336	- Ändmutter	382
- Kullager & nållager	338-345	- Kolvstänger trimcylindrar	382
- Skjuthylsor	346	- Verktyg ändmutter	382
- Slitbrickor dubbellagerboxar	346	- Monteringssats trimcylinder	382
- Skruvsatser dubbellagerboxar	347	- Power trim hydraulslangar	383-385
- Knutkors	348	- Bussningar styrgafflar	386
- Packningssatser knutkors	349	- Tätningsringar styrarmar	386
- Gummiringar klämring & kardanaxel	350-351	- Låsskruv styrgaffel	386
- Skruvsats klämring	351	<b>Axelsystem</b>	<b>387</b>
- Flänssats klämring	351	- Propelleraxeltätningar	387
- Lagertapp upphängning	352	- Propelleraxellager	387
- Låsskruvssats	352	<b>Propeller &amp; tillbehör</b>	<b>388-391</b>
- Bussningssatser upphängning	353	- Propellrar SX-drev	388
- Styrhjälmsskruvar	354	- Duo-Propellrar	389
- Plunsch	354	- Fisklinebrickor	390
- Bussning plunsch	354	- Brytpinnesats	390
- Saxpinnar & brickor	354	- Låsskruv folding propellerblad	390
- Kuggsegment, nitmutter, skruv	355	- Saxpinne folding propellermutter	390
- Spårryttare och skyddshatt	355	- Distansbrickor	390
- Slangsatser	356	- Låsbrickor	391
- Slangfästen	356	- Propellerkonor	391
- Ställpinne	358	- Låsskruv propellerkona	391
- Fjädersats	358		
- Trimfena	358		
- Monteringssats täckkåpa	358		
- Gummitätningar sköld	359		
- Gummikuddar sköld	359		
- Oljepluggar	360		
- Backventiler	360		
- Packningssatser oljepluggar	361		
- Reglagekablar	362		
- Skyddsslang växelväjer	362		
- Servicesatser drev "sjösättningssats"	363-365		
- Bälgar	366-368		
- Segeldrevsdamask	368		
- Anoder & anodsatser	369-377		
<b>Powertrim &amp; styrning</b>	<b>378-386</b>		
- Hydraulpumpar	378		
- Powertrim relä	378		
- Powertrim motorer	379		
- Mikrobrytare	380		
- Packningssatser powertrim	380		
- Packningssatser styrcylindrar	381		

# Innehållsförteckning



## Ersättningsdelar

## Krosslistor Volvo Penta

364-375

### Yanmar

**392-421**

## Krosslistor Yanmar

376-377

#### Servicesatser motor

392-394

- Servicesatser motor

392-394

#### Filter

395-399

- Bränslefilter

395-396

- Oljefilter

397-398

- Luftfilter

399

#### Drivremmar

400-403

- Drivremmar

400-403

#### Packningar

404-406

- Sotningssatser

404-405

- Topplockspackningar

406

#### Bränslesystem

407

- Bränslepump

407

#### Kyl- och avgassystem

408-415

- Impellrar

408-409

- Termostater

410-411

- Packningssats sjövattenpump

412

- Tempgivare

413

- Sjövattenpumpar

413

- Avgaskrökar

414-415

#### Anoder

416-417

- Anoder

416-417

#### Elsystem

418-421

- Generatorer

418-419

- Startmotorer

420-421

# Register



<b>A</b>		- Bussningsatser	353, 386
- Absorbentduk	35	- Bussning plunsch	354
- Absorbenter	35	- Bälgar	366-368
- Aerosoler	33	- Bälgsatser	366-368
- Anoder & anodsatser	369-377	<b>C</b>	
- Aluminiumanoder AQ-drev	369-377	- CAV-filter	148-149
- Anodsatser AQ-drev	369-377	- Cirkulationspumpar & vattenpumpar	205-206
- Anoder bogpropeller	377	- Cutlesslager	387
- Anoder folding propellrar	370	- Cylinderfodersatser	40-41
- Anoder kylsystem	228	- Cylinderfoderpackningssatser	41
- Anoder parallellstag	375	<b>D</b>	
- Anoder propelleraxel	376	- Damask segelbåtsdrev	368
- Anoder sköld	371	- Distansbrickor	390
- Anoder segelbåtsdrev	369	- Drevolja	29-30
- Anoder upphängningsgaffel	375	- Drivremmar	70-82
- Anoder Yanmar	416-417	- Drivremmar Yanmar	400-403
- ATF-Olja	31	- Drivknut	348
- Avgasbälgar	366-368	- Drivknutsbälg	366-368
- Avgaskrökar	240-244	- Duoprop propeller	389
- Avgaskrökar Yanmar	414-415	<b>E</b>	
- Avgaslimpor	234	- Expansionspluggar	231
- Avgasslangar	254-256	<b>F</b>	
- Avgasventil	50-51	- Fett	32, 175
- Avtappningskranar	232	- Fläns klämring	351
- Avtappningskran för bag-in-box	35	- Fisklinebrickor	390
- Avtappningspluggar	59, 150	- Fjädersatser	358
<b>B</b>		- Fjädrar ventiler	56-57
- Black Jack	387	- Flänsmutter	58
- Bricksatser bränslesystem	123-126	- Fodersatser	40-41
- Brytarspetsar	275-276	- Fördelarlock	266-268
- Brytpinnesats	390	- Förgasarmembran	117
- Bränslefilter	140-147	- Förgasare reparationsatts	117
- Bränslefilter Yanmar	395-396	<b>G</b>	
- Bränslefilter CAV	148-149	- Gasvajer	362
- Bränslefiltersats	148	- Gavellock avgasrör	245
- Bränslefilter vattenavskiljande	148, 152	- Generatorer	263-265, 418-419
- Bränslepumpar	113-116	- Givare	284-288
- Bränslepumpar Yanmar	407	- Givare oljetryck	285-287
- Bränslepumpspackningssats	116	- Givare temperatur	285, 413
- Bussningar styrgaffel	386	- Givare varvtal	288
- Bultsatser avgaslimpa	238-239	- Glykol	34
- Bultar topplock	58		
- Bussningar	386, 353		

# Register



- Glödstift	280	<b>L</b>	
- Gummidamask segelbåtsdrev	368	- Laddningsfördelare	281
- Gummikudde motorupphängning	60-62	- Laddningsregulator	281
- Gummikudde sköld	359	- Lagertapp upphängning	352
- Gummiplugg motorkåpa	69	- Ljuddämpare	252
- Gummiringar klämring	350-351	- Luftfilter	154-156
- Gummiring kardanaxel	351	- Luftfilter Yanmar	399
- Gummitätning sköld	359	- Lågfriktionskabel	362
<b>H</b>		- Låsbrickor	391
- Hydraulpumpar	378	- Låsbrickor propeller	391
- Hydraulslangsatser, power trim	383-385	- Låsskruvar	352, 386, 391
<b>I</b>		- Låsskruvar propellerkona	391
- Impellrar	167-175	- Låsringar	68
- Impellerfett	175	- Låsskruvssats	352
- Impellersatser	167-175	<b>M</b>	
- Impellersatser Yanmar	408-409	- Marinfett	32
- Impellerverktyg	177	- Matarpump	113-116
- Injektorhylsa	118-119	- Medbringare	194
- Insugsventiler	50-51	- Mikrobrytare	380
<b>J</b>		- Monteringssatser avgaskrökar	245
- Justershims cylinderfot	93	- Motorkuddar	60-62
<b>K</b>		- Motorolja	26-27
- Kamaxlar & kamaxelsatser	48	- Motorservicesatser	128-131, 392-394
- Kamaxelbrickor	49	- Motorupphängning	60-62
- Kamremmar	83	<b>N</b>	
- Klämringsskruvar	351	- Nipplar	151
- Knaster	52	- Nållager	340-345
- Knutbälgar	366-368	<b>O</b>	
- Knutkors	348	- Ombyggnadssats vevaxeltätning	49
- Knutkors packningssatser	349	- Olja	26-31
- Kran bag-in-box	35	- Oljeabsorbenter	35
- Kolvar	36	- Oljefilter	132-138
- Kolvringsatser	37-39	- Oljefilter backslag	138
- Kompressorolja	30	- Oljefilter Yanmar	397-398
- Kona propeller	391	- Oljepluggar	59, 360
- Kondensatorer	276-277	- Oljepumpar	59
- Kullager	338-345	- Oljepumpspackning	59
- Kylarvätska	34	- Oljetryckskontakter	234
- Kylvattenslangar	210-213	- Oljetrycksgivare	285-287
		- Oljetryckspackningar	94-95
		- Oljesumppackningar	94-95

# Register



<b>P</b>			
- Packbox sköld	69	- Propelleraxeltätningar	387
- Packningar avgaskrökar	246-248	- Propelleraxellager	387
- Packningar avgaslimpor	235-238	- Propellerkonor	391
- Packningssatser avgaskrök - turbo	249-251	<b>R</b>	
- Packningssatser cirkulationspump	208-209	- Ramlager	42-43
- Packningssatser cylinderfoder	41	- Ramlagersatser	42-43
- Packningssatser bränslepump	116	- Reglagekablar	362
- Packningssatser insugningsrör	99	- Reläer	282
- Packningssatser knutkors	349	- Remmar	70-82, 400-403
- Packningssatser kylvattenrör	214-216	- Remsträckare	84
- Packningssatser kompletta drev	326-329	- Reparationsatser cirkulationspump	202-208
- Packningssatser mellanhus-nedre växel	334	- Reparationsatser förgasare	117
- Packningssatser mellankylare	223	- Reparationsatser sjövattenpump	186-192
- Packningssatser laddluftkylare	224	- Reparationsatser svänghjulsåpa	66-68
- Packningssats oljefilterhus - värmeväxlare	223	- Reservdelar CAV	150-151
- Packningssatser oljekylare	225-227	- Rotorer	273-274
- Packningssatser oljepluggar	59	<b>S</b>	
- Packning oljepump	59	- Saxpinnar & brickor	354
- Packningssatser nedre växel	332-333	- Segeldrevsdamask	368
- Packningssatser powertrimkolv	380	- Sensor	284-288
- Packningssatser propelleraxel	335	- Servicesatser drev	363-365
- Packningssatser sjövattenpumpar	198-200, 412	- Servicesatser motor	128-131, 392-394
- Packningssatser sotning	101-107	- Shims cylinderfot	93
- Packningssatser spridare	121	- Sjövattenfilter locksats	233
- Packningssatser styrcylinder	381	- Sjövattenpumpar	178-185
- Packningssatser tilläggssats	108-112	- Sjövattenpumpar Yanmar	413
- Packningssatser vakuumventil	231	- Sjösättningssatser	363-365
- Packningssatser ventiljustering	52	- Skjuthylsor	346
- Packningssatser Yanmar	404-405	- Skarvrör	253
- Packningssatser värmeväxlare	218-222	- Skruv klämring	351
- Packningssatser växelmekanism	336	- Skruvsatser dubbellagerbox	347
- Packningssatser övre växel	329-331	- Skruvsatser impellerlock	194-196
- Packningssatser övre växel-mellanhus	334	- Skyddshatt	355
- Pinnbult motorkudde	62	- Skyddsslang växelväjer	362
- Pinwing sjövattenpump	203-204	- Slangfästen	356
- Plunsch	354	- Slangsatser	356
- Powertrim hydraulslangsatser	383-385	- Slitbrickor	346
- Powertrim motorer	379	- Smörjmedel	26-32
- Powertrimmpumpar	378	- Sotningssatser	101-107, 404-405
- Powertrim relä	378	- Sprayfett	33
- Propeller SX-drev	388	- Spridarhylssatser	118-119
- Propeller Duoprop	389	- Spridarspetsar	120-121
- Propelleraxelfett	32		

# Register



- Spridare packningssats	121	- Tätningsringar styrarmar	335
- Sprängskiss nedre växel	300-324	- Tätningsmassa	95
- Sprängskiss övre växel	291-299	<b>U</b>	
- Spårryttare	355	- Underhåll	26-35
- Spännrullar	84	<b>V</b>	
- Stödlager	69	- Varvtalsgivare	288
- Styrhjälmkruv	354	- Vattenpumpar	205-206
- Startmotorer	259-262, 420-421	- Vattenslangssatser	210-213, 356
- Sumpmackning	94-95	- Vattenavskiljande bränslefilter	148, 152
- Ställpinne drev	358	- Ventiler	50-51
- Stödlager vevaxel	69	- Ventilknaster	52
- Stödlager sköld	69	- Ventilfjädrar	56-57
- Svängningsdämpare	64-65	- Ventiljusteringssatser	52
- Svänghjulskåpa reparationssats	66-68	- Ventilåpningssatser	90-93
<b>T</b>		- Ventilstyrningar	53
- Temperaturgivare	285	- Ventilseten	55
- Termostater	159-166, 410-411	- Ventillyftare	59
- Tilläggsatser	108-112	- Verktyg impeller	176
- Topplocksbulvar	58	- Verktyg ändmutter	382
- Topplockspackningar	85-89	- Vevaxellager	44-46
- Topplockspackningar Yanmar	406	- Vevaxeltätning ombyggnad	49
- Transmissionsolja	29-30	- Vevhusfilter	157-158
- Trim- & tiltpumpar	378	- Vevlagersatser	44-46
- Trim- & tiltmotorer	379	- Vevlager	44-46
- Trimkolvar packningssats	380	- Vevstaksbult & mutter	48
- Trimrelä	378	- Vibrationsdämpare motorinfästning	60-62
- Trycklager	47	- Vibrationsdämpare	64-65
- Tryckbrickssatser	47	- Växellhusolja	29-30
- Tryckgivare	284-287	- Växelkåpa	346
- Trycklock	233	- Växelväjare	362
- Turboaggregat	248-249	- Växelväjerskydd	362
- Tvåtaktsolja	28	<b>Y</b>	
- Tändkabelsatser	269-270	- Yanmar	392-421
- Tändmoduler	278-279	<b>Z</b>	
- Tändspolar	277-278	- Zinkanoder	228-229, 369-377, 416-417
- Tändstift	271-272	<b>Ä</b>	
- Tätningslist sköld	359	- Ändmutter trimkolv	382
- Tätningsatser AQ-drev	327-329		
- Tätningsatser nedre växel	332-333		
- Tätningsatser oljeplugg	313		
- Tätningsatser propelleraxel	335		
- Tätningsatser växelmekanism	336		
- Tätningsatser övre växel	330-331		

# Directory



## **Lubricants & Maintenance**

- Engine oil	26-27
- Two stroke oil	28
- Transmission oil	29-30
- Compressor oil	30
- Automatic transmission fluid	31
- Paste Vaseline	31
- Propeller shaft grease	32
- Marine grease	32
- Aerosols	33
- Anti freeze	34
- Cleaning wipes	34
- Absorbent sheet	35
- Drain tap bag-in box	35

## **Aftermarket parts**

### **Volvo Penta**

#### **Internal engine parts**

- Pistons	36
- Piston ring kits	39-39
- Cylinder liner kits	40-41
- Gasket kits cylinder liner	41
- Main bearing kits & main bearings	42-43
- Con rod bearings	44-46
- Thrust bearings	47
- Thrust washers	47
- Support bearings crankshaft	47
- Connecting rod bolt & nut	48
- Camshaft & camshaft kits	48
- Camshaft washers	49
- Flange kit rebuild crankshaft sealing	49
- Valves	50-51
- Valve cotters	52
- Valve adjustment gasket kit	52
- Valve sealings	53
- Valve guides	54-55
- Valve seats	55
- Valve springs	56-57
- Valve lifters	59
- Cylinder head bolt kits	58
- Flange nut	58
- Oil pumps	59
- Oil drain plugs	59

#### **External engine parts**

- Engine mounts	60-62
- Pin bolt kit engine mount	62
- Vibration dampers	64-65
- Repair kit flywheel housing	66-68
- Retaining rings	68
- Seal transom	71
- Gimbal bearing	71
- Rubber cap engine cover	69
- Drive belts	70-82
- Timing belts	83
- Tension pulleys	84

#### **Gaskets & gasket kits engine**

- Cylinder head gaskets	85-89
- Valve cover gaskets	90-93
- Adjusting shims cylinder block	93
- Oil pan gaskets	94-95
- Sealant oil pan gaskets	95
- Crankshaft sealings	96-97
- Gaskets MS gearcase	98
- Gasket kits inlet tube	99
- Gasket kits exhaust - turbo	96-97
- Decarbonizing gasket kits	101-107
- Additional gasket kits	108-112

#### **Fuel system**

- Fuel pumps	113-116
- Gasket kit fuel pumps	116
- Repair kits carburettors	117
- Carburettor diaphragms	117
- Injector sleeve kits	118-119
- Nozzles	120-121
- Gasket kits fuel injectors	121
- Gasket kits fuel systems	123-126
- Bleeder screw kit	127

#### **Filters**

- Service kit engines	128-131
- Oil filters	132-138
- Fuel filters	140-147
- CAV filters	148-149
- CAV fuel filter complete	148
- CAV spare parts and accessories	150-151

# Directory



- Racor water separating fuel filter	152	- Mounting kits exhaust bends	245
- Air filters	154-156	- End cover manifold	245
- Crankcase filters	157-158	- Gaskets exhaust bends	246-248
<b>Cooling &amp; exhaust system</b>	<b>159-256</b>	- Turbo chargers	248-249
- Thermostats	159-166	- Gasket kits Turbo chargers	249-251
- Impeller kits	167-175	- Silencers	252
- Impeller grease	175	- Joint pipes	253
- In-peller tool kit	176	- Exhaust hoses AQ-drives	254-256
- Impeller tools	177	<b>Electrical system</b>	<b>259-289</b>
- Sea water pumps	178-185	- Starter motors	259-262
- Repair kits sea water pumps	186-192	- Alternators	263-265
- End cap sea water pump	193	- Engine relays	265
- Cross pieces	193	- Distributor caps	266-268
- Clamp seawater pump	194	- Ignition cable kits	269-270
- Screw kits impeller covers	194-196	- Spark plugs	271-272
- Support washer	196	- Rotors	273-274
- Shaft seawater pump	196-197	- Breaker points	275-276
- Gasket kits sea water pumps	198-200	- Capacitors	276-277
- End cap gaskets	200-202	- Ignition coils	277-278
- Hose clamps	202	- Ignition modules	278-279
- Pin-wing screw kits	203-204	- Pick-up coils	279
- Circulation pumps	205-206	- Glow plugs	280
- Repair kits circulation pumps	207-208	- Main switch	280
- Gasket kits circulation pumps	208-209	- Voltage regulators	281
- Cooling hoses	210-213	- Charge distributor	281
- Gasket kits cooling water tubes	214-216	- Spare parts instrument panel	281
- Gasket kits heat exchangers	218-222	- Relays	282
- Gasket kit oil filter housing - heat exch.	223	- Oil pressure switch	284
- Gasket kits after coolers	223	- Oil pressure sensors	285-287
- Gasket kit charge air coolers	224	- Temperature sensors	285
- Gasket kits oil coolers	225-227	- RPM sensors	288
- Anodes cooling system	228-229	<b>Drive parts</b>	<b>290-377</b>
- Vacuum valves	230	- Exploded view upper gear	290-299
- Gasket kits vacuum valves	231	- Exploded view lower gear	300-323
- Expansion plugs	231	- Gasket kits complete, Saildrive	326
- Sea water intake Saildrive	231	- Gasket kits complete, AQ-drive	327-329
- Drain cocks	232	- Gasket kits upper gear, Saildrive	329
- Pressure caps	233	- Gasket kits upper gear, AQ-drive	330-331
- Transparent cap kit seawater filter	233	- Gasket kits lower gear	332-333
- Exhaust manifolds	234	- Gasket kits upper gear - interm.	334
- Gaskets exhaust manifolds	235-238	- Gasket kits interm. - lower gear	334
- Bolt kits exhaust manifolds	238-239	- Gasket kits propeller shaft	335
- Exhaust bends	240-244		

# Directory



- Gasket kits gearshift mechanism	336	- Seal kits steering cylinders	381
- Roller bearings and needle bearings	338-345	- End cap trim pistons	382
- Sliding sleeves	346	- Pistons trim cylinder	382
- Thrust washers double bearing units	346	- End cap tool	382
- Bolt kits double bearing units	347	- Mounting kit power trim cylinder	382
- Universal joints	348	- Hydraulic hoses, power trim	383-385
- Seal kits universal joints	349	- Bushings steering forks	386
- Rubber rings clamp ring	350-351	- Seal ring steering forks	386
- Rubber rings jackshaft	351	- Locking screw steering fork	386
- Screw kit clamp ring	351		
- Flange kit clamp ring	351	<b>Shaft system</b>	<b>387</b>
- Bearing pin	352	- Stuffy boxes	387
- Screw kit bearing pin	352	- Propeller shaft bearings (cutless)	387
- Bushing kits	353		
- Shoulder screws	354	<b>Propeller &amp; accessories</b>	<b>388-391</b>
- Bushing pivot pin	354	- Propeller SX	388
- Pivot pins	354	- Propeller Duo	389
- Cotter pins & washers	354, 390	- Thrust washers (fishing line protector)	390
- Gear segment, ratchet nut, plastic screw	355	- Drive pin kits	390
- Clip and protecting cap	355	- Locking screws folding propellers	390
- Hose kits	356	- Cotter pin	390
- Water hose connectors	356	- Spacer washers propeller cones	390
- Adjusting pin	358	- Tab washers propeller cones	391
- Spring kits	358	- Propeller cones	391
- Trim fin	358	- Locking screw propeller cone	391
- Mounting details protecting cover	358		
- Rubber seals shields	359		
- Rubber block shields	359		
- Oil drain plugs	360		
- Rubber check valves	360		
- Gasket kits oil plug	361		
- Remote cable low friction	362		
- Protecting hose shift cable	362		
- Service kits AQ-drive "spring launch"	363-365		
- Bellows	366-368		
- Sail drive mounting cover	368		
- Anodes & anode kits	369-377		
<b>Power trim &amp; steering</b>	<b>378-386</b>		
- Hydraulic pumps	378		
- Power trim relay	378		
- Power trim motors	379		
- Micro switches	380		
- Seal kits power trim pistons	380		

# Directory



## After market parts

## Cross reference Volvo Penta

364-375

## Yanmar

**392-421**

## Cross reference Yanmar

**376-377**

### Service kits engine

**392-394**

- Service kits engine

392-394

### Filters

**395-399**

- Fuel filters

395-396

- Oil filters

397-398

- Air filters

399

### Drive belts

**400-403**

- Drive belts

400-403

### Gaskets

**404-406**

- Decarbonizing gasket kits

404-405

- Cylinder head gaskets

406

### Fuel system

**407**

- Fuel pumps

407

### Cooling & exhaust system

**408-415**

- Impeller kits

408-409

- Thermostats

410-411

- Gasket kits seawater pump

412

- Temperature sensor

413

- Sea water pumps

413

- Exhaust bends

414-415

### Anodes

**416-417**

- Anodes

416-417

### Electrical system

**418-421**

- Alternators

418-419

- Starter motors

420-421

# Index



- A**
- Absorbent sheet 35
  - Absorbent 35
  - Additional gasket kits 108-112
  - Adjusting pin 310
  - Aerosols 33
  - Adjusting shims cylinder block 93
  - Air filters 154-156
  - Air filters Yanmar 399
  - Alternators 263-265, 418-419
  - Anodes for shields 371
  - Anodes for sail drives 369
  - Anodes for AQ drives 369-377
  - Anode kits aluminium 369-377
  - Anode suspension yoke 375
  - Anode steering bar 375
  - Anodes shaft 376
  - Anodes bow thrusters 377
  - Anodes for cooling system 228
  - Anodes Yanmar 416-417
  - Automatic transmission fluid 31
- B**
- Ball bearings 338-345
  - Bearings main 42-43
  - Bearings thrust 47
  - Bearings con rod 44-46
  - Bearing needle 340-345
  - Bearing pin 352
  - Belts 70-82
  - Belts Yanmar 400-403
  - Bellows, drive bellow 366-368
  - Bellows, exhaust bellow 366-368
  - Black jack 387
  - Bleeder screws, fuel system 177
  - Bolt kits double bearing units 347
  - Bolt kits exhaust manifolds 238-239
  - Bow thruster anodes 377
  - Break pin kits 390
  - Breaker points 275-276
  - Bushing kits 353, 386
  - Bushings steering fork 386
  - Bushing pivot pin 354
  - Bushings 353, 354, 386
- C**
- Camshaft & camshaft kits 48
  - Camshaft washers 49
  - Camshaft thrust flange 47
  - Carburettor diaphragms 117
  - Carburettor repair kits 117
  - CAV filters 148-149
  - Charge distributor 281
  - Circulation pumps 205-206
  - Clamp ring rubber rings 350-351
  - Clamp ring, screws 351
  - Clamp ring flange 351
  - Clip, shaft for PT cylinders SX/DPS 355
  - Compressor oil 30
  - Capacitors 276-277
  - Con rod bearings 44-46
  - Conversion gasket kits 108-112
  - Cotter pin 354, 390
  - Coolant 34
  - Cooling water hoses 210-213
  - Cover exhaust manifolds 245
  - Cover protection mounting details 358
  - Crank shaft flange kit 49
  - Crank case filters 157-158
  - Crankshaft pulse sensors 288
  - Cross pieces 348
  - Cylinder head gaskets 85-89
  - Cylinder head gaskets Yanmar 406
  - Cylinder head bolt kits 58
  - Cylinder liner kits 40-41
  - Connecting rod bolt & nut 48
  - Cutless bearings 387
- D**
- De-carbonizing gasket kits 101-107, 404-405
  - Distributor caps 266-268
  - Drain taps 232
  - Drain tap bag-in-box 35
  - Drain plugs, oil 59, 360
  - Drive bellows 366-368
  - Drive belts 70-82, 400-403
  - Drive pin kits 352
  - Duoprop propellers 389
- E**
- End cap power trim 382
  - End cap tool 382
  - Engine oil 26-27
  - Exhaust bellow 366-368
  - Exhaust bends 240-244
  - Exhaust bends Yanmar 414-415
  - Exhaust hoses 254-256
  - Exhaust manifolds 234
  - Exhaust valve 50-51
  - Expansion plugs 231
  - Exploded view lower unit 300-324
  - Exploded view upper unit 291-299
  - Engine mounts 60-62

# Index



## F

- Filter air 154-156, 399
- Filter oil 132-138, 397-398
- Filter crankcase 157-158
- Filter fuel 140-147, 395-396
- Filter fuel Yanmar 395-396
- Filter oil Yanmar 397-398
- Filter air Yanmar 399
- Fishing line protector 390
- Fittings CAV 150-151
- Flange clamp ring 351
- Flange kit crankshaft sealing 49
- Flywheel casing repair kit 66-68
- Fuel filters 140-147, 395-396
- Fuel filter kits water separating 148, 152
- Fuel pumps 113-116, 407
- Fuel pump Yanmar 407
- Fuel filters CAV 148-149
- Flange nut 58

## G

- Gaskets cylinder heads 85-89, 406
- Gaskets oil pans 94-95
- Gaskets valve covers 90-93
- Gasket kits de-carbonizing 101-107, 404-405
- Gasket kits conversion 108-112
- Gaskets exhaust bends 246-248
- Gaskets exhaust manifolds 235-238
- Gasket kits Yanmar 404-405
- Gasket kits after coolers 223
- Gasket kits circulation pumps 208-209
- Gasket kits charge air coolers 224
- Gasket kits complete drives 326-329
- Gasket kits cylinder liners 41
- Gasket kits exhaust bend - turbo 249-251
- Gasket kits fuel injectors 121
- Gasket kits fuel pumps 116
- Gasket kits gearshift mechanism 336
- Gasket kits heat exchangers 218-222
- Gasket kits injectors 121
- Gasket kit inlet pipes 99
- Gasket kits interm. - lower units 334
- Gasket kits lower units 332-333
- Gasket kits oil coolers 225-227
- Gasket kits oil filter housing - heat exch. 223
- Gasket kits oil plugs 59
- Gasket oil pump 59
- Gasket kits propeller shafts 335
- Gasket kits power trim cylinders 380
- Gasket kits sea water pumps 198-200, 412
- Gasket kits universal joints 349
- Gasket kits steering cylinder 381
- Gasket kits upper unit 329-331

- Gasket kits upper unit - interm. 334
- Gasket kits cooling water tubes 214-216
- Gasket kits vacuum valves 231
- Transmission oil 29-30
- Gear shift cones 346
- Gimbal bearing 69
- Glow plugs 280
- Glycol 34
- Grease 32, 175

## H

- Heat exchanger gasket kits 218-222
- Hose connectors 356
- Hoses, cooling water 210-213
- Hose kits 210-213, 356
- Hose kits, power trim cylinders 383-385
- Hose shift cable 362
- Hook up fork bushings 386
- Hook up kit trim cylinder 382
- Hydraulic pumps 378
- Hydraulic hoses, power trim 383-385

## I

- Ignition cable kits 269-270
- Ignition coils 277-278
- Ignition modules 278-279
- Ignition rotors 273-274
- Impeller grease 175
- Impeller kits 167-175, 408-409
- Impeller kits Yanmar 408-409
- Impeller tools 177
- Injector sleeve kits 118-119
- Injector nozzles 120-121
- Inlet pipes gasket kits 99
- Inlet valves 50-51

## J

- Jackshaft rubber rings 351
- Joint pipes 253

## L

- Launch kits drives 363-365
- Liner kits 40-41
- Liner gasket kits 41
- Locking screws 352, 386, 391
- Locking screws folding propellers 390
- Locking screws bearing pin 352
- Locking screws double bearing unit 347
- Locking screw propeller cone 391
- Locking screw steering fork 386
- Low friction cables 362
- Lubricants 26-32, 175

# Index



<b>M</b>	
- Main bearing kits & main bearings	42-43
- Maintenance	26-35
- Manifold bolt kits	238-239
- Manifolds exhaust	234
- Manifold gaskets	235-238
- Marine grease	32, 175
- Marine service spray	33
- Micro switches	380
- Modules ignition	278-279
- Motors power trim	379
- Motor starters	259-262, 420-421
- Mounts engine	60-62
- Mounting cover sail drive	368
- Mounting kits exhaust bends	245
<b>N</b>	
- Needle bearings	340-345
- Nozzles	120-121
- Nut flange	58
- Nuts & bolts connecting rod	48
<b>O</b>	
- Oil	26-31
- Oil absorbents	35
- Oil cooler gasket kits	225-227
- Oil drain plugs	59, 360
- Oil filters	132-138, 397-398
- Oil pan gaskets	94-95
- Oil plug gasket kits	59
- Oil pressure sensors	285-287
- Oil pressure switch	234
- Oil pumps	59
- Oil pump gasket	59
<b>P</b>	
- Paste Vaseline	31
- Pick-up coils	279
- Pins & washers	390
- Pinwing screw kits	203-204
- Pistons	36
- Piston ring kits	37-39
- Pistons trim cylinder	382
- Pivot pins	354
- Plugs expansion	231
- Plug oil drain	59, 360
- Power trim hose kit	383-385
- Power trim pumps	378
- Power trim piston seals	380
- Power trim piston end caps	382
- Power trim motors	379
- Power trim relays	378
- Pumps fuel Yanmar	407
- Pulse sensors crankshaft	288
- Pumps sea water	163-168
- Pumps circulation	178-185
- Pumps fuel	113-116, 407
- Pumps hydraulic	378
- Pumps oil	59
- Pressure caps	233
- Pressure sensors	285-287
- Pressure switch	234
- Propeller cones	391
- Propeller cone locking screw	391
- Propeller cone spacers	390
- Propeller shaft anodes	328
- Propeller shaft bearings (cutless)	387
- Propeller shaft seal kits	387
- Propeller shaft grease	32
- Propeller SX	388
- Propeller Duoprop	389
- Protecting cap for PT cylinders SX/DPS	355
- Protecting hose shift cable	362
<b>R</b>	
- Remote cables	362
- Regulators voltage	281
- Relays	282
- Repair kits carburettors	117
- Repair kits circulation pumps	202-208
- Repair kits flywheel casing	66-68
- Repair kits sea water pumps	186-192
- Retaining rings	68
- Ring kits	37-39
- Rotors	273-274
- Rubber blocks engine suspension	60-62
- Rubber cap engine cover	69
- Rubber cover sail drives	368
- Rubber rings clamp ring	350
- Rubber rings jackshaft	351
- Rubber sealing transom	359
- Rubber block transom	359
- Rubber stuffy boxes	387
<b>S</b>	
- Sail drive mounting cover	368
- Screw kit clamp ring	351
- Screw kits impeller covers	194-196
- Sea water filter cap kit	233
- Sea water pumps	178-185, 413
- Sea water pumps Yanmar	413
- Seal kits power trim pistons	380
- Seal kits steering cylinders	381
- Seal kits universal joints	349

# Index



- Seal rings shield	359
- Seal ring steering forks	335
- Seal transom	359
- Seal washer kits fuel system	123-126
- Sensors	284-288
- Service kits engine	128-131, 392-394
- Service kits drives	363-365
- Settings pin	358
- Shaft anodes	328
- Shim cylinder block	93
- Shift cables	362
- Shift cones	346
- Silencers	252
- Sliding sleeves & dog	346
- Spacer washers propeller cones	391
- Spare parts CAV	150-151
- Spiders	348
- Spring launch kits	363-365
- Starter motors	259-262, 420-421
- Starter motors Yanmar	420-421
- Steering piston seals	381
- Stuffy boxes	387
- Support bearings crankshaft	69
- Stud engine mount	60
- Switches oil	234
<b>T</b>	
- Tab washers propeller cones	391
- Thermostats	159-166, 410-411
- Temperature sensors	285, 413
- Tension pulleys	84
- Throttle cables	362
- Thrust bearings	47
- Thrust washers engine	47
- Thrust washers double bearing units	346
- Thrust washers (fishing line protector)	390
- Timing belts	83
- Transom seal	359
- Transmission oil	29-30
- Trim hose kit	383-385
- Trim cylinder hook up kit	382
- Trim piston end cap	382
- Trim motors	379
- Trim cylinder piston	382
- Trim piston seal kit	380
- Trim relay	378
- Turbo chargers	248-249
- Two stroke engine oil	28

## U

- Universal joints	348
- Universal joints seal kits	349

## V

- Valves	50-51
- Valve cotters	52
- Valve adjustment kits	52
- Valve cover gaskets	90-93
- Valve guides	53
- Valve seats	55
- Valve lifters	59
- Valve springs	56-57
- Vibration dampers	64-65
- Voltage regulators	281

## W

- Washers double bearing units	346
- Washer kits fuel system	123-126
- Water hoses	210-213
- Water hose connectors	356
- Water tube gasket kits	214-216
- Water pumps	178-185, 205-206, 413
- Water pump gasket kits	198-200, 412
- Water pump repair kits	186-192, 202-208
- Water resistant grease	32, 175
- Water separating fuel filter	144
- White grease	33
- Wipes	34

## Y

- Yanmar aftermarket parts	392-421
----------------------------	---------

## Z

- Zinc anodes transom	371
- Zinc anodes saildrives	369
- Zinc anodes AQ drives	369-377
- Zinc anodes bow thrusters	377
- Zinc anodes suspension yokes	375
- Zinc anodes steering tie bars	375
- Zinc anodes propeller shafts	328
- Zinc anodes cooling system	228
- Zinc anodes Yanmar	416-417





Våra smörjmedel uppfyller samtliga krav och klassningar för att användas till den privata såväl som den kommersiella sjöfarten, oavsett om båten används i tropiska vatten eller iskalla hav.


Vi erbjuder ett komplett program som täcker allt du behöver för din båt med inom- eller utombordare.

Om du vill känna dig trygg och säker på sjön så väljer du smörjmedel från Orbitrade!

Our lubricants meets all the requirements and classifications for private use as well as commercial shipping, regardless of whether the boat is used in tropical waters or icy seas.

We offer a complete program that covers everything you need for your boat, whether it is an outboard or an inboard engine.

If you want to feel safe at sea, then choose lubricants from Orbitrade!



## Motorolja Engine oil



**Motorolja 5W-30 Helsyntetisk  
Engine oil 5W-30 Synthetic**



Oljan är uppbyggd av syntetiska basoljor med mycket hög kvalitet av s.k. Longlife-typ. Detta säkerställer en effektiv smörjning vid varierande driftstemperaturer och belastningar. Oljan innehåller slitageminskande tillsatser som håller motorn ren från skadliga slaggprodukter, vilket förlänger både oljans och motorns livslängd.



A high quality oil made of a synthetic based blend. This Long life oil ensures efficient lubrication at varying levels of operating temperatures and loads. It also contains wear-resistant additives that keeps the engine clean from harmful slag products which benefits the life of both the oil as well as the engine.

### Tekniska data/Specifications

SAE grad(er): 5W-30 Longlife  
API: SM/CF  
ACEA: 04-A3/B3  
MB 229.51,  
Porsche C30,  
VW 502.00/503.01/504.00/505.00/505.01/ 506.00/506.01/507.00,  
BMW LL-04

**Rekommenderas för inombords- samt utombordsmotorer  
Recommended for inboard and outboard engines**

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
2401-1	21363429	1 L
2401-5	21363430	5 L
2401-20	21363431	20 L
2401-208		210 L



**Motorolja 10W-40  
Engine oil 10W-40**



Oljan är uppbyggd av en blandning bestående av en mineraloljebaserad olja tillsammans med en syntetisk basolja av mycket hög kvalitet, s.k. Longlife-typ. Detta säkerställer en mycket effektiv smörjning vid varierande driftstemperaturer och belastningar. Oljan innehåller slitageminskande tillsatser som håller motorn ren från skadliga slaggprodukter vilket förlänger både oljans och motorns livslängd.



This engine oil is made up of a mixture consisting a mineral based oil blended with a synthetic based oil of very high quality, so-called Longlife. This ensures a very efficient lubrication at varying operating temperatures and loads. The oil contains wear-reducing additives to keep the engine clean from harmful slag products, which benefits the life of both the oil and the engine.

### Tekniska data/Technical data

Viskositetsindex/Viscosity index 171  
Viskositet/Viscosity vid/at 40 °C: 80,5 mm<sup>2</sup>/s  
Viskositet/Viscosity vid/at 100 °C: 13,5 mm<sup>2</sup>/s  
Flytgräns/Flow limit: -42 °C  
Flampunkt/Flash-point: >230 °C  
Densitet/Density vid/at 15 °C: 880 kg/m<sup>3</sup>

### Specifikationer/Specifications:

SAE: 10W-40  
API SN/SM/CF, ACEA A3/B4

**Rekommenderas för inombords- samt utombordsmotorer  
Recommended for inboard and outboard engines**

Art. nr/Part no	Storlek/Size
2419-1	1 L
2419-5	5 L
2419-20	20 L
2419-208	210 L



Spare parts from Sweden

## Motorolja Engine oil



**Motorolja 15W-40 Mineral  
Engine oil 15W-40 Mineral**



Specialolja för 4-taktsmotorer med eller utan turbo. Ett specialanpassat additiv säkerställer en stabil drift av hårt belastade motorer i en krävande miljö. Oljan innehåller utmärkta korrosionsinhibitorer som förebygger korrosion från söt- och saltvatten. Den viskösa högkvalitativa oljan ger ett maximalt skydd mot slitage och förhindrar uppbyggnad av avlagringar på motorns interna delar.



Specialized oil for 4 stroke engines with or without a turbocharger. A customized additive ensures a stable operation on hard loaded engines in a demanding environment. The oil contains excellent corrosion inhibitors that prevents corrosion from fresh and salt water. This high quality oil provides maximum protection against wear and prevents build-up of deposits in the engine's internal parts.

### Tekniska data/Specifications

SAE grad(er): 15W-40  
API: CI-4/CG-4/ CF-4/CF/SL  
ACEA: 04-E7/ A3/B3/ B4  
Volvo:VDS 3

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
2402-1	23909459, 3840002	1 L
2402-5	23909460, 3840003	5 L
2402-20	23909456, 22479643	20 L
2402-208		210 L



**Motorolja 25W-40 Delsyntetisk  
Engine oil 25W-40 Semi synthetic**



Oljan är uppbyggd av syntetiska basoljor med mycket hög kvalitet av s.k. Longlife-typ. Detta säkerställer en effektiv smörjning vid varierande driftstemperaturer och belastningar. Oljan innehåller slitageminskande tillsatser som håller motorn ren från skadliga slaggprodukter vilket förlänger både oljans och motorns livslängd.



A high quality oil made of a synthetic based blend. This Long life oil ensures efficient lubrication at varying levels of operating temperatures and loads. It also contains wear-resistant additives that keeps the engine clean from harmful slag products which benefits the life of both the oil as well as the engine.

### Tekniska data/Specifications

SAE grad(er): 25W-40  
API: SL/CF  
ACEA: A3/B3

**Rekommenderas för inombords- samt utombordsmotorer  
Recommended for inboard and outboard engines**

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
2409-1		1 L
2409-5		5 L
2409-20		20 L



## 2-taktsolja 2-stroke engine oil



**Motorolja 2-takt TC-W3 Mineral**  
Engine oil 2-stroke TC-W3 Mineral



2-taktsolja framtagen för allroundanvändande i marinmotorer med förgasare. Oljan förhindrar bildandet av förbränningsrester oavsett varvtal. Detta innebär att motorn alltid varvar upp jämnt även om motorn har gått på tomgång en längre stund. Gamla beläggningar pulveriseras och blåses sedan ut tillsammans med avgaserna. Oljan är rök- och askfri.



2-stroke oil designed for all-round use in marine engines with carburettors. The oil prevents the formation of combustion residues regardless of speed. This means that the engine always revs up smoothly even if the engine has been running on idle for a long time. Old residues are pulverized and then blown out with the exhaust gases. The oil is smoke and ash free.

### Tekniska data/Specifications

NMMA: TC-W3  
API: TC Del I, II, III  
JASO: FC  
ISO: ISO-L-EGC

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
2410-1		1 L
2410-5		5 L



**Motorolja 2-takt TC-W3 Helsyntetisk**  
Engine oil 2-stroke TC-W3 Synthetic



Biosyntetisk 2-taktsolja framtagen för högpresterande utombordsmotorer och vattenskotrar, med eller utan insprutningssystem. Oljan förhindrar bildandet av förbränningsrester oavsett varvtal. Detta innebär att motorn alltid varvar upp jämnt även om motorn har gått på tomgång en längre stund. Gamla beläggningar pulveriseras och blåses sedan ut tillsammans med avgaserna. Oljan är rök- och askfri.



Bio synthetic 2-stroke oil designed for high performance outboard engines and watercrafts, with or without injection system. The oil prevents the formation of combustion residues regardless of speed. This means that the engine always revs up smoothly even if the engine has been running on idle for a long time. Old residues are pulverized and then blown out with the exhaust gases. The oil is smoke and ash free.

### Tekniska data/Specifications

NMMA: TC-W3  
API: TD

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
2411-1		1 L
2411-5		5 L



## Transmissionsolja Transmission oil



**Drevolja 75W-90 Syntetisk  
Gear oil 75W-90 Synthetic**



Syntetisk drevolja konstruerad för att tåla höga och låga temperaturer under svåra driftförhållanden. Produkten innehåller välbalanserade tillsatser och är avsedd för alla typer av transmissioner där ett EP-smörjmedel rekommenderas. Oljan skummar ej, klarar extrema tryck och innehar goda anti-emulsionsegenskaper.



Synthetic gear oil designed to withstand both high and low temperatures in difficult operating conditions. The product contains well-balanced additives and is intended for all types of transmissions where an EP lubricant is recommended. The oil does not foam, can handle extreme pressure and possesses good anti-emulsion properties.

### Tekniska data/Specifications

SAE grad(er): 75W-90  
API: GL-5

Rekommenderas för de flesta AQ-drev, IPS samt utombordare.  
Recommended for most AQ-drives, IPS and Outboards

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
2403-1	22479650	1L
2403-5	22479648	5 L
2403-20	22479647	20 L "Bag-in box"
2403-208		210 L



**Drevolja 80W-90 Mineral  
Transmission oil 80W-90 Mineral**



Transmissionsolja konstruerad för växlar som arbetar under mycket svåra förhållanden. Produkten är en mineraloljebaserad hypoidolja som innehåller kraftiga EP-tillsatser. Oljan har ett mycket brett användningsområde t ex backslag och växlar och andra applikationer där SAE 90/API GL-5 olja rekommenderas.



Transmission oil constructed for gears operating under very tough circumstances. The product is a mineral oil based hypoid oil which contains heavy amounts of EP-additives. The oil has a very broad application area e.g gears and switches and other uses where SAE 90/API GL-5 oil is recommended.

### Tekniska data/Specifications

SAE grad(er): 80W-90 / SAE degree(s): 80W-90  
Viskositet vid 40°C: 190 mm<sup>2</sup>/s / Viscosity at 40°C: 190 mm<sup>2</sup>/s  
Viskositet vid 100°C: 18.1 mm<sup>2</sup>/s / Viscosity at 100°C: 18.1 mm<sup>2</sup>/s  
Temperaturområde: -25°C - 160°C / Temperature range: -25°C - 160°C  
Klass: API-GL5

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
2418-025	3809446	250 ml
2418-1	3809446	1 L
2418-5	3809445	5 L
2418-20	3809444	20 L "Bag-in box"



## Transmissionsolja Transmission oil



**Drevolja 75W-140 Syntetisk  
Gear oil 75W-140 Synthetic**



Syntetisk drevolja konstruerad för att tåla höga och låga temperaturer under svåra driftförhållanden. Produkten innehåller välbalanserade tillsatser och är avsedd för alla typer av transmissioner där ett EP-smörjmedel rekommenderas. Oljan skummar ej, klarar extrema tryck och innehar goda anti-emulsions egenskaper.



Synthetic gear oil designed to withstand both high and low temperatures in difficult operating conditions. The product contains well-balanced additives and is intended for all types of transmissions where an EP lubricant is recommended. The oil does not foam, can handle extreme pressure and possesses good anti-emulsion properties.

### Tekniska data/Specifications

SAE grad(er): 75W-140  
API: GL-5  
MIL: MIL-L-2105

Rekommenderas för Mercruiser, Volvo Penta DPH 1,59:1, DPG  
Recommended for Mercruiser, Volvo Penta DPH 1,59:1, DPG

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
2405-1		1 L
2405-5	22574246, 3809439	5 L
2405-20		20 L "Bag-in box"

## Kompressorolja Compressor oil



**Kompressorolja ISO VG80  
Compressor oil ISO VG80**



Produkten är askfri vilket innebär att koks ej bildas på motorns inre rörliga delar. Oljan är temperaturstabil vilket ger lätta starter vintertid och säkerställer en sval drift sommartid. Produkten är avsedd för de flesta kolvkompressorer.



The product is ash free, which means that soot residues are not formed on the internal moving parts of the engine. The oil is temperature-stable, which provides an easy start winter time and ensures a cool operation summer time. The product is suitable for most piston compressors.

### Tekniska data/Specifications

ISO VG80

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
2404-025	85108974	250 ml



Spare parts from Sweden

**ATF olja**  
**Automatic transmission fluid**



**ATF Dextron III**



Denna ATF-olja av Dextron-typ är avsedd för powertrim, trimplan och automatiska växellådor. Produktens goda låg- och högttrycks-egenskaper säkerställer en utmärkt funktion under varierande driftförhållanden. Produkten är mycket oxidationsstabil, vilket medför en lång livslängd. Oljan har låg flyktighet och är skonsam för alla former av packningar och tätningar. Produkten rekommenderas till alla typer av automatiska och manuella transmissioner där en ATF-olja föreskrivs.



Dextron-type ATF oil is designed for power trims, trim tabs and automatic gearboxes. The excellent low and high-pressure properties of the product ensures an excellent function under varying operating conditions. The product is highly oxidative stable, which results in a long life-span. The oil has low volatility and is gentle to all types of gaskets and seals. The product is recommended for all types of automatic and manual transmissions where an ATF oil is recommended.

**Tekniska data/Specifications**

GM: Dextron III-G  
ZF: TE-ML

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
2406-1	23909464, 85122800	1 L
2406-5	23909465, 1161995	5 L

**Monteringspasta**  
**Vaselin**



**Monteringspasta**  
**Vaselin**



Hög motståndaktighet mot höga temperaturer samt förhindrar friktion för metall mot metall komponenter. Innehåller inga tungmetaller. Fri från zinkoxid, vilket gör den mer miljövänlig.

Förenklar montering och demontering.  
Utmärkt för montering av bla. lager och tätningar.



High resistance to high temperatures and prevents friction for metal against metal components. Contains no heavy metals. Free of zinc oxide, which makes it more environmentally friendly.

Simplifies assembly and disassembly.  
Excellent for mounting of e.g bearings and seals.

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
2414-100	N/A	100 g



## Propelleraxelfett Propeller shaft grease



**Propelleraxelfett NLGI 3  
Propeller shaft grease NLGI 3**



Fettet är ett s.k. "komplexfett" som är baserat på syntetiska basoljor. Produkten är extremt vattenresistent och ett utmärkt val för ett stort antal olika applikationer. Fettet klarar höga belastningar och temperaturer. Produkten är beständigt mot många typer av lösningsmedel, syror etc. och har mycket god mekanisk stabilitet. Utmärkt för axelgenomföringar och propelleraxlar mm.



This grease is a so-called "complex grease" based on synthetic based oils. The product is extremely water resistant and is an excellent choice for a large number of different applications. Handles high loads and temperatures. This grease is resistant to many types of solvents, acids etc. and has a very good mechanical stability. Excellent for shaft bushings and propeller axles etc.

### Tekniska data/Specifications

NLGI 3

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
2407	3809449	500 g burk/container
2407-100		100 g tub/tube
2407-020		20 g tub/tube

## Marinfett Marine grease



**Fett NLGI 2  
Grease NLGI 2**



Fettet är ett s.k. "komplexfett" som är baserat på syntetiska basoljor. Produkten är extremt vattenresistent och ett utmärkt val för ett stort antal olika applikationer. Fettet klarar höga belastningar och temperaturer. Produkten är beständigt mot många typer av lösningsmedel, syror etc. och har mycket god mekanisk stabilitet. Utmärkt för en mängd olika applikationer och förhållanden.



This grease is a so-called "complex grease" based on synthetic based oils. The product is extremely water resistant and is an excellent choice for a large number of different applications. Handles high loads and temperatures. This grease is resistant to many types of solvents, acids etc. and has a very good mechanical stability. Excellent for a variety range of applications and conditions.

### Tekniska data/Specifications

NLGI 2

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
2408-020	828250	20 g tub/tube
2408-400	21347121, 22618330	400 g Patron/cartridge
2408-500		500 g burk/container
2408-400LS		400g Lube Shuttle



Spare parts from Sweden

## Aerosoler Aerosols



**Marine Service Spray**



Detta syntetiska universalsmörjmedel innehållande PTFE är både vattenavvisande och har mycket goda rostlösande egenskaper. Det krypande smörjmedlet lämnar efter sig en stark smörjfilm som med sina nanoteknologiska tillsatser ger låg friktion och en långtidsverkande smörjning under även de mest extrema förhållanden. Marine Service Spray innehåller oljor med hög viskositet vilket innebär att detta smörjmedel kan användas vid högre temperaturintervall än andra smörjmedel.

Marine Service Spray håller undan vatten och fukt, ger ett långtidsverkande skydd mot korrosion samt kan med fördel användas i gradintervallet -60°C - 270°C.

Marine Service Spray har ett väldigt brett användningsområde. Några exempel på användningsområden är kättingar, gångjärn, vinschar, rörliga delar och rostlösning.



This synthetic universal lubricant containing PTFE is both water-repellent and has very good anti-rust properties. The creeping lubricant leaves behind a strong lubricating film which with its nanotechnological additives provides low friction and a long-lasting lubrication under even the most extreme conditions. Marine Service Spray contains oils with high viscosity, which means that this lubricant can be used at higher temperature ranges than other lubricants.

Marine Service Spray keeps water and moisture away, provides long-lasting protection against corrosion and can be used in the degree range -60°C - 270°C.

Marine Service Spray has a very wide range of uses. Some examples of areas of use are chains, hinges, winches, moving parts and rust remover.

### Färg/Color

Svagt gul till ofärgad/Pale yellow to colorless

### Temperaturområde/Temperature range:

-60°C till/to +270°C

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
1410	1161928, 85110720	400 ml



**White Grease**



White Grease (aerosol) är ett exceptionellt vattenfast smörj fett baserat på paraffinolja med ett brett användningsområde, tål höga belastningar, höga temperaturer med mycket god mekanisk stabilitet. Mycket beständig mot lösningsmedel och syror – härsknar ej.

White Grease är avsett för alla typer av fettsmörjning; rullningsslager, bussningar, leder, chucker, etc.



White Grease (aerosol) is an exceptional waterproof lubricating grease based on paraffin oil with a wide range of applications. Withstands high loads and high temperatures with a very good mechanical stability. Very resistant to solvents and acids - does not turn rancid.

White Grease is intended for all types of grease lubrication; rolling bearings, bushings, joints, chucks, etc.

### Färg/Color

Vit/White

### Temperaturområde/Temperature range:

-20°C till/to +130°C

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
1411	N/A	400 ml



## Glykol Glycol



### Glykol G12+ Glycol G12+



Orbitrade Glycol G12+ är en OEM-godkänd Long Life-glykol för den nya generationens motorer och kylsystem. Lämplig till de flesta motorer som kräver glykol av typen D-G12+. Glycol G12+ bör inte blandas med andra typer av förekommande kylarglykoler på marknaden. Glycol G12+ höjer kokpunkten och ger kylsystemet ett förlängt och förstärkt korrosionsskydd för aluminium, gjutjärn och andra metaller samtidigt som den ger ett effektivt frostskydd. Verkar ej aggressivt och angriper tex. inte komponenter av lättmetall.



Orbitrade Glycol G12 + is an OEM approved Long Life glycol for the new generation engines and cooling systems. Suitable for most engines that requires a glycol of the type D-G12+. Glycol G12+ should not be mixed with other types of cooling glycols on the market. Glycol G12+ raises the boiling point and gives the cooling system an extended and reinforced corrosion protection for aluminum, cast iron and other metals while providing an effective anti-freeze protection. Does not seem aggressive and does not affect e.g. components of light metal.

#### Tekniska data/Technical data

Färg/Color: Röd/Red  
Densitet/Density: 1,04  
Kokpunkt/Boiling point: 165°C  
Flampunkt/Flash-point: >100°C  
pH (50 vol%) 8,6

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
2421-1		1L

## Heavy duty wipes Heavy duty wipes



### Heavy duty wipes Heavy duty wipes



Orbitrade Heavy Duty wipes avlägsnar effektivt olja, fett, sot, färg, tjära, bläck etc. på svårt nedsmutsade ytor och händer. Innehåller även återfettningsmedel.

Innehåller 50st rengöringsdukar i praktisk plastförpackning.




Orbitrade Heavy Duty Wipes effectively removes oil, grease, soot, paint, tar etc from heavily soiled hands and surfaces. Contains degreasers.

Contains 50 wipes in practical plastic container.

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
2424		50



**Absorberande ark**  
**Absorbent sheet**

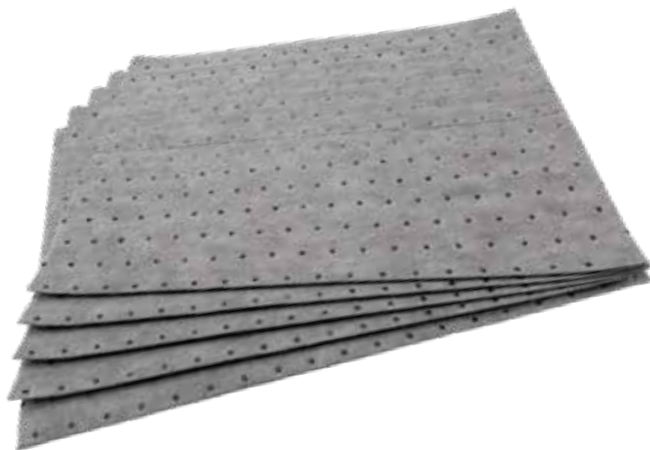

**Absorberande ark / Absorbent sheet**



För uppsugning av alla typer av vätskor.



For absorption of all types of fluids.

**Tekniska data/Specifications**

Storlek/Size: 400 x 500 mm.  
Uppsugningsförmåga ca 0,8 liter/per ark  
Absorbency: est. 0,8 liter/sheet

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
2426-5		5st/5pcs
2426-100		Bulk 100st/100pcs

**Oljeabsorberande ark**  
**Oil absorbent sheet**



**Ark/Sheet**



För uppsugning av alla typer av petroleumprodukter. Perfekt att placera under drevet eller motorn vid tex oljebyten. Absorberar ej vatten.



For absorption of all types of petroleum products. Perfect to place underneath the drive or the engine when performing an oil change etc. Does not absorb water.

**Tekniska data/Specifications**

Storlek/Size: 400 x 500 mm.  
Uppsugningsförmåga ca 0,8 liter/per ark  
Absorbency: est. 0,8 liter/sheet

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
2416-5		5st/5pcs
2416-100		Bulk 100st/100pcs

**Avtappningskran**  
**Drain tap**



**Kran/Drain tap**

Kran för enkel avtappning från 20 liters Bag-in box  
Drain tap for easy usage of the 20 liters Bag-in box

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
2417		



## Kolvar Pistons



**B20, B30, MB10**  
 AQ115A, AQ115B  
 AQ130A, AQ130B, AQ130C, AQ130D  
 BB115A, BB115B, BB115C  
 MB20A, MB20B, MB20C  
 AQ165A, AQ170A, AQ170B, AQ170C  
 BB165A, BB170A, BB170B, BB170C  
 MB10A

Kolvbult/Piston pin 22 mm

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
11202	272002	Std.
11203	272012	,015" ö.d/o.s
11200	272004	,030" ö.d/o.s



### D4, D6

D4-180I-B, D4-180I-C, D4-180I-D, D4-180I-E, D4-210A-A, D4-225A-B, D4-210I-A, D4-210I-B, D4-225I-B, D4-225A-C, D4-225A-D, D4-225I-C, D4-225I-D, D4-260A-A, D4-260A-B, D4-260A-C, D4-260A-D, D4-260D-B, D4-260D-C, D4-260D-D, D4-260I-A, D4-260I-B, D4-260I-C, D4-260I-D, D4-300A-A, D4-300A-C, D4-300A-D, D4-300D-A, D4-300D-C, D4-300I-A, D4-300I-C, D4-300I-D, D4-225A-E, D4-225I-E, D4-260A-E, D4-260D-E, D4-260I-E, D4-300A-E, D4-300D-E, D4-300D-D, D4-300I-E

D6-280A-A, D6-280A-B, D6-280A-C, D6-280A-D, D6-280A-E, D6-280I-A, D6-280I-B, D6-280I-C, D6-280I-D, D6-280I-E, D6-310I-A, D6-310A-A, D6-310A-B, D6-310A-C, D6-310A-D, D6-310D-B, D6-310D-C, D6-310D-D, D6-310I-B, D6-310I-C, D6-310I-D, D6-330A-B, D6-330A-C, D6-330A-D, D6-330D-B, D6-330D-C, D6-330D-D, D6-330I-B, D6-330I-C, D6-330I-D, D6-350A-A, D6-350A-B, D6-370A-B, D6-370A-C, D6-370A-D, D6-370D-B, D6-370D-C, D6-370D-D, D6-370I-A, D6-370I-B, D6-370I-C, D6-370I-D, D6-310A-E, D6-310D-E, D6-310I-E, D6-330A-E, D6-330D-E, D6-330I-E, D6-370A-E, D6-370D-E, D6-370I-E, D6-400A-E, D6-435D-A, D6-435D-D, D6-435D-C, D6-435D-E, D6-435I-A, D6-435I-C, D6-435I-D, D6-435I-E

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
12545	21921545, 21728415, 3842771	Std.



Spare parts from Sweden

## Kolvringsatser Piston ring kits



**B18**  
AQ60F, AQ90, AQ95, AQ95A  
AQ110, AQ120  
BB100

Ringbredd/Ring width 2.0x2.0x4.0mm

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
11082	275282	Std.
11083	275283	,020" ö.d / o.s



**B21**  
AQ120B, AQ125A, AQ140A  
BB125A, BB140A

Ringbredd / Ring width 2.0x2.0x4.0mm

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
11337	275337	Std.
11338	275338	0,50 mm ö.d / o.s
11339	275339	1,00 mm ö.d / o.s

Ringbredd / Ring width 1.75x2.0x4.0mm


Art. nr/Part no	Ersätter/Replaces	Storlek/Size
11342	275342	1.00 mm ö.d / o.s



**B20, B30, MB10**  
AQ105A, AQ115A, AQ115B  
AQ130A, AQ130B, AQ130C, AQ130D  
BB115A, BB115B, BB115C  
MB20A, MB20B, MB20C  
AQ165A, AQ170A, AQ170B, AQ170C  
BB165A, BB170A, BB170B, BB170C  
MB10A

Ringbredd/Ring width 2,0x2.0x4.7mm

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
11534	275334	Std.
11536	275336	,030" ö.d / o.s

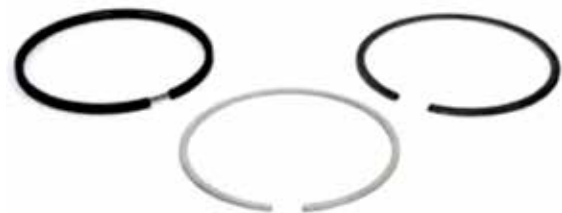

**B23**  
AQ145A  
BB145A

Ringbredd / Ring width 1.75x2.0x4.0mm

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
11531	275331	Std.



**B23, B25**  
230A, 230B  
AQ125B, AQ145B  
AQ131A, AQ131B, AQ131C, AQ131D  
AQ151A, AQ151B  
AQ171A, AQ171C  
250A, 251A

Ringbredd/Ring width 1.75x1.75x3.5mm

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
11369	275369	Std.



## Kolvringssatser Piston ring kits




### MD1A, MD2A, MD1, MD2

MD1A = 1st sats åtgär/1 kit required  
MD2A = 2 st satser åtgär/2 kits required

Cylinder diameter 79,37 mm

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
11271	875271	Std.



2001, 2002, 2003  
2001, 2001B, 2001AG, 2001BG,  
2002, 2002B, 2002D, 2002AG, 2002BG,  
2003, 2003B, 2003D, 2003AG, 2003BG, 2003T, 2003TB,  
2003 SOLAS, 2003B SOLAS, 2003TB SOLAS

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
11114	876114, 876012	Std.



### MD21, MD32

AQD21A, AQD21B, MD21A = 4st satser åtgär/4pcs of kits required  
AQD32A, MD32 = 6st satser åtgär/6pcs of kits required

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
11161	876161	Std.



### MD1B, MD2B, MD3B, MD11C/D, MD17C/D

MD1B, MD2B, MD3B  
MD11C, MD11D  
MD17C, MD17D

MD1B = 1st sats åtgär/1 kit required  
MD2B, MD11 = 2 st satser åtgär/2 kits required  
MD3B, MD17 = 3 st satser åtgär/3 kits required

Cylinder diameter 88,90 mm

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
11498	875498	Std.
11499	875499	0,75mm ö.d/o.s



### 31, 41, KAD32, KAD42, KAD43

AD31D, AD31D-A, AD31L-A, AD31P-A, AD31XD, TMD31D, TAMD31D,  
TMD31L-A, TAMD31L-A, TAMD31M-A, TAMD31P-A, TAMD31S  
KAD32P, KAD32P-A  
AD41D, AD41L-A, AD41P-A, D41D, D41L-A, TMD41D, TAMD41D,  
TAMD41H-A, TAMD41H-B, TMD41L-A, TAMD41P, TAMD41P-A  
KAD42A, KAD42B, KAD42P-A, KAMD42A, KAMD42B, KAMD42P-A,  
TAMD42B, TAMD42WJ-A  
KAD43P-A, KAD43P-B, KAMD43P, KAMD43P-A, KAMD43P-B

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
30033	3817033	Std.



## Kolvringsatser Piston ring kits



### 30, 40, 31, 41

MD30A, AD30A, AQAD30A, TMD30A, TAMD30A  
MD31A, TMD31A, TAMD31A, AD31, AD31B, TMD31B, TAMD31B,  
TMD31D, AD31D, AD31D-A, AD31XD, TAMD31D  
MD40A, AQD40A, TMD40A, TAMD40A, AQAD40A, AD40B, AQAD40B,  
TMD40B, TAMD40B, TMD40C  
AD41A, TMD41A, TAMD41A, D41B, TMD41B, AD41B, TAMD41B, AD41BJ,  
TAMD41D, D41D, AD41D

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
30350	275350	Std.



### KAD32, KAD44, KAD300

KAD32P  
KAD44P, KAD44P-A, KAD44P-B, KAD44P-C  
KAD300-A, KAMD300-A, KAMD300-B, KAMD300-C

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
30758	3586758	Std.



### TAM60

TAMD60A, TAMD60B, TAMD60C

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
30713	270713	Std.



Spare parts from Sweden

## Cylinderfodersatser Cylinder liner kits



**MD21, MD32**  
MD21B  
MD32A

Diameter: 90 mm

Art. nr/Part no	Ersätter/Replaces
30530	829530, 829254, 829532



**30, 40**

MD30A, AD30A, AQAD30A, TMD30A, TAMD30A  
MD40A, TMD40A, TAMD40A, AQD40A, AQAD40A, AD40B, AQAD40B,  
TMD40B, TAMD40B, TMD40C

Art. nr/Part no	Ersätter/Replaces
30722	875722



**31, 41**

MD31A, TMD31A, TAMD31A, AD31, AD31B, TMD31B, TAMD31B  
AD41A, TMD41A, TAMD41A, TAMD41H-A, TAMD41P, TAMD41P-A,  
D41L-A, AD41L-A, TMD41L-A, AD41P-A

Art. nr/Part no	Ersätter/Replaces
30099	876099, 867975, 838660



**31, 41**

AD31B, AD31D-A, AD31XD  
TAMD31B, TAMD31D  
TMD31B  
AD41B, AD41D  
D41B, D41D  
TAMD41B, TAMD41D  
TMD41B, TMD41D

Utän oljemunstycke/Without oil nozzle

Art. nr/Part no	Ersätter/Replaces
30834	876834, 876819, 876784, 876261, 22389354




**31, 41, KAD42, KAD43**

AD31L-A, AD31P-A  
TAMD31L-A, TAMD31M-A, TAMD31P-A, TAMD31S-A, TMD31L-A  
KAD32P-A  
AD41L-A, AD41P-A, D41L-A  
TAMD41H-A, TAMD41H-B, TAMD41P-A, TAMD41L-A, TAMD41M-A,  
TMD41L-A  
KAD42P-A, KAMD42P-A, TAMD42WJ-A  
KAD43P-A, KAMD43P-A

Art. nr/Part no	Ersätter/Replaces
30714	22185027, 3817034, 3581714, 876851



## Cylinderfodersatser Cylinder liner kits

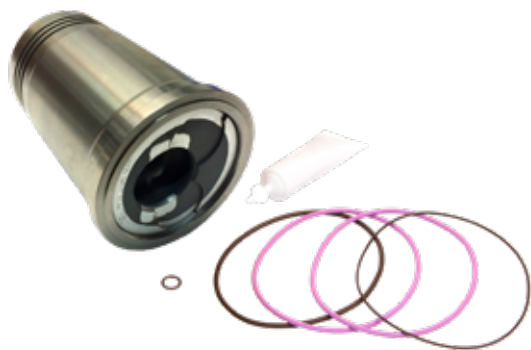

**KAD42**  
KAD42A, KAD42B, KAMD42A, KAMD42B, TAMD42B

Art. nr/Part no	Ersätter/Replaces
30071	876527, 877071, 22185019



**KAD32, KAD42, KAD43, KAD44, KAD300**  
KAD32P  
KAD42A, KAD42B, KAMD42A, KAMD42B, TAMD42B, TAMD42WJ-A  
KAD43P-A, KAD43P-B, KAMD43P, KAMD43P-A, KAMD43P-B  
KAD44P, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-B,  
KAMD44P-C  
KAD300-A, KAMD300-A

Art. nr/Part no	Ersätter/Replaces
30861	3817861, 3586722



**72, 73**  
TAMD72A, TAMD72P-A, TAMD72WJ-A  
TAMD73P-A, TAMD73WJ-A

Art. nr/Part no	Ersätter/Replaces
30548	876548

## Packningsatts cylinderfoder Gasket kits cylinder liner



**MD11, MD17**  
MD11C, MD11D = 2 satser åtgär / 2 kits required  
MD17C, MD17D = 3 satser åtgär / 3 kits required

Art. nr/Part no	Ersätter/Replaces
11550	875550



**30, 31, 40, 41, KAD32, KAD42, KAD43, KAD44, KAD300**  
AD30A, AQAD30A, MD30A, TAMD30A, TMD30A  
AD31A, AD31B, AD31L-A, AD31P-A, AD31XD, AQAD31A, MD31A,  
TAMD31A, TAMD31B, TAMD31D, TAMD31L-A, TAMD31M-A,  
TAMD31P-A, TMD31A, TMD31D, TMD31L-A  
KAD32P-A  
AD40B, AQAD40A, AQAD40B, AQD40A, MD40A  
TAMD40A, TAMD40B, TMD40A, TMD40B, TMD40C  
AD41A, AD41B, AD41D, AD41L-A, AD41P-A, AQAD41A, D41A, D41B,  
D41D, D41L-A  
TAMD41A, TAMD41B, TAMD41D, TAMD41H-A, TAMD41L-A  
TAMD41M-A, TAMD41P-A, TMD41A, TAMD41B, TMD41D, TMD41L-A  
KAD42A, KAD42B, KAD42P-A, KAMD42A, KAMD42B, KAMD42P-A  
TAMD42B, TAMD42WJ-A  
KAD43P-A, KAMD43P-A  
KAD44P-A, KAD44P-B, KAD44P-C,  
KAMD44P-A, KAMD44P-B, KAMD44P-C  
KAD300A, KAMD300A

30, 31 = 4 satser åtgär / 4 kits required  
40, 41, 42, 43, 44, 300 = 6 satser åtgär / 6 kits required

Art. nr/Part no	Ersätter/Replaces
11651	275751, 875651, 275595



## Ramlagersatser Main bearing kits



**B18, B20, B21, B23**  
 AQ60F, AQ90, AQ95, AQ95A, AQ110, AQ120  
 BB30, BB100  
 MB18  
 AQ105, AQ115A, AQ115B  
 AQ130A, AQ130B, AQ130C, AQ130D  
 BB115A, BB115B, BB115C  
 MB20A, MB20B, MB20C  
 AQ120B, AQ125A, AQ140A, BB140A  
 AQ145A, BB145A

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
11214	271214	Std.



**B23, B25**  
 230A, 230B  
 AQ131C, AQ131D  
 250A, 250B, 251A  
 AQ151C, AQ171C

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
11906	270906	Std.



**B30**  
 AQ165A, AQ170A, AQ170B, AQ170C  
 BB165A, BB170A, BB170B, BB170C

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
11019	271217	Std.



**MD1B, MD2B, MD3B, MD11C/D, MD17C/D**  
 MD1B, MD2B, MD3B  
 MD11C, MD11D  
 MD17C, MD17D

Lagerbredd/Bearing width: 28mm

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
11139	833139, 875484	Std.



**MD1, MD2, MD3, MD11, MD17**  
 MD1B, 2B, 3BMD11C, MD11D  
 MD17C, MD17D

Lagerbredd/Bearing width: 39mm

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
11238	833138, 875483	Std.



**MD21**  
 AQD21A, AQD21B  
 MD21A

Tryckbricksats 11262 ingår ej.  
 Thust washer kit 11262 not included.

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
11306	875306	Std.
11307	875307	0,30 mm u.d/u.s
11308	875308	0,50 mm u.d/u.s



## Ramlagersatser Main bearing kits



### MD29, MD32

AQD29, AQD29A  
MD 29, MD29A  
AQD32A, MD32A

Tryckbricksats 11262 ingår ej / thrust washer kit 11262 not included.

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
11335	875335	0,30 mm u.d / u.s.
11336	875336	0,50 mm u.d / u.s.



### 30, 31, 40, 41, KAD32, KAD42, KAD43, KAD44, KAD300

MD30A, AD30A, AQAD30A, TMD30A, TAMD30A  
MD31A, TMD31A, TAMD31A, TMD31B, TAMD31B, AD31, AD31B,  
TMD31D, AD31D, AD31D-A, TAMD31D, AD31L-A, AD31P-A, AD31XD,  
TMD31L-A, TAMD31L-A, TAMD31M-A, TAMD31P-A, TAMD31S  
KAD32P, KAD32P-A  
MD40A, AQD40A, AQAD40A, TMD40A, TAMD40A, AQAD40B, AD40B,  
TMD40B, TAMD40B, TMD40C  
AD41A, TMD41A, TAMD41A, D41B, AD41B, TMD41B, TAMD41B,  
AD41BJ, D41D, D41L-A, AD41D, TMD41D, TAMD41D, AD41L-  
A, AD41P-A, TMD41L-A, TAMD41H-A, TAMD41H-B, TAMD41P,  
TAMD41P-A  
KAD42A, KAD42B, KAD42P-A, KAMD42A, KAMD42B, KAMD42P-A,  
TAMD42B, TAMD42WJ-A  
KAD43P-A, KAD43P-B, KAMD43P, KAMD43P-A, KAMD43P-B  
KAD44P, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-B,  
KAMD44P-C  
KAD300A, KAMD300A

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
11515	876515, 270467	Std.

### D4, D6

D4-145I-G, D4-150A-G, D4-175I-G  
D4-180I-B, D4-180I-C, D4-180I-D, D4-180I-E, D4-180I-F  
D4-210A-A, D4-225A-B, D4-210I-A, D4-210I-B  
D4-225I-B, D4-225A-C, D4-225A-D, D4-225I-C, D4-225I-D, D4-225A-E  
D4-225I-E, D4-225A-F, D4-225I-F  
D4-260A-A, D4-260A-B, D4-260A-C, D4-260A-D, D4-260D-B, D4-260D-C  
D4-260D-D, D4-260I-A, D4-260I-B, D4-260I-C, D4-260I-D, D4-260A-E  
D4-260D-E, D4-260I-E, D4-260A-F, D4-260D-F, D4-260I-F  
D4-300A-A, D4-300A-C, D4-300A-D, D4-300D-A, D4-300D-C, D4-300I-A  
D4-300I-C, D4-300I-D, D4-300A-E, D4-300D-E, D4-300D-D, D4-300I-E  
D4-300A-F, D4-300D-F, D4-300I-F, D4-300I-G  
D4-320A-G, D4-320I-G

D6-280A-A, D6-280A-B, D6-280A-C, D6-280A-D, D6-280A-E, D6-280I-A  
D6-280I-B, D6-280I-C, D6-280I-D, D6-280I-E  
D6-310I-A, D6-310A-A, D6-310A-B, D6-310A-C, D6-310A-D, D6-310D-B,  
D6-310D-C, D6-310D-D, D6-310I-B, D6-310I-C, D6-310I-D, D6-310A-E,  
D6-310D-E, D6-310I-E  
D6-330A-B, D6-330A-C, D6-330A-D, D6-330D-B, D6-330D-C, D6-330D-D,  
D6-330I-B, D6-330I-C, D6-330I-D, D6-330A-E, D6-330D-E, D6-330I-E  
D6-350A-A, D6-350A-B,  
D6-370A-B, D6-370A-C, D6-370A-D, D6-370D-B, D6-370D-C, D6-370D-D,  
D6-370I-A, D6-370I-B, D6-370I-C, D6-370I-D, D6-370A-E, D6-370D-E,  
D6-370I-E,  
D6-400A-E  
D6-435D-A, D6-435D-D, D6-435D-C, D6-435D-E, D6-435I-A, D6-435I-C,  
D6-435I-D, D6-435I-E, D6-435I-F  
D6-440A-G, D6-440D-G, D6-440I-G, D6-440I-WJ-G  
D6-480D-G, D6-480I-G, D6-480I-WJ-G

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
11687	3586871	Std.



## Vevlager Con rod bearings



### B18, B20

AQ60F, AQ90, AQ95, AQ95A, AQ110, AQ120  
BB30, BB100  
MB18  
AQ105, AQ115A, AQ115B  
AQ130A, AQ130B, AQ130C, AQ130D  
BB115A, BB115B, BB115C  
MB20A, MB20B, MB20C

Lagerbredd/Bearing width 27 mm

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
11051	271051	Std.



### B23, B25

230A, 230B  
AQ125B  
AQ131A, AQ131B, AQ131C, AQ131D  
AQ145B  
250A, 251A  
AQ151A, AQ151B, AQ151C  
AQ171A, AQ171C

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
11136	270136	Std.
11137	270137	0,25mm u.d/u.s



### B20, B21, B23

AQ105A, AQ115A, AQ115B  
AQ130A, AQ130B, AQ130C, AQ130D  
BB115A, BB115B, BB115C  
MB20A, MB20B, MB20C  
AQ120B  
AQ125A  
AQ140A, BB140A  
AQ145A, BB145A

Lagerbredd/Bearing width 24 mm

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
11063	271063	Std.



### B30

AQ165A  
AQ170A, AQ170B, AQ170C  
BB165A  
BB170A, BB170B, BB170C

Lagerbredd/Bearing width 27 mm

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
11022	271054	Std.



## Vevlager Con rod bearings



### MD1B, MD2B, MD3B, MD11, MD17

MD1, MD1A, MD1B  
MD2, MD2A, MD2B  
MD3B  
MD11C, MD11D  
MD17C, MD17D

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
11491	875491, 803353	Std.



### MD21

AQD21A, AQD21B  
MD21A, MD21B

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
11302	875302	Std.
11304	875304	0,50mm u.d/u.s
11305	875305	0,80mm u.d/u.s



### MD29, MD32

AQD29, AQD29A  
MD29, MD29A  
AQD32A  
MD32A

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
11330	875330	Std.
11331	875331	0,30mm u.d/u.s
11332	875332	0,50mm u.d/u.s
11333	875333	0,80mm u.d/u.s



### 30, 31, 40, 41, KAD32, KAD42, KAD43, KAD44, KAD300

MD30A, AD30A, AQAD30A, TMD30A, TAMD30A  
MD31A, AD31, TMD31A, TAMD31A, TMD31B, TAMD31B, AD31B, AD31D,  
AD31D-A, TMD31D, TAMD31D, TMD31L-A, TAMD31L-A, TAMD31M-A,  
TAMD31P-A, AD31L-A, AD31P-A, AD31XD, TAMD31S  
KAD32P  
MD40A, AD40B, AQD40A, AQAD40A, TMD40A, TAMD40A, AQAD40B,  
TMD40B, TAMD40B, TMD40C  
AD41A, D41B, TMD41A, TAMD41A, TMD41B, TAMD41B, AD41B, AD41BJ,  
AD41D, TMD41D, TAMD41D, D41D, D41L-A, AD41L-A, TMD41L-A, AD41P-  
A, TAMD41H-A, TAMD41H-B, TAMD41P, TAMD41P-A  
KAD42A, KAMD42A, KAD42B, TAMD42B, KAMD42B, KAD42P-A,  
KAMD42P-A, TAMD42WJ-A  
KAD43P-A, KAD43P-B, KAMD43P, KAMD43P-A, KAMD43P-B  
KAD44P, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-B, KAMD44P-C  
KAD300A, KAMD300-A

Säljes parvis/Sold as a pair

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
11511	876511	Std.



## Vevlager Con rod bearings



### D4, D6

D4-180I-B, D4-180I-C, D4-180I-D, D4-180I-E, D4-180I-F

D4-210A-A, D4-225A-B, D4-210I-A, D4-210I-B

D4-225I-B, D4-225A-C, D4-225A-D, D4-225I-C, D4-225I-D, D4-225A-E,  
D4-225I-E, D4-225A-F, D4-225I-F

D4-260A-A, D4-260A-B, D4-260A-C, D4-260A-D, D4-260D-B,  
D4-260D-C, D4-260D-D, D4-260I-A, D4-260I-B, D4-260I-C, D4-260I-D,  
D4-260A-E, D4-260D-E, D4-260I-E, D4-260A-F, D4-260D-F, D4-260I-F

D4-300A-A, D4-300A-C, D4-300A-D, D4-300D-A, D4-300D-C,  
D4-300I-A, D4-300I-C, D4-300I-D, D4-300A-E, D4-300D-E, D4-300D-D,  
D4-300I-E, D4-300A-F, D4-300D-F, D4-300I-F

D6-280A-A, D6-280A-B, D6-280A-C, D6-280A-D, D6-280A-E, D6-280I-A,  
D6-280I-B, D6-280I-C, D6-280I-D, D6-280I-E

D6-310I-A, D6-310A-A, D6-310A-B, D6-310A-C, D6-310A-D, D6-310D-B,  
D6-310D-C, D6-310D-D, D6-310I-B, D6-310I-C, D6-310I-D, D6-310A-E,  
D6-310D-E, D6-310I-E

D6-330A-B, D6-330A-C, D6-330A-D, D6-330D-B, D6-330D-C,  
D6-330D-D, D6-330I-B, D6-330I-C, D6-330I-D, D6-330A-E, D6-330D-E,  
D6-330I-E

D6-350A-A, D6-350A-B

D6-370A-B, D6-370A-C, D6-370A-D, D6-370D-B, D6-370D-C,  
D6-370D-D, D6-370I-A, D6-370I-B, D6-370I-C, D6-370I-D, D6-370A-E,  
D6-370D-E, D6-370I-E

D6-400A-E

D6-435D-A, D6-435D-D, D6-435D-C, D6-435D-E, D6-435I-A, D6-435I-C,  
D6-435I-D, D6-435I-E

Säljes parvis/Sold as a pair

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
11323	3885323	Std.



Spare parts from Sweden

## Trycklager Thrust bearings



### 31, 41, KAD32, KAD42, KAD43, KAD44, KAD300

TMD31D, TMD31E, AD31D-A, AD31XD, AD31L-A, AD31P-A, TAMD31L-A, TAMD31M-A, TAMD31P-A, TAMD31S-A, TMD31L-A, MD31A, TMD31A, TAMD31A, AD31A, AQAD31A, TMD31B, TAMD31B, AD31B, KAD32P-A,

AD41B, AD41L-A, AD41P-A, D41A, D41L-A, AQAD41A, AD41A, TAMD41A, TAMD41H-A, TAMD41H-B, TAMD41P-A, TAMD41L-A, TAMD41M-A, TMD41A, TMD41L-A, TMD41B, TMD41D, TAMD41B, TAMD41D, AD41D, D41B, D41D

TAMD42WJ-A, KAMD42A, KAD42A, TAMD42B, KAMD42B, KAD42B, KAMD42P-A, KAD42P-A, KAMD43P-A, KAD43P-A, KAMD44P-A, KAMD44P-C, KAD44P-A, KAD44P-B, KAD44P-C, KAD300-A, KAMD300-A

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
11519	876519	Std.



### D4, D6

D4-180I-B, D4-180I-C, D4-180I-D, D4-180I-E, D4-180I-F  
D4-210A-A, D4-225A-B, D4-210I-A, D4-210I-B  
D4-225I-B, D4-225A-C, D4-225A-D, D4-225I-C, D4-225I-D, D4-225A-E, D4-225I-E, D4-225A-F, D4-225I-F  
D4-260A-A, D4-260A-B, D4-260A-C, D4-260A-D, D4-260D-B, D4-260D-C, D4-260D-D, D4-260I-A, D4-260I-B, D4-260I-C, D4-260I-D, D4-260A-E, D4-260D-E, D4-260I-E, D4-260A-F, D4-260D-F, D4-260I-F  
D4-300A-A, D4-300A-C, D4-300A-D, D4-300D-A, D4-300D-C, D4-300I-A, D4-300I-C, D4-300I-D, D4-300A-E, D4-300D-E, D4-300D-D, D4-300I-E, D4-300A-F, D4-300D-F, D4-300I-F

D6-280A-A, D6-280A-B, D6-280A-C, D6-280A-D, D6-280A-E, D6-280I-A, D6-280I-B, D6-280I-C, D6-280I-D, D6-280I-E  
D6-310I-A, D6-310A-A, D6-310A-B, D6-310A-C, D6-310A-D, D6-310D-B, D6-310D-C, D6-310D-D, D6-310I-B, D6-310I-C, D6-310I-D, D6-310A-E, D6-310D-E, D6-310I-E  
D6-330A-B, D6-330A-C, D6-330A-D, D6-330D-B, D6-330D-C, D6-330D-D, D6-330I-B, D6-330I-C, D6-330I-D, D6-330A-E, D6-330D-E, D6-330I-E  
D6-350A-A, D6-350A-B  
D6-370A-B, D6-370A-C, D6-370A-D, D6-370D-B, D6-370D-C, D6-370D-D, D6-370I-A, D6-370I-B, D6-370I-C, D6-370I-D, D6-370A-E, D6-370D-E, D6-370I-E  
D6-400A-E  
D6-435D-A, D6-435D-D, D6-435D-C, D6-435D-E, D6-435I-A, D6-435I-C, D6-435I-D, D6-435I-E

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
11877	3586877, 24051715	Std.

## Tryckbricksats vevaxel Thrust washers crankshaft



### MD21, MD29, MD32

AQD21A, AQD21B, MD21A, MD21B  
AQD29, AQD29A, MD29, MD29A  
AQD32A, MD32A

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
11262	818262	Std.

## Stödlager vevaxel Support bearing crankshaft



### B18, B20, B21, B23, B25, B30

AQ60F, AQ90, AQ95, AQ95A, AQ110, AQ120, BB30, BB100, MB18  
AQ115A, AQ115B, BB115A, BB115B, BB115C  
AQ130A, AQ130B, AQ130C, AQ130D, MB20A, MB20B, MB20C  
AQ120B, AQ125A, AQ140A, BB140A  
230A, 230B  
AQ125B, AQ131A, AQ131B, AQ131C, AQ131D  
AQ145A, BB145A  
250A, 250B, 251A  
AQ151A, AQ151B, AQ151C, AQ171A, AQ171C  
AQ165A, BB165A,  
AQ170A, AQ170B, AQ170C, BB170A, BB170B, BB170C

### Kapslat lager/Sealed bearing

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
11799	181799	Std.



## Vevstaksbult Connecting rod bolt



**30, 31, 40, 41, KAD32, KAD42, KAD43, KAD44, KAD300**  
MD30A, AD30A, AQAD30A, TMD30A, TAMD30A

MD31A, TMD31A, TAMD31A, AD31, TMD31B, TAMD31B, AD31B,  
AD31D, TMD31D, TAMD31D, AD31D-A, TAMD31L-A, AD31L-A,  
AD31P-A, AD31XD, TMD31L-A, TAMD31M-A, TAMD31P-A, TAMD31S

KAD32P

MD40A, AD40B, AQD40A, AQAD40A, TMD40A, TAMD40A, TMD40B,  
AQD40B, AQAD40B, TAMD40B, TMD40C

D41A, AD41A, TMD41A, TAMD41A, D41B, AD41B, AD41BJ, TMD41B,  
TAMD41B, AD41D, TMD41D, TAMD41D, D41L-A, AD41L-A, TMD41L-  
A, AD41P-A, TAMD41P, TAMD41P-A, TAMD41H-A, TAMD41H-B

KAD42, KAD42A, KAD42B, KAD42P-A, KAMD42A, KAMD42B,  
TAMD42B, KAMD42P-A, TAMD42WJ-A

KAD43, KAD43P-A, KAD43P-B, KAMD43P, KAMD43P-A, KAMD43P-B

KAD44P, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-B,  
KAMD44P-C

KAD300-A, KAMD300-A

Vevstaksbult inklusive mutter/Connecting rod bolt including nut

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
12079	1542077, 1542078, 861499	

## Kamaxlar Camshafts



**B18, B20**

AQ60F  
AQ90  
AQ95, AQ95A  
AQ105  
AQ110  
AQ115A, AQ115B  
AQ120  
AQ130A, AQ130B, AQ130C, AQ130D  
BB30, BB100, MB18  
BB115A, BB115B, BB115C  
MB20A, MB20B, MB20C

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
12003	1218674	Profil/profile: P



**B21, B23**

AQ120B, AQ125A  
230A, 230B  
AQ125B  
AQ131A, AQ131B, AQ131C, AQ131D

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
12767	1336767, 1219706	



## Kamaxelbricka Thrust flange



**B18, B20, B30**  
 AQ60F, AQ90, AQ95, AQ95A, AQ110, AQ120  
 BB30, BB100  
 AQ105, AQ115A, AQ115B, BB115A, BB115B, BB115C  
 AQ130A, AQ130B, AQ130C, AQ130D  
 MB18, MB20A, MB20B, MB20C  
 AQ165A, BB165A  
 AQ170A, AQ170B, AQ170C, BB170A, BB170B, BB170C

Skrubar ingår/Screws included

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
22142	418267	

## Tätbricka kamaxel Rubber washer camshaft



**B23, B25**  
 230B  
 AQ125B  
 AQ131A, AQ131B, AQ131C, AQ131D  
 AQ145B  
 250A, 250B  
 AQ151A, AQ151B, AQ151C

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
12006	1336763	Std.

## Ombyggnadsats bakre vevaxeltätning Flange kit rear crankshaft sealing



**B18, B20**  
 AQ60F, AQ90, AQ95, AQ95A, AQ110  
 AQ120  
 BB30, BB100  
 MB18  
 AQ115A, AQ115B  
 AQ130A, AQ130B, AQ130C, AQ130D  
 BB115A, BB115B, BB115C  
 MB20A, MB20B, MB20C

Art. nr/Part no	Ersätter/Replaces	
11014	1218634 x 1	
	430118 x 1	
	430134 x 1	



## Ventiler Valves



**B18**  
AQ60F, AQ90, AQ95, AQ95A, AQ110  
BB30, BB100

AQ 95A, 120A Endast avgas/Only outlet

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
12368	419368, 418290	Insug/Inlet 40 x 8,6 mm



**B20, B30**  
AQ105A  
AQ115A, AQ115B, BB115A, BB115B, BB115C  
AQ130A, AQ130B, AQ130C, AQ130D  
MB20A, MB20B, MB20C  
AQ165A, BB165A  
AQ170A, AQ170B, AQ170C, BB170A, BB170B, BB170C

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
12005	419735	Avgas/Exhaust 35 mm



**B21, B23, B25**  
AQ120B, AQ125A, AQ140A, BB140A  
230A, 230B  
AQ125B  
AQ131A, AQ131B, AQ131C, AQ131D  
AQ145A, AQ145B, BB145A  
250A, 250B  
AQ151A, AQ151B, AQ151C

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
12395	463395	Insug/Inlet 44 mm
12526	463526	Avgas/Exhaust 35 mm



**B25**  
251A  
AQ171A, AQ171C

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
12793	1317793	Insug/Inlet 34,5 mm
12792	1317792	Avgas/Exhaust 31,5 mm



**MD1B, MD2B, MD3B, MD11, MD17**  
MD1B, MD2B, AQD2B, MD3B  
MD11C, MD11D  
MD17C, MD17D

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
12188	833188	Insug/Inlet 34 mm
12020	829620	Avgas/Exhaust 38 mm



**40**  
AD40B  
AQAD40A, AQAD40B  
AQD40A  
MD40A  
TAMD40A, TAMD40B  
TMD40A, TMD40B, TMD40C

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
12472	1542472	Insug/Inlet 42 mm
12389	1542389	Avgas/Exhaust 36 mm



## Ventiler Valves



**31, 32, 41, 42, 43**

MD31A, TMD31A, TAMD31A, AD31, TMD31B, TAMD31B, AD31B, AD31D, TMD31D, TAMD31D, AD31D-A, AD31L-A, AD31P-A, AD31XD, TMD31L-A, TAMD31L-A, TAMD31M-A, TAMD31P-A, TAMD31S

KAD32P-A

TMD41A, TAMD41A, AD41A, D41B, TMD41B, TAMD41B, AD41B, AD41BJ, D41D, TMD41D, TAMD41D, AD41D, D41L-A, AD41L-A, AD41P-A, TAMD41H-A, TAMD41H-B, TAMD41P, TAMD41P-A, TMD41L-A

KAD42A, KAD42B, KAD42P-A, KAMD42A, KAMD42B, KAMD42P-A, TAMD42B, TAMD42WJ-A

KAD43P-A, KAD43P-B, KAMD43P, KAMD43P-A, KAMD43P-B

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
12637	838637	Insug/Inlet 39 mm
12638	838638	Avgas/Exhaust 37 mm



**KAD44, KAD300**

KAD44P, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-C  
KAD300-A, KAMD300-A

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
12698	861698	Insug/Inlet
12699	861699	Avgas/Exhaust



**D3**

D3-110I-A, D3-110I-B, D3-110I-C, D3-110I-D, D3-110I-E, D3-110I-F, D3-110I-G, D3-110I-H  
D3-130A-A, D3-130A-B, D3-130A-C, D3-130I-A, D3-130I-B, D3-130I-C, D3-140A-D, D3-140A-E, D3-140A-F, D3-140A-G, D3-140A-H, D3-140I-D, D3-140I-E, D3-140I-F, D3-140I-G, D3-140I-H  
D3-150I-D, D3-150I-E, D3-150I-F, D3-150I-G, D3-150I-H  
D3-160A-A, D3-160A-B, D3-160A-C, D3-160I-A, D3-160I-B, D3-160I-C, D3-170A-D, D3-170A-E, D3-170A-F, D3-170A-G, D3-170A-H, D3-170I-D, D3-170I-E, D3-170I-F, D3-170I-G, D3-170I-H  
D3-190A-B, D3-190A-C, D3-190I-A, D3-190I-B, D3-190I-C  
D3-200A-D, D3-200A-E, D3-200A-F, D3-200A-G, D3-200A-H, D3-200I-D, D3-200I-E, D3-200I-F, D3-200I-G, D3-200I-H  
D3-220A-D, D3-220A-E, D3-220A-F, D3-220A-G, D3-220A-H, D3-220I-D, D3-220I-E, D3-220I-F, D3-220I-G, D3-220I-H

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
12650	8631650	Insug/Inlet
12651	8631651	Avgas/Exhaust



**D4, D6**

D4-180I-B, D4-180I-C, D4-180I-D, D4-180I-F, D4-210A-A, D4-210I-A, D4-210I-B, D4-225A-B, D4-225I-B, D4-225A-C, D4-225A-D, D4-225I, D4-225A-F, D4-225I-F, D4-260A-F, D4-260D-F, D4-260I-F, D4-300A-F, D4-300D-F, D4-300I-F

D6-280A-A, D6-280A-B, D6-280A-C, D6-280A-D, D6-280A-E, D6-280I-A, D6-280I-B, D6-280I-C, D6-280I-D, D6-280I-E, D6-310I-A, D6-310A, D6-300A-F, D6-300D-F, D6-300I-F, D6-300A-F, D6-330A-F, D6-330D-F, D6-330I-F, D6-370A-F, D6-370D-F, D6-370I-F, D6-400A-F, D6-435D-F

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
12886	3884010, 3581886	Insug/Inlet
12887	3884015, 3581887	Avgas/Exhaust



## Ventiljusteringsatts Valve adjustment kit



### KAD44, KAD300

KAD44P-A, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-B,  
KAMD44P-C  
KAD300A, KAMD300A

Art. nr/Part no	Ersätter/Replaces
22180	944988 x 6 + 11991 x 13

## Ventilknaster Valve cotters



### B20, B21, B23, B25, B30, MB10, 30, 40, D9, D11, D13

MB10A  
AQ115A, AQ115B  
AQ120B  
AQ125A, AQ125B  
AQ130A, AQ130B, AQ130C, AQ130D  
AQ131A, AQ131B, AQ131C, AQ131D  
AQ140A, BB140A  
AQ145A, AQ145B, BB145A  
AQ151A, AQ151B, AQ151C  
AQ165A, BB165A  
AQ170A, AQ170B, AQ170C, BB170A, BB170B, BB170C  
230A  
250A, 250B  
AQAD30A, MD30A, TAMD30A, TMD30A, TD30A  
MD40A, TMD40A, AQD40A, TAMD40A, TAMD40B, AQAD40A, AQAD40B

Art. nr/Part no	Ersätter/Replaces
13643	419643

## Ventilknaster Valve cotters



### D4, D6, KAD44, KAD300

D4-145I-G  
D4-150A-G  
D4-175I-G  
D4-180I-B, D4-180I-C, D4-180I-D, D180I-E, D180I-F  
D4-210A-A, D4-210A-B, D4-210I-A, D4-210I-B  
D4-225A-B, D4-225A-C, D4-225A-D, D4-225A-E, D4-225A-F, D4-225I-B,  
D4-225I-C, D4-225I-D, D4-225I-E, D4-225I-F  
D4-230A-G, D4-230I-G  
D4-260A-A, D4-260A-B, D4-260A-C, D4-260A-D, D4-260A-E, D4-260A-F,  
D4-260D-B, D4-260D-C, D4-260D-D, D4-260D-E, D4-260D-F, D4-260I-A,  
D4-260I-B, D4-260I-C, D4-260I-D, D4-260I-E, D4-260I-F  
D4-270A-G, D4-270I-G  
D4-300A-A, D4-300A-C, D4-300A-D, D4-300A-E, D4-300A-F, D4-300A-G,  
D4-300D-A, D4-300D-C, D4-300D-D, D4-300D-E, D4-300D-F, D4-300I-A,  
D4-300I-C, D4-300I-D, D4-300I-E, D4-300I-F, D4-300I-G  
D4-320A-G

D6-280A-A, D6-280A-B, D6-280A-C, D6-280A-D, D6-280A-E, D6-280I-A,  
D6-280I-B, D6-280I-C, D6-280I-D, D6-280I-E  
D6-300A-F, D6-300A-G, D6-300D-F, D6-300D-G, D6-310I-F, D6-310I-G,  
D6-310A-A, D6-310A-B, D6-310A-C, D6-310A-D, D6-310A-E,  
D6-310D-B, D6-310D-C, D6-310D-D, D6-310D-E, D6-310I-A, D6-310I-B,  
D6-310I-C, D6-310I-D, D6-310I-E  
D6-330A-B, D6-330A-C, D6-330A-D, D6-330A-E, D6-330A-F, D6-330D-B,  
D6-330D-C, D6-330D-D, D6-330D-E, D6-330D-F, D6-330I-B, D6-330I-C,  
D6-330I-D, D6-330I-E, D6-330I-F  
D6-340A-G, D6-340D-G, D6-340I-G  
D6-350A-A, D6-350A-B  
D6-370A-B, D6-370A-C, D6-370A-D, D6-370A-E, D6-370A-F, D6-370D-A,  
D6-370D-B, D6-370D-C, D6-370D-D, D6-370D-E, D6-370D-F, D6-370I-A,  
D6-370I-B, D6-370I-C, D6-370I-E, D6-370I-F  
D6-380A-E, D6-380A-F  
D6-400A-E, D6-400A-F, D6-400A-G  
D6-435D-A, D6-435D-C, D6-435D-D, D6-435D-E, D6-435D-F, D6-435I-A,  
D6-435I-C, D6-435I-D, D6-435I-E, D6-435I-F  
D6-440A-G, D6-440D-G, D6-440I-G, D6-440I-WJ-G  
D6-480D-G, D6-480I-G, D6-480I-WJ-G

KAD44P-A, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-B,  
KAMD44P-C

KAD300-A, KAMD300-A

Art. nr/Part no	Ersätter/Replaces
12703	861703



## Ventiltätningar Valve sealings



**2000, 31, 41, 32, 42, 43, 63, 74, 75, D9, D12**

2001, 2001AG, 2001B, 2001BG, 2001D, 2001R

2002, 2002AG, 2002B, 2002BG, 2002D

2003, 2003 SOLAS, 2003B, 2003B SOLAS, 2003R, 2003R SOLAS

2003T, 2003TB, 2003TB SOLAS, 2003TR

MD31A, TMD31A, TAMD31A, TMD31B, TAMD31B, TMD31D, TAMD31D,  
TAMD31L-A, TAMD31M-A, TAMD31P-A, TAMD31S, AD31, AD31B,  
AD31D, AD31D-A, TMD31L-A, AD31L-A, AD31P-A, AD31XD

AD41A, AD41B, AD41BJ, AD41D, AD41L-A, AD41P-A, D41B, D41D,  
D41L-A, TMD41A, TAMD41A, TMD41B, TAMD41B, TMD41D, TMD41L-A,  
TAMD41D, TAMD41H-A, TAMD41H-B, TAMD41P, TAMD41P-A

KAD32P, KAD42A, KAD42B, TAMD42B, TAMD42WJ-A, KAD43P-A,  
KAD43P-B, KAMD42A, KAMD42B, KAMD42P-A, KAMD43P, KAMD43P-  
A, KAMD43P-B

TAMD63L-A, TAMD63P-A

TAMD74A, TAMD74C-A, TAMD74C-B, TAMD74L-A, TAMD74L-B,

TAMD74P-A, TAMD74P-B

TAMD75P-A

D9A2A, D9A2B, D9A2C, D9A2D, D9A2E, D9A2F, D9A2G, D9A2H, D9A2J,  
D9A2K, D9A2L MH, D9A2M MP

D12C-A MP, D12D-A MH, D12D-A MP, D12D-B MH, D12D-B MP,  
D12D-B MP, D12D-C MH, D12D-C MP, D12D-D MP, D12D-E MH,  
D12D-E MP, D12D-F MP, D12D-G MH, D12D-G MP, D12D-H MP

Art. nr/Part no	Ersätter/Replaces
12171	21501189, 859171



**22**

MD22A, TMD22A, MD22L, MD22P, TAMD22P-B, TMD22B, TMD22P-C

Art. nr/Part no	Ersätter/Replaces
12251	419643



**MD1-3, MD5, MD7, MD11-17, 2000, 30, 31, 32, 41, 42, B21, B23, B30,**

MD1B, MD2B, AQD2B, MD3B

MD5A, MD5B, MD5C

MD7A, MD7B

MD11C, MD11D, MD17C, MD17D

MD30A, AD30A, AQAD30A, TMD30A, TAMD30A

MD31A, AD31B, AD31D-A, AD31L-A, AD31P-A, AD31XD, TMD31B,  
TMD31D, TAMD31B, TAMD31D, TMD31L-A, TAMD31L-A, TAMD31M-A,  
TAMD31P-A, TAMD31S

MD40A, AD40B, AQD40A, AQAD40A, AQAD40B, TMD40A, TAMD40A,  
TMD40B, TAMD40B, TMD40C

AD41B, D41B, AD41BJ, AD41D, D41D, D41L-A, AD41L-A, AD41P-A,  
TMD41B, TAMD41B, TMD41D, TAMD41D, TMD41L-A, TAMD41H-A,  
TAMD41P, TAMD41P-A

KAD32P, KAD42A, KAD42B, KAD42P-A, KAMD42A, KAMD42B,  
KAMD42P-A, TAMD42B

230A, 230B, 250A, 250B

AQ120B, AQ140A, BBI40A

AQ125A, AQ125B, AQ145A, BBI45A

AQ131A, AQ131B, AQ131C, AQ131D

AQ151A, AQ151B, AQ151C

AQ165A, AQ170A, AQ170B, AQ170C, BBI65A, BBI70A, BBI70B,

BBI70C

Art. nr/Part no	Ersätter/Replaces
12630	1306630, 419702, 833347



## Ventilstyrningar Valve guides



**MB10**  
MB10A

Insug och avgas/Inlet and outlet

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
12652	419652	52x13,5x8 mm



**B18**  
AQ60F, AQ90, AQ95, AQ95A  
AQ110, AQ120  
BB30, BB100  
MB18

Insug och avgas/Inlet and outlet

AQ95A, AQ120  
Endast avgas/Outlet only

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
12603	3547603, 463771	63,5x15x8,7 mm



**B20, B30**  
AQ105A  
AQ115A, AQ115B, BB115A, BB115B, BB115C  
AQ130A, AQ130B, AQ130C, AQ130D  
AQ165A, BB165A  
AQ170A, AQ170B, AQ170C, BB170A, BB170B, BB170C

Insug och avgas/Inlet and outlet

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
12652	419652	Insug/Inlet 52x13,5x8 mm
12653	3582561, 419653	Avgas/Exhaust 59x13,5x8 mm



**B21, B23, B25**  
AQ120B  
AQ125A, AQ125B  
AQ131A, AQ131B, AQ131C, AQ131D  
AQ140A, BB140A  
AQ145A, AQ145B, BB145A  
AQ151A, AQ151B, AQ151C  
230A, 230B  
250A, 250B

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
12652	419652	Insug/Inlet 52x13,5x8 mm
12603	3547603, 463771	Avgas/Exhaust 63,5x15x8,7 mm



**B25**  
251A  
AQ171A, AQ171C

Insug och avgas/Inlet and outlet

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
12960	1378960	55x12,0x7 mm

## Ventillyftare Valve tappet



**B18, B20, B30**  
AQ60F, AQ90, AQ95, AQ95A, AQ110  
AQ120  
BB30, BB100  
MB18  
AQ105, AQ115A, AQ115B, BB115A,  
BB115B, BB115C  
AQ130A, AQ130B, AQ130C, AQ130D  
MB20A, MB20B, MB20C  
AQ165A, AQ170A, AQ170B, AQ170C  
BB165A, BB170A, BB170B, BB170C

Art. nr/Part no	Ersätter/Replaces
12513	1218630, 418423



## Ventilstyrningar Valve guides



**MD1B, MD2B, MD3B, MD11, MD17, 30, 31, 40, 41, KAD42, KAD43**  
 MD1B, 2B, 3B, 11C,D,17C,D (endast/only insug/inlet)  
 AQAD30A, MD30A, TAMD30A, TMD30A  
 AD31B, AD31D-A, AD31L-A, AD31P-A  
 AQAD31A  
 MD31A  
 TAMD31A, TAMD31B, TAMD31D, TAMD31L-A, TAMD31M-A  
 TAMD31P-A, TAMD31S-A  
 TMD31A, TMD31B, TMD31L-A  
 KAD32P-A  
 AQAD40A, AQAD40B, AQD40A  
 MD40A  
 TMD40A, TMD40B, TMD40C, TAMD40A, TAMD40B  
 AD41D, AD41L-A, AD41P-A  
 AQAD41A  
 TAMD41A, TAMD41B, TAMD41D, TAMD41H-A, TAMD41H-B  
 TAMD41L-A, TAMD41M-A, TAMD41P-A  
 TMD41A, TMD41B, TMD41D, TMD41L-A  
 KAD42A, KAD42B, KAD42P-A  
 KAMD42A, KAMD42B, KAMD42P-A  
 TAMD42B, TAMD42WJ-A  
 KAD43P-A, KAMD43P-A

Insug och avgas/Inlet and outlet

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
12653	3582561, 419653	59x13,5x8 mm



**70, 71, 72, 73**  
 MD70B, TMD70B, TAMD70B, TMD70C, TAMD70C, TAMD70E, MD70C,  
 AQD70B, AQD70BL, AQD70C, AQD70CL, AQD70D, TAMD70C,  
 TAMD70D, TAMD70E, THAMD70B, THAMD70C  
 TAMD71A, TAMD71B  
 TAMD72A, TAMD72P-A, TAMD72WJ-A  
 TAMD73P-A, TAMD73WJ-A

Insug och avgas/Inlet and outlet

Art. nr/Part no	Ersätter/Replaces
12386	466386, 466330



### D4, D6, KAD44, KAD300

D4-145I-G  
 D4-150A-G  
 D4-175I-G  
 D4-180I-B, D4-180I-C, D4-180I-D, D180I-E, D180I-F  
 D4-210A-A, D4-210A-B, D4-210I-A, D4-210I-B  
 D4-225A-B, D4-225A-C, D4-225A-D, D4-225A-E, D4-225A-F, D4-225I-B,  
 D4-225I-C, D4-225I-D, D4-225I-E, D4-225I-F  
 D4-230A-G, D4-230I-G  
 D4-260A-A, D4-260A-B, D4-260A-C, D4-260A-D, D4-260A-E, D4-260A-F,  
 D4-260D-B, D4-260D-C, D4-260D-D, D4-260D-E, D4-260D-F, D4-260I-A,  
 D4-260I-B, D4-260I-C, D4-260I-D, D4-260I-E, D4-260I-F  
 D4-270A-G, D4-270I-G  
 D4-300A-A, D4-300A-C, D4-300A-D, D4-300A-E, D4-300A-F, 4-300A-G,  
 D4-300D-A, D4-300D-C, D4-300D-E, D4-300D-F, D4-300I-A, D4-300I-C,  
 D4-300I-D, D4-300I-E, D4-300I-F, D4-300I-G  
 D4-320A-G, D4-320I-G

D6-280A-A, D6-280A-B, D6-280A-C, D6-280A-D, D6-280A-E, D6-280I-A,  
 D6-280I-B, D6-280I-C, D6-280I-D, D6-280I-E  
 D6-300A-F, D6-300A-G, D6-300D-F, D6-300D-G, D6-300I-F, D6-300I-G  
 D6-310A-A, D6-310A-B, D6-310A-C, D6-310A-D, D6-310A-E,  
 D6-310D-B, D6-310D-C, D6-310D-D, D6-310D-E, D6-310I-A, D6-310I-B,  
 D6-310I-C, D6-310I-D, D6-310I-E  
 D6-330A-B, D6-330A-C, D6-330A-D, D6-330A-E, D6-330A-F, D6-330D-B,  
 D6-330D-C, D6-330D-D, D6-330D-E, D6-330D-F, D6-310I-A, D6-330I-B,  
 D6-330I-C, D6-330I-D, D6-330I-E, D6-330I-F  
 D6-340A-G, D6-340I-G  
 D6-350A-A, D6-350A-B  
 D6-370A-B, D6-370A-C, D6-370A-D, D6-370A-E, D6-370A-F, D6-370D-A,  
 D6-370D-B, D6-370D-C, D6-370D-D, D6-370D-E, D6-370D-F, D6-370I-A,  
 D6-370I-B, D6-370I-C, D6-370I-D, D6-370I-E, D6-370I-F  
 D6-380A-G, D6-380D-G, D6-380I-G  
 D6-400A-E, D6-400A-F, D6-400A-G  
 D6-435D-A, D6-435D-C, D6-435D-D, D6-435D-E, D6-435D-F, D6-435I-A,  
 D6-435I-C, D6-435I-D, D6-435I-E, D6-435I-F  
 D6-440A-G, D6-440D-G, D6-440I-G, D6-440I-WJ-G  
 D6-480D-G, D6-480I-G, D6-480I-WJ-G  
 KAD44P, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-B, KAMD44P-C  
 KAD300A, KAMD300A

Insug och avgas/Inlet and outlet

Art. nr/Part no	Ersätter/Replaces
12892	3580892, 861687



## Ventilfjädrar Valve springs



### 30, 31, 32, 40, 41, 42, 43

MD30A, AD30A, AQAD30A, TMD30A, TAMD30A  
MD31A, TMD31A, TAMD31A, AD31, AD31B, TMD31B, TAMD31B, AD31D,  
AD31D-A, TMD31D, TAMD31D, TMD31L-A, TAMD31L-A, TAMD31M-A,  
TAMD31P-A, AD31L-A, AD31P-A, AD31XD, TAMD31S  
KAD32P-A, KAD32P  
MD40A, AD40B, AQAD40A, TMD40A, TAMD40A, AQAD40B,  
TMD40B, TAMD40B, TMD40C  
AD41A, TMD41A, TAMD41A, D41B, AD41B, AD41BJ, TMD41B, TAMD41B,  
D41D, D41L-A, TMD41D, TAMD41D, AD41D, AD41L-A, TMD41L-A,  
AD41P-A, TAMD41H-A, TAMD41H-B, TAMD41P, TAMD41P-A  
KAD42A, KAD42B, KAD42P-A, KAMD42A, KAMD42B, KAMD42P-A,  
TAMD42B, TAMD42VJ-A  
KAD43P-A, KAD43P-B, KAMD43P, KAMD43P-A, KAMD43P-B

Endast för topplock med 12 ventiler/Only for cylinder head with 12 valves

Art. nr/Part no	Ersätter/Replaces
12798	1545198



### KAD300, KAMD300, KAD44, KAMD44

KAD300-A, KAMD300-A  
KAD44P, KAD44-P, KAD44P-B, KAD44P-C  
KAMD44P-A, KAMD44P-B, KAMD44P-C

Endast för topplock med 24 ventiler/Only for cylinder head with 24 valves

Art. nr/Part no	Ersätter/Replaces
12701	861701, 24208879



### D4, D6

D4-180I-B, D4-180I-C, D4-180I-D, D180I-E, D180I-F  
D4-210A-A, D4-210A-B, D4-210I-A, D4-210I-B  
D4-225A-B, D4-225A-C, D4-225A-D, D4-225A-E, D4-225A-F, D4-225I-B,  
D4-225I-C, D4-225I-D, D4-225I-E, D4-225I-F  
D4-260A-A, D4-260A-B, D4-260A-C, D4-260A-D, D4-260A-E, D4-260A-F,  
D4-260D-B, D4-260D-C, D4-260D-D, D4-260D-E, D4-260D-F, D4-260I-A,  
D4-260I-B, D4-260I-C, D4-260I-D, D4-260I-E, D4-260I-F  
D4-300A-A, D4-300A-C, D4-300A-D, D4-300A-E, D4-300A-F, D4-300D-A,  
D4-300D-C, D4-300D-D, D4-300D-E, D4-300D-F, D4-300I-A, D4-300I-C,  
D4-300I-D, D4-300I-E, D4-300I-F  
D6-280A-A, D6-280A-B, D6-280A-C, D6-280A-D, D6-280A-E, D6-280I-A,  
D6-280I-B, D6-280I-C, D6-280I-D, D6-280I-E  
D6-300A-F, D6-300D-F, D6-300I-F  
D6-310A-A, D6-310A-B, D6-310A-C, D6-310A-D, D6-310A-E, D6-310D-B,  
D6-310D-C, D6-310D-D, D6-310D-E, D6-310I-A, D6-310I-B, D6-310I-C,  
D6-310I-D, D6-310I-E  
D6-330A-B, D6-330A-C, D6-330A-D, D6-330A-E, D6-330A-F, D6-330D-B,  
D6-330D-C, D6-330D-D, D6-330D-E, D6-330D-F, D6-330I-B, D6-330I-C,  
D6-330I-D, D6-330I-E, D6-330I-F  
D6-350A-A, D6-350A-B, D6-350A-C, D6-350A-D, D6-350A-E, D6-350A-F  
D6-370D-A, D6-370D-B, D6-370D-C, D6-370D-D, D6-370D-E,  
D6-370D-F, D6-370I-A, D6-370I-B, D6-370I-C, D6-370I-D, D6-370I-E,  
D6-370I-F  
D6-400A-E, D6-400A-F  
D6-435D-A, D6-435D-C, D6-435D-D, D6-435D-E, D6-435D-F, D6-435I-A,  
D6-435I-C, D6-435I-D, D6-435I-E, D6-435I-F

Art. nr/Part no	Ersätter/Replaces
12889	3581889, 23951640



### 70, 71, 72, 73, 74, 75

MD70C, TMD70C, TAMD70C, THAMD70C, TAMD70D, TAMD70E,  
AQD70C, AQD70CL, AQD70D  
TAMD71A, TAMD71B  
TAMD72A, TAMD72VJ-A  
TAMD73P-A, TAMD73VJ-A  
TAMD74A, TAMD74C-A, TAMD74C-B, TAMD74L-A, TAMD74L-B,  
TAMD74P-A, TAMD74P-B  
TAMD75P-A

Art. nr/Part no	Ersätter/Replaces
12384	466384
12383	466383



## Ventilfjädrar Valve springs



### D9, D11, D12

D9A2A, D9A2B, D9A2C, D9A2D, D9A2E, D9A2F, D9A2G, D9A2H, D9A2J, D9A2K, D9A2L MH, D9A2M MP  
D11A-A, D11A-B, D11A-C, D11A-C (IPS), D11A-C MP, D11A-D, D11A-D MP, D11A-E, D11A-E MP, D11B1-A MP, D11B2-A MP, D11B3-A MP, D11B4-A MP, D11C1-A MP, D11C2-A MP, D11C3-A MP, D11C4-A MP  
D12C-A MP, D12D-A MH, D12D-B MH, D12D-C MH, D12D-C MP, D12D-D MP, D12D-E MH, D12D-E MP, D12D-F MP, D12D-G MH, D12D-G MP, D12D-H MP, D12D-A MG, D12D-E MG

Art. nr/Part no	Ersätter/Replaces
12211	3183211, 23803420
12068	21310068, 23803415

## Ventilsäten Valve seats



### KAD300, KAMD300, KAD44, KAMD44

KAD300, KAMD300, KAD44, KAMD44  
KAD44P, KAD44P-A, KAD44P-B, KAD44P-C  
KAD300-A, KAMD300-A, KAMD44P-A, KAMD44P-B, KAMD44P-C

12 st av varje sort åtgår till ett cylinderhuvud / 12 pcs of each to one cylinder head

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
12888	3580888	Insug/Inlet std
12890	3580890	Avgas/Exhaust std

## Ventilsäten Valve seats



### D4, D6

D4-145I-G  
D4-150I-G  
D4-175I-G  
D4-180I-B, D4-180I-C, D4-180I-D, D180I-F  
D4-210A-A, D4-210A-B, D4-210I-A, D4-210I-B  
D4-225A-B, D4-225I-B, D4-225A-C, D4-225A-D, D4-225A-E, D4-225A-F, D4-225I-C, D4-225I-D, D4-225I-E, D4-225I-F  
D4-230A-G, D4-230I-G  
D4-260A-A, D4-260A-B, D4-260A-C, D4-260A-D, D4-260A-E, D4-260A-F, D4-260D-B, D4-260D-C, D4-260D-D, D4-260D-E, D4-260D-F, D4-260I-A, D4-260I-B, D4-260I-C, D4-260I-D, D4-260I-E, D4-260I-F  
D4-270A-G, D4-270I-G  
D4-300A-A, D4-300A-B, D4-300A-C, D4-300A-D, D4-300A-E, D4-300A-F, D4-300A-G, D4-300D-A, D4-300D-B, D4-300D-C, D4-300D-D, D4-300D-E, D4-300D-F, D4-300I-A, D4-300I-B, D4-300I-C, D4-300I-D, D4-300I-E, D4-300I-F, D4-300I-G  
D4-320A-G, D4-320I-G  
D6-280A-A, D6-280A-B, D6-280A-C, D6-280A-D, D6-280A-E, D6-280I-A, D6-280I-B, D6-280I-C, D6-280I-D, D6-280I-E  
D6-300A-F, D6-300A-G, D6-300D-F, D6-300D-G, D6-300I-F, D6-300I-G  
D6-310A-A, D6-310A-B, D6-310A-C, D6-310A-D, D6-310A-E, D6-310D-B, D6-310D-C, D6-310D-E, D6-310I-A, D6-310I-B, D6-310I-C, D6-310I-D, D6-310I-E  
D6-330A-B, D6-330A-C, D6-330A-D, D6-330A-E, D6-330A-F, D6-330D-B, D6-330D-C, D6-330D-D, D6-330D-E, D6-330D-F, D6-330I-B, D6-330I-C, D6-330I-D, D6-330I-E, D6-330I-F  
D6-340A-G, D6-340D-G, D6-340I-G  
D6-350A-A, D6-350A-B, D6-350A-C, D6-350A-D, D6-350A-E, D6-350A-F, D6-370D-A, D6-370D-B, D6-370D-C, D6-370D-D, D6-370D-E, D6-370D-F, D6-370I-A, D6-370I-B, D6-370I-C, D6-370I-D, D6-370I-E, D6-370I-F  
D6-380A-G, D6-380D-G, D6-380I-G  
D6-400A-E, D6-400A-F, D6-400A-G  
D6-435D-A, D6-435D-C, D6-435D-D, D6-435D-E, D6-435D-F, D6-435I-A, D6-435I-C, D6-435I-D, D6-435I-E, D6-435I-F  
D6-440A-G, D6-440D-G, D6-440I-G, D6-440I-WJ-G  
D6-480D-G, D6-480I-G, D6-480I-WJ-G

Art. nr/Part no	Ersätter/Replaces	Storlek/Size
12861	3581861, 3583679	Insug/Inlet, Ø 39 mm
12862	3581862, 3583681	Avgas/Exhaust, Ø 33,5 mm



## Bultsats topplock Cylinder head bolt kits



**B21, B23, B25**  
AQ120B, AQ125A  
AQ140A, BB140A  
230A, 230B  
AQ125B  
AQ131A, AQ131B, AQ131C, AQ131D  
AQ145A, AQ145B, BB145A  
250A, 250B  
AQ151A, AQ151B, AQ151C

En sats åtgår/One set required

Art. nr/Part no	Ersätter/Replaces
13341	1306341 x 10pcs



**30, 31, 40, 41, KAD32, KAD42, KAD43, KAD44, KAD300**  
MD30A, TMD30A, TAMD30A, AQAD30A  
MD31A, TMD31A, TAMD31A, AD31, TAMD31A SOLAS, AD31B, TMD31B,  
TAMD31B, AD31D-A, AD31XD, TMD31D, TAMD31D, AD31L-A, TMD31L-  
A, TAMD31L-A, TAMD31M-A, AD31P-A, TAMD31P-A, TAMD31S  
KAD32P, KAD32P-A  
MD40A, TMD40A, TAMD40A, AQD40A, AQAD40A, AQAD40B, TMD40B,  
TAMD40B, TMD40C  
TMD41A, TAMD41A, TAMD41A SOLAS, AD41A, AD41B, AD41BJ, D41B,  
TMD41B, TAMD41B, TAMD41H-A, TAMD41H-B, TAMD41P, TAMD41P-  
A, TMD41L-A, AD41L-A, AD41P-A, D41L-A, AD41D, D41D, TMD41D,  
TAMD41D  
KAD42A, KAMD42A, KAD42P-A, KAMD42P-A, TAMD42B, KAD42B,  
KAMD42B, TAMD42VJ-A  
KAD43P-A, KAMD43P, KAMD43P-A, KAMD43P-B  
KAD44P, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-B, KAMD44P-  
C  
KAD300-A, KAMD300-A

Säljes styckvis eller i sats, se nedan / Sold separately or in kit, see below

Art. nr/Part no	Ersätter/Replaces	Info
13775	838775	1 st / 1 pcs
13775-19	838775 x 19	Sats/kit 19 st / 19 pcs
13775-27	838775 x 27	Sats/kit 27 st / 27 pcs

## Flänsmutter Flange nut



**MD1, MD2, MD3, MD11, MD17**  
MD1B, MD2B, MD3B  
MD11C, MD11D, MD17C, MD17D  
MD1, MD1A, MD2, MD2A

Mutter med tätningsmaterial. Ska bytas varje gång topplocket demonteras / Nut with sealing. Must be changed every time the cylinder head is demounted.

Art. nr/Part no	Ersätter/Replaces
13414	943414



## Oljepumpar Oil pumps



### B 18, B 20

AQ60F, AQ90, AQ95, AQ110, AQ120  
BB30, BB100  
AQ105  
AQ115A, AQ115B  
AQ130A, AQ130B, AQ130C, AQ130D  
BB115A, BB115B, BB115C  
MB20A, MB20B, MB20C

Art. nr/Part no	Ersätter/Replaces
14706	1218706, 418280, 149542



### B 21, B 23, B 25

AQ120B\*  
AQ125AB\*  
AQ140A\*  
BB140A\*  
\* Senare utf./Later version

230A, 230B  
AQ125B  
AQ131A, AQ131B, AQ131C, AQ131D  
AQ145A, AQ145B  
BB145A  
250A, 250B, 251A  
AQ151A, AQ151B, AQ151C  
AQ171A, AQ171C

Art. nr/Part no	Ersätter/Replaces
14144	1346144, 1276336

## Oljeavtappningsplugg Oil drain plug



### B 18, B 20, B 21, B 23, B 25, B 30, D 30, D 31, D 32, D 40, D 41, D 42, D 43, D 44, D 300

AQ60F, AQ90, AQ95, AQ110, AQ120  
BB30, BB100  
AQ105, AQ115A, AQ115B, AQ130A, AQ130B, AQ130C, AQ130D  
BB115A, BB115B, BB115C  
MB20A, MB20B, MB20C  
AQ120B, AQ125A, AQ140A, BB140A  
230A, 230B  
AQ125B,  
AQ131A, AQ131B, AQ131C, AQ131D  
AQ145A, AQ145B, BB145A  
250A, 250B, 251A  
AQ151A, AQ151B, AQ151C  
AQ171A, AQ171C  
AD30A, AQAD30A, MD30A, TAMD30A, TMD30A  
AD31A, AD31B, AD31D, AD31L-A, AD31P-A, AD31XD, AQAD31A  
MD31A, TAMD31A, TAMD31B, TAMD31D, TAMD31L-A, TAMD31M-A,  
TAMD31P-A, TMD31A, TMD31B, TMD31D, TMD31L-A  
KAD32P-A  
AD40A, AQAD40A, AQAD40B, AQD40A, MD40A, TAMD40A, TAMD40B  
TMD40A, TMD40B, TMD40C  
AD41A, AD41B, AD41D, AD41L-A, AD41P-A, AQAD41A, D41A, D41B,  
D41D, D41L-A, TAMD41A, TAMD41B, TAMD41D, TAMD41H-A,  
TAMD41L-A, TAMD41L-A, TAMD41M-A, TAMD41P-A, TMD41A, TMD41B,  
TMD41D, TMD41L-A  
KAD42A, KAD42B, KAD42P-A, KAMD42A, KAMD42B, KAMD42P-A  
TAMD42B, TAMD42WJ-A  
KAD43P-A, KAMD43P-A  
KAD44P-A, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-B,  
KAMD44P-C  
KAD300A, KAMD300A

Art. nr/Part no	Ersätter/Replaces
14001	948187



### MD 1 B, MD 2 B, AQD 2 B, MD 3 B

MD 1 B, MD 2 B, AQD 2 B, MD 3 B

Art. nr/Part no	Ersätter/Replaces
14035	859035



## Gummikuddar motorupphängning Engine mounts



### B18, B20

AQ60F, AQ90, AQ95, AQ95A, AQ100  
AQ110, AQ120  
AQ105A  
AQ115A, AQ115B  
AQ130A, AQ130B, AQ130C, AQ130D

För motorer med främre stödbalk  
For engine with forward suport

Art. nr/Part no	Ersätter/Replaces	Info
19106	653190, 273060	65 x 38 mm



### B20, B23, B25, B30

MB20C, AQ130D, BB115A, BB115B, BB115C, AQ170C  
230A, 230B, 250A, 250B  
AQ120B, AQ125A, AQ125B, AQ140A, BB140A, AQ145A, BB145A,  
AQ145B, AQ131A, AQ131B, AQ131C, AQ131D  
AQ151A, AQ151B, AQ151C  
AQ171A, AQ171C, 251A

Art. nr/Part no	Ersätter/Replaces	Info
22926	833926	M16 x 1,5 - C/C 90 mm



### MB10, MD5, MD6, MD7, MD11, MD17

MB10A  
MD5A, MD5B, MD5C  
MD6A, MD6B  
MD7A, MD7B  
MD11C, MD11D  
MD17C, MD17D

Art. nr/Part no	Ersätter/Replaces	Info
22050	833950	UNC 3/8"



### MB10, MD1, MD2, MD3, MD6, MD7, MD11, MD17

MB10A  
MD1A\*, MD1B  
AQD2B, D2A\*, MD2\*, MD2A\*, MD2B, MD3B  
MD6A, MD6B, MD7A, MD7B  
MD11C, MD11D, MD17C, MD17D

\*Endast bakre fäste/Rear rubber block only

Art. nr/Part no	Ersätter/Replaces	Info
22144	849170, 833315, 833625, 807464, 833720	1/2"-20 UNF



### MD5, MD11, MD17

MD5A  
MD11C, MD11D  
MD17C, MD17D

C/C hålbild/holes: 90 mm

Art. nr/Part no	Ersätter/Replaces	Info
22646	829646, 838240	M16 x 1,5



## Gummikuddar motorupphängning Engine mounts



**B18, B20, B30, MB10, 2001, 2002, 2003, 2010, 2020, 2030, 2040  
MD1, MD2, MD3, MD5, MD6, MD7, MD11, MD17, D21, D22, D29,  
D32D1-13, D1-20, D1-30, D2-40, D2-55, D2-75**  
BB30, BB100, BB115, BB165, BB170  
MB10A, MB18, MB20  
2001, 2002, 2003,  
2010, 2020, 2030, 2040  
MD1B, MD2B, MD3B, MD5A, MD5B, MD5C, MD6A, MD6B, MD7A, MD7B  
MD11C, MD11D, MD17C, MD17D, MD21, MD22, MD29, MD32  
D1-13A, D1-13B, D1-13F  
D1-20A, D1-20B, D1-20F  
D1-30A, D1-30B, D1-30F,  
D2-40A, D2-40B, D2-40F  
D2-55A, D2-55B, D2-55C, D2-55D, D2-55E, D2-55F  
D2-75A, D2-75B, D2-75C, D2-75F

Till flexibel propelleraxelkoppling. 4 eller 6 st åtgår/For the flexible propeller shaft coupling. 4 or 6 pcs required C/C hål/holes 135 mm

Art. nr/Part no	Ersätter/Replaces	Info
22062	803762	H rubber 24 mm



**Motorkudde 50 shore, blått märke / 60 shore, blue marking**  
MD5A, MD5B, MD5C  
2001, 2001B, 2002, 2002B, 2002D, 2003, 2003B, 2003D  
MD2010-A, MD2010-B, MD2010C, MD2010D, MD2010-B  
MD2020-B, MD2020-C, MD2020-D  
MD2030-A, MD2030-B, MD2030-C, MD2030-D  
MD2040-A, MD2040-B, MD2040-C, MD2040-D

Art. nr/Part no	Ersätter/Replaces	Info
22262	838262, 838278	50 shore, blå/blue



**Motorkudde 60 shore, gult märke / 60 shore, yellow marking**  
MD5B, MD5C  
MD7A, MD7B,  
MD11C, MD11D, MD17C, MD17D  
2001, 2001B, 2001AG, 2001BG  
2002, 2002B, 2002D, 2002AG, 2002BG,  
2003, 2003B, 2003D, 2003AG, 2003BG, 2003T, 2003TB, 2003 SOLAS,  
2003B SOLAS, 2003TB SOLAS  
MD2010A, MD2010B, MD2010-C, MD2010-D

Art. nr/Part no	Ersätter/Replaces	Info
22845	840845	60 shore, gul/yellow




**Motorkudde 75 shore, svart märke / 75 shore, black marking**  
2002\*, 2002AG\*, 2002B\*, 2002BG\*, 2002D\* 2003\*, 2003AG\*, 2003B\*,  
2003BG\*, 2003D\* 2003T\*, 2003TB\*  
MD11C, MD11D, MD17C, MD17D  
MD2020A, MD2020B, MD2020C, MD2020D  
MD2030A, MD2030B, MD2030C, MD2030D

\*För motorer med svänghjulskåpa för PRM backslag

Art. nr/Part no	Ersätter/Replaces	Info
22455	858455, 858405, 858452	75 shore, svart/black



## Gummikuddar motorupphängning Engine mounts

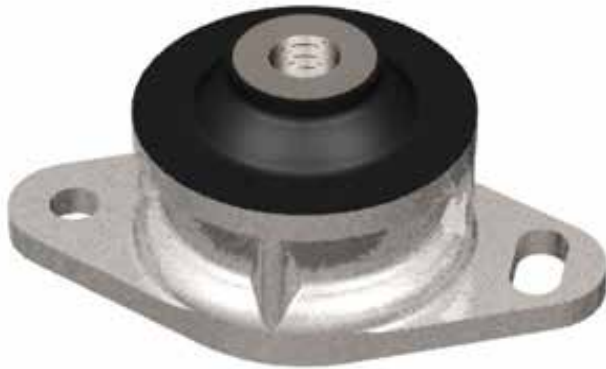

### 40, 41, KAD42

MD40A, AQD40A, AQAD40A, AQAD40B, AD40B,  
AD41A, D41B, AD41B, AD41BJ, D41D, D41L-A, AD41D, AD41L-A, AD41P-  
A  
KAD42A, KAD42B, KAD42P-A

Pinnbultssats ingår ej, kan köpas separat 22323-I / Stud bolt kit is not included,  
can be purchased separately 22323-I. C/C hål/holes 105 mm

Art. nr/Part no	Ersätter/Replaces	Info
22323	843323, 876596	M16 x 1,5 - C/C 105 mm

## Pinnbultssats gummikudde Stud kit engine mounts



### D1-13, D1-20, D1-30, D2-40, 2010, 2020, 2030, 2040, D40, D41, D42

D1-13A, D1-13B, D1-13F  
D1-20A, D1-20B, D1-20F  
D1-30A, D1-30B, D1-30F  
D2-40A, D2-40B, D2-40F  
MD2010A, MD2010B, MD2010C, MD2010D  
MD2020A, MD2020B, MD2020C, MD2020D  
MD2030A, MD2030B, MD2030C, MD2030D  
MD2040A, MD2040B, MD2040C, MD2040D  
AQAD40A, AQAD40B, AQD40A  
AD41A, AD41B, AD41D, AD41L-A, AD41P-A, AQAD41A, D41A, D41B,  
D41D, D41L-A  
KAD42A, KAD42B, KAD42P-A

### Passar/Fits 22323

Komplett med muttrar och brickor/Complete with washers and nuts

Art. nr/Part no	Ersätter/Replaces	Info
22323-I	861431, 829567	M16 x 1,5



### MD2030, MD2040, 22, 30, 31, 41, KAD42, KAD43, KAD44, KAD300

MD2030A  
MD2040A  
MD22L-B, MD22P-B  
AD30A, AQAD30A, MD30A, TAMD30A, TMD30A  
TAMD31L-A, TAMD31M-A, TAMD31A, TAMD31B  
KAD32P  
TAMD40A, TAMD40B  
AD41A, TAMD41A  
TAMD41P-A, TAMD41H-A, TAMD41H-B, TAMD41L-A, TAMD41M-A  
KAMD42P-A  
KAMD43P-A  
KAMD44P-A, KAD44P-B, KAD44P-C  
KAD300-A, KAMD300-A

Pinnbultssats ingår (M16)/Stud bolt kit is included (M16). C/C hål/holes 135 mm

Art. nr/Part no	Ersätter/Replaces	Hårdhet/Shore
22325	858161	65 Sh
22325-55	858161	55 Sh



### MD2010, MD2020, MD2030, MD2040, D1-13, D1-20, D2-40

MD2010A, MD2010B, MD2010C  
MD2020-D, MD2020A, MD2020B, MD2020-C, MD2020-D  
MD2030A, MD2030B, MD2030-C,  
MD2030-D  
MD2040A, MD2040B, MD2040-C, MD2040-D  
D1-13, D1-13B, D1-13F, D1-20, D1-20B,  
D1-20F  
D2-40, D2-40B, D2-40F

Pinnbultssats ingår (M16)/Stud bolt kit is included (M16). C/C hål/holes 135 mm

Art. nr/Part no	Ersätter/Replaces	Hårdhet/Shore
22325-45	861460	45 Sh



Spare parts from Sweden



## Svängningsdämpare Vibration dampers



### B20, B21, B23, B25, 30, 31, 32, 40, 43, 44, 300

AQ115A, AQ115B, BB115A, BB115B, BB115C, MB20A, MB20B, MB20C  
AQ130A, AQ130B, AQ130C, AQ130D  
AQ120B, AQ140A, BB140A  
AQ125A, AQ125B, AQ145A, AQ145B, BB145A  
230A, 230B  
250A, 250B  
251A  
AQ131A, AQ131B, AQ131C, AQ131D  
AQ151A, AQ151C  
AQ171A, AQ171C

MD30A, AD30A, TMD30A, AQAD30A, TAMD30A  
MD31A, AD31, TMD31A, TAMD31A, AD31B, TMD31B, TAMD31B, AD31D,  
TMD31D, TAMD31D, AD31D-A, AD31XD  
KAD32P  
MD40A, AD40B, AQD40A, AQAD40A, TMD40A, TAMD40A, AQAD40B,  
TMD40B, TAMD40B, TMD40C  
TAMD42WJ-A  
KAD43P-A, KAMD43P, KAMD43P-A, KAMD43P-B  
KAD44P, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-B, KAMD44P-  
C  
KAD300-A, KAMD300-A

Art. nr/Part no	Ersätter/Replaces	Info
19389	855389, 831778, 841895, 1326334	Hål/Hole: 34mm 26 Splines



### B30, MD21, D40

MD21A, MD21B, AQD21A, AQD21B  
MD40A, AD40B, AQD40A, AQAD40A, TMD40A, TAMD40A, AQAD40B,  
TMD40B, TAMD40B, TMD40C  
AQ165A, BB165A  
AQ170A, AQ170B, AQ170C, BB170A, BB170B, BB170C

425 Nm

Art. nr/Part no	Ersätter/Replaces	Info
19617	841893, 824991, 831106	Hål/Hole: 34mm 26 Splines



### KAD32, 41, KAD42, KAD43, KAD44, KAD300

KAD32P  
AD41A, TMD41A, TAMD41A, AD41B, TMD41B, TAMD41B, AD41Bj,  
AD41D, D41A, D41B, D41D, TAMD41P  
KAD42A, KAD42B, TAMD42WJ-A  
KAD43P-A, KAMD43P, KAMD43P-A, KAMD43P-B  
KAD44P, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-B, KAMD44P-  
C  
KAD300-A, KAMD300-A  
DP-D, DP-E, DP-G

825 Nm

Art. nr/Part no	Ersätter/Replaces	Info
19618	24212254, 855617	Hål/Hole: 34 mm 26 Splines



## Svängningsdämpare Vibration dampers



### MD2010-MD2040, V6, V8

MD2010-C, MD2010-D  
MD2020-C, MD2020-D  
MD2030-C, MD2030-D  
MD2040-C, MD2040-D  
430A, 430B  
431A, 431B  
500A, 500B  
501A, 501B  
570A, 571A  
572A  
AQ175A, AQ205A  
AQ190A, AQ240A  
AQ200B, AQ200C, AQ200D, AQ200F  
AQ211A  
AQ225B, AQ225C, AQ225D, AQ225E, AQ225F, BB225A, BB225AV, BB225B, BB225C  
AQ231A, AQ231B  
AQ255A, AQ255B, AQ260A, AQ260B  
AQ271A, AQ271B, AQ271C, AQ271D  
AQ290A  
AQ311A, AQ311B

Passar/Fits: 14" Svänghjul 450 Nm / 14" Flywheel 450 Nm

Art. nr/Part no	Ersätter/Replaces
19694	855694, 835550, 855648

### V6, V8

4.3GIPLKDCE, 4.3GIPLKECE, 4.3GIPNCACE, 4.3GIPNCBCE, 4.3GIPNC-MCE, 4.3GIPNCSCCE, 4.3GLMMDA, 4.3GLPLKD, 4.3GLPLKE, 4.3GLPMDA, 4.3GLPNCA, 4.3GLPNCB, 4.3GLPNCS, 4.3GSJLKD, 4.3GSJNCC, 4.3GSJNCS, 4.3GSPLKD, 4.3GSJNCC, 4.3GSJNCS, 4.3GSPLKD, 4.3GSPLKE, 4.3GSPMDA, 4.3GSPNCA, 4.3GSPNCM, 4.3GSPNCS, 5.7GIIMDA, 5.7GIINCCCE, 5.7GIPHUS, 5.7GIPLKDCE, 5.7GIPLKECE, 5.7GIPLKDCE, 5.7GIPMDA, 5.7GIPMDACE, 5.7GIPMCACE, 5.7GIPNC-MCE, 5.7GIPNCSCCE, 5.7GLIMDA, 5.7GLIPLKDCE, 5.7GLPKLA, 5.7GLPLKD, 5.7GLPLKE, 5.7GLPLKR, 5.7GLPMDA, 5.7GLPNCS, 5.7GSIC-PLKD, 5.7GSIPLKE, 5.7GSIPLKD, 5.7GSIPLKE  
430, 430A, 430B  
431A, 431B, 432A, 434A  
500B, 501B,  
570, 570A, 572A  
740B  
BB225A, BB225AV, BB225B, BB225C  
BB231A  
AQ260A, AQ260B, BB260AV, BB260B, BB260C, BB261A

Passar/Fits: 12 3/4" Svänghjul 450 Nm / 12 3/4" Flywheel 450 Nm

Art. nr/Part no	Ersätter/Replaces
19656	855656, 841375



## Reparationsatts svänghjulskåpa Repair kits flywheel casing



Motor typ Engine type	AQ-drev typ Sterndrive type
B16	80
AQ60	100
AQ80S	80
AQ90	100
AQ95	100
AQ100	100
AQ105	100
AQ110	100
AQ115	100
AQ130	100
AQD19	100

Lager/Bearing: 52 x 25 mm

Art. nr/Part no	Ersätter/Replaces
22057	11012 + 958973



Motor typ Engine type	AQ-drev typ Sterndrive type
432A	SP-CI, DP-CI
434A	SP-CI, DP-CI
500B	SP-CI, DP-CI, DP-DI
501B	SP-CI, DP-CI, DP-DI
570A	SP-CI, DP-CI, DP-DI
572A	SP-CI, DP-CI, DP-DI
740B	SP-CI, DP-CI, DP-DI

Lager/Bearing: 62 x 30 mm

Art. nr/Part no	Ersätter/Replaces
22055	11013 + 856917 + 958859 + 958866



Motor typ Engine type	AQ-drev typ Sterndrive type
AQ115A,B	100B

T.o.m/Up to MO62358  
Lager/Bearing: 62 x 35 mm

Art. nr/Part no	Ersätter/Replaces
22058	181105 + 958859 + 958866



Motor typ Engine type	AQ-drev typ Sterndrive type
AQ110	200
AQ120A	200
AQ115A	250
AQ115B	250
AQ115C	250
AQ130A	250
AQ130B	250
AQ130C	250
AQD21A	250
AQD21B	250
AQD27	200
AQD29	200, 250
AQD32A	250

Lager/Bearing: 52 x 25 mm

Art. nr/Part no	Ersätter/Replaces
22059	11012 + 946242 + 958973



## Reparationsatts svänghjulskåpa Repair kits flywheel casing



Motor typ Engine type	AQ-drev typ Sterndrive type
AQ120B	270
AQ125A,B	270, 275A
AQ130	270, 270T, 280
AQ131A,B,C,D	275, 290, SP-A
AQ140A	280, 280PT
AQ145A,B	280, 280PT, 290
AQ151A,B,C	290, 290A, SP-A
AQ165A	250,
AQ170	250, 270, 270T, 280, 280T
AQ171A,C	290A, SP-A
230	275, SP-A, SP-A1
250	SP-A, SP-A1
251	SP-A, SP-A1
AQD21A,B	270, 280
AQD32A	270, 280

Lager/Bearing: 62 x 30 mm

Art. nr/Part no	Ersätter/Replaces
22074	11013 + 946242 + 958860



Motor typ Engine type	AQ-drev typ Sterndrive type
AQ175	280, 280PT, 290
AQ200B,C,D	280, 280PT, 290
AQ205A	SP-A, DP-A,
AQ211A	290A, 290DP, SP-A, DP-A
AQ225A,B,C,D,E,F	275, 285, 290A, 290DP
AQ231A,B	280
AQ255A,B	280, 280PT, 290
AQ260A	275, 290A
AQ271A,B,C,D	280PT, 290
AQ290A	290A, SP-A
AQ311A,B	SP-A, DP-A,
430	SP-A1, SP-A2, SP-C, PD-A, DP-A1
430A	DP-A2, DP-C, SP-C, DP-C
430B	DP-A, DP-A1, DP-A2, DP-C, DP-A,
431A	DP-A1, DP-A2, DP-C, DP-C, DP-C
431B	DP-A1, SP-A2, SP-C, DP-A1
500B	DP-A2, DP-C., SP-A2, SP-C, DP-A2, DP-C
501B	SP-A, SP-A1, SP-A2, SP-C
570A	DP-A, DP-A1, DP-A2., SP-C, DP-C,
572A	DP-B, DP-B1, DP-C
740A	Kardan 2satser åtgär / Cardan shaft 2pcs required
AQAD30A	280DP, 280PT, 290A, 290DP,
AD30A	290A, 290DP, SP-C, DP-C, DP-D
AD31A,B	290A, 290DP
AQAD31A	SP-A2, DP-A2,
TAMD31B	280, 280DP, 280PT
AQD40A	280, 280DP, 280PT, 290, 290DP
AQAD40A,B	Kardan 2satser åtgär / Cardan shaft 2pcs required
AQAD40B	280, 280DP, 290, 290DP
AD40B	290, 290DP
AD41A	290A, 290DP
AQAD41A	290A, 290DP
AQD41A	SP-A2, SP-C, DP-C, DP-D, DP-B1
AD41B	SP-A2, DP-A2
D41B	SP-A2, SP-C, DP-B1, DP-D
TAMD41B	SP-D
KAD42	

Lager/Bearing: 62 x 30 mm

Art. nr/Part no	Ersätter/Replaces
22075	1 st/pcs 11013 + 1 st/pcs 181105 + 2 st/pcs 958860



## Reparationsatts svänghjulskåpa Repair kits flywheel casing



**Motor typ  
Engine type**

AD31D-A  
AD31L-A  
AD31P-A  
AD31XD  
KAD32P-A  
AD41D  
AD41L-A  
AD41P-A  
D41D  
D41L-A  
KAD42B  
KAD42P-A  
KAMD42P-A  
KAD43P-A  
KAD44P-A  
KAD44P-B  
KAD44P-C  
KAMD44P-C  
KAD300A  
KAMD300A

**AQ-drev typ  
Sterndrive type**

DP-DI, SP-CI  
DP-DI, SX  
DP-DI, SX  
DP-DI  
DP-E, DP-G, DPX  
DP-DI, SP-CI  
DP-DI  
DP-DI  
DP-DI, SP-CI  
DP-DI  
DP-DI, DPX  
DP-DI, DPX  
DP-DI, DPX  
DP-D, DP-E, DP-G, DPX  
DP-D, DP-E, DP-G, DPX  
DP-D  
DP-E, DP-G, DPX  
DP-E  
DP-G, DP-E, DPX  
DP-G, DP-E, DPX

Lager/Bearing: 62 x 30 mm

Art. nr/Part no	Ersätter/Replaces
22161	184841 + 958860 + 872991



**Motor typ  
Engine type**

D4, D6


**AQ-drev typ  
Sterndrive type**

DPH, DPR

Lager/Bearing: 62 x 30 mm

Art. nr/Part no	Ersätter/Replaces
22162	6842273 + 958860 + 184841

## Låsringar Retaining rings

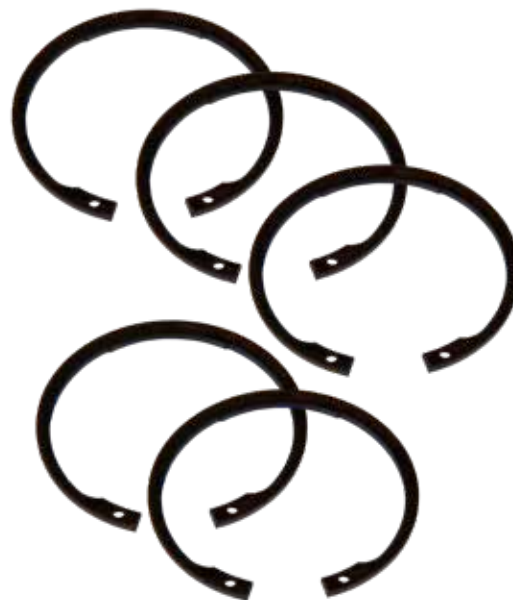

Art. nr/Part no	Ersätter/Replaces	Fpk/Pack
15533	914533	5 pcs / package



Art. nr/Part no	Ersätter/Replaces	Fpk/Pack
15462	914462	5 pcs / package



## Stödlager och packbox sköld SX Gimbal bearing and sealing transom SX



### SX

SX-C, SX-CI, SX-CIAC, SX-C2AC, SX-CLT M10, SX-CLT1  
SX-M, SX-MACLT, SX-MBAC, SX-MDA, SX-MDB, SX-MDC, SX-MHP, SX-MLT  
SX-R, SX-R1, SX-R2  
SX-S, SX-SLT

Packbox ingår ej. Kan köpas separat (19448). / Sealing ring is not included. Can be purchased separately (P/N 19448).

Art. nr/Part no	Ersätter/Replaces
19712	3855707, 3853807, 21752712



### SX, XDP

SX-C, SX-CI, SX-CIAC, SX-C2AC, SX-CLT M10, SX-CLT1  
SX-M, SX-MAC, SX-MACLT, SX-MBAC, SX-MDA, SX-MDB, SX-MDC,  
SX-MHP, SX-MLT  
SX-R, SX-R1, SX-R2  
SX-S, SX-SLT  
XDP-D3

Art. nr/Part no	Ersätter/Replaces
19448	3852548



### SX-A

SX-A, SX-AAC, SX-AACLT32, SX-AACLT42, SX-ALT32, SX-ALT42, SX-OXI-AACL, SX-OXI-ACC, SX-OXI-ACCL

Packbox ingår ej. Kan köpas separat (11257). / Sealing ring is not included. Can be purchased separately (P/N 11257).

Art. nr/Part no	Ersätter/Replaces
19555	3888555



### SX-A

SX-A, SX-AAC, SX-AACLT32, SX-AACLT42, SX-ALT32, SX-ALT42, SX-OXI-AACL, SX-OXI-ACC, SX-OXI-ACCL

Art. nr/Part no	Ersätter/Replaces
11257	3883257

## Gummiplugg / låsplugg Rubber cap / lock plug



KAD32P  
KAD42A, KAMD42A, KAD42B, KAMD42B, KAD42P-A, KAMD42P-A  
KAD43P-A, KAMD43P-A  
KAD44P, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-C  
KAD300-A, KAMD300-A

Art. nr/Part no	Ersätter/Replaces
14019	861019



## Drivremmar Drive belts



### B18, B20

AQ60F, AQ90, AQ95, AQ95A, AQ110  
AQ120  
BB30, BB100  
MB18  
AQ105A  
AQ115A, AQ115B  
AQ130A, AQ130B, AQ130C, AQ130D  
BB115A, BB115B, BB115C  
MB20A, MB20B, MB20C

Art. nr/Part no	Ersätter/Replaces	Info
18805	966891, 950805	10 x 711 mm



### B21, B23, B25, B30, MB10

AQ120B, AQ125A  
AQ140A, BB140A  
230A, 230B  
AQ125B, AQ145A, BB145A  
250A, 250B, 251A  
AQ165A, AQ170A, AQ170B, AQ170C  
BB145A, BB165A, BB170A, BB170B, BB170C  
MB10A\*

För 35 amp. generator/For 35 amps alternator  
\* För Bosch startgenerator/\* With Bosch dynamo  
2 st åtgår/2 pcs required

Art. nr/Part no	Ersätter/Replaces	Info
18548	966694, 834548, 958313	10 x 1075 mm



### B21, B23, B25, MD22

MD22A, MD22L, MD22L-A, TMD22A  
AQ120B, AQ125A, AQ140A  
BB140A  
AQ125B  
AQ131A, AQ131B, AQ131C, AQ131D  
AQ145A, AQ145B, BB145A  
AQ151A, AQ151B, AQ151C  
AQ171A, AQ171C

För 50 amp. generator/For 50 amps alternator

Art. nr/Part no	Ersätter/Replaces	Info
18382	966382, 841821, 958314	10 x 1100 mm



### 3.0, 5.0, 5.8

3.0GSPBYMCE, 3.0GSPLKD, 3.0GSPMDA, 3.0GSPNCS, 3.0GSPWTR

5.0FIPHUECE, 5.0FIPHURCE, 5.0FIPMDA, 5.0FIPMDM, 5.0FIPNCBCE, 5.0FIPNCSCCE, 5.0FLPHUE, 5.0FLPHUR, 5.0FLPMDA, 5.0FLPNCB, 5.0FLPNCS

5.8FIPHUECE, 5.8FIPHURCE, 5.8FIPMDA, 5.8FIPMDM, 5.8FIPNCACE, 5.8FIPNCBCE, 5.8FIPNCMCE, 5.8FIPNCSCCE, 5.8FLPHUE, 5.8FLPHUR, 5.8FLPHUC, 5.8FLPMDA, 5.8FLPNCA, 5.8FLPNCB, 5.8FLPNCM, 5.8FLPNCS, 5.8FSIINCC, 5.8FSIINCS, 5.8FSIPHUBCE, 5.8FSIPHURCE, 5.8FSIPNCACE, 5.8FSIPNCD, 5.8FSIPNCS

Art. nr/Part no	Ersätter/Replaces	Info
18835	3857835	Servo / Power steering 10 x 1150 mm



### 3.0, 4.3, 5.7

3.0GLMMDA, 3.0GSMBYMCE, 3.0GSMLKD, 3.0GSMNCS, 3.0GSMWTR, 3.0GSPBYMCE, 3.0GSMLKD, 3.0GSPMDA, 3.0GSPNCS, 3.0GSPWTR

4.3GIPNCACE, 4.3GIPNCMCE, 4.3GLMMDA, 4.3GLPMDA, 4.3GLPNCA, 4.3GSJNCS, 4.3GSPMDA, 4.3GSPNCA, 4.3GSPNCM

5.7GIPHUS, 5.7GIPNCACE, 5.7GIPNCMCE

Art. nr/Part no	Ersätter/Replaces	Info
18336	3852336	10 x 1013 mm



## Drivremmar Drive belts



### V6, V8, MD2020\*, MD2030\*

430, 430A, 430B, 431A, 431B, 432A, 434A

500A, 500B, 501A, 501B

570, 570A, 571A, 572A

740B

AQ175A, AQ205A

AQ200A, AQ200B, AQ200C, AQ200D, AQ200F

AQ225B, AQ225C, AQ225D, AQ225E, AQ225F, BB225B, BB225C

AQ211A

AQ231A, AQ231B, BB231A

AQ255A, AQ255B

AQ260A, AQ260B, BB260B, BB260C, BB261A

AQ271A, AQ271B, AQ271C, AQ271D

AQ280A, AQ290A

AQ311A, AQ311B

BB261A

MD2020B\*, MD2020-C\*, MD2020-D\*

MD2030B\*, MD2030-C\*, MD2030-D\*

\*) för motorer utrustade med en extra generator/for engines equipped with an extra alternator

Art. nr/Part no	Ersätter/Replaces	Info
18498	22298172, 978750, 966857	13 x 1200 mm



### 430, 570, AQ211, AQ271, AQ311

430, 570, AQ211, AQ271, AQ311

430A, 430B, 431A, 431B, 432A, 434A

AQ205A

500A, 500B, 501A, 501B

570A, 571A, 572A

AQ211A, AQ231A

AQ271A, AQ271B, AQ271C

AQ311A, AQ311B

Art. nr/Part no	Ersätter/Replaces	Info
18111	967111	13 x 1025 mm, Servo/Power steering



### AQ175, AQ200, AQ225, AQ260, AQ290

AQ175A

AQ200D, AQ200F

AQ225D, AQ225F

AQ260A, AQ290A,

740A

Art. nr/Part no	Ersätter/Replaces	Info
18387	966387	13 x 1050 mm, Servo/Power steering



### 4.3

4.3GIPNCACE, 4.3GIPNCMCE, 4.3GLMMDA, 4.3GLPMDA, 4.3GLPNCA, 4.3GSJNCS, 4.3GSPMDA, 4.3GSPNCA, 4.3GSPNCM

Art. nr/Part no	Ersätter/Replaces	Info
18504	3852504	10 x 1200 mm, Generator / Alternator



## Drivremmar Drive belts



**4.3, 5.0, 5.7**

4.3GIPEFS  
4.3GX1-A, 4.3GX1-B, 4.3GX1-BF, 4.3GX1-C, 4.3GX1-CF, 4.3GX1-D, 4.3GX1-DF  
4.3OS1-B, 4.3OS1-BF, 4.3OS1-C, 4.3OS1-CF, 4.3OS1-D, 4.3OS1-DF

5.0GIPEFS

5.0GX1-A, 5.0GX1-B, 5.0GX1-BF, 5.0GX1-C, 5.0GX1-CF, 5.0GX1-D, 5.0GX1-DF,  
5.0OS1-B, 5.0OS1-C, 5.0OS1-CF, 5.0OS1-D, 5.0OS1-DF

5.7GSIPEFS

5.7GI-A, 5.7GI-B, 5.7GI-BF, 5.7GI-C, 5.7GI-CF, 5.7GI-D, 5.7GI-DF, 5.7GX1-A,  
5.7GX1-B, 5.7GX1-C, 5.7GX1-CF, 5.7GX1-D, 5.7GX1-DF, 5.7GX1-E, 5.7GX1-EF,  
5.7OS1-A, 5.7OS1-B, 5.7OS1-BF, 5.7OS1-C, 5.7OS1-CF, 5.7OS1-A, 5.7OS1-AF,  
5.7OS1-B, 5.7OS1-BF, 5.7OS1-C, 5.7OS1-CF

Art. nr/Part no	Ersätter/Replaces	Info
18086	3860086	6PK2525



**4.3, 5.0, 5.7**

4.3GIJBYA, 4.3GIPBYCCE, 4.3GIPLKDCE, 4.3GIPLKECE, 4.3GLPBYC,  
4.3GLPLKD, 4.3GLPLKE  
4.3GSJBYA, 4.3GSJLKD, 4.3GSPBYC, 4.3GSPLKD, 4.3GSPLKE

5.0GIPBYCCE, 5.0GLPBYC

5.7GIINCCCE, 5.7GIPLKDCE, 5.7GIPLKECE, 5.7GIPNCBCE, 5.7GIPNCSCCE  
5.7GLIPLKDCE, 5.7GLPLKA, 5.7GLPLKD, 5.7GLPLKE, 5.7GLPLKR,  
5.7GLPNCS, 5.7GSICPLKD, 5.7GSIPBYCCE, 5.7GSIPLKE, 5.7GSPBYC,  
5.7GSPLKD, 5.7GSPLKE

Art. nr/Part no	Ersätter/Replaces	Info
18457	3857015, 978457	10x735 mm Cirk. pump/Circ. pump



**4.3, 5.0, 5.7**

4.3GIJBYA, 4.3GIJWTR, 4.3GIPBYCCE, 4.3GIPLKDCE, 4.3GIPLKECE,  
4.3GIPNCACE, 4.3GIPNCBCE, 4.3GIPNCMCE, 4.3GIPNCSCCE,  
4.3GIPWTRCE  
4.3GL-A, 4.3GL-B, 4.3GL-C, 4.3GL-D, 4.3GL-E, 4.3GL-EF  
4.3GLMMDA, 4.3GLPBYC, 4.3GLPEFS, 4.3GLPLKD, 4.3GLPLKE,  
4.3GLPMDA, 4.3GLPNCA, 4.3GLPNCB, 4.3GLPNCS, 4.3GLPWTR  
4.3GSJBYA, 4.3GSJLKD, 4.3GSJNCC, 4.3GSJNCS, 4.3GSJWTR, 4.3GSPBYC,  
4.3GSPLKD, 4.3GSPLKE, 4.3GSPMDA, 4.3GSPNCA, 4.3GSPNCB,  
4.3GSPNCM, 4.3GSPNCS, 4.3GSPWTR

5.0GIPBYCCE, 5.0GIPWTR,  
5.0GL-A, 5.0GL-B, 5.0GL-C, 5.0GL-D, 5.0GL-E, 5.0GL-F, 5.0GL-FF  
5.0GLPBYC, 5.0GLPEFS, 5.0GLPWTR

5.7GIPHUS, 5.7GIPLKDCE, 5.7GIPMDA, 5.7GIPMDACE, 5.7GIPNCACE,  
5.7GIPNCBCE, 5.7GIPNCMCE, 5.7GIPNCSCCE  
5.7GL-A, 5.7GL-B, 5.7GL-C, 5.7GL-D, 5.7GL-E  
5.7GLIPLKDCE, 5.7GLPLKA, 5.7GLPLKD, 5.7GLPLKE, 5.7GLPLKR,  
5.7GLPMDA, 5.7GLPNCS  
5.7GSICPLKD, 5.7GSIPBYCCE, 5.7GSIPLKE, 5.7GSIPWTR, 5.7GSPBYC,  
5.7GSPEFS, 5.7GSPLKD, 5.7GSPLKE, 5.7GSPWTR

Art. nr/Part no	Ersätter/Replaces	Info
18464	3852464	10 x 1150 mm



**4.3, 5.0, 5.7**

4.3GIJBYA, 4.3GIJWTR, 4.3GIPBYCCE, 4.3GIPLKDCE, 4.3GIPLKECE,  
4.3GIPNCBCE, 4.3GIPNCSCCE, 4.3GIPWTRCE  
4.3GL-A, 4.3GL-B, 4.3GL-C, 4.3GL-D, 4.3GL-E, 4.3GL-EF  
4.3GLPBYC, 4.3GLPEFS, 4.3GLPLKD, 4.3GLPLKE, 4.3GLPNCB,  
4.3GLPNCS, 4.3GLPWTR  
4.3GSJBYA, 4.3GSJLKD, 4.3GSJNCC, 4.3GSJWTR, 4.3GSPBYC,  
4.3GSPLKD, 4.3GSPLKE, 4.3GSPNCB, 4.3GSPWTR

5.0GiPBYCCE, 5.0GiPWTR  
5.0GL-A, 5.0GL-B, 5.0GL-C, 5.0GL-D, 5.0GL-E, 5.0GL-F, 5.0GL-FF  
5.0GLPBYC, 5.0GLPEFS, 5.0GLPWTR

5.7GIINCCCE, 5.7GIPLKDCE, 5.7GIPLKECE, 5.7GIPNCBCE,  
5.7GIPNCSCCE  
5.7GL-A, 5.7GL-B, 5.7GL-C, 5.7GL-D, 5.7GL-E  
5.7GLIPLKDCE, 5.7GLPLKA, 5.7GLPLKD, 5.7GLPLKE, 5.7GLPLKR,  
5.7GLPNCS  
5.7GSICPLKD, 5.7GSIPBYCCE, 5.7GSIPLKE, 5.7GSPWTR

Art. nr/Part no	Ersätter/Replaces	Info
18547	978547	10 X 1225 mm



## Drivremmar Drive belts



### 4.3, 5.7, 7.4, 8.2, DPX385, DPX415

4.3GIPNCACE, 4.3GIPNCMCE, 4.3GLPNCA, 4.3GSJNCS, 4.3GSPNCA, 4.3GSPNCM  
5.7GIIMDA, 5.7GIINCCE, 5.7GiPHUS, 5.7GIPMDA, 5.7GIPMDACE, 5.7GIPNCACE, 5.7GIPNCMCE, 5.7GLIMDA, 5.7GLPMDA  
7.4GIINCCE, 7.4GIINCSC, 7.4GIPBYCCE, 7.4GIPLKDCE, 7.4GIPLKECE, 7.4GIPNCACE, 7.4GIPNCBCE, 7.4GIPNCMCE, 7.4GIPNCSC, 7.4GIPWTR, 7.4GLIMDM, 7.4GLINCC, 7.4GLINCS, 7.4GLPLKD, 7.4GLPLKE, 7.4GLPMDA, 7.4GLPMDM, 7.4GLPNCA, 7.4GLPNCB, 7.4GLPNCM, 7.4GLPNCS, 7.4GSIINCC, 7.4GSIINCS, 7.4GSIPBYCCE, 7.4GSIPWTR, 7.4GSIXNCB, 7.4GSIXNCM  
8.2GLPMDA, 8.2GLPMDM, 8.2GSIPBYCCE, 8.2GSIPWTR, 8.2GSIXNCB  
DPX385XBYDCE, DPX385XEFS, DPX385XLKE  
DPX415XBYDCE, DPX415XEFS, DPX415XLKE

Art. nr/Part no	Ersätter/Replaces	Info
18368	3853368	10 x 1225 mm



### 5.7GiL, 5.7GXiL 5.7GiL-E, 5.7GXil-F

Art. nr/Part no	Ersätter/Replaces	Info
18632	3586327	6PK1990



### 5.7GiL, 5.7GSiL, 5.7GXiL

5.7GiL-A, 5.7GiL-B, 5.7GiL-C, 5.7GiL-D  
5.7GSiL-A,  
5.7GXil-A, 5.7GXil-B, 5.7GXil-C, 5.7GXil-D, 5.7GXil-E

Art. nr/Part no	Ersätter/Replaces	Info
18150	3861500	6PK2020



### 5.7GiL, 5.7GXiL, 8.2GSI

5.7GiL-F, 5.7GiL-GF, 5.7GXil-G, 5.7GXil-H, 8.2GSIPWTR, 8.2GSIPBYCCE

Art. nr/Part no	Ersätter/Replaces	Info
18125	3889125	6PK2075



## Drivremmar Drive belts



### MD1, MD1A, MD1B, MD2, MD2A, MD2B

MD1, MD1A Från / From SNI1132 -  
MD1B, MD2, MD2A, MD2B, AQD2B

För startgenerator (Dynastart), sats om 2 remmar/  
For dynamo (Dynastart), set of 2 belts

Art. nr/Part no	Ersätter/Replaces	Info
18990	966990, 958367	2st 10 x 1300 mm



### MD1, MD2

MD1B\*  
AQD2B  
MD2, MD2A Från / From SN6275 -  
MD2B\*

\* För vevaxelremskiva diam. 210 mm/  
\* For crankshaft pulley diam. 210 mm

Art. nr/Part no	Ersätter/Replaces	Info
18311	978515, 966916, 958311, 20701268	10 x 1025 mm



### MD2, D30, D40

MD2A Upp till / Up to MO -6274  
AD30A\*, AQAD30A\*, MD30A\*, TAMD30A\*, TMD30A\*  
AD40B\*, AQAD40A\*, AQAD40B\*, AQD40A\*, MD40A\*  
TAMD40A\*, TAMD40B\*, TMD40A\*, TMD40B\*, TMD40C\*

\*) Med extra generator/With additional alternator

Art. nr/Part no	Ersätter/Replaces	Info
18310	978510, 966914, 958310	10 x 1000 mm



### 2002, 2003, MD2B, MD11C

2002\*\*, 2002AG\*\*, 2002B\*\*, 2002BG\*\*  
2003\*\*, 2003AG\*\*, 2003B\*\*, 2003BG\*\*  
2003T\*\*, 2003TB\*\*  
MD2B\*, AQD2B\*  
MD11C

\* För vevaxelremskiva diam. 150 mm/  
\* For crankshaft pulley diam. 150 mm  
\*\* Med Volvo Penta original sötvattenkyllning /  
With Volvo Penta original freshwater cooling

Art. nr/Part no	Ersätter/Replaces	Info
18906	966906, 958306	10 x 900 mm



### MD3, MD17, 30, 40

MD3B\*  
MD17C\*  
AD30A\*\*, AQAD30A\*\*  
AQD40A\*\*, AQAD40A\*\*, AD40B\*\*, AQD40B\*\*, AQAD40B\*\*

\* För/For generator/alternator  
\*\* För/For servo/power steering

Art. nr/Part no	Ersätter/Replaces	Info
18383	976489, 966383	10 x 1175 mm



### MD5C

MD5C Från/From MO 30017 -

Sats med två remmar / kit with two belts

Art. nr/Part no	Ersätter/Replaces	Info
18843	976492, 966843, 958368	2 st 10 x 1325 mm



## Drivremmar Drive belts



**MD5A, MD5B, MD5C, MD11C, TAMD60C**  
MD5A, MD5B, MD5C upp till / up to MO -30016  
MD11C  
TAMD60C

Art. nr/Part no	Ersätter/Replaces	Info
18698	966698, 958322	10 x 1300 mm



**MD6A, MD11C**  
MD6A  
MD11C

Art. nr/Part no	Ersätter/Replaces	Info
18931	966931, 958326	10 x 1400 mm



**MD6A**  
MD6A Up to MO -1234

För startgenerator (Dynastart), sats om 2 remmar/  
For dynamo (Dynastart), set of 2 belts

Art. nr/Part no	Ersätter/Replaces	Info
18700	966700, 958362	2 st 10 x 1175 mm



**MD6B, MD7A**  
MD6B  
MD7A

Art. nr/Part no	Ersätter/Replaces	Info
18327	966933, 958327	10 x 1425 mm



**MD6A**  
MD6A From MO 1235-

För startgenerator (Dynastart), sats om 2 remmar/  
For dynamo (Dynastart), set of 2 belts

Art. nr/Part no	Ersätter/Replaces	Info
18981	966981, 960336	2 st 10 x 1140 mm



**MD7B**  
MD7B

Art. nr/Part no	Ersätter/Replaces	Info
18707	966707, 958328	10 x 1450 mm



## Drivremmar Drive belts



**MD11C, MD11D**  
MD11C, MD11D

Med Volvo Penta original sötvattenkyllning / With Volvo Penta original freshwater cooling

Art. nr/Part no	Ersätter/Replaces	Info
18942	966942, 958332	10 x 1550 mm



**MD11D**  
MD11D

Art. nr/Part no	Ersätter/Replaces	Info
18283	966907, 960283	10 x 913 mm



**MD17**  
MD17C  
MD17D

Art. nr/Part no	Ersätter/Replaces	Info
18330	966938	10 X 1500 mm



**MD17**  
MD17D

Art. nr/Part no	Ersätter/Replaces	Info
18385	966385, 958320	10 x 1250 mm



**MB10, MD2010, MD2020**

MB10A,  
MD2010A, MD2010B, MB2010C, MB2010D  
MD2020A, MD2020B, MB2020C, MB2020D

Art. nr/Part no	Ersätter/Replaces	Info
18534	973534, 966898	10 x 800 mm



**2001**  
2001, 2001AG, 2001B, 2001BG, 2001D, 2001R

Art. nr/Part no	Ersätter/Replaces	Info
18003	966903, 966903	10 x 863 mm



## Drivremmar Drive belts



**2002, 2003, 2003T**  
2002, 2002AG, 2002B, 2002BG  
2003, 2003AG, 2003B, 2003BG  
2003T, 2003TB

Art. nr/Part no	Ersätter/Replaces	Info
18900	966900, 958303	10 x 825 mm



**MD2030, MD22, TMD22, TAMD22**  
MD2030, MD2030A, MD2030B, MD2030C, MD2030D,  
MD22P, MD22P-B, TAMD22P-B, TMD22B, TMD22-B

Art. nr/Part no	Ersätter/Replaces	Info
18482	978482, 966901	10 x 838 mm



**MD21, MD32**  
AQD21A, AQD21B, MD21A, MD21B  
AQD32A, MD32A

Med generator/With alternator

Art. nr/Part no	Ersätter/Replaces	Info
18207	829207, 958316	10 x 1165 mm



**MD22, TMD22, TAMD22**  
MD22, MD22A, MD22L, MD22L-A, MD22L-B, MD22P, MD22P-B  
TMD22A, TMD22B, TMD22P-C  
TAMD22P-B

Art. nr/Part no	Ersätter/Replaces	Info
16912	966912	10 x 975 mm



**30, 31, 40, 41, KAD42, 70**  
MD30A, AD30A, AQAD30A, TMD30A, TAMD30A  
MD31A, TMD31A, TAMD31A, AD31, AD31B, TMD31B, TAMD31B, AD31D,  
AD31D-A, TMD31D, TAMD31D, AD31L-A, TMD31L-A, TAMD31L-A,  
TAMD31M-A, AD31P-A, TAMD31P-A, AD31XD, TAMD31S  
MD40A, AQD40A, AQAD40A, TMD40A, TAMD40A, AD40B, AQAD40B,  
TMD40B, TAMD40B, TMD40C  
AD41A, TMD41A, TAMD41A, D41B, AD41B, TMD41B, TAMD41B, D41D,  
AD41D, TMD41D, TAMD41D, TAMD41H-A, TAMD41H-B, D41L-A,  
TMD41L-A, AD41L-A, AD41P-A, TAMD41P, TAMD41P-A  
KAD42A\*, KAD42B\*, KAMD42A\*, KAMD42B\*, TAMD42B\*  
MD70B, MD70C, AQD70B, AQD70C, AQD70D, TMD70B, TAMD70B,  
TMD70C, TAMD70C, TAMD70D, TAMD70E

**\*Med extra generator/\* With additional alternator**  
**Sats om 2 remmar/Set of 2 belts**

Art. nr/Part no	Ersätter/Replaces	Info
18978	966978, 958359	2 st 10 x 1100 mm



**31, 41**  
AD31, AD31B, AD31D, AD31D-A, AD31L-A, AD31P-A, AD31XD  
AD41A, AD41B, AD41B, AD41D, AD41L-A, AD41P-A, D41B, D41L-A

Art. nr/Part no	Ersätter/Replaces	Info
18123	967123	Servopump / Power steering, 13 x 1200 mm



## Drivremmar Drive belts



30, 31, 40, 41, 60, 61, 62, 63, 71, 72, 73, 74, 75

Till generatorsats/fpr Alternator kits 858572, 858573, 859576, 859577, 860871, 860872, 861155, 861156 eller extra generator/or for an extra alternator:

MD30A, AD30A, TMD30A, TAMD30A, AQAD30A  
AD41A, AD41B, AD41BJ, AD41D, AD41L-A, D41B, D41D, D41L-A,  
TMD41A, TAMD41A, TMD41B, TAMD41B, TMD41D, TAMD41D, TMD41L-  
A, TAMD41H-A, TAMD41H-B, TAMD41P, TAMD41P-A  
MD31A, TMD31A, TAMD31A, AD31, AD31B, TMD31B, TAMD31B,  
AD31D, AD31D-A, TMD31D, TAMD31D, TMD31L-A, AD31L-A, AD31P-A,  
AD31XD, TAMD31M, TAMD31M-A, TAMD31P-A, TAMD31S  
TMD40C

Till cirkulationspump/for circulation pump:  
TAMD60A, TAMD60B, TAMD60C

Till extra sidomonterad generator/for extra side mounted alter-  
nator:

TAMD61A, TAMD62A  
TAMD63L-A, TAMD63P-A  
TAMD71A, TAMD71B  
TAMD72A, TAMD72P-A, TAMD72WJ-A  
TAMD73P-A, TAMD73WJ-A  
TAMD74A, TAMD74C-A, TAMD74C-B, TAMD74L-A, TAMD74L-B,  
TAMD74P-A, TAMD74P-B  
TAMD75P-A

Art. nr/Part no	Ersätter/Replaces	Info
18391	966391, 958539	2 st. 13 x 1100 mm



**KAD32, KAD42, KAD43, KAD44, KAD300**

KAD32, KAD32P-A  
KAD42A, KAD42B, KAD42P-A, KAMD42B, TAMD42B, TAMD42WJ-A  
KAD43P-A, KAD43P-B  
KAD44P, KAD44P-B, KAD44P-C  
KAD300-A

Art. nr/Part no	Ersätter/Replaces	Info
18487	973487, 967781	Servorem Power steering belt, 11,9 x 1010 mm



**KAD32**  
KAD32P, KAD32P-A

Art. nr/Part no	Ersätter/Replaces	Info
18460	3581460	Kompressor/compressor, 6PK1138



**KAD32, KAD42, KAD43, KAD44, KAD300**

KAD32P, KAD32P-A  
KAD42A, KAD42B, KAD42P-A, KAMD42A, KAMD42B, KAMD42P-A,  
TAMD42B, TAMD42WJ-A  
KAD43P, KAD43P-A, KAD43P-B, KAMD43P, KAMD43P-A, KAMD43P-B  
KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-B, KAMD44P-C  
KAD300-A, KAMD300-A

Art. nr/Part no	Ersätter/Replaces	Info
18542	977542	Generator/alternator, 13 x 992



**KAD32, KAD42, KAD43, KAD44, KAD300**

KAD32P\*, KAD32P-A\*  
KAD42B, KAD42P-A, KAMD42B, KAMD42P-A, TAMD42B, TAMD42WJ-A  
KAD43P-A, KAD43P-B, KAMD43P, KAMD43P-A, KAMD43P-B  
KAD44P, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-B, KAMD44P-  
C  
KAD300-A, KAMD300-A

\*) till/for KAD32 med/with SN2203202197 och tidigare/and earlier

Art. nr/Part no	Ersätter/Replaces	Info
18564	861564	Cirkulationspump / circulation pump, 7PK920



**KAD42, KAD43, KAD44, KAD300**

KAD42A, KAD42B, KAD42P-A, KAMD42A, KAMD42B, KAMD42P-A  
KAD43P-A, KAD43P-B, KAMD43P, KAMD43P-A, KAMD43P-B  
KAD44P, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-B, KAMD44P-C  
KAD300-A, KAMD300-A

Art. nr/Part no	Ersätter/Replaces	Info
18388	54564470, 860388	Kompressor/compressor, 6PK1200



## Drivremmar Drive belts



### KAD32, 42, KAD43, KAD44

KAD32P\*, KAD32P-A\*  
TAMD42WJ-A  
KAD43P-A, KAD43P-B, KAMD43P, KAMD43P-A, KAMD43P-B  
KAD44P, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-B, KAMD44P-C  
KAD300-A, KAMD300-A

\*) till KAD32 med SN2203202198 ch senare / for KAD32 with SN2203202198 and later

Art. nr/Part no	Ersätter/Replaces	Info
18424	3582424, 24677528	Cirkulationspump / Circulation pump, 7PK910



### KAD42, 162, 163, 165

KAD42A, KAD42B, KAMD42A, KAMD42B, TAMD42B  
TAMD162A, TAMD162B, TAMD162C, TAMD162C-B, TAMD162C-C  
TAMD163A-A, TAMD163P-A  
TAMD165A, TAMD165C

Sats med 2 st remmar/Kit of 2 belts

Art. nr/Part no	Ersätter/Replaces	Info
18483	976483, 966967	2 st 10 x 950 mm



### 63, 73

TAMD63L-A, TAMD63P-A,  
TAMD73P-A, TAMD73WJ-A

Art. nr/Part no	Ersätter/Replaces	Info
16653	866653	6PK1530



### 70

AQD70BL, AQD70CL  
THAMD70B, THAMD70C

Sats om 2st remmar/Kit of 2 belts.

Art. nr/Part no	Ersätter/Replaces	Info
18367	978367, 966642	Generator/Alternator, 10 x 1200 mm



### 61, 62, 71, 72

TAMD61A  
TAMD62A  
TAMD71A, TAMD71B  
TAMD72A, TAMD72P-A, TAMD72WJ-A

Sats om 2st remmar/Kit of 2 belts.

Art. nr/Part no	Ersätter/Replaces	Info
18193	967193	Generator/Alternator, 1300 mm



### 100, 120

MD100A, TMD100A, MD100B, MD100B-CC  
MD120A, TMD120A, TAMD120A

Sats om 2st remmar/Kit of 2 belts.

Art. nr/Part no	Ersätter/Replaces	Info
18980	966980, 958360	2 st 10 x 1125 mm



## Drivremmar Drive belts



**D1-13, D1-20**  
D1-13, D1-13B, D1-13F  
D1-20, D1-20B, D1-20F

Art. nr/Part no	Ersätter/Replaces	Info
18625	3809625	Generator/Alternator, 5PK790



**D1-30, D2-40**  
D1-30A, D1-30B, D1-30F  
D2-40A, D2-40B, D2-40F

Art. nr/Part no	Ersätter/Replaces	Info
18188	21951188, 3812159	Generator/Alternator, 5PK850



**D1-30, D2-40**  
D1-30, D1-30B, D1-30F  
D2-40, D2-40B, D2-40F

Art. nr/Part no	Ersätter/Replaces	Info
18684	21314684, 3812145	Generator/Alternator, 5PK820



**D2-50, D2-55, D2-60, D2-75**  
D2-50F  
D2-55, D2-55A, D2-55B, D2-55C, D2-55D, D2-55E, D2-55F  
D2-60F  
D2-75, D2-75B, D2-75C, D2-75F

Art. nr/Part no	Ersätter/Replaces	Info
18087	3584086	Generator/Alternator, 5PK1040



**D2-50, D2-55, D2-75, MD2010, MD2020, MD2030, MD2040**  
D2-50F  
D2-55, D2-55A, D2-55B, D2-55C, D2-55D, D2-55E, D2-55F  
D2-75, D2-75A, D2-75B, D2-75C  
MD2010, MD2010B  
MD2020, MD2020B  
MD2030, MD2030B  
MD2040, MD2040A, MD2040B, MD2040C, MD2040D

Art. nr/Part no	Ersätter/Replaces	Info
18711	978710, 20797711, 20492542, 20496664, 20580723, 967114	13 x 1075 mm



## Drivremmar Drive belts



### D3-110, D3-130, D3-160, D3-190

D3-110I-A, D3-110I-B, D3-110I-C  
D3-130A-A, D3-130A-B, D3-130A-C, D3-130I-A, D3-130I-B, D3-130I-C  
D3-160A-A, D3-160A-B, D3-160A-C, D3-160I-A, D3-160I-B, D3-160I-C  
D3-190A-B, D3-190A-C, D3-190I-A, D3-190I-B, D3-190I-C

Art. nr/Part no	Ersätter/Replaces	Info
18809	30731809, 8627228	Generator/Alternator, 6PK1853



### D3-110, D3-140, D3-150, D3-170, D3-200, D3-220

D3-110I-D, D3-110I-E, D3-110I-F, D3-110I-G, D3-110I-H

D3-140A-D, D3-140A-E, D3-140A-F, D3-140A-G, D3-140A-H, D3-140I-D,  
D3-140I-E, D3-140I-F, D3-140I-G, D3-140I-H

D3-150I-D, D3-150I-E, D3-150I-F, D3-150I-G, D3-150I-H

D3-170A-D, D3-170A-E, D3-170A-F, D3-170A-G, D3-170A-H, D3-170I-D,  
D3-170I-E, D3-170I-F, D3-170I-G, D3-170I-H

D3-200A-D, D3-200A-E, D3-200A-F, D3-200A-G, D3-200A-H, D3-200I-D,  
D3-200I-E, D3-200I-F, D3-200I-G, D3-200I-H

D3-220A-D, D3-220A-E, D3-220A-F, D3-220A-G, D3-220A-H, D3-220I-D,  
D3-220I-E, D3-220I-F, D3-220I-G, D3-220I-H

Art. nr/Part no	Ersätter/Replaces	Info
18912	21160912, 24677541	4PK935



### D4, D6

D4-145I-G  
D4-150A-G  
D4-175I-G  
D4-230A-G, D4-230I-G  
D4-270A-G, D4-270I-G  
D4-300A-A, D4-300A-C, D4-300A-D, D4-300A-E, D4-300A-F, D4-300A-G  
D4-300D-A, D4-300D-C, D4-300D-D, D4-300D-E, D4-300D-F, D4-300I-G  
D4-320A-G, D4-320I-G

D6-300A-G, D6-300I-G  
D6-340A-G, D6-340I-G  
D6-380A-G, D6-380I-G  
D6-400A-E, D6-400A-F, D6-400A-G  
D6-435D-A, D6-435D-C, D6-435D-D, D6-435D-E, D6-435D-F  
D6-435I-A, D6-435I-C, D6-435I-D, D6-435I-E, D6-435I-F  
D6-440A-G, D6-440D-G, D6-440I-G, D6-440I-WJ-G  
D6-480D-G, D6-480I-G, D6-480I-WJ-G

Art. nr/Part no	Ersätter/Replaces	Info
18493	21405493	Kompressor/Compressor, 6PK1400



### D4, D6

D4-260A-A, D4-260A-B, D4-260A-C, D4-260A-D, D4-260A-E, D4-260A-F  
D4-260D-B, D4-260D-C, D4-260D-D, D4-260D-E, D4-260D-F

D6-350A-A, D6-350A-B  
D6-370A-B, D6-370A-C, D6-370A-D, D6-370A-E, D6-370A-F  
D6-370D-A, D6-370D-B, D6-370D-C, D6-370D-D, D6-370D-E

Art. nr/Part no	Ersätter/Replaces	Info
18026	21407026, 3583963	Kompressor/Compressor, 6PK1432



## Drivremmar Drive belts



### D4, D6

D4-145I-G  
D4-150A-G  
D4-175I-G  
D4-180I-B, D4-180I-C, D4-180I-D, D4-180I-E, D4-180I-F  
D4-210A-A, D4-210A-B, D4-210I-A, D4-210I-B  
D4-225A-B, D4-225A-C, D4-225A-D, D4-225A-E, D4-225A-F, D4-225I-B,  
D4-225I-C, D4-225I-D, D4-225I-E, D4-225I-F  
D4-230A-G, D4-230I-G  
D4-260A-A, D4-260A-B, D4-260A-C, D4-260A-D, D4-260A-E, D4-260A-F,  
D4-260D-B, D4-260D-C, D4-260D-D, D4-260D-E, D4-260D-F, D4-260I-A,  
D4-260I-B, D4-260I-C, D4-260I-D, D4-260I-E, D4-260I-F  
D4-270A-G, D4-270I-G  
D4-300A-A, D4-300A-C, D4-300A-D, D4-300A-E, D4-300A-F, D4-300A-G,  
D4-300D-A, D4-300D-C, D4-300D-D, D4-300D-E, D4-300D-F, D4-300I-A,  
D4-300I-C, D4-300I-D, D4-300I-E, D4-300I-F, D4-300I-G  
D4-320A-G, D4-320I-G

D6-280A-A, D6-280A-B, D6-280A-C, D6-280A-D, D6-280A-E, D6-280I-A,  
D6-280I-B, D6-280I-C, D6-280I-D, D6-280I-E  
D6-300A-F, D6-300A-G, D6-300D-F, D6-300D-G, D6-300I-F, D6-300I-G  
D6-310A-A, D6-310A-B, D6-310A-C, D6-310A-D, D6-310A-E,  
D6-310D-B, D6-310D-C, D6-310D-D, D6-310D-E  
D6-310I-A, D6-310I-B, D6-310I-C, D6-310I-D, D6-310I-E  
D6-330A-B, D6-330A-C, D6-330A-D, D6-330A-E, D6-330A-F, D6-330D-B,  
D6-330D-C, D6-330D-D, D6-330D-E, D6-330D-F, D6-330I-B, D6-330I-C,  
D6-330I-D, D6-330I-E, D6-330I-F  
D6-340A-G, D6-340D-G, D6-340I-G  
D6-350A-A, D6-350A-B  
D6-370A-B, D6-370A-C, D6-370A-D, D6-370A-E, D6-370A-F, D6-370D-A,  
D6-370D-B, D6-370D-C, D6-370D-D, D6-370D-E, D6-370D-F, D6-370I-A,  
D6-370I-B, D6-370I-C, D6-370I-D, D6-370I-E, D6-370I-F  
D6-380A-G, D6-380D-G, D6-380I-G  
D6-400A-E, D6-400A-F, D6-400A-G  
D6-435D-A, D6-435D-C, D6-435D-D, D6-435D-E, D6-435D-F, D6-435I-A,  
D6-435I-C, D6-435I-D, D6-435I-E, D6-435I-F  
D6-440A-G, D6-440D-G, D6-440I-G, D6-440I-WJ-G  
D6-480D-G, D6-480I-G, D6-480I-WJ-G

### D4, D6

D4-145I-G  
D4-150A-G  
D4-175I-G  
D4-180I-B, D4-180I-C, D4-180I-D, D4-180I-E, D4-180I-F  
D4-210A-A, D4-210A-B, D4-210I-A, D4-210I-B  
D4-225A-B, D4-225A-C, D4-225A-D, D4-225A-E, D4-225A-F, D4-225I-B,  
D4-225I-C, D4-225I-D, D4-225I-E, D4-225I-F  
D4-230A-G, D4-230I-G  
D4-260A-A, D4-260A-B, D4-260A-C, D4-260A-D, D4-260A-E, D4-260A-F,  
D4-260D-B, D4-260D-C, D4-260D-D, D4-260D-E, D4-260D-F, D4-260I-A,  
D4-260I-B, D4-260I-C, D4-260I-D, D4-260I-E, D4-260I-F  
D4-270A-G, D4-270I-G  
D4-300A-A, D4-300A-C, D4-300A-D, D4-300A-E, D4-300A-F, D4-300A-G,  
D4-300D-A, D4-300D-C, D4-300D-D, D4-300D-E, D4-300D-F, D4-300I-A,  
D4-300I-C, D4-300I-D, D4-300I-E, D4-300I-F, D4-300I-G  
D4-320A-G, D4-320I-G

D6-280A-A, D6-280A-B, D6-280A-C, D6-280A-D, D6-280A-E, D6-280I-A,  
D6-280I-B, D6-280I-C, D6-280I-D, D6-280I-E  
D6-300A-F, D6-300A-G, D6-300D-F, D6-300D-G, D6-300I-F, D6-300I-G  
D6-310A-A, D6-310A-B, D6-310A-C, D6-310A-D, D6-310A-E,  
D6-310D-B, D6-310D-C, D6-310D-D, D6-310D-E  
D6-310I-A, D6-310I-B, D6-310I-C, D6-310I-D, D6-310I-E  
D6-330A-B, D6-330A-C, D6-330A-D, D6-330A-E, D6-330A-F, D6-330D-B,  
D6-330D-C, D6-330D-D, D6-330D-E, D6-330D-F, D6-330I-B, D6-330I-C,  
D6-330I-D, D6-330I-E, D6-330I-F  
D6-340A-G, D6-340D-G, D6-340I-G  
D6-350A-A, D6-350A-B  
D6-370A-B, D6-370A-C, D6-370A-D, D6-370A-E, D6-370A-F, D6-370D-A,  
D6-370D-B, D6-370D-C, D6-370D-D, D6-370D-E, D6-370D-F, D6-370I-A,  
D6-370I-B, D6-370I-C, D6-370I-D, D6-370I-E, D6-370I-F  
D6-380A-G, D6-380D-G, D6-380I-G  
D6-400A-E, D6-400A-F, D6-400A-G  
D6-435D-A, D6-435D-C, D6-435D-D, D6-435D-E, D6-435D-F, D6-435I-A,  
D6-435I-C, D6-435I-D, D6-435I-E, D6-435I-F  
D6-440A-G, D6-440D-G, D6-440I-G, D6-440I-WJ-G  
D6-480D-G, D6-480I-G, D6-480I-WJ-G

Art. nr/Part no	Ersätter/Replaces	Info
18494	21405494, 3583729	Std. Generator/Alternator, <b>utan</b> servopump / <b>without</b> power steering pump, 6PK2065

Art. nr/Part no	Ersätter/Replaces	Info
18028	21407028, 3582696	Std. Generator/Alternator, <b>med</b> servopump / <b>with</b> power steering pump, 6PK2200



## Kamremmar Timing belts



### B21, B23

AQ120B, AQ140A, BB140A  
AQ125A, AQ125B  
AQ145A, AQ145B, BB145A  
230A, 230B  
250A, 250B  
AQ131A, AQ131B, AQ131C, AQ131D  
AQ151A, AQ151B, AQ151C

Spännrulle 12986-1 beställs separat / Tension pulley 12986-1 to be ordered separately

Art. nr/Part no	Ersätter/Replaces
12377	463377



### AQ171, AQ251A

251A  
AQ171A, AQ171C

Spännrulle 12507 beställs separat / Tension pulley 12507 to be ordered separately

Art. nr/Part no	Ersätter/Replaces
12506	855506



### D3

D3-1101-A, D3-1101-B, D3-1101-C, D3-1101-D, D3-1101-E, D3-1101-F, D3-1101-G, D3-1101-H,  
D3-130A-A, D3-130A-B, D3-130A-C, D3-1301-A, D3-1301-B, D3-1301-C  
D3-140A-D, D3-140A-E, D3-140A-F, D3-140A-G, D3-140A-H, D3-1401-D,  
D3-1401-E, D3-1401-F, D3-1401-G, D3-1401-H  
D3-1501-D, D3-1501-E, D3-1501-F, D3-1501-G, D3-1501-H  
D3-160A-A, D3-160A-B, D3-160A-C, D3-1601-A, D3-1601-B, D3-1601-C  
D3-170A-D, D3-170A-E, D3-170A-F, D3-170A-G, D3-170A-H, D3-1701-D,  
D3-1701-E, D3-1701-F, D3-1701-G, D3-1701-H  
D3-190A-B, D3-190A-C, D3-1901-A, D3-1901-B, D3-1901-C  
D3-200A-D, D3-200A-E, D3-200A-F, D3-200A-G, D3-200A-H, D3-2001-D,  
D3-2001-E, D3-2001-F, D3-2001-G, D3-2001-H  
D3-220A-D, D3-220A-E, D3-220A-F, D3-220A-G, D3-220A-H, D3-2201-D,  
D3-2201-E, D3-2201-F, D3-2201-G, D3-2201-H

Art. nr/Part no	Ersätter/Replaces
12779	30777779



### D3

D3-1101-A, D3-1101-B, D3-1101-C, D3-1101-D, D3-1101-E, D3-1101-F, D3-1101-G, D3-1101-H,  
D3-130A-A, D3-130A-B, D3-130A-C, D3-1301-A, D3-1301-B, D3-1301-C  
D3-140A-D, D3-140A-E, D3-140A-F, D3-140A-G, D3-140A-H, D3-1401-D,  
D3-1401-E, D3-1401-F, D3-1401-G, D3-1401-H  
D3-1501-D, D3-1501-E, D3-1501-F, D3-1501-G, D3-1501-H  
D3-160A-A, D3-160A-B, D3-160A-C, D3-1601-A, D3-1601-B, D3-1601-C  
D3-170A-D, D3-170A-E, D3-170A-F, D3-170A-G, D3-170A-H, D3-1701-D,  
D3-1701-E, D3-1701-F, D3-1701-G, D3-1701-H  
D3-190A-B, D3-190A-C, D3-1901-A, D3-1901-B, D3-1901-C  
D3-200A-D, D3-200A-E, D3-200A-F, D3-200A-G, D3-200A-H, D3-2001-D,  
D3-2001-E, D3-2001-F, D3-2001-G, D3-2001-H  
D3-220A-D, D3-220A-E, D3-220A-F, D3-220A-G, D3-220A-H, D3-2201-D,  
D3-2201-E, D3-2201-F, D3-2201-G, D3-2201-H

Art. nr/Part no	Ersätter/Replaces	Info
12306	31359568, 31258305, 30731772	Sats inkl. spännrullar / kit incl. tension pulleys



## Spännrullar Tension pulleys



**KAD32, TAMD42, KAD43, KAD44, KAD300**  
KAD32P, KAD32P-A  
TAMD42WJ-A  
KAD43P-A, KAD43P-B, KAMD43P, KAMD43P-A, KAMD43P-B  
KAD44P, KAD44P-A, KAD44P-B, KAD44P-C  
KAD300-A, KAMD300-A

Art. nr/Part no	Ersätter/Replaces
12324	3582324



**KAD32, KAD42, KAD43, KAD44**  
KAD32P-A (tom SN-2203202197)  
KAD42B, KAD42P-A, KAMD42B, KAMD42P-A, TAMD42B, TAMD42WJ-A  
KAD43P-A, KAD43P-B, KAMD43P, KAMD43P-A, KAMD43P-B  
KAD44P, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-B, KAMD44P-C

Art. nr/Part no	Ersätter/Replaces
18563	861563



**B25, KAD42**  
251A  
AQ171A, AQ171C  
KAD42A, KAD42B, KAMD42A, KAMD42B

Art. nr/Part no	Ersätter/Replaces
18507	855507



**D3**  
D3-1101-A, D3-1101-B, D3-1101-C  
D3-130A-A, D3-130A-B, D3-130A-C, D3-1301-A, D3-1301-B, D3-1301-C  
D3-160A-A, D3-160A-B, D3-160A-C, D3-1601-A, D3-1601-B, D3-1601-C  
D3-190A-A, D3-190A-B, D3-190A-C, D3-1901-A, D3-1901-B, D3-1901-C

Art. nr/Part no	Ersätter/Replaces
18962	30637962



**B21, B23, B25**  
AQ120B, AQ140A, BBI40A  
AQ125A, AQ125B  
AQ145A, AQ145B, BBI45A  
230A, 230B  
AQ131A, AQ131B, AQ131C, AQ131D  
AQ151A, AQ151B, AQ151C  
250A, 250B

Ej rostfri/Not stainless

Art. nr/Part no	Ersätter/Replaces
12986-1	831986



**D3**  
D3-1101-A, D3-1101-B, D3-1101-C  
D3-130A-A, D3-130A-B, D3-130A-C, D3-1301-A, D3-1301-B, D3-1301-C  
D3-160A-A, D3-160A-B, D3-160A-C, D3-1601-A, D3-1601-B, D3-1601-C  
D3-190A-B, D3-190A-C, D3-1901-A, D3-1901-B, D3-1901-C

Passar motorer med serienummer tom SN-2003005306  
Fits engines with serial number up to SN-2003005306

Art. nr/Part no	Ersätter/Replaces
18252	31251252



**D3**  
D3-1101-B, D3-1101-C  
D3-130A-B, D3-130A-C, D3-1301-B, D3-1301-C  
D3-160A-B, D3-160A-C, D3-1601-B, D3-1601-C  
D3-190A-B, D3-190A-C, D3-1901-B, D3-1901-C

Passar motorer med serienummer fr.om SN2003005306-  
Fits engines with serial number from SN2003005306- and up

Art. nr/Part no	Ersätter/Replaces
18251	31251251, 30757282



## Topplöckspackningar Cylinder head gaskets



**B18**  
AQ95, AQ110  
BB100

Ej för fotogenmotor/Not for kerosine engines. Runda hål/Round holes  
Ingår i sotningssats/Included in decarbonizing gasket kit 21357

Art. nr/Part no	Ersätter/Replaces
13990	9139283, 418990



**B20**  
AQ115A, AQ130A, AQ130C  
MB20B

Tjocklek 0,8 mm ovala hål/Thickness 0,8 mm oval holes  
Ingår i sotningssats/Included in decarbonizing gasket kit 21401

Art. nr/Part no	Ersätter/Replaces
13009	419310



**B20**  
AQ115A, AQ130B, AQ130C  
BB115A, BB115B  
MB20A

Tjocklek 2,0 mm runda hål/Thickness 2,0 mm round holes  
Ingår i sotningssats/Included in decarbonizing gasket kit 21418

Art. nr/Part no	Ersätter/Replaces
13783	857621, 876783, 875543, 419628



**B20**  
AQ115B, BB115C  
AQ130D  
MB20C

Tjocklek 1,2 mm ovala hål/Thickness 1,2 mm oval holes  
Ingår i sotningssats/Included in decarbonizing gasket kit 21569

Art. nr/Part no	Ersätter/Replaces
13623	9139282, 462623



**B30**  
AQ165A, BB165A  
AQ170A, AQ170B, AQ170C, BB170A, BB170B, BB170C

Tjocklek 0,8 mm ovala hål/Thickness 0,8 mm oval holes  
Ingår i sotningssats/Included in decarbonizing gasket kit 21335, 21359

Art. nr/Part no	Ersätter/Replaces
13008	9139284, 3855409, 461056, 430107, 461618



**B21**  
AQ120B, AQ125A  
AQ140A, BB140A

Art. nr/Part no	Ersätter/Replaces
13645	1378645, 463412



**B23, B25**  
230A, 230B  
AQ125B  
AQ145A, AQ145B, BB145A  
AQ131A, AQ131B, AQ131C, AQ131D  
AQ151A, AQ151B, AQ151C  
250A, 250B, 251A  
AQ171A, AQ171C

Ingår i sotningssatser/Included in decarbonizing gasket kits 21301, 21302, 21303

Art. nr/Part no	Ersätter/Replaces
13646	1378646, 1326785, 1332644



### Topplöckspackningar Cylinder head gaskets



**MD1, MD2**  
MD1, MD1A  
MD2, MD2A

Ingår i sotningsatts/Included in decarbonizing gasket kit 21422

Art. nr/Part no	Ersätter/Replaces	Info
13274	833274	Kolv/Piston Ø 79 mm Cylinder Ø 79,37mm



**MD1B, MD2B, MD3B**  
MD1B  
MD2B, AQD2B  
MD3B

Ingår i sotningsatts/Included in decarbonizing gasket kit 21500

Art. nr/Part no	Ersätter/Replaces	Info
13070	859151, 833070	Kolv/piston Ø 88,78 mm Cylinder Ø 88,90 mm



**MD11, MD17**  
MD11C, MD11D  
MD17C, MD17D

Ingår i sotningsatts/Included in decarbonizing gasket kit 21553, 21572

Art. nr/Part no	Ersätter/Replaces	Info
13453	859137, 833453	Kolv/piston Ø 88,78 mm Cylinder Ø 88,90 mm



**MD5**  
MD5A, MD5B, MD5C

Ingår i sotningsatts/Included in decarbonizing gasket kit 21561

Art. nr/Part no	Ersätter/Replaces
13127	859134, 838127



**MD6**  
MD6A, MD6B

Ingår i sotningsatts/Included in decarbonizing gasket kit 21379

Art. nr/Part no	Ersätter/Replaces
13376	859135, 3875376



**MD7**  
MD7A MO - 35144  
MD7B MO - 35144

Tjocklek/Thickness 1,3 mm

Ingår i sotningsatts/Included in decarbonizing gasket kit 21430

Art. nr/Part no	Ersätter/Replaces
13136	3809167, 859136, 840270




## Topplöckspackningar Cylinder head gaskets



**MD7**  
MD7A MO 35145 -  
MD7B MO 35145 -

Tjocklek Thickness 0,8 mm  
Ingår i sotningssats/Included in decarbonizing gasket kit 21431

Art. nr/Part no	Ersätter/Replaces
13749	3809167, 860749, 840910, 840270

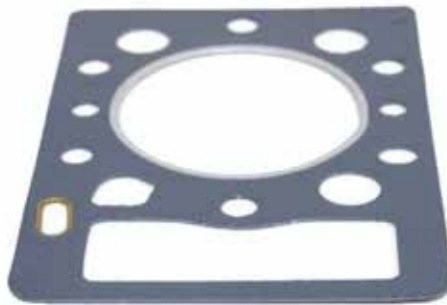

**2001**  
2001, 2001AG, 2001B, 2001BG, 2001D, 2001R

Ingår i sotningssats/Included in decarbonizing gasket kit 21307


Art. nr/Part no	Ersätter/Replaces
13569	840569



**2002**  
2002, 2002AG, 2002B, 2002BG, 2002D

Ingår i sotningssats/Included in decarbonizing gasket kit 21308

Art. nr/Part no	Ersätter/Replaces
13094	859094, 840328

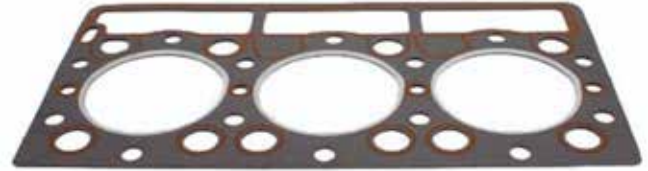

**2003, 2003T**  
2003, 2003AG, 2003B, 2003B SOLAS, 2003BG, 2003D, 2003R, 2003R SOLAS  
2003T, 2003TB, 2003TB SOLAS, 2003TR

Ingår i sotningssats/Included in decarbonizing gasket kit 21309, 21310

Art. nr/Part no	Ersätter/Replaces
13093	859093, 840405



**MD2030**  
MD2030, MD2030B, MD2030-C, MD2030-D

Ingår i sotningssats/Included in decarbonizing gasket kit 21760

Art. nr/Part no	Ersätter/Replaces
13309	3580309



**MD2040**  
MD2040, MD2040B, MD2040-C, MD2040-D

Ingår i sotningssats/Included in decarbonizing gasket kit 21761

Art. nr/Part no	Ersätter/Replaces
13202	3584202, 3580482



## Topplöckspackningar Cylinder head gaskets



**MD21**  
MD21A, MD21B  
AQD21A, AQD21B

Ingår i sotningsatts/Included in decarbonizing gasket kit 21417

Art. nr/Part no	Ersätter/Replaces
13531	859152, 829531, 829214



**MD22**  
MD22, MD22A, MD22L, MD22P, MD22L-A, MD22L-B, MD22P-B  
TMD22A, TMD22B, TMD22P-C  
TAMD22P-B

Ingår i sotningsatts/Included in decarbonizing gasket kit 21762, 21763, 21764, 21765

Art. nr/Part no	Ersätter/Replaces
13647	859647



**MD30**  
MD30A  
AD30A, AQAD30A  
TMD30A, TAMD30A

Ingår i sotningsatts/Included in decarbonizing gasket kit 21453


Art. nr/Part no	Ersätter/Replaces
13150	859150



**31, KAD32**  
AD31, AD31A, AQAD31A, AD31B, AD31D, AD31D-A, AD31L-A, AD31P-A, AD31XD  
MD31A, TMD31A, TAMD31A, TMD31B, TAMD31B, TMD31D, TAMD31D, TMD31L-A, TAMD31L-A, TAMD31M-A, TAMD31P-A, TAMD31S  
KAD32P, KAD32P-A

Ingår i sotningsatts/Included in decarbonizing gasket kit 21103

Art. nr/Part no	Ersätter/Replaces
13993	3582432, 858993

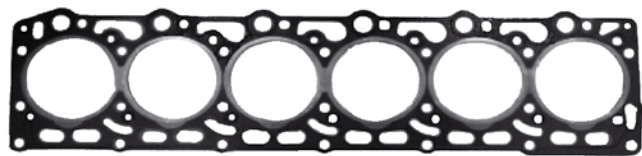

**40**  
MD40A, TMD40A, TAMD40A, TMD40B, TAMD40B, TMD40C  
AD40B, AQD40A, AQAD40A, AQAD40B

Ingår i sotn. sats/Incl. in decarb.gasket set 21395

Art. nr/Part no	Ersätter/Replaces
13155	859155




**41, KAD42, KAD43, KAD44, KAD300**  
AD41A, AQAD41A, AD41B, AQAD41B, AD41BJ, AD41D, AD41L-A, AD41P-A  
D41B, D41D, D41L-A  
TMD41A, TAMD41A, TMD41B, TAMD41B, TMD41D, TAMD41D, TAMD41H-A, TAMD41H-B, TAMD41P, TAMD41P-A, TMD41L-A  
KAD42A, KAD42B, KAD42P-A, KAMD42A, KAMD42B, KAMD42P-A, TAMD42B, TAMD42WJ-A  
KAD43P-A, KAD43P-B, KAMD43P-A, KAMD43P-B  
KAD44P, KAD44P-A, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-B, KAMD44P-C  
KAD300-A, KAMD300-A

Ingår i sotningsatts/Included in decarbonizing gasket kit 21104, 21105

Art. nr/Part no	Ersätter/Replaces
13742	3583786, 3582433, 3580742, 858992, 876853



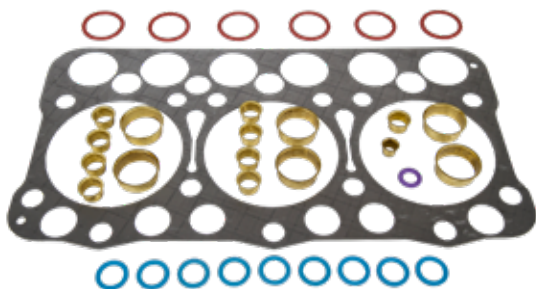

**60**  
TAMD60A, TAMD60B, TAMD60C

Art. nr / Part no	Ersätter/Replaces
13740	275740, 275566, 275446, 275521,



**D2-50, D2-55, D2-75**  
D2-50F  
D2-55, D2-55A, D2-55B, D2-55C, D2-55D, D2-55E, D2-55F  
D2-75, D2-75A, D2-75B, D2-75C


Ingår i sotningsatts/Included in decarbonizing gasket kit 21801

Art. nr/Part no	Ersätter/Replaces
90051	21228429, 3809337



**D3**  
D3-1101-A, D3-1101-B, D3-1101-C  
D3-130A-A, D3-130A-B, D3-130A-C, D3-130I-A, D3-130I-B, D3-130I-C  
D3-160A-A, D3-160A-B, D3-160A-C, D3-160I-A, D3-160I-B, D3-160I-C  
D3-190A-B, D3-190A-C, D3-190I-B, D3-190I-C


Art. nr/Part no	Ersätter/Replaces	Info
90261	30731261	1 hål/hole, A klass/class
90262	30731262	2 hål/hole, B klass/class
90263	30731263	3 hål/hole, C klass/class
90524	30731264, 30650524	4 hål/hole, D klass/class
90525	30731265, 30650525	5 hål/hole, E klass/class

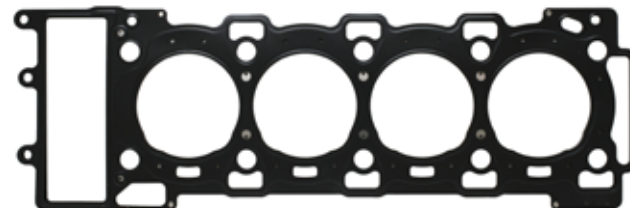

**D4**  
D4-145I-G, D4-150A-G, D4-175I-G  
D4-180I-B, D4-180I-C, D4-180I-D, D4-180I-E, D4-180I-F  
D4-210A-A, D4-210A-B, D4-210I-A, D4-210I-B  
D4-225A-B, D4-225A-C, D4-225A-D, D4-225A-E, D4-225A-F, D4-225I-B,  
D4-225I-C, D4-225I-D, D4-225I-E, D4-225I-F  
D4-230A-G, D4-230I-G  
D4-260A-A, D4-260A-B, D4-260A-C, D4-260A-D, D4-260A-E,  
D4-260A-F, D4-260D-B, D4-260D-C, D4-260D-D, D4-260D-E,  
D4-260D-F, D4-260I-A, D4-260I-B, D4-260I-C, D4-260I-D, D4-260I-E,  
D4-260I-F  
D4-270A-G, D4-270I-G  
D4-300A-A, D4-300A-C, D4-300A-D, D4-300A-E, D4-300A-F,  
D4-300A-G, D4-300D-A, D4-300D-C, D4-300D-D, D4-300D-E,  
D4-300D-F, D4-300I-A, D4-300I-C, D4-300I-D, D4-300I-E, D4-300I-F,  
D4-300I-G  
D4-320A-G, D4-320I-G

Ingår i sotningsatts/Included in decarbonizing gasket kit 21804

Art. nr/Part no	Ersätter/Replaces
90028	21165389, 3581868

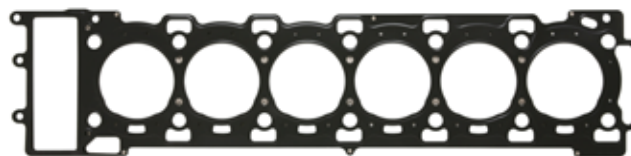

**D6**  
D6-280A-A, D6-280A-B, D6-280A-C, D6-280A-D, D6-280A-E, D6-280I-A,  
D6-280I-B, D6-280I-C, D6-280I-D, D6-280I-E  
D6-300A-F, D6-300A-G, D6-300D-F, D6-300D-G, D6-300I-F, D6-300I-G  
D6-310A-A, D6-310A-B, D6-310A-C, D6-310A-D, D6-310A-E,  
D6-310D-B, D6-310D-C, D6-310D-D, D6-310D-E, D6-310I-A, D6-310I-B,  
D6-310I-C, D6-310I-D, D6-310I-E  
D6-330A-B, D6-330A-C, D6-330A-D, D6-330A-E, D6-330A-F,  
D6-330D-B, D6-330D-C, D6-330D-D, D6-330D-E, D6-330D-F, D6-330I-B,  
D6-330I-C, D6-330I-D, D6-330I-E, D6-330I-F  
D6-340A-G, D6-340D-G, D6-340I-G  
D6-350A-A, D6-350A-B, D6-350A-C, D6-350A-D, D6-350A-E,  
D6-350A-F, D6-350D-A, D6-350D-B, D6-350D-C, D6-350D-D,  
D6-350D-E, D6-350D-F  
D6-370I-A, D6-370I-B, D6-370I-C, D6-370I-D, D6-370I-E, D6-370I-F  
D6-380A-G, D6-380D-G, D6-380I-G  
D6-400A-E, D6-400A-F, D6-400A-G  
D6-435D-A, D6-435D-C, D6-435D-D, D6-435D-E, D6-435D-F,  
D6-435I-A, D6-435I-C, D6-435I-D, D6-435I-E, D6-435I-F  
D6-440A-G, D6-440D-G, D6-440I-G, D6-440I-WJ-G  
D6-480D-G, D6-480I-G, D6-480I-WJ-G

Ingår i sotningsatts/Included in decarbonizing gasket kit 21805

Art. nr/Part no	Ersätter/Replaces
90029	21165390, 3581869



### Ventilkåpspackningar Valve cover gaskets

**B18, B20**

AQ60F, AQ90, AQ95, AQ95A, AQ110, AQ120  
BB30, BB100  
MB18  
AQ115A, AQ115B, BB115A, BB115B, BB115C  
AQ130A, AQ130B, AQ130C, AQ130D  
MB20A, MB20B, MB20C

Art. nr/Part no	Ersätter/Replaces
13100	419678

**B30**

AQ165A, BB165A  
AQ170A, AQ170B, AQ170C, BB170A, BB170B, BB170C

Art. nr/Part no	Ersätter/Replaces
13039	430039

**B21, B23**

AQ120B, AQ140A, BB140A  
AQ125A, AQ145A, BB145A

Art. nr/Part no	Ersätter/Replaces
13909	1378909

**B23, B25**

230A, 230B  
AQ125B, AQ145B  
AQ131A, AQ131B, AQ131C, AQ131D  
AQ151A, AQ151B, AQ151C  
250A, 250B

Art. nr/Part no	Ersätter/Replaces
12870	1378870, 1336753

**B21, B23, B25**

AQ120B, AQ140A, BB140A  
AQ125A, AQ125B  
AQ145A, BB145A  
251A  
AQ171A, AQ171C

2 st åtgär för 171A, C, 251A/2 pcs required for 171A, C, 251A  
Gummitätning för ventilkåpa/Rubber seal for valve cover

Art. nr/Part no	Ersätter/Replaces
11416	463416

**MD1A, MD2A, MD1B, MD2B, MD3B, MD11, MD17**

MD1, MD1A  
MD2, MD2A  
MD1B  
MD2B, AQD2B  
MD3B  
MD11C, MD11D  
MD17C, MD17D

Art. nr/Part no	Ersätter/Replaces
13399	859120, 802399



## Ventilkåpspackningar Valve cover gaskets



**MD5**  
MD5A, MD5B, MD5C

Art. nr/Part no	Ersätter/Replaces
13066	838066



**2002**  
2002, 2002B, 2002AG, 2002BG, 2002D

Art. nr/Part no	Ersätter/Replaces
13043	859043, 840440



**MD6, MD7**  
MD6A\*, MD6B\*, MD7A\*  
MD7B\*\*

\*) 2 st åtgår/2 pcs required


\*\*) 1 st åtgår/1 pcs required

Art. nr/Part no	Ersätter/Replaces
13115	840115, 3875384



**2003, 2003T**  
2003, 2003 SOLAS, 2003B, 2003B SOLAS, 2003D, 2003R, 2003R SOLAS  
2003T, 2003TB, 2003TB SOLAS, 2003TR

Art. nr/Part no	Ersätter/Replaces
13044	859044, 840461

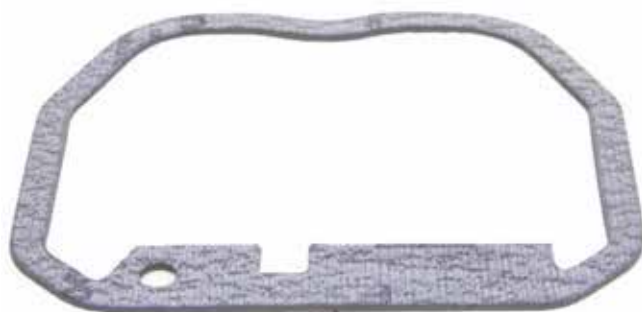

**2001**  
2001, 2001AG, 2001B, 2001BG, 2001D, 2001R

Art. nr/Part no	Ersätter/Replaces
13042	859042, 840572



**MD2030**  
MD2030, MD2030A, MD2030B, MD2030-C, MD2030-D

Art. nr/Part no	Ersätter/Replaces
13316	3580316



### Ventilkåpspackningar Valve cover gaskets

**MD2030**

MD2030, MD2030A, MD2030B, MD2030-C, MD2030-D

Art. nr/Part no	Ersätter/Replaces
13317	3580317

**30**MD30A, TMD30A, TAMD30A  
AD30A, AQAD30A

Art. nr/Part no	Ersätter/Replaces
13119	1544119

**31, KAD32**MD31A, TMD31A, TAMD31A, TMD31B, TAMD31B, TMD31D, TAMD31D,  
TMD31L-A, TAMD31L-A, TAMD31M-A, TAMD31P-A, TAMD31S  
AD31A, AQAD31A, AD31B, AD31D, AD31D-A, AD31L-A, AD31P-A,  
AD31XD  
KAD32P, KAD32P-A

Art. nr/Part no	Ersätter/Replaces
13652	838652

**40**MD40A, TMD40A, TAMD40A, TMD40B, TAMD40B, TMD40C  
AD40B  
AQD40A, AQAD40A, AQAD40B

Art. nr/Part no	Ersätter/Replaces
13287	1542287

**41, KAD42, KAD43**D41B, D41D, D41L-A  
TMD41A, TAMD41A, TMD41B, TAMD41B, TMD41D, TAMD41D,  
TAMD41H-A, TAMD41H-B, TMD41L-A, TAMD41P, TAMD41P-A  
AD41A, AQAD41A, AD41B, AD41BJ, AD41D, AD41L-A, AD41P-A  
KAD42A, KAD42B, KAD42P-A, KAMD42A, KAMD42B, KAMD42P-A,  
TAMD42B, TAMD42WJ-A  
KAD43P-A, KAD43P-B, KAMD43P, KAMD43P-A, KAMD43P-B


Art. nr/Part no	Ersätter/Replaces
13653	838653

**31, 41, KAD32, KAD42, KAD43**MD31A, TMD31A, TAMD31A, TMD31B, TAMD31B, TMD31D, TAMD31D,  
TMD31L-A, TAMD31L-A, TAMD31M-A, TAMD31P-A, TAMD31S, AD31,  
AD31B, AD31D, AD31D-A, AD31L-A, AD31P-A, AD31XD  
TMD41A, TAMD41A, TMD41B, TAMD41B, TMD41D, TAMD41D,  
TAMD41H-A, TAMD41H-B, TAMD41P, TAMD41P-A, TMD41L-A, AD41A,  
D41B, AD41B, AD41BJ, D41D, AD41D, D41L-A, AD41L-A, AD41P-A  
KAD32P, KAD32P-A  
KAD42A, KAD42B, KAD42P-A, KAMD42A, KAMD42B, KAMD42P-A,  
TAMD42B, TAMD42WJ-A  
KAD43P-A, KAD43P-B, KAMD43P, KAMD43P-A, KAMD43P-B

Art. nr/Part no	Ersätter/Replaces
13654	838654



## Ventilkåpspackningar Valve cover gaskets

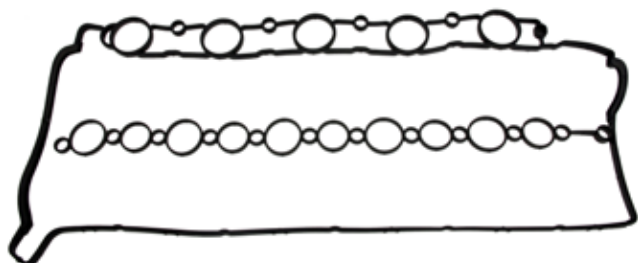

**D3**  
D3-110I-B, D3-110I-C  
D3-130A-B, D3-130A-C, D3-130I-B, D3-130I-C  
D3-160A-B, D3-160A-C, D3-160I-B, D3-160I-C  
D3-190A-B, D3-190A-C, D3-190I-A, D3-190I-B, D3-190I-C

Art. nr/Part no	Ersätter/Replaces
13459	30715459

## Tätningssmassa Sealant



Ett enkomponents anaerob tätningssmedel med medelhög mekanisk hållfasthet, designat att täta metallkomponenter med bearbetade ytor.


Idealisk för tätning av metallkomponenter av aluminiumlegeringar eller bearbetat stål som ventilkåpor, transmissionskåpor, oljeträg, samt olje- och kylvattenpumpar.

A single-component anaerobic sealant (methacrylic anaerobic resin) of medium mechanical strength designed to seal metal components with machined surfaces.

Ideal for sealing metal components of aluminum alloys or machined steel as rocker covers, timing covers, oil pans, oil or coolant pumps, gearboxes and gearboxes cover.

Art. nr/Part no	Ersätter/Replaces	Info
14879	22618325, 840879	50 ml

## Justershims cylinderfot block Adjusting shims cylinder block

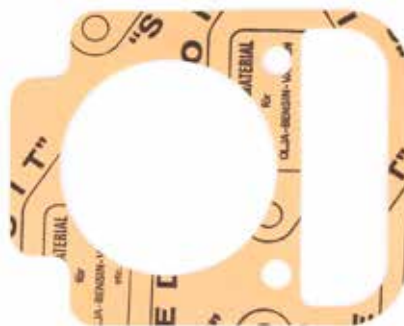

**MD1A, MD2A**  
MD1, MD1A  
MD2, MD2A

Art. nr/Part no	Ersätter/Replaces	Info
13024	859224, 807294	0,2 mm
13025	859225, 807298	0,3 mm



**MD1B, MD2B, MD3B**  
MD1B  
AQD2B  
MD2B  
MD3B

Art. nr/Part no	Ersätter/Replaces	Info
13497	859138, 833497	0,2 mm
13498	859148, 833498	0,3 mm



**MD11, MD17**  
MD11C, MD11D  
MD17C, MD17D

Art. nr/Part no	Ersätter/Replaces	Info
13780	833780	0,2 mm
13781	833781	0,3 mm



### Oljetrågspackningar Oil pan gaskets



#### B18, B20, B21, B23, B25

AQ60F, AQ90, AQ95, AQ95A, AQ110  
MB18, BB30, BB100  
MB20A, MB20B, MB20C  
AQ105  
AQ115A, AQ115B, BB115A, BB115B, BB115C  
AQ130A, AQ130B, AQ130C, AQ130D  
AQ120B, AQ140A, BB140A  
AQ125A, AQ125B  
AQ145A, AQ145B, BB145A  
230A, 230B, B230, B230E, B230FB, B230FX  
AQ131A, AQ131B, AQ131C, AQ131D  
AQ151A, AQ151B, AQ151C  
250A, 250B, 251A  
AQ171A, AQ171C

Art. nr/Part no	Ersätter/Replaces
14864	1378864, 463587, 418262



#### B30

AQ165A  
AQ170A, AQ170B, AQ170C  
BB165A  
BB170A, BB170B, BB170C

Art. nr/Part no	Ersätter/Replaces
14914	1378914, 461113




#### MD1A, MD2A, MD1B, MD2B, MD11

MD1, MD1A, MD1B,  
MD2, MD2A, MD2B, AQD2B  
MD11C, MD11D

Packning till vevhuslucka/Gasket for crankcase inspection lid

Art. nr/Part no	Ersätter/Replaces
11159	859159, 833792

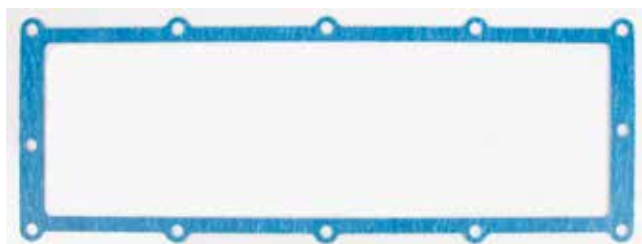

#### MD3, MD17

MD3B  
MD17C, MD17D

Art. nr/Part no	Ersätter/Replaces
14189	859189, 833047



#### MD5

MD5A, MD5B, MD5C

Art. nr/Part no	Ersätter/Replaces
14031	859031, 838235




## Oljeträgspackningar Oil pan gaskets



**MD6, MD7**  
MD6A, MD6B  
MD7A, MD7B

Art. nr/Part no	Ersätter/Replaces
14036	859036, 3875377

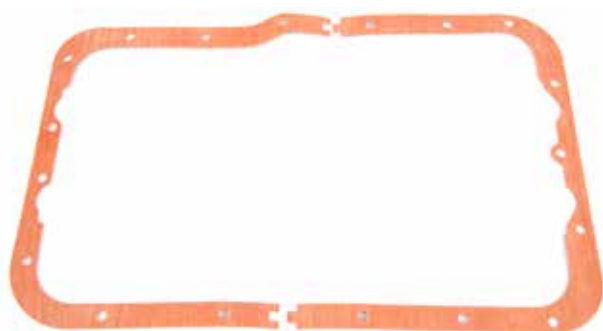

**22**  
MD22, MD22A, MD22L, MD22L-A, MD22L-B, MD22P,  
TMD22A, TMD22B, TMD22P-C, TAMD22P-B

Art. nr/Part no	Ersätter/Replaces
14603	861603, 833792



**30, 31, KAD32**  
MD30A, AD30A, AQAD30A, TMD30A, TAMD30A  
MD31A, TMD31A, TAMD31A, TMD31B, TAMD31B, TMD31D, TAMD31D,  
TMD31L-A, TAMD31L-A, TAMD31M-A, TAMD31P-A, TAMD31S, AD31,  
AQAD31A, AD31B, AD31D, AD31D-A, AD31L-A, AD31P-A, AD31XD  
KAD32P, KAD32P-A

Art. nr/Part no	Ersätter/Replaces
14250	24419772, 861250, 860684, 1544124



**40, 41, KAD42, KAD43, KAD44, KAD300**  
MD40A, TMD40A, TAMD40A, TMD40B, TAMD40B, TMD40C, AD40A,  
AQD40A, AQAD40A, AD40B, AQAD40B,  
TMD41A, TAMD41A, TMD41B, TAMD41B, TMD41D, TAMD41D,  
TAMD41H-A, TAMD41H-B, TAMD41P, TAMD41P-A, TMD41L-A, AD41A,  
AQAD41A, D41B, AD41B, AD41BJ, D41D, AD41D, D41L-A, AD41L-A,  
AD41P-A  
KAD42A, KAD42B, KAD42P-A, KAMD42A, KAMD42B, KAMD42P-A,  
TAMD42B, TAMD42VJ-A  
KAD43P-A, KAD43P-B, KAMD43P, KAMD43P-A, KAMD43P-B  
KAD44P, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-B, KAMD44P-C  
KAD300-A, KAMD300A

Art. nr/Part no	Ersätter/Replaces
14251	24250185, 861251, 860685, 1542247

## Tätningssmassa Sealant



**2001, 2002, 2003**  
2001, 2001AG, 2001B, 2001BG  
2002, 2002AG, 2002B, 2002BG  
2003, 2003AG, 2003B, 2003BG  
2003T, 2003TB

Tätningssmassa i tub till oljeträg. Universal - passar alla motorer / Sealant for oil pan. Universal use - fits all engines.

Art. nr/Part no	Ersätter/Replaces	Info
14879	22618325, 840879	50 ml



### Vevaxeltätningar Crank shaft sealings



**MD1, MD2, MD11**  
MD1, MD1A, MD2, MD2A  
MD1B, MD2B  
MD11C, MD11D

Art. nr/Part no	Ersätter/Replaces
11356	3588879, 803356



**MD3, MD17**  
MD3B, MD17C, MD17D

Art. nr/Part no	Ersätter/Replaces
11181	944181



**MD5, MB10, B30**  
MB10  
MD5A, MD5B  
AQ165A, BB165A, BB170A, BB170B, BB170C, AQ170A, AQ170B,  
AQ170C

Art. nr/Part no	Ersätter/Replaces
12425	1276424, 1276425



**MD6, MD7**  
MD6, MD7, MD6A, MD7A, MD6B, MD7B

Art. nr/Part no	Ersätter/Replaces
11075	3588078, 840075



**2001, 2002, 2003, 2003T**  
2001, 2001B, 2001AG, 2001BG  
2002, 2002B, 2002D, 2002AG, 2002BG  
2003, 2003B, 2003D, 2003AG, 2003BG  
2003T, 2003TB, 2003 SOLAS, 2003B SOLAS, 2003TB SOLAS

Art. nr/Part no	Ersätter/Replaces
11919	40005775, 840919, 861211, 267269



## Vevaxeltätningar Crank shaft sealings



**30, 40, 31, 41, KAD32, KAD42, KAD43, KAD44, KAD300**  
AD30A, AQAD30A, MD30A, TAMD30A, TMD30A, AD30, AQAD30, MD30, TAMD30, TMD30

MD31A, TMD31A, TMD31B, TAMD31A, TAMD31B, AD31, AQAD31A, AD31B, AD31D, AD31D-A, AD31XD, TAMD31D, TMD31D, AD31L-A, AD31P-A, TAMD31L-A, TAMD31M-A, TAMD31P-A, TAMD31S-A, TMD31L-A, TAMD31S, TAMD31L, TAMD31P

MD40A, TMD40A, TMD40B, TMD40C, AQD40A, TAMD40A, TAMD40B, AD40B, AQAD40A, AQAD40B

TMD41A, TMD41B, D41A, D41B, TAMD41A, TAMD41B, AQAD41A, AD41A, AD41B, AD41D, D41D, TAMD41D, TMD41D, AD41L-A, AD41P-A, D41L-A, TAMD41H-A, TAMD41H-B, TAMD41P-A, TAMD41L-A, TAMD41M-A, TMD41L-A, TAMD41P

KAD32P, KAD42A, KAMD42A, KAD42P-A, KAMD42P-A, KAD42B,

KAMD42B, TAMD42B TAMD42WJ-A,

KAD43P-A, KAMD43P, KAMD43P-A, KAMD43P-B

KAD44P, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-C

KAD300-A, KAMD300-A

Främre vevaxeltätning / Forward crank shaft sealing

Art. nr/Part no	Ersätter/Replaces
11318	1542318



**30, 40, 31, 41, KAD32, KAD42, KAD43, KAD44, KAD300**  
AD30A, AQAD30A, MD30A, TAMD30A, TMD30A, AD30, AQAD30, MD30, TAMD30, TMD30

MD31A, TMD31A, TMD31B, TAMD31A, TAMD31B, AD31, AQAD31A, AD31B, AD31D, AD31D-A, AD31XD, TAMD31D, TMD31D, AD31L-A, AD31P-A, TAMD31L-A, TAMD31M-A, TAMD31P-A, TAMD31S-A, TMD31L-A, TAMD31S, TAMD31L, TAMD31P

MD40A, TMD40A, TMD40B, TMD40C, AQD40A, TAMD40A, TAMD40B, AD40B, AQAD40A, AQAD40B

TMD41A, TMD41B, D41A, D41B, TAMD41A, TAMD41B, AQAD41A, AD41A, AD41B, AD41D, D41D, TAMD41D, TMD41D, AD41L-A, AD41P-A, D41L-A, TAMD41H-A, TAMD41H-B, TAMD41P-A, TAMD41L-A, TAMD41M-A, TMD41L-A, TAMD41P

KAD32P, KAD42A, KAMD42A, KAD42P-A, KAMD42P-A, KAD42B,

KAMD42B, TAMD42B TAMD42WJ-A,

KAD43P-A, KAMD43P, KAMD43P-A, KAMD43P-B

KAD44P, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-C


KAD300-A, KAMD300-A

Bakre vevaxeltätning / Rear crank shaft sealing

Art. nr/Part no	Ersätter/Replaces
11971	3582851, 1542204, 860431, 860971




### Packningar till MS-backslag Gaskets for MS gearcases

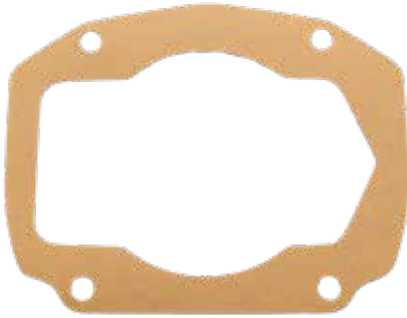


För MS-backslag mellan främre kåpa och planetväxel / fits between forward section and planetary housing  
För motorer med MS-backslag / for engines equipped with MS gearcase  
MD1B, MD2B, MD3B, MD5A, MD5B, MD5C, MD6A, MD6B, MD7A, MD7B, MD11C, MD11D, MD17C, MD17D, MB10A

Art. nr/Part no	Ersätter/Replaces
20156	852156

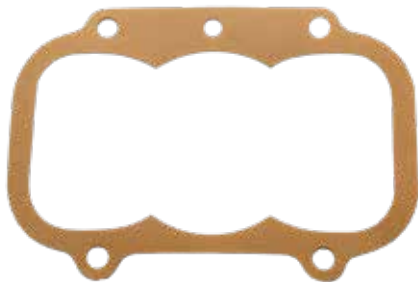


För MS-backslag mellan bakre kåpa och planetväxel / fits between rear section and planetary housing  
För motorer med MS-backslag / for engines equipped with MS gearcase  
MD1B, MD2B, MD3B, MD5A, MD5B, MD5C, MD6A, MD6B, MD7A, MD7B, MD11C, MD11D, MD17C, MD17D, MB10A

Art. nr/Part no	Ersätter/Replaces
20889	827889

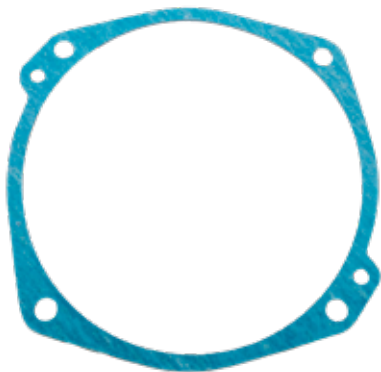

För MS- och RB-backslag mellan motor och främre kåpa / fits MS- and RB-gearcases, between forward flange and engine  
MD1B, MD2B, MD3B, MD1, MD1A, MD2, MD2A, MD11C, MD11D, MD17C, MD17D, MB10A

Art. nr/Part no	Ersätter/Replaces
20935	853935, 803227

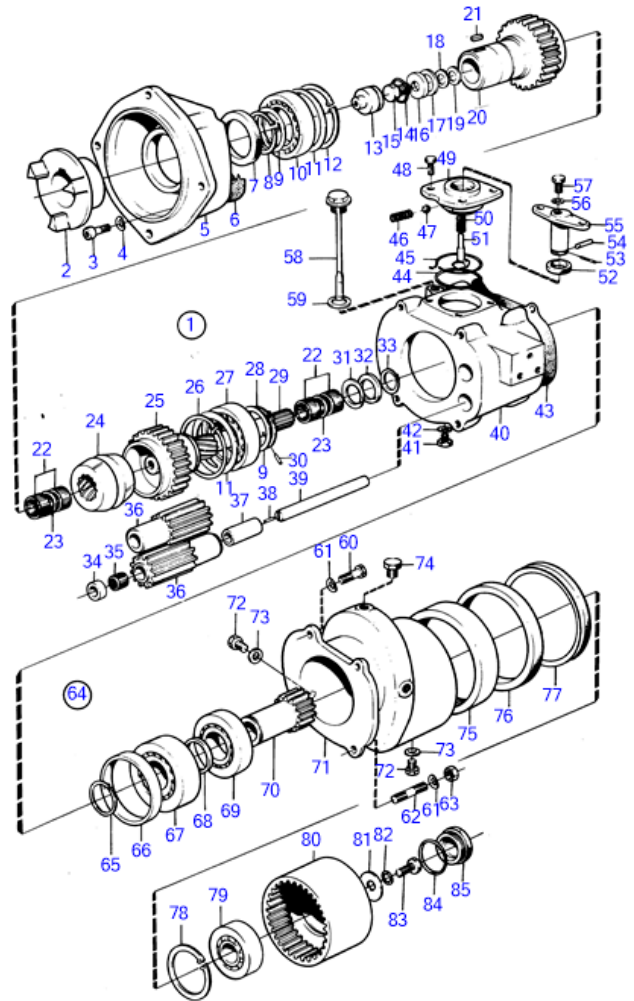

## Packningsseter insugningsrör Gasket kits inlet pipes



**B21, B23**

AQ120BAQ140A, BB140A  
AQ125A, AQ125B  
AQ145A, AQ145B, BB145A  
AQ131A, AQ131B, AQ131C, AQ131D  
AQ151A, AQ151B, AQ151C  
230A, 230B  
250A, 250B

Art. nr/Part no	Ersätter/Replaces
16879	1378879



**40**

MD40A, TMD40A, TAMD40A, TMD40B, TAMD40B, TMD40C  
AQAD40A, AD40B, AQAD40B

Art. nr/Part no	Ersätter/Replaces
22120	1 x 859131, 6 x 859034, 1 x 957173



**40**

MD40A, TMD40A, TAMD40A, AQD40A, TMD40B, TAMD40B, AD40B,  
AQAD40B, TMD40C


Art. nr/Part no	Ersätter/Replaces
22121	2 x 968967, 6 x 859034, 1 x 859065



**30**

MD30A, TMD30A, TAMD30A  
AD30A, AQAD30A

Art. nr/Part no	Ersätter/Replaces
22119	2 x 968967, 4 x 859034, 1 x 859130, 1 x 957173

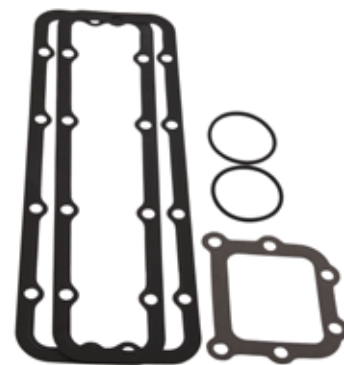


**73, 74, 75**


TAMD73P-A, TAMD73WJ-A  
TAMD74A, TAMD74C-A, TAMD74C-B, TAMD74L-A, TAMD74L-B,  
TAMD74P-A, TAMD74P-B  
TAMD75P-A

Art. nr/Part no	Ersätter/Replaces
23050	877063



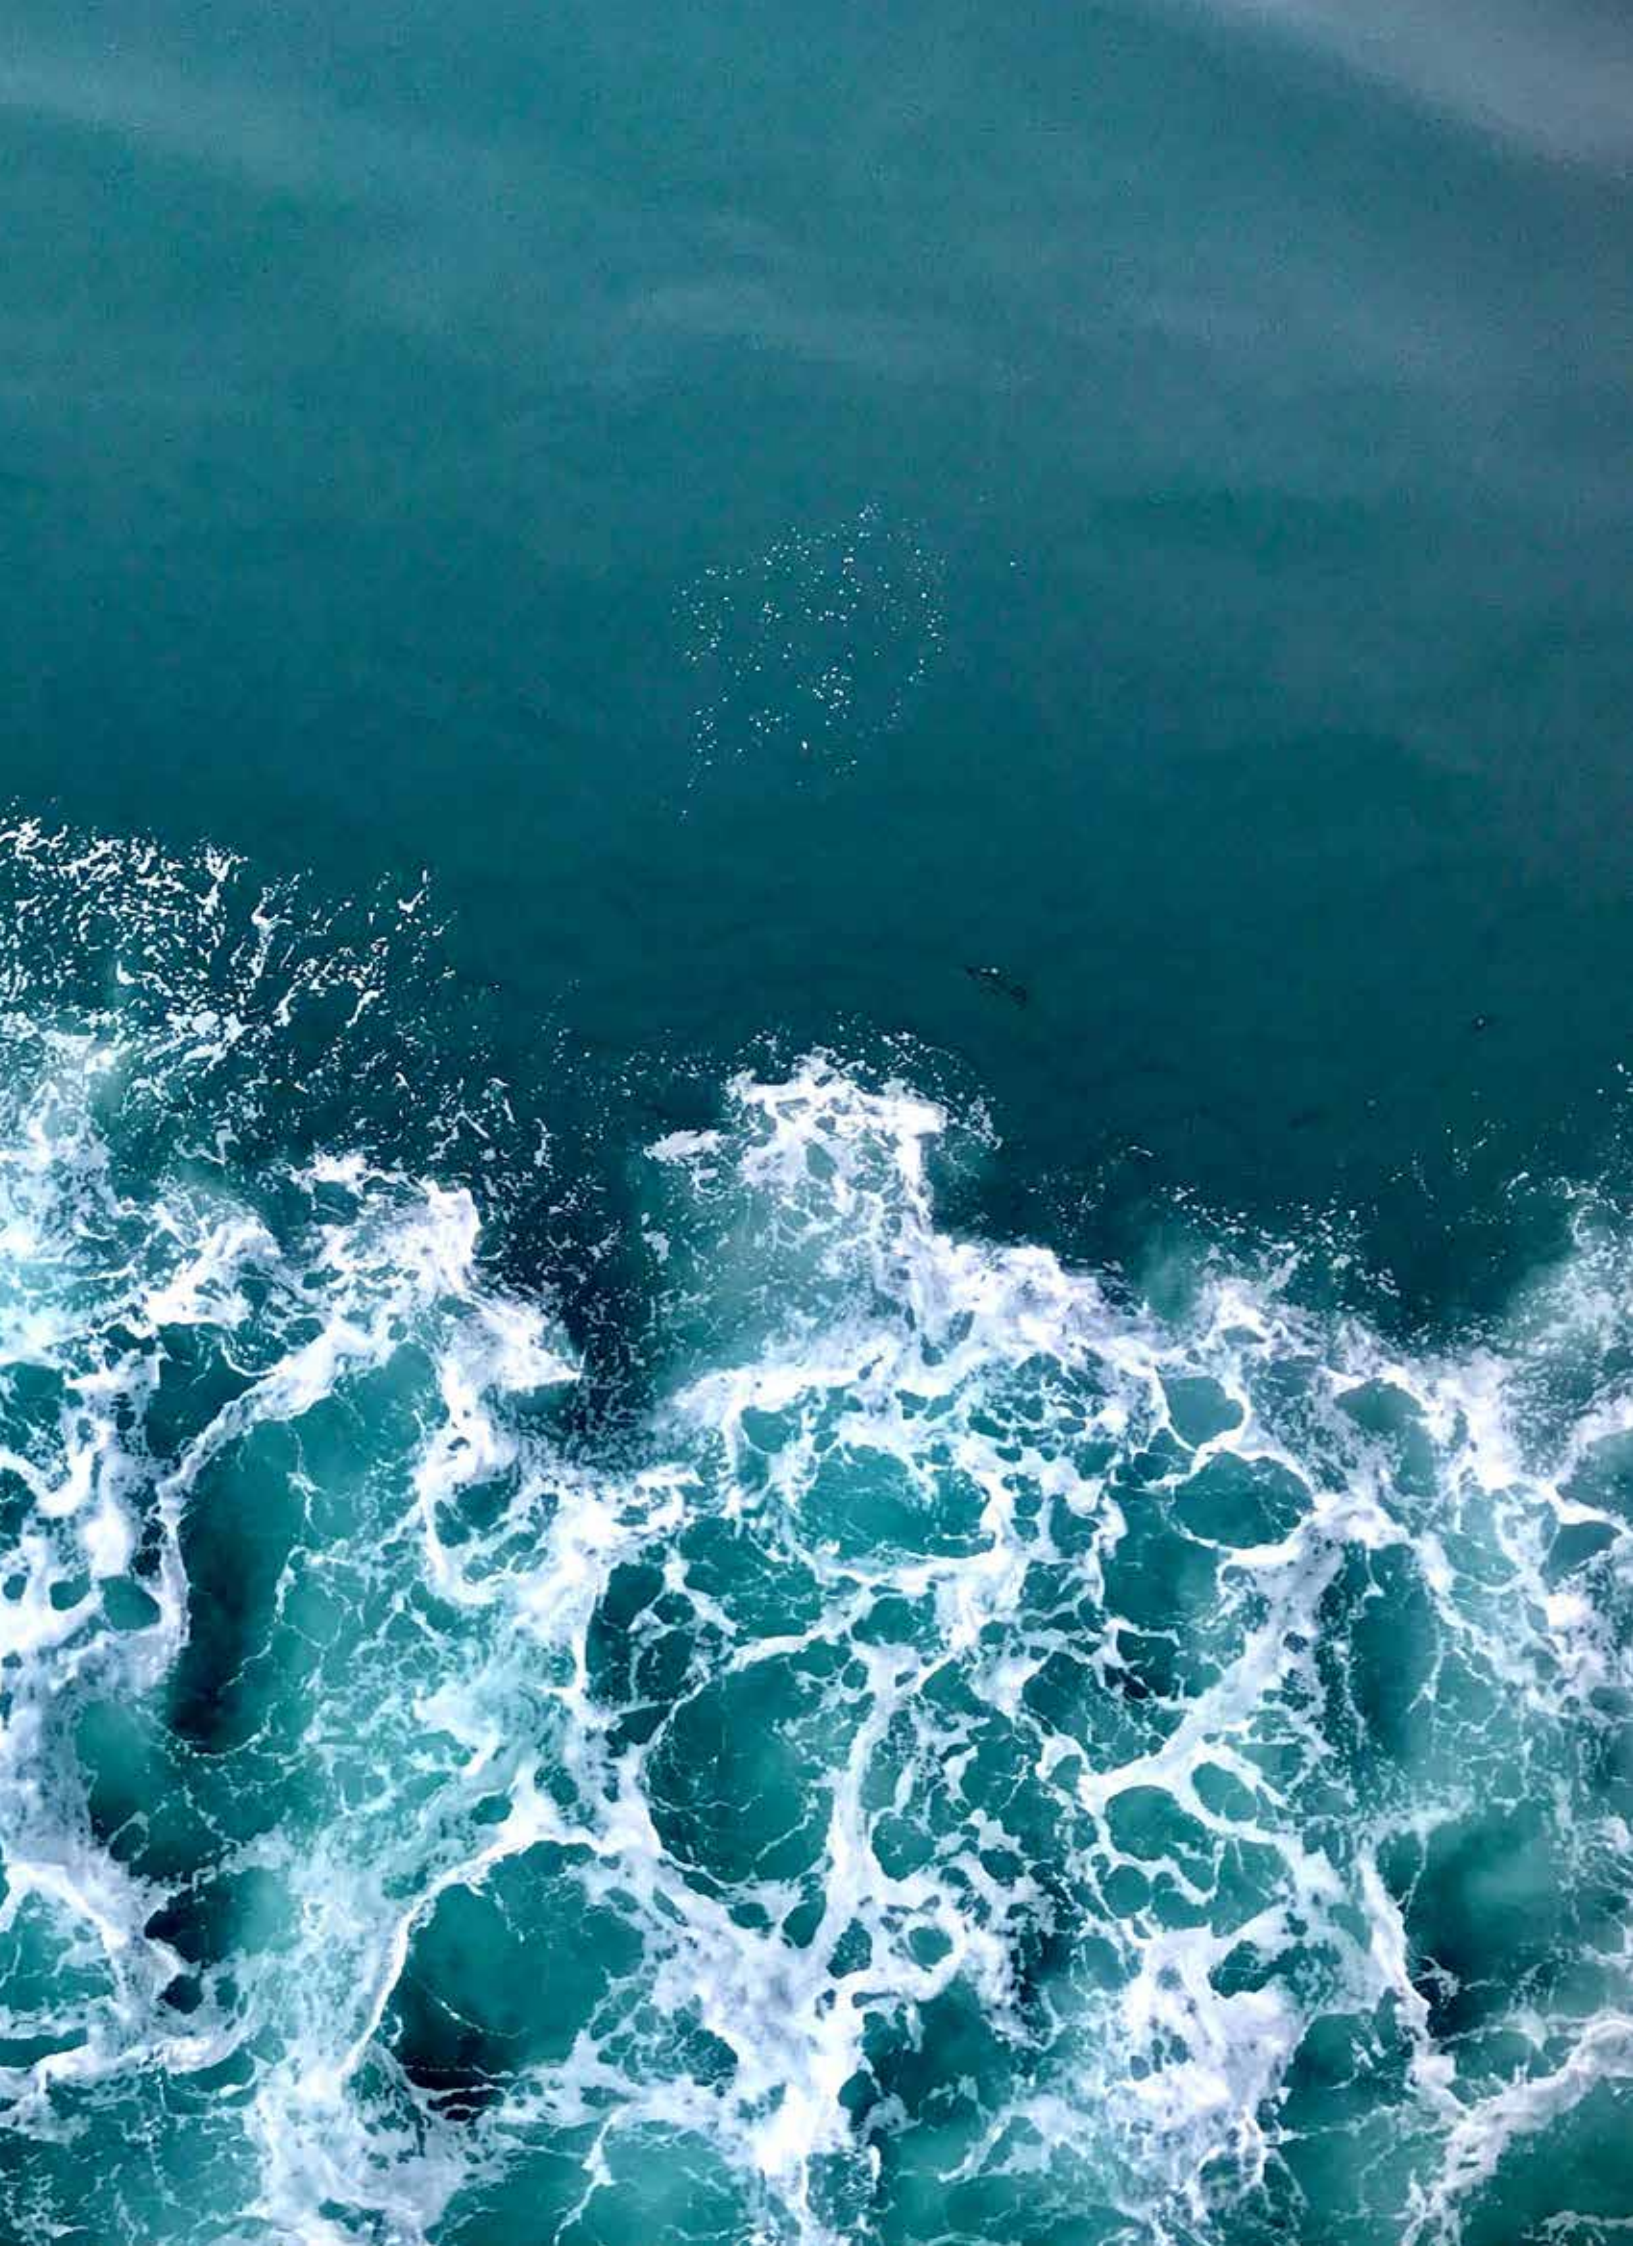


## Sotningsatser De-carbonizing kits

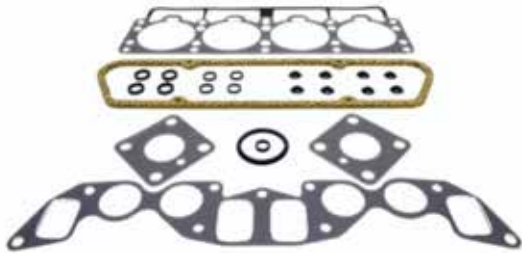

**B18**  
AQ60F  
AQ90, AQ95  
AQ110  
BB30, BB100, MB18

Art. nr/Part no	Ersätter/Replaces
21357	876357, 875077

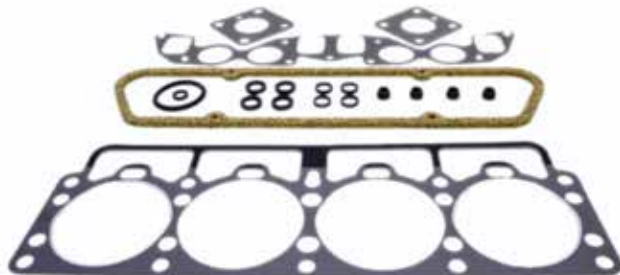

**B18**  
AQ60F  
AQ90, AQ95  
AQ110  
BB30, BB100, MB18


För B18 motorer med B20 topp/For B18 engines with B20 cylinder head

Art. nr/Part no	Ersätter/Replaces
21358	N/A



**B20**  
AQ115A  
AQ130A, AQ130C  
MB20B

Art. nr/Part no	Ersätter/Replaces	Info
21401	876356, 875401	0,8 mm

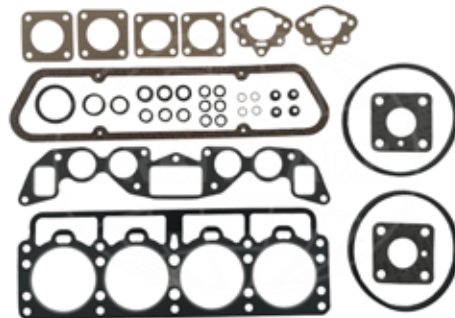

**B20**  
AQ130B  
BB115A, BB115B  
MB20A

Art. nr/Part no	Ersätter/Replaces	Info
21418	876348, 875418	2,0 mm



**B20**  
AQ115B  
AQ130D  
BB115C  
MB20C

Art. nr/Part no	Ersätter/Replaces
21569	876358, 875569




**B30**  
AQ165A  
AQ170A, AQ170B  
BB165A  
BB170A, BB170B

Art. nr/Part no	Ersätter/Replaces
21335	876335, 876337, 875402, 875533



### Sotningssatser De-carbonizing kits

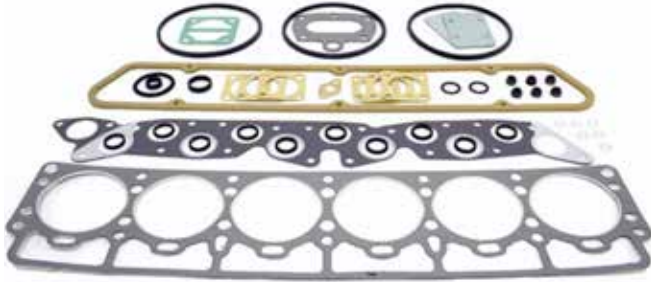

**B30**  
AQ170C, BB170C

Art. nr/Part no	Ersätter/Replaces
21359	876359, 875570



**B21**  
AQ120B, AQ125A,  
AQ140A, BB140A

Art. nr/Part no	Ersätter/Replaces
21300	876300, 875587




**B23, B25**  
AQ125B  
AQ131A, AQ131B, AQ131C, AQ131D  
AQ145B  
AQ151A, AQ151B, AQ151C  
230A, 230A  
250A, 250B

Art. nr/Part no	Ersätter/Replaces
21302	876302, 876022



**B23**  
AQ145A, BB145A

Art. nr/Part no	Ersätter/Replaces
21301	876301, 875678

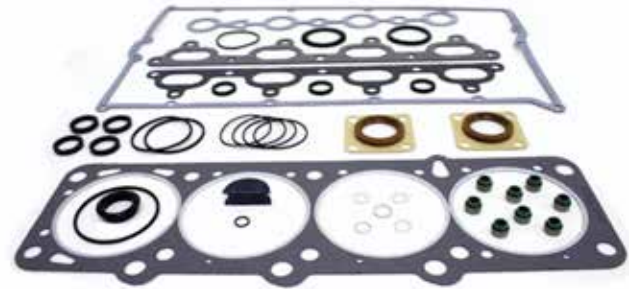

**B25**  
251A  
AQ171A, AQ171C

Art. nr/Part no	Ersätter/Replaces
21303	876303, 876071



**MD1, MDIA, MD2, MD2A**  
D1A, MDIA  
D2A, MD2, MD2A

MDIA = 1 sats åtgår / 1 kit required  
MD2A = 2 satser åtgår / 2 kits required

Art. nr/Part no	Ersätter/Replaces	Info
21422	875422, 876415	Cylinder Ø 79,37 mm



## Sotningsatser De-carbonizing kits




### MD1B, MD2B, MD3B

MD1B  
MD2B, AQD2B  
MD3B

MD1B = 1 sats åtgär / 1 kit required  
MD2B = 2 satser åtgär / 2 kits required  
MD3B = 3 satser åtgär / 3 kits required

Art. nr/Part no	Ersätter/Replaces	Info
21500	876377, 875500	Cylinder Ø 88,90 mm

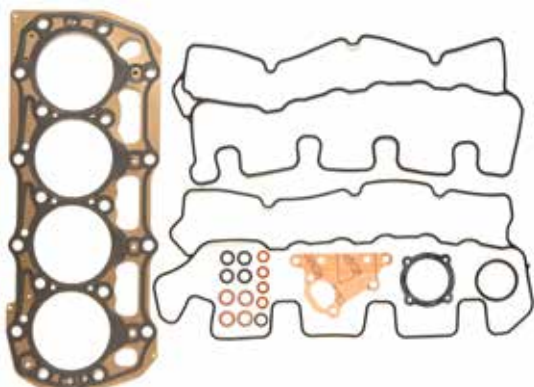

### D2-50, D2-55, D2-75

D2-50F  
D2-55, D2-55A, D2-55B, D2-55C, D2-55D, D2-55E, D2-55F  
D2-75, D2-75A, D2-75B, D2-75C, D2-75F

Art. nr/Part no	Ersätter/Replaces
21801	3589322



### MD5


MD5A, MD5B, MD5C

Art. nr/Part no	Ersätter/Replaces
21561	876341, 875561



### MD6 MD6A, MD6B

Art. nr/Part no	Ersätter/Replaces
21379	876379, 875508

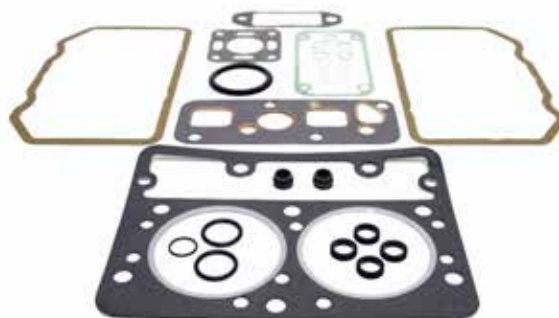

### MD7 MD7A

Upp till / Up to serial number -35144

Art. nr/Part no	Ersätter/Replaces	Info
21430	876430, 875613	1,3 mm



### MD7 MD7A\* MD7B

\* Från / From serial number 35145-

Art. nr/Part no	Ersätter/Replaces	Info
21431	876431, 875613	0,8 mm




### Sotningssatser De-carbonizing kits



**MD11**  
MD11C, MD11D

Foderpackningssats 11550 ingår ej i denna packningssats / Cylinder liner gasket kit 11550 not included. 2 st 11550 åtgär/2 pcs of 11550 is required

Art. nr/Part no	Ersätter/Replaces	Info
21553	876376, 875553	Cylinder Ø 88,90 mm

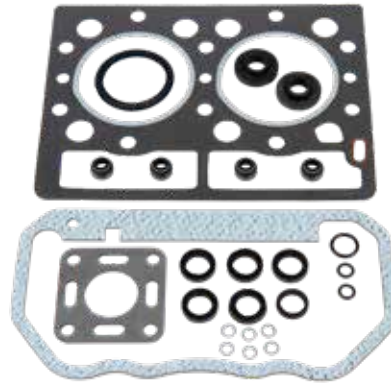

**2002**  
2002, 2002AG, 2002B, 2002BG, 2002D

Art. nr/Part no	Ersätter/Replaces
21308	876308



**MD17**  
MD17C, MD17D

Foderpackningssats 11550 ingår ej i denna packningssats / Cylinder liner gasket kit 11550 not included. 3 st 11550 åtgär/3 pcs of 11550 is required

Art. nr/Part no	Ersätter/Replaces	Info
21572	876380, 875572	Cylinder Ø 88,90 mm



**2003**  
2003, 2003 SOLAS, 2003AG, 2003B, 2003B SOLAS, 2003BG, 2003D, 2003R, 2003 R SOLAS

Art. nr/Part no	Ersätter/Replaces
21309	876309



**2001**  
2001, 2001AG, 2001B, 2001BG, 2001D, 2001R

Art. nr/Part no	Ersätter/Replaces
21307	876307



**2003**  
2003T, 2003TB, 2003TB SOLAS, 2003TR

Art. nr/Part no	Ersätter/Replaces
21310	876310




## Sotningsatser De-carbonizing kits



**MD2010**  
MD2010, MD2010A, MD2010B, MD2010-C, MD2010-D

Topplockspackning av stål / Steel cylinder head gasket

Art. nr/Part no	Ersätter/Replaces
21758	N/A

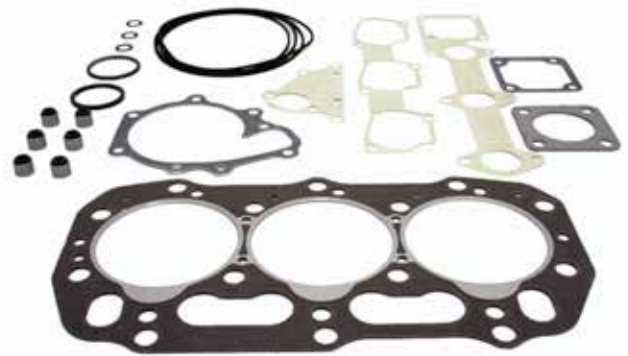

**MD2040**  
MD2040, MD2040A, MD2040B, MD2040-C, MD2040-D


Art. nr/Part no	Ersätter/Replaces
21761	N/A



**MD2020**  
MD2020, MD2020A, MD2020B, MD2020-C, MD2020-D

Topplockspackning av komposit / Composite cylinder head gasket

Art. nr/Part no	Ersätter/Replaces
21759	N/A

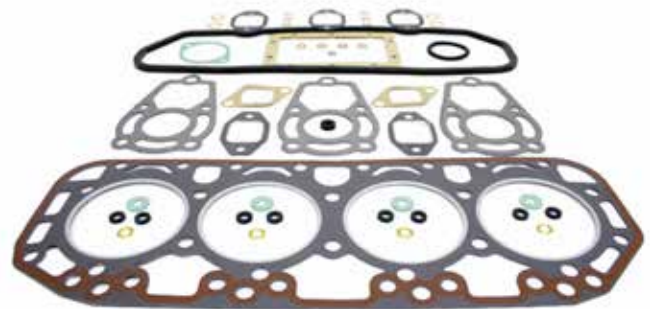

**MD21**  
MD21A, MD21B  
AQD21A, AQD21B

Art. nr/Part no	Ersätter/Replaces
21417	876417, 875388, 875567



**MD2030**  
MD2030, MD2030A, MD2030B, MD2030-C, MD2030-D

Art. nr/Part no	Ersätter/Replaces
21760	N/A



**30**  
MD30A, TMD30A, TAMD30A  
AD30A, AQAD30A

Art. nr/Part no	Ersätter/Replaces
21453	3582597, 876453, 875031



### Sotningssatser De-carbonizing kits

**31, KAD32**


MD31A, TMD31A, TAMD31A, TMD31B, TAMD31B, TMD31D, TAMD31D,  
TMD31L-A, TAMD31L-A, TAMD31M-A, TAMD31P-A, TAMD31S  
AD31, AQAD31A, AD31B, AD31D, AD31D-A, AD31L-A, AD31P-A,  
AD31XD  
KAD32P, KAD32P-A

Art. nr/Part no	Ersätter/Replaces
21103	3582435, 876103

**40**


MD40A, TMD40A, TAMD40A, TMD40B, TAMD40B, TMD40C  
AQD40A, AQAD40A, AD40B, AQAD40B

Art. nr/Part no	Ersätter/Replaces
21395	3582596, 876395, 875633, 875662

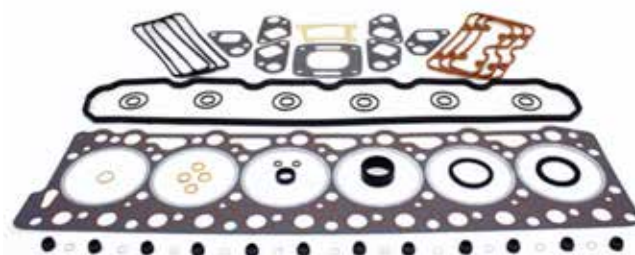**41, KAD42, KAD43**

TMD41A, TAMD41A, D41B, TMD41B, TAMD41B, D41D, TMD41D,  
TAMD41D, D41L-A, TAMD41H-A, TAMD41H-B, TMD41L-A, TAMD41L-A,  
TAMD41P, TAMD41P-A  
AD41A, AD41B, AD41Bj, AD41D, AD41L-A,  
KAD42A, KAD42B, KAD42P-A, KAMD42A, KAMD42B, KAMD42P-A,  
TAMD42B, TAMD42WJ-A  
KAD43P-A, KAD43P-B, KAMD43P, KAMD43P-A, KAMD43P-B

Art. nr/Part no	Ersätter/Replaces
21104	3583787, 876104, 876530

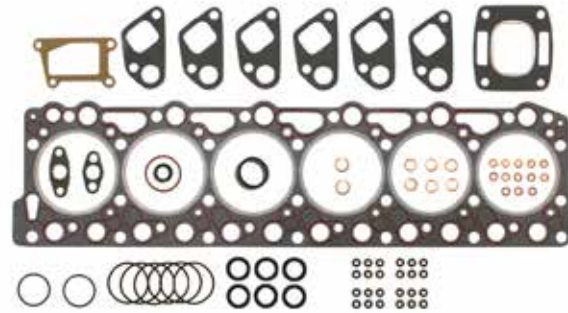**KAD44, KAD300**

KAD44P, KAD44P-A, KAD44P-B, KAD44P-C  
KAMD44P-A, KAMD44P-B, KAMD44P-C  
KAD300-A, KAMD300-A

Art. nr/Part no	Ersätter/Replaces
21105	3583788, 3582437

**D3**


D3-110I-A, D3-110I-B, D3-110I-C  
D3-130A-A, D3-130A-B, D3-130I-A, D3-130I-B, D3-130A-C, D3-130I-C  
D3-160A-A, D3-160A-B, D3-160A-C, D3-160I-A, D3-160I-B, D3-160I-C  
D3-190A-B, D3-190A-C, D3-190I-B, D3-190I-C

Topplockspackning ingår inte utan köpes separat enligt nedan / Cylinder head gasket not included, please choose from below

Art. nr/Part no	Ersätter/Replaces	Info
21802	3883845, 3589554	Sotningsatts/ De-carbonizing set
	<b>Topplockspackning/ Cylinder head gasket</b>	
90261	30731261, 30650521	1 hål, klass A/ 1 hole, class A
90262	30731262, 30650522	2 hål, klass B/ 2 hole, class B
90263	30731263, 30650523	3 hål, klass C/ 3 hole, class C
90524	30731264, 30650524	4 hål, klass D/ 4 hole, class D
90525	30650525, 8692385	5 hål, klass E/ 5 hole, class E




## Sotningssatser De-carbonizing kits

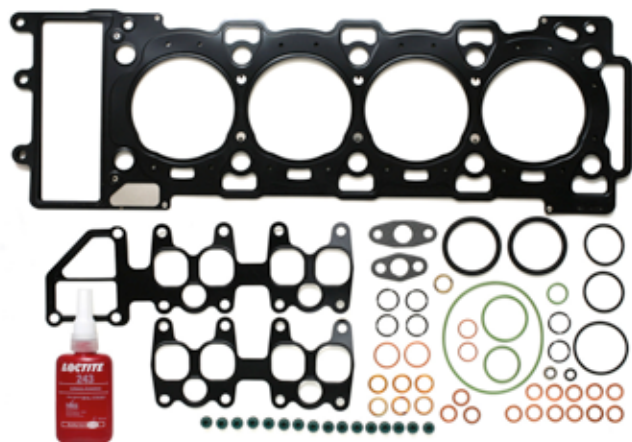

### D4

D4-180I-B, D4-180I-C, D4-180I-D, D4-180I-E, D4-180I-F  
 D4-210A-A, D4-210A-B, D4-210I-A, D4-210I-B  
 D4-225A-C, D4-225A-D, D4-225A-E, D4-225A-F, D4-225I-B, D4-225I-C,  
 D4-225I-D, D4-225I-E, D4-225I-F  
 D4-260A-A, D4-260A-B, D4-260A-C, D4-260A-D, D4-260A-E,  
 D4-260A-F, D4-260D-B, D4-260D-C, D4-260D-D, D4-260D-E  
 D4-260D-F, D4-260I-A, D4-260I-B, D4-260I-C, D4-260I-D, D4-260I-E,  
 D4-260I-F  
 D4-300A-A, D4-300A-C, D4-300A-D, D4-300A-E, D4-300A-F,  
 D4-300D-A, D4-300D-C, D4-300D-D, D4-300D-E  
 D4-300I-A, D4-300I-C, D4-300I-D, D4-300I-E, D4-300I-F

Art. nr/Part no	Ersätter/Replaces
21803	21371112, 3588432

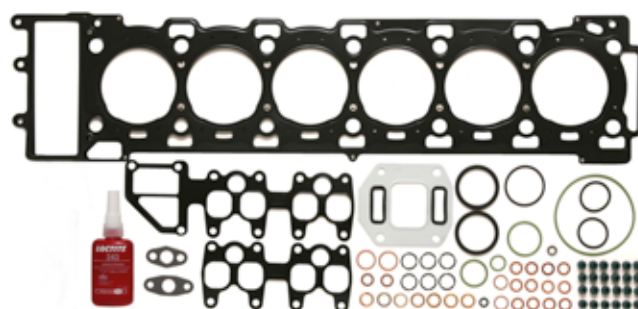

### D6

D6-280A-A, D6-280A-B, D6-280A-C, D6-280A-D, D6-280A-E, D6-280I-A,  
 D6-280I-B, D6-280I-C, D6-280I-D, D6-280I-E  
 D6-310A-A, D6-310A-B, D6-310A-C, D6-310A-D, D6-310A-E,  
 D6-310D-B, D6-310D-C, D6-310D-D, D6-310D-E, D6-310I-A, D6-310I-B,  
 D6-310I-C, D6-310I-D, D6-310I-E  
 D6-330A-B, D6-330A-C, D6-330A-D, D6-330A-E, D6-330D-B,  
 D6-330D-C, D6-330D-D, D6-330D-E, D6-330I-B, D6-330I-C, D6-330I-D,  
 D6-330I-E  
 D6-350A-A, D6-350A-B  
 D6-370A-B, D6-370A-C, D6-370A-D, D6-370A-E, D6-370D-B,  
 D6-370D-C, D6-370D-D, D6-370D-E, D6-370I-A, D6-370I-B, D6-370I-C,  
 D6-370I-D, D6-370I-E  
 D6-400A-E  
 D6-435D-A, D6-435D-C, D6-435D-D, D6-435D-E, D6-435I-A, D6-435I-C,  
 D6-435I-D, D6-435I-

Art. nr/Part no	Ersätter/Replaces
21805	21371111, 3588433



### Tilläggsatser Conversion gasket kits

**B18, B20**

AQ60F  
AQ90, AQ95, AQ95A  
AQ110, AQ120  
BB30, BB100, MB18  
AQ105  
AQ115A, AQ115B  
AQ130A, AQ130B, AQ130C, AQ130D  
BB115A, BB115B, BB115C  
MB20A, MB20B, MB20C

Satsen är kompletterad att passa både för B-18 och B-20 motorer / Gaskets added to fit both B18 and B20 engines

Art. nr/Part no	Ersätter/Replaces
21400	876342, 875400

**B21, B23**

AQ120B, AQ125A,  
AQ140A, BB140A  
AQ145A, BB145A

Art. nr/Part no	Ersätter/Replaces
21433	876393, 876433, 875588

**B23**


AQ125B  
AQ145B

Art. nr/Part no	Ersätter/Replaces
21023	876448, 876023

**B23, B25**

230A, 230B  
AQ131A, AQ131B, AQ131C, AQ131D  
250A, 250B, 251A  
AQ151A, AQ151B, AQ151C  
AQ171A, AQ171C

Art. nr/Part no	Ersätter/Replaces
21304	876304

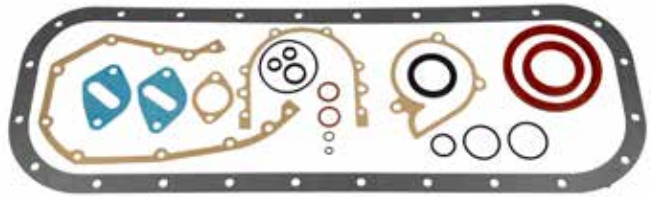**B30**

AQ165A  
AQ170A, AQ170B, AQ170C  
BB165A  
BB170A, BB170B, BB170C

Art. nr/Part no	Ersätter/Replaces
21306	876306, 875403

**MDI**

MDI, DIA, MDIA

Art. nr/Part no	Ersätter/Replaces
21423	876393



## Tilläggsatser Conversion gasket kits



**MD2, MD2A**  
D2A, MD2, MD2A

Art. nr/Part no	Ersätter/Replaces
21394	876394, 875424



**MD3B**  
MD3B

Art. nr/Part no	Ersätter/Replaces
21388	876388, 875505




**MD1B**  
MD1B

Art. nr/Part no	Ersätter/Replaces
21378	876378, 875501




**MD5**  
MD5A, MD5B

Art. nr/Part no	Ersätter/Replaces
21381	876381, 875562

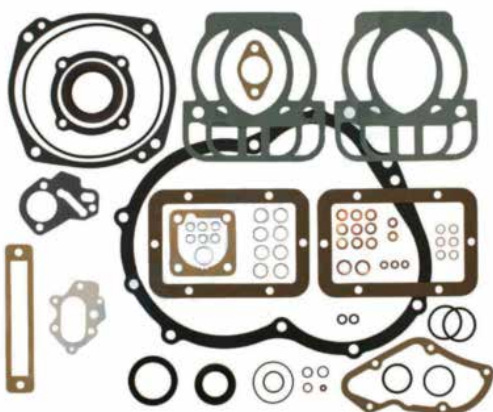

**MD2B**  
MD2B, AQD2B

Art. nr/Part no	Ersätter/Replaces
21389	876389, 875503

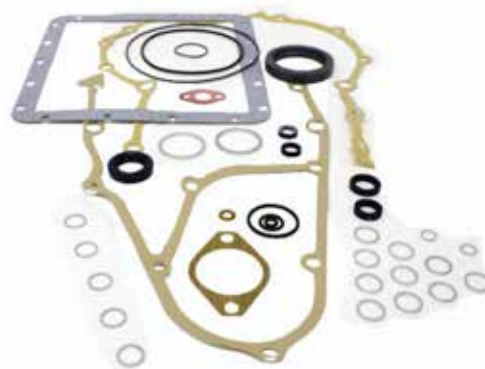

**MD5**  
MD5C

Art. nr/Part no	Ersätter/Replaces
21382	876382, 875715



### Tilläggsatser Conversion gasket kits



**MD6, MD7**  
MD6A, MD6B  
MD7A, MD7B

Art. nr/Part no	Ersätter/Replaces
21314	876314, 875509



**MD11**  
MD11C, MD11D

Foderpackningssats 11550 ingår ej i denna packningssats / Cylinder liner gasket kit 11550 not included. 2 st 11550 åtgär/2 pcs of 11550 is required

Art. nr/Part no	Ersätter/Replaces
21384	876384, 875554



**MD17**  
MD17C, MD17D

Foderpackningssats 11550 ingår ej i denna packningssats / Cylinder liner gasket kit 11550 not included. 3 st 11550 åtgär/3 pcs of 11550 is required

Art. nr/Part no	Ersätter/Replaces
21383	876383, 875573



**2001, 2002, 2003**  
2001, 2001AG, 2001B, 2001BG, 2001D, 2001R  
2002, 2002AG, 2002B, 2002BG, 2002D  
2003, 2003 SOLAS, 2003B, 2003B SOLAS, 2003D, 2003R, 2003R SOLAS

Art. nr/Part no	Ersätter/Replaces
21757	875757



**2003T**  
2003T, 2003TB, 2003TB SOLAS, 2003TR

Art. nr/Part no	Ersätter/Replaces
21054	876054



**MD2030**  
MD2030A, MD2030B, MD2030-C, MD2030-D

Art. nr/Part no	Ersätter/Replaces
21655	876655



## Tilläggsatser Conversion gasket kits



**MD21**  
MD21A, MD21B, AQD21A, AQD21B

Art. nr/Part no	Ersätter/Replaces
21387	875387



**22**  
MD22A, MD22L-A, MD22L-B, MD22P-B,  
TAMD22P-B, TMD22A, TMD22B

Art. nr/Part no	Ersätter/Replaces
21766	N/A



**30A**  
MD30A, TMD30A, TAMD30A  
AD30A, AQAD30A, MD30A

Foderpackningssats 11651 ingår ej i denna packningssats / Cylinder liner gasket kit 11651 not included. 4 st 11651 åtgår/4 pcs of 11651 is required

Art. nr/Part no	Ersätter/Replaces
21427	876427, 876032



**31, KAD32**  
MD31A, TMD31A, TAMD31A, TMD31B, TAMD31B, TMD31D, TAMD31D,  
TMD31L-A, TAMD31L-A, TAMD31M-A, TAMD31P-A, TAMD31S  
AD31, AD31B, AD31D, AD31D-A, AD31L-A, AD31P-A, AD31XD  
KAD32P, KAD32P-A

Foderpackningssats 11651 ingår ej i denna packningssats / Cylinder liner gasket kit 11651 not included. 4 st 11651 åtgår/4 pcs of 11651 is required


Art. nr/Part no	Ersätter/Replaces
21361	876361, 876105



**40**  
MD40A, TMD40A, TAMD40A, TMD40B, TAMD40B, TMD40C  
AD40B, AQD40A, AQAD40A, AQAD40B,

Foderpackningssats 11651 ingår ej i denna packningssats / Cylinder liner gasket kit 11651 not included. 6 st 11651 åtgår/6 pcs of 11651 is required

Art. nr/Part no	Ersätter/Replaces
21349	876349, 875634

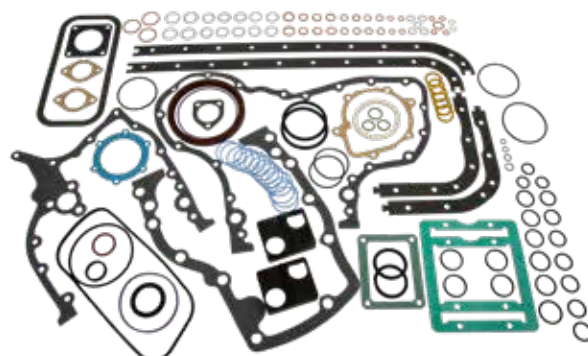


**60**  
TAMD60A, TAMD60B, TAMD60C

Art. nr/Part no	Ersätter/Replaces
21813	876350, 875605



### Tilläggsatser Conversion gasket kits

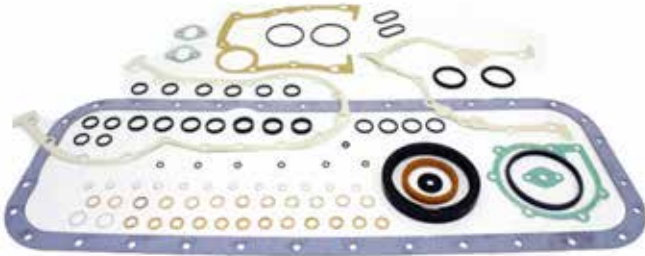


#### 41, KAD42, KAD43, KAD44, KAD300

TMD41A, TAMD41A, TMD41B, TAMD41B, TMD41D, TAMD41D,  
TAMD41H-A, TAMD41H-B, TAMD41P, TAMD41P-A, TMD41L-A, D41A,  
AD41A, AQAD41A, D41B, AD41B, AD41Bj, D41D, AD41D, D41L-A,  
AD41L-A, AD41P-A  
KAD42A, KAD42B, KAD42P-A, KAMD42A, KAMD42B, KAMD42P-A,  
TAMD42B, TAMD42WJ-A  
KAD43P-A, KAD43P-B, KAMD43P, KAMD43P-A, KAMD43P-B  
KAD44P, KAD44P-A, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-B,  
KAMD44P-C  
KAD300-A, KAMD300-A

Foderpackningssats 11651 ingår ej i denna packningssats. / Cylinder liner gasket kit 11651 not included. 6 st 11651 åtgär/6 pcs of 11651 is required

Art. nr/Part no	Ersätter/Replaces
21362	876774, 876362, 876106, 876531

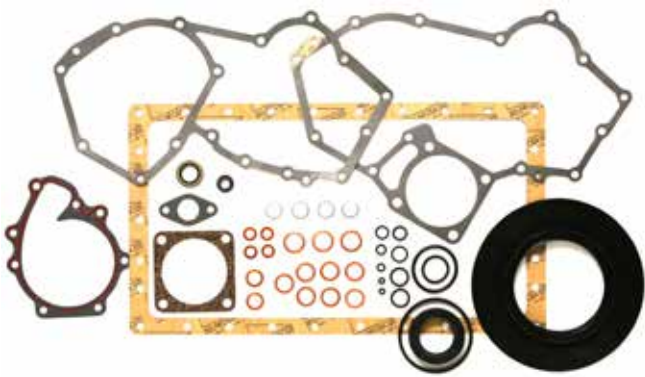

#### D2-50, D2-55, D2-75

D2-50F  
D2-55, D2-55A, D2-55B, D2-55C, D2-55D, D2-55E, D2-55F  
D2-75, D2-75A, D2-75B, D2-75C, D2-75F

Art. nr/Part no	Ersätter/Replaces
21800	877419



#### D4, D6

D4-145I-G  
D4-150A-G  
D4-175I-G  
D4-180I-B, D4-180I-C, D4-180I-D, D4-180I-E  
D4-210A-A, D4-210A-B, D4-210I-A, D4-210I-B  
D4-225A-B, D4-225A-C, D4-225A-D, D4-225A-E, D4-225A-F, D4-225I-B,  
D4-225I-C, D4-225I-D, D4-225I-E, D4-225I-F  
D4-230A-G, D4-230I-G  
D4-260A-A, D4-260A-B, D4-260A-C, D4-260A-D, D4-260A-E,  
D4-260A-F, D4-260D-B, D4-260D-C, D4-260D-D, D4-260D-E,  
D4-260D-F  
D4-260I-A, D4-260I-B, D4-260I-C, D4-260I-D, D4-260I-E, D4-260I-F  
D4-270A-G, D4-270I-G  
D4-300A-A, D4-300A-B, D4-300A-C, D4-300A-D, D4-300A-E,  
D4-300A-F, D4-300A-G, D4-300D-A, D4-300D-C, D4-300D-D,  
D4-300D-E, D4-300D-F, D4-300I-A, D4-300I-C, D4-300I-D, D4-300I-E,  
D4-300I-F, D4-300I-G  
D4-320A-G, D4-320I-G

D6-280A-A, D6-280A-B, D6-280A-C, D6-280A-D, D6-280A-E, D6-280I-A,  
D6-280I-B, D6-280I-C, D6-280I-D, D6-280I-E  
D6-300A-F, D6-300A-G, D6-300D-F, D6-300D-G, D6-300I-F, D6-300I-G  
D6-310A-A, D6-310A-B, D6-310A-C, D6-310A-D, D6-310A-E,  
D6-310D-B, D6-310D-C, D6-310D-D, D6-310D-E, D6-310I-A, D6-310I-B,  
D6-310I-C, D6-310I-D, D6-310I-E  
D6-330A-B, D6-330A-C, D6-330A-D, D6-330A-E, D6-330A-F,  
D6-330D-B, D6-330D-C, D6-330D-D, D6-330D-E, D6-330D-F, D6-330I-B,  
D6-330I-C, D6-330I-D, D6-330I-E, D6-330I-F  
D6-340A-G, D6-340D-G, D6-340I-G  
D6-350A-A, D6-350A-B  
D6-370A-B, D6-370A-C, D6-370A-D, D6-370A-E, D6-370A-F,  
D6-370D-A, D6-370D-B, D6-370D-C, D6-370D-D, D6-370D-E,  
D6-370D-F, D6-370I-A, D6-370I-B, D6-370I-C, D6-370I-D, D6-370I-E,  
D6-370I-F  
D6-380A-G, D6-380D-G, D6-380I-G  
D6-400A-E, D6-400A-F, D6-400A-G  
D6-435D-A, D6-435D-C, D6-435D-D, D6-435D-E, D6-435D-F,  
D6-435I-A, D6-435I-C, D6-435I-D, D6-435I-E, D6-435I-F  
D6-440A-G, D6-440D-G, D6-440I-G, D6-440I-VJ-G  
D6-480D-G, D6-480I-G, D6-480I-VJ-G

Art. nr/Part no	Ersätter/Replaces
21804	3588434




## Bränslepumpar Fuel pumps



**MB10**  
MB10A

Art. nr/Part no	Ersätter/Replaces
17223	834223

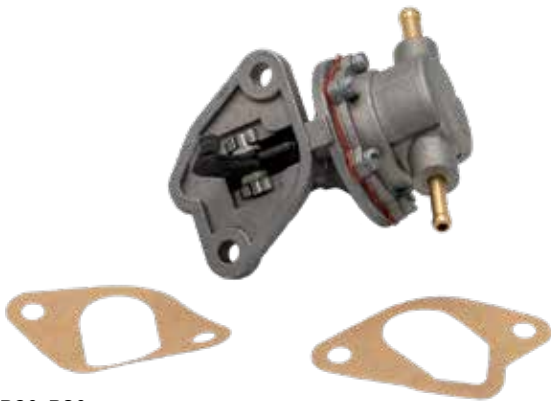

**B18, B20, B30**

AQ115A, AQ115B, AQ130A, AQ130B, AQ130C, AQ130D, AQ165A,  
AQ170A, AQ170B, AQ170C  
BB115A, BB115B, BB165A,  
BB170A, BB170B, BB170C  
MB20A, MB20B, MB20C

OBS/NOTE: Anslutning med slang, ej gängad/For hose connection, not threaded

Art. nr/Part no	Ersätter/Replaces	Info
17092	831092	8 mm



**B21, B23, B25**

AQ120B\*  
AQ140A\*, BB140A\*  
230A, 230B  
AQ125B  
AQ131A, AQ131B, AQ131C, AQ131D  
AQ145A, AQ145B, BB145A  
250A, 250B, 251A  
AQ151A, AQ151B, AQ151C  
AQ171A, AQ171C

\*Senare utförande/\*Later version

Art. nr/Part no	Ersätter/Replaces	Info
17161	841161	1/8"-27NPT + M10x1.



**V6**

430A, 431A  
AQ175A  
AQ205A, AQ205LB

Art. nr/Part no	Ersätter/Replaces
17297	855297



**V8**

500A, 500B, 501A, 501B  
570, 570A, 571A, 572A  
740B  
AQ200D, AQ200F  
AQ211A  
AQ225D, AQ225E, AQ225F, BB225A, BB225AV, BB225B, BB225C  
AQ231A, AQ231B, BB231A  
AQ255B  
AQ260A, AQ260B, BB260A, BB260AV, BB260B, BB260C, BB261A  
AQ271A, AQ271B, AQ271C, AQ271D  
AQ280A  
AQ290A  
AQ311A, AQ311B

Art. nr/Part no	Ersätter/Replaces
17493	826493



### Bränslepumpar Fuel pumps



#### V6, V8

4.3GIJBYA, 4.3GIJWTR, 4.3GIPBYCCE, 4.3GIPLKDCE, 4.3GIPLKECE,  
4.3GIPNCACE, 4.3GIPNCBCE, 4.3GIPNCMCE, 4.3GIPNCSCCE,  
4.3GIPWTRCE  
5.0FIPHUECE, , 5.0FIPHUECE, 5.0FIPHURCE, 5.0FIPMDA, 5.0FIPNCBCE,  
5.0FIPNCSCCE, 5.0GIPBYCCE, 5.0GIPWTR  
5.7GIIMDA, 5.7GIINCCCE, 5.7GIPHUS, 5.7GIPLKDCE, 5.7GIPLKECE,  
5.7GIPMDA, 5.7GIPMDACE, 5.7GIPNCACE, 5.7GIPNCBCE, 5.7GIPNCMCE, ,  
5.7GIPNCSCCE, , 5.7GLIPLKDCE, 5.7GSICPLKD, 5.7GSIPBYCCE, 5.7GSIPLKE,  
5.7GSIPWTR  
5.8FIIHUBCE, 5.8FIIHUECE, 5.8FIPHUECE, 5.8FIPHURCE, 5.8FIPMDA,  
5.8FIPMDM, 5.8FIPNCACE, 5.8FIPNCBCE, 5.8FIPNCMCE, 5.8FIPNCSCCE,  
5.8FSIINCC, 5.8FSIINCS, 5.8FSIPHUBCE, 5.8FSIPHURCE, 5.8FSIPNCACE,  
5.8FSIPNCD, 5.8FSIPNCS  
7.4GIINCCCE, 7.4GIINCSCE, 7.4GIPBYCCE, 7.4GIPLKDCE, 7.4GIPLKECE,  
7.4GIPNCACE, 7.4GIPNCACE, 7.4GIPNCBCE, 7.4GIPNCMCE,  
7.4GIPNCSCCE, 7.4GIPWTR, 7.4GSIINCC, 7.4GSIINCS, 7.4GSIPBYCCE,  
7.4GSIPWTR, 7.4GSIXNCB, 7.4GSIXNCM  
8.2GSIPBYCCE, 8.2GSIPWTR, 8.2GSIXNCB  
DPX385XBYDCE, DPX385XEFS, DPX385XLKE  
DPX415XBYDCE, DPX415XEFS, DPX415XLKE

Art. nr/Part no	Ersätter/Replaces
17650	3857650, 3854137




#### 2001, 2002, 2003, 2003T, MD1, MD2, MD3, MD5, MD6, MD7, MD11, MD17

2001\*, 2001AG\*, 2001B\*, 2001BG\*, 2001D\*, 2001R\*  
2002\*, 2002AG\*, 2002B\*, 2002BG\*, 2002D\*  
2003\*, 2003 SOLAS\*, 2003B\*, 2003B SOLAS\*, 2003D\*, 2003R\*, 2003R\*  
SOLAS  
2003T\*, 2003TB\*, 2003TB SOLAS\*, 2003TR\*  
MD1B  
MD2A  
MD2B, AQD2B  
MD3B  
MD5A, MD5B, MD5C  
MD6A, MD6B  
MD7A, MD7B  
MD11C, MD11D  
MD17C, MD17D

\*Tidigare utförande med koniskt lock

\*Earlier version with conical cap on top.

Art. nr/Part no	Ersätter/Replaces	Info
17323	21134777, 833323, 840001	M14 x 1,5

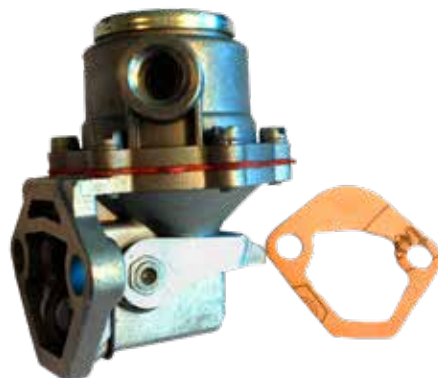

#### MD19, MD21, MD29, MD32

MD19, AQD19  
MD21A, MD21B, AQD21A, AQD21B  
MD29, MD29A, AQD29, AQD29A  
MD32A, AQD32A

Art. nr/Part no	Ersätter/Replaces
17459	858459, 826550, 818445



## Bränslepumpar Fuel pumps



**2001, 2002, 2003, 2003T**

2001, 2001B, 2001AG, 2001BG, 2001D, 2001R  
2002, 2002B, 2002D, 2002AG, 2002BG  
2003, 2003 SOLAS, 2003B, 2003B-SOLAS, 2003D, 2003R, 2003R SOLAS  
2003T, 2003TB, 2003TB SOLAS, 2003TR

Art. nr/Part no	Ersätter/Replaces
17428	859428



**MD2010, MD2020, MD2030, MD2040, D2-50, D2-55**

D2-50F  
D2-55, D2-55A, D2-55B, D2-55C, D2-55D, D2-55E, D2-55F  
MD2010, MD2010A, MD2010B, MD2010C, MD2010D  
MD2020, MD2020A, MD2020B, MD2020C, MD2020D  
MD2030, MD2030A, MD2030B, MD2030C, MD2030D  
MD2040, MD2040A, MD2040B, MD2040C, MD2040D

Art. nr/Part no	Ersätter/Replaces
80100	3580100



**22**

MD22, MD22A, MD22L, MD22P  
TMD22A, TMD22B, TMD22P-C, TAMD22P-B

Art. nr/Part no	Ersätter/Replaces	Info
17500	3582500	Gänga/thread 1/2"-20



**30, 31, 40, 41, KAD32, KAD42, KAD43, KAD44, KAD300**

MD30A, TMD30A, TAMD30A, AD30A, AQAD30A  
MD31A, TMD31A, TAMD31A, TMD31B, TAMD31B, TMD31D, TAMD31D,  
TMD31L-A, TAMD31L-A, TAMD31M-A, TAMD31P-A, TAMD31S, AD31,  
AD31A, AQAD31A, AD31B, AD31D, AD31D-A, AD31L-A, AD31P-A,  
AD31XD  
KAD32P, KAD32P-A  
MD40A, TMD40A, TAMD40A, TMD40B, TAMD40B, TMD40C, AQD40A,  
AQAD40A, AD40B, AQAD40B  
TMD41A, TAMD41A, TMD41B, TAMD41B, TMD41D, TAMD41D, TMD41L-  
A, TAMD41H-A, TAMD41H-B, TAMD41P, TAMD41P-A, AD41A, D41B,  
AD41B, AD41BJ, D41D, AD41D, D41L-A, AD41L-A, AD41P-A  
KAD42A, KAD42B, KAD42P-A, KAMD42A, KAMD42B, KAMD42P-A,  
TAMD42B, TAMD42WJ-A  
KAD43P-A, KAD43P-B, KAMD43P, KAMD43P-A, KAMD43P-B  
KAD44P, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-B, KAMD44P-  
C  
KAD300-A, KAMD300-A

Art. nr/Part no	Ersätter/Replaces
17310	3582310, 860320



### Bränslepumpar Fuel pumps



**D1-13, D1-20, D1-30, D2-40, D2-50, D2-55, D2-60, D2-75**

D1-13, D1-13B, D1-13F

D1-20, D1-20B, D1-20F

D1-30, D1-30B, D1-30F

D2-40, D2-40B, D2-40F

D2-50F

D2-55, D2-55B, D2-55C, D2-55D, D2-55E, D2-55F

D2-60F

D2-75, D2-75B, D2-75C, D2-75F

Art. nr/Part no	Ersätter/Replaces
80050	21132189



**61, 62, 63, 71, 72, 73, 74, 75, 100, 102, 121, 122**

TAMD61A, TAMD62A, TAMD63L-A, TAMD63P-A

TAMD71A, TAMD71B

TAMD72A

TAMD73P-A, TAMD73WJ-A

TAMD74A, TAMD74C-A, TAMD74C-B, TAMD74L-A, TAMD74L-B,

TAMD74P-A, TAMD74P-B

TAMD75P-A

TMD100C


TMD102A, TAMD102A, TAMD102D

TMD121C, TAMD121D, TMD122A, TAMD122A, TAMD122A/C,

TAMD122AF, TAMD122D, TAMD122P-A, TAMD122P-B, TAMD122P-C

Art. nr/Part no	Ersätter/Replaces	Info
17825	244825	M14 x 1.5

### Packningsatser bränslepump Gasket kits fuel pump

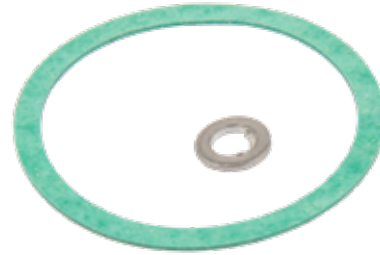

**MB10, 2001, 2002, 2003, 2003T, MD1B, MD2B, MD3B, MD5, MD6  
MD7, MD11, MD17**

MB10A

2001\*, 2001AG\*, 2001B\*, 2001BG\*, 2001D\*, 2001R\*

2002\*, 2002AG\*, 2002B\*, 2002BG\*, 2002D\*

2003\*, 2003 SOLAS\*, 2003B\*, 2003B SOLAS\*, 2003D\*, 2003R\*, 2003R\*

SOLAS

2003T\*, 2003TB\*, 2003TB SOLAS\*, 2003TR\*

MD1B

MD2A, MD2B

MD3B

MD5A, MD5B, MD5C

MD6A, MD6B

MD7A, MD7B

MD11C, MD11D

MD17C, MD17D

\* Tidigare utförande med koniskt lock / Earlier version with conical cover.  
Passar/fits OEM pumps 833323 + 834223

Art. nr/Part no	Ersätter/Replaces
17003	418948 + 15521



**30, 31, 40, 41**

MD30A, TMD30A, TAMD30A, AD30A, AQAD30A

MD31A, TMD31A, TAMD31A, TMD31B, TAMD31B, AD31, AD31A, AD31B

MD40A, TMD40A, TAMD40A, TMD40B, TAMD40B, TMD40C, AQD40A,

AQAD40A, AD40B, AQAD40B

TAMD41A, AD41A

Reparationsatts för bränslepump OEM nr 1542170 / Repair kit for fuel  
pump OEM no 1542170

Art. nr/Part no	Ersätter/Replaces
17663	273663



## Reparationsatser förgasare Repair kits carburetor



**B20, B21, B23, B25, B30**  
 AQ115A, AQ115B, BB115A, BB115B, BB115C, MB20B  
 AQ130A, AQ130B, AQ130C, AQ130D  
 AQ120B  
 AQ125A  
 230A, 230B  
 AQ125A, AQ125B  
 AQ131A, AQ131B, AQ131C, AQ131D  
 AQ145A, AQ145B, BB145A  
 250A, 250B, 251A  
 AQ151A, AQ151B, AQ151C  
 AQ171A, AQ171C  
 AQ165A, AQ170A, AQ170B, AQ170C, BB170A, BB170B, BB170C

För Solex 44 PAI förgasare / For Solex 44 PAI carburetor

Art. nr/Part no	Ersätter/Replaces
17292	841292



**B21**  
 AQ120B  
 AQ125A  
 AQ140A  
 BB140A

Art. nr/Part no	Ersätter/Replaces
17293	841293



**B20, B21, B23, B25, B30**  
 AQ115A, AQ115B, BB115A, BB115B, BB115C  
 MB20A, MB20B, MB20C  
 AQ130A, AQ130B, AQ130C, AQ130D  
 AQ120B, AQ125A  
 230A, 230B  
 AQ125B  
 AQ131A, AQ131B, AQ131C, AQ131D  
 AQ145A, AQ145B, BB145A  
 250A, 250B, 251A  
 AQ151A, AQ151B, AQ151C  
 AQ171A, AQ171C  
 AQ165A, AQ170A, AQ170B, AQ170C, BB170A, BB170B, BB170C

För Solex förgasare/For Solex carburetor

Art. nr/Part no	Ersätter/Replaces
17803	856470, 824803

## Förgasarmembran Carburetor diaphragms



**B18, B20, B30**  
 AQ120  
 AQ130A, AQ130B  
 BB115B  
 AQ165A  
 BB165A

För Zenith/Stromberg förgasare CD175 / For Zenith/Stromberg carburetor CD175

Art. nr/Part no	Ersätter/Replaces
17666	237666, 237299



## Spridarhylssatser Injector sleeve kit



### MD1B, MD2B, MD3B, MD11, MD17

MD1B  
MD2B, AQD2B  
MD3B  
MD11C, MD11D  
MD17C, MD17D

Packningar ingår/Gaskets included

Art. nr/Part no	Ersätter/Replaces
11170	897170



### MD6, MD7

MD6A, MD6B  
MD7B\*

\*) Tidig version /early version

Packningar ingår/Gaskets included

Art. nr/Part no	Ersätter/Replaces
11347	3875347



### 31, 41, KAD32, KAD42, KAD43

TAMD31L-A, TAMD31M-A, TAMD31P-A, TAMD31S, TMD31L-A, AD31L-A, AD31P-A  
KAD32P, KAD32P-A  
TAMD41H-A, TAMD41H-B, TAMD41P, TAMD41P-A, TMD41L-A, AD41P-A, AD41L-A, D41L-A  
KAD42A, KAD42P-A, KAMD42A, KAMD42P-A, TAMD42WJ-A  
KAD43P-A, KAD43P-B, KAMD43P, KAMD43P-A, KAMD43P-B

Packningar ingår/Gaskets included

Senare utförande - yttertapp  $\varnothing$ 10,3 mm, hylslängd 72,6 mm /  
Later version - outer pin  $\varnothing$ 10,3 mm, sleeve length 72,6 mm

Art. nr/Part no	Ersätter/Replaces
11614	3581536



### 31, 41, KAD42, KAD43

MD31A, TMD31A, TAMD31A SOLAS, TMD31B, TAMD31B, TMD31D, TAMD31D, TMD31L-A, TAMD31L-A, TAMD31M-A, TAMD31P-A, TAMD31S, AD31, AD31A, AQAD31A, AD31B, AD31D, AD31D-A, AD31L-A, AD31P-A, AD31XD  
TMD41A, TAMD41A, D41A, TMD41B, TAMD41B, D41B, TMD41D, TAMD41D, D41D, TAMD41H-A, TAMD41H-B, TAMD41P, TAMD41P-A, D41L-A, TMD41L-A, AD41A, AQAD41A, AD41B, AD41B, AD41D, AD41L-A, AD41P-A  
KAD42A, KAD42B, KAD42P-A, KAMD42A, KAMD42B, KAMD42P-A, TAMD42B, TAMD42WJ-A  
KAD43P-A\*, KAD43P-B\*, KAMD43P\*, KAMD43P-A\*, KAMD43P-B\*

\* Tidigare utförande/Earlier version

Packningar ingår/Gaskets included.

Distans ingår ej. Lös distans köps separat art. nr 17619. / Spacer is not included. Can be purchased separately

Hylslängd / Sleeve length: 69,7mm

Art. nr/Part no	Ersätter/Replaces
11609	861255, 838609
17619	838619



### KAD44, KAD300

KAD44P, KAD44P-A, KAD44P-B, KAD44P-C  
KAMD44P-A, KAMD44P-B, KAMD44P-C  
KAD300-A, KAMD300-A

Packningar ingår/Gaskets included

Art. nr/Part no	Ersätter/Replaces
11610	861688



## Spridarhylssatser Injector sleeve kit



60  
TAMD60A

Art. nr/Part no	Ersätter/Replaces
11611	465547, 465144, 411085, 741108



60, 61, 62, 63  
TAMD60B, TAMD60C  
TAMD61A  
TAMD62A  
TAMD63L-A, TAMD63P-A

Art. nr/Part no	Ersätter/Replaces
11575	270575, 877094

**Stålring**  
**Steel ring**



31, 41, KAD32, KAD42, KAD43

Art. nr/Part no	Ersätter/Replaces
17619	838619



**D4, D6**

D4-145I-G  
D4-150A-G  
D4-175I-G  
D4-180I-B, D4-180I-C, D4-180I-D, D4-180I-E, D180I-F  
D4-210A-A, D4-210A-B, D4-210I-A, D4-210I-B  
D4-225A-B, D4-225A-C, D4-225A-D, D4-225A-E, D4-225A-F, D4-225I-B,  
D4-225I-C, D4-225I-D, D4-225I-E, D4-225I-F  
D4-230A-G, D4-230I-G  
D4-260A-A, D4-260A-B, D4-260A-C, D4-260A-D, D4-260A-E, D4-260A-F,  
D4-260D-B, D4-260D-C, D4-260D-D, D4-260D-E, D4-260D-F, D4-260I-A,  
D4-260I-B, D4-260I-C, D4-260I-D, D4-260I-E, D4-260I-F  
D4-270A-G, D4-270I-G  
D4-300A-A, D4-300A-C, D4-300A-D, D4-300A-E, D4-300A-F, D4-300A-G,  
D4-300D-A, D4-300D-B, D4-300D-C, D4-300D-D, D4-300D-E,  
D4-300D-F, D4-300I-A, D4-300I-C, D4-300I-D, D4-300I-E, D4-300I-F,  
D4-300I-G  
D4-320A-G, D4-320I-G

D6-280A-A, D6-280A-B, D6-280A-C, D6-280A-D, D6-280A-E, D6-280I-A,  
D6-280I-B, D6-280I-C, D6-280I-D, D6-280I-E  
D6-300A-F, D6-300A-G, D6-300D-F, D6-300D-G, D6-300I-F, D6-300I-G  
D6-310A-A, D6-310A-B, D6-310A-C, D6-310A-D, D6-310A-E,  
D6-310D-B, D6-310D-C, D6-310D-D, D6-310D-E, D6-310I-A, D6-310I-B,  
D6-310I-C, D6-310I-D, D6-310I-E  
D6-330A-B, D6-330A-C, D6-330A-D, D6-330A-E, D6-330A-F, D6-330D-B,  
D6-330D-C, D6-330D-E, D6-330D-F, D6-330I-B, D6-330I-C, D6-330I-D,  
D6-330I-E, D6-330I-F  
D6-340A-G, D6-340D-G, D6-340I-G  
D6-350A-A, D6-350A-B  
D6-370A-B, D6-370A-C, D6-370A-D, D6-370A-E, D6-370A-F, D6-370D-A,  
D6-370D-B, D6-370D-C, D6-370D-D, D6-370D-E, D6-370D-F, D6-370I-A,  
D6-370I-B, D6-370I-C, D6-370I-D, D6-370I-E, D6-370I-F  
D6-380A-G, D6-380D-G, D6-380I-G  
D6-400A-E, D6-400A-F, D6-400A-G  
D6-435D-A, D6-435D-C, D6-435D-D, D6-435D-E, D6-435D-F, D6-435I-A,  
D6-435I-C, D6-435I-D, D6-435I-E, D6-435I-F  
D6-440A-G, D6-440D-G, D6-440I-G, D6-440I-WJ-G  
D6-480D-G, D6-480I-G, D6-480I-WJ-G

Art. nr/Part no	Ersätter/Replaces
11613	889970



### Spridarspetsar Injector nozzles


**MD1B, MD2B, MD3B, MD11, MD17**

MD1B  
MD2B, AQD2B  
MD3B  
MD11C MO -50988  
MD17C MO -16621

Art. nr/Part no	Ersätter/Replaces	Info
17179	233179	DLLA 150 S720


**MD2040, D2-50, D2-55, D2-60, D2-75**

MD2040, MD2040B, MD2040-C  
D2-50F  
D2-55, D2-55B, D2-55C, D2-55D, D2-55E, D2-55F  
D2-60F  
D2-75, D2-75B, D2-75C, D2-75F

Art. nr/Part no	Ersätter/Replaces	Info
17636	3580636	NP-DN 4 PDN 117

**MD5, MD6, MD7**

MD5A, MD5B, MD5C  
MD6A, MD6B  
MD7A, MD7B

Art. nr/Part no	Ersätter/Replaces	Info
17287	838287	DLLA 150 P33


**2001, 2002, 2003**

2001, 2001AG, 2001B, 2001D, 2001R  
2002, 2002AG, 2002B, 2002D  
2003, 2003 SOLAS, 2003B, 2003D, 2003R, 2003R SOLAS

Art. nr/Part no	Ersätter/Replaces	Info
17597	840597	DLLA 150 P65


**30, 40**

MD30A, TMD30A, TAMD30A, AD30A, AQAD30A,  
MD40A, TMD40A, TAMD40A, TMD40B, TAMD40B, TMD40C, AQD40A,  
AD40A, AQAD40A, AD40B, AQAD40B

Art. nr/Part no	Ersätter/Replaces	Info
17303	1542303	DNO SD193



## Spridarspetsar Injector nozzles



31, 41

TMD31A, TAMD31A, AD31, AD31A, AQAD31A  
D41A, TMD41A, TAMD41A, AD41A, AQAD41A

Art. nr/Part no	Ersätter/Replaces	Info
17358	858358	DLLA 144P 118



31, 41

MD31A, TMD31A, TAMD31A, TMD31B, TAMD31B, TMD31D, TAMD31D,  
TAMD31L-A, TAMD31M, TAMD31M-A, AD31, AD31B, AD31D, AD31D-A,  
AD31XD  
TMD41B, TAMD41B, D41B, AD41B, AD41BJ, AD41L-A, AD41P-A

Art. nr/Part no	Ersätter/Replaces	Info
17782	859782	DLLA 140P 196

## Packningsatser spridare Gasket kits fuel injector



30

AQAD30A, MD30A, TAMD30A, TMD30A

Art. nr/Part no	Ersätter/Replaces
22018	4 x 1542157, 4 x 1542158, 4 x 1542159, 9 x 957171



40

AD40B, AQAD40A, AQAD40B, AQD40A, MD40A  
TAMD40A, TAMD40B, TMD40A, TMD40B, TMD40C

Art. nr/Part no	Ersätter/Replaces
22010	6 x 1542157, 6 x 1542158, 6 x 1542159, 13 x 957171





## Bricksatser bränslesystem Washer kits fuel system



**MD1A, MD2A, MD1B, MD2B, MD11**  
MD1, MD1A,  
MD2, MD2A  
MD1B  
MD2B, AQD2B  
MD11C

Art. nr/Part no	Ersätter/Replaces
22088	6 x 957171, 8 x 957178, 1 x 11991, 2 x 11994



**MD5**  
MD5C

Art. nr/Part no	Ersätter/Replaces
22063	2 x 957171, 6 x 957178, 5 x 48588, 2 x 190990, 2 x 11991



**MD3B, MD17C**  
MD3B  
MD17C

Art. nr/Part no	Ersätter/Replaces
22043	8 x 957171, 4 x 957178, 1 x 25534, 1 x 11991, 2 x 11994



**MD6, MD7**  
MD6A, MD6B  
MD7A, MD7B

Art. nr/Part no	Ersätter/Replaces
22044	2 x 957170, 6 x 957175, 9 x 957178, 1 x 25534, 4 x 190990



**MD5**  
MD5A, MD5B

Art. nr/Part no	Ersätter/Replaces
22048	2 x 957170, 2 x 957171, 8 x 957178, 1 x 25534, 1 x 947620, 1 x 969011, 1 x 11991, 2 x 11994



**MD11D**  
MD11D

Art. nr/Part no	Ersätter/Replaces
22064	2 x 957171, 8 x 957178, 5 x 48588, 4 x 17990, 1 x 11991



### Bricksatser bränslesystem Washer kits fuel system



**MD17D**  
MD17D

Art. nr/Part no	Ersätter/Replaces
22065	1 x 957170, 2 x 957171, 8 x 957178, 5 x 48588, 6 x 190990




**MD29, MD32**  
AQD29, AQD29A, MD29, MD29A  
AQD32A, MD32

Art. nr/Part no	Ersätter/Replaces
22133	12 x 18811, 10 x 957177, 4 x 48588, 1 x 18665, 2 x 957179, 6 x 817899



**MD21**  
AQD21A  
MD21A

Art. nr/Part no	Ersätter/Replaces
22131	8 x 18811, 12 x 957177, 4 x 48588, 1 x 18665, 4 x 817899

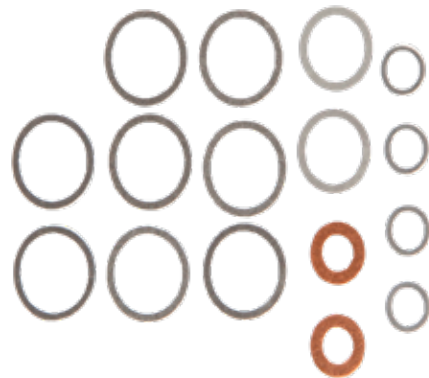

**2001**  
2001, 2001AG, 2001B, 2001BG

Art. nr/Part no	Ersätter/Replaces
22029	4 x 957170, 2 x 957175, 8 x 957178, 2 x 190990



**MD21B**  
AQD21B  
MD21B

Art. nr/Part no	Ersätter/Replaces
22132	8 x 18811, 4 x 957177, 6 x 48588, 7 x 18817



**2002**  
2002, 2002AG, 2002B, 2002BG

Art. nr/Part no	Ersätter/Replaces
22030	4 x 957170, 6 x 957175, 8 x 957178, 4 x 190990



## Bricksatser bränslesystem Washer kits fuel system



**2003, 2003T**  
2003, 2003AG, 2003B, 2003BG  
2003T, 2003TB

Art. nr/Part no	Ersätter/Replaces
22031	1 x 957170, 12 x 957175, 8 x 957178, 6 x 190990



**MD2010, MD2020, MD2030, MD2040**  
MD2010, MD2010B, MD2010C, MD2010D  
MD2020, MD2020B, MD2020C, MD2020D  
MD2030, MD2030B, MD2030C, MD2030D  
MD2040, MD2040B, MD2040C, MD2040D

Art. nr/Part no	Ersätter/Replaces
22078	5 x 969011, 5 x 947620, 2 x 11991, 2 x 18665, 2 x 11994



**30**  
AD30A, AQAD30A, MD30A, TAMD30A, TMD30A

Art. nr/Part no	Ersätter/Replaces
22020	11 x 957171, 1 x 25534, 4 x 969011, 10 x 11994



**31, KAD32**  
AD31A, AD31D, AD31L-A, AD31P-A, AD31XD, AQAD31A, MD31A,  
TAMD31A, TAMD31D, TAMD31L-A, TAMD31M-A, TAMD31P-A,  
TMD31A, TMD31D, TMD31L-A  
KAD32P-A

Art. nr/Part no	Ersätter/Replaces
22027	12 x 957171, 1 x 25534, 4 x 969011, 10 x 11994



**31**  
AD31B, TAMD31B, TMD31B

Art. nr/Part no	Ersätter/Replaces
22026	4 x 957171, 1 x 25534, 8 x 947620, 4 x 969011, 8 x 11994



**31, KAD32**  
AD31L-A, AD31P-A, TAMD31L-A, TAMD31M-A, TAMD31P-A, TMD31L-A  
KAD32P-A

Art. nr/Part no	Ersätter/Replaces
22117	1 x 25534, 8 x 947620, 1 x 969011, 8 x 11994



### Bricksatser bränslesystem Washer kits fuel system



40

AD40B, AQAD40A, AQAD40B, AQD40A, MD40A  
TAMD40A, TAMD40B, TMD40A, TMD40B, TMD40C

Art. nr/Part no	Ersätter/Replaces
22052	17 x 957171, 6 x 48588, 10 x 11994



KAD44

KAD44P, KAD44P-B, KAD44P-C  
KAMD44P, KAMD44P-B, KAMD44P-C


Art. nr/Part no	Ersätter/Replaces
22184	13 x 981183, 11 x 11994, 1 x 25534



41

AD41A, AQAD41A, D41A, TAMD41A, TMD41A

Art. nr/Part no	Ersätter/Replaces
22069	16 x 957171, 1 x 25534, 16 x 11994

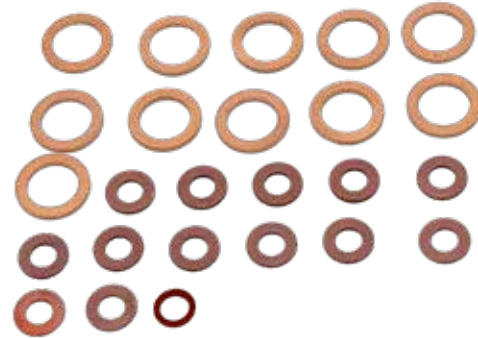

KAD300

KAD300-A  
KAMD300-A

Art. nr/Part no	Ersätter/Replaces
22185	13 x 11991, 11 x 11994, 1 x 25534



41, KAD42, KAD43

AD41B, AD41D, AD41L-A, AD41P-A, D41B, D41D, D41L-A  
TAMD41B, TAMD41D, TAMD41H-A, TAMD41L-A  
TAMD41M-A, TAMD41P-A, TMD41B, TMD41D, TMD41L-A  
KAD42P-A, KAMD42P-A, TAMD42WJ-A  
KAD43P-A, KAMD43P-A

Art. nr/Part no	Ersätter/Replaces
22028	1 x 25534, 16 x 947620, 12 x 11994



## Luftskruvar bränslesystem Bleeder screws, fuel system



**MD1B-2B-3B, MD5, MD6-7, MD11-17, 2002-2003, 30-31, 32, 70-72**  
 MD1B, MD2B, MD3B  
 MD5A, MD5B, MD5C  
 MD6A, MD6B, MD7A  
 MD11C, MD11D  
 MD17C, MD17D 2002, 2003, 2003T  
 TMD30A, TAMD30A, AD30A, AQAD30A, MD30A  
 MD31A, 31B, KAD32P-A  
 MD70, TMD70, TAMD71, TAMD72

Art. nr/Part no	Ersätter/Replaces
17664	240664



**MD5, MD6-7, MD11-17, 2001-2003T, 31, 41, KAD44, KAD300**  
 MD5A, MD5B, MD5C  
 MD6A, MD6B, MD7A, MD7B  
 MD11C, MD11D, MD17C, MD17D  
 2001, 2001AG, 2001B, 2001BG, 2001D, 2001R, 2001D, 2002, 2002AG,  
 2002B, 2002BG, 2002BG, 2002D, 2003, 2003SOLAS, 2003B, 2003BSOLAS,  
 2003D, 2003R, 2003T, 2003TB, 2003TR  
 TAMD31L-A, TAMD31M-A, TAMD31P-A, TAMD31S  
 TAMD41H-A, TAMD41H-B, TAMD41P, TAMD41P-A  
 KAD44P, KAD44P-B, KAD44P-C, KAMD44P, KAMD44P-A, KAMD44P-B,  
 KAMD44P-C, KAD300-A, KAMD300-A

Art. nr/Part no	Ersätter/Replaces
17487	1 x 243487, 2 x 190990



### Servicesatser motor Service kits engine



**2001, 2002, 2003**  
2001  
2002  
2003

Art. nr/Part no	Ersätter/Replaces	Info
23194	877194	
23194-2		Without impeller



**D1-30, D2-40, 2030, 2040**  
D1-30, D2-40, MD2030, MD2040  
D1-30A, D1-30B, D1-30F  
D2-40A, D2-40B, D2-40F  
MD2030A, MD2030B, MD2030C, MD2030D  
MD2040A, MD2040B, MD2040C, MD2040D

Bränslefiltret i denna sats passar ej motorer med det nya fästet 22444100 /  
The fuel filter does not fit engines with new bracket 22444100

Art. nr/Part no	Ersätter/Replaces	Info
23422	21189422	
23422-2		Without impeller



**D1-13, D1-20, 2010, 2020**  
D1-13A, D1-13B, D1-13F  
D1-20A, D1-20B, D1-20F  
MD2010A, B, C, D  
MD2020A, B, C, D

Bränslefiltret i denna sats passar ej motorer med det nya fästet 22444100/The  
fuel filter does not fit engines with new bracket 22444100

Art. nr/Part no	Ersätter/Replaces	Info
23380	21189380	
23380-2		Without impeller



**D2-50, D2-55, D2-75**  
D2-50F  
D2-55, D2-55A, D2-55B, D2-55C, D2-55D, D2-55E  
D2-75, D2-75A, D2-75B, D2-75C

Art. nr/Part no	Ersätter/Replaces	Info
23426	21189426	
23426-2		Without impeller



## Servicesatser motor Service kits engine



### 30, 31, KAD32

MD30A, TMD30A, TAMD30A  
MD31A, TMD31A, TAMD31A, TAMD31B, TAMD31D, TAMD31L-A, TAMD31M-A, TAMD31P-A, TAMD31S, TMD31B, TMD31D, TMD31L-A  
KAD32P

Art. nr/Part no	Ersätter/Replaces	Info
23201	877201	
23201-2		Without impeller



### 40, 41

MD40A, TMD40A, TMD40B, TMD40C, AQD40A, TAMD40A, TAMD40B, AQAD40A, AQAD40B  
TMD41A, D41A, TAMD41A, AQAD41A, AD41A, TMD41B, D41B, TAMD41B, AD41B, AD41D, D41D, TAMD41D, TMD41D, AD41L-A, AD41P-A, D41L-A, TAMD41H-A, TAMD41H-B, TAMD41P-A, TAMD41L-A, TAMD41M-A, TMD41L-A

OBS! till vissa TAMD40 och TAMD41 ska en större impeller användas. Impellern som ingår passar motorer med SN2004033317 och senare. / NB! to some TAMD40 and TAMD41 a larger impeller should be used. The impeller included fits engines with SN2004033317 and later.

Art. nr/Part no	Ersätter/Replaces	Info
23202	877202	
23202-2		Without impeller



### KAD42, KAD43, KAD44, KAD300

KAD42A, KAMD42A, KAD42B, KAMD42B, TAMD42B, KAD42P-A, KAMD42P-A  
KAD43P-A, KAMD43P-A  
KAD44P-A, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-B, KAMD44P-C  
KAD300-A, KAMD300-A

Art. nr/Part no	Ersätter/Replaces	Info
23203	877203	
23203-2		Without impeller



### D3 (-MY2009)

D3-1101-A, D3-1101-B, D3-1101-C  
D3-130A-A, D3-130A-B, D3-130A-C, D3-130I-A, D3-130I-B, D3-130I-C  
D3-160A-A, D3-160A-B, D3-160A-C, D3-160I-A, D3-160I-B, D3-160I-C  
D3-190A-B, D3-190A-C, D3-190I-A, D3-190I-B, D3-190I-C

Art. nr/Part no	Ersätter/Replaces	Info
23842	21105842	
23842-2		Without impeller



### Servicesatser motor Service kits engine



#### D3 (MY2010-)

D3-110I-D, D3-110I-E, D3-110I-F, D3-110I-G  
 D3-140A-D, D3-140A-E, D3-140A-F, D3-140A-G, D3-140I-D, D3-140I-E,  
 D3-140I-F, D3-140I-G  
 D3-150I-D, D3-150I-E, D3-150I-F, D3-150I-G  
 D3-170A-D, D3-170A-E, D3-170A-F, D3-170A-G, D3-170I-D, D3-170I-E,  
 D3-170I-F, D3-170I-G  
 D3-200A-D, D3-200A-E, D3-200A-F, D3-200A-G, D3-200I-D, D3-200I-E,  
 D3-200I-F, D3-200I-G  
 D3-220A-D, D3-220A-E, D3-220A-F, D3-220A-G, D3-220I-D, D3-220I-E,  
 D3-220I-F, D3-220I-G

Art. nr/Part no	Ersätter/Replaces	Info
23184	21759184	
23184-2		Without impeller



#### D4 (-MY2019)

D4-180I-B, D4-180I-C, D4-180I-D, D4-180I-E, D4-180I-F  
 D4-210A-A, D4-210A-B, D4-210I-A, D4-210I-B  
 D4-225A-B, D4-225A-C, D4-225A-D, D4-225A-E, D4-225A-F, D4-225I-B,  
 D4-225I-C, D4-225I-D, D4-225I-E, D4-225I-F  
 D4-260A-A, D4-260A-B, D4-260A-C, D4-260A-D, D4-260A-E, D4-260A-F,  
 D4-260D-B, D4-260D-C, D4-260D-D, D4-260D-E, D4-260D-F, D4-260I-A,  
 D4-260I-B, D4-260I-C, D4-260I-D, D4-260I-E, D4-260I-F  
 D4-300A-A, D4-300A-C, D4-300A-D, D4-300A-E, D4-300A-F, D4-300D-A,  
 D4-300D-C, D4-300D-D, D4-300D-E, D4-300D-F, D4-300I-A, D4-300I-C,  
 D4-300I-D, D4-300I-E, D4-300I-F

Passar D4 med A-F som sista bokstav / Fits D4 with A-F as last letter

Art. nr/Part no	Ersätter/Replaces	Info
23968	22383875, 21704968	
23969-2		Without impeller



#### D4 (MY2020-)

D4-145I-G  
 D4-150A-G  
 D4-175I-G  
 D4-230A-G, D4-230I-G  
 D4-270A-G, D4-270I-G  
 D4-300A-G, D4-300I-G  
 D4-320A-G, D4-320I-G

Passar D4 med G som sista bokstav / Fits D4 with G as last letter

Art. nr/Part no	Ersätter/Replaces	Info
23227	23746227, 24272027	
23228-2		Without impeller



#### D6 A-D (-MY2019)

D6-280A-A, D6-280A-B, D6-280A-C, D6-280A-D, D6-280I-A, D6-280I-B,  
 D6-280I-C, D6-280I-D  
 D6-310A-A, D6-310A-B, D6-310A-C, D6-310A-D, D6-310D-B, D6-310D-C,  
 D6-310D-D, D6-310I-A, D6-310I-B, D6-310I-C, D6-310I-D  
 D6-330A-B, D6-330A-C, D6-330A-D, D6-330D-B, D6-330D-C, D6-330D-D,  
 D6-330I-B, D6-330I-C, D6-330I-D  
 D6-350A-A, D6-350A-B  
 D6-370A-C, D6-370A-D, D6-370D-A, D6-370D-B, D6-370D-C, D6-370D-D,  
 D6-370I-A, D6-370I-B, D6-370I-C, D6-370I-D  
 D6-435D-A, D6-435D-C, D6-435D-D, D6-435I-A, D6-435I-C, D6-435I-D

Passar D6 med A-D som sista bokstav / Fits D6 with A-D as last letter

Art. nr/Part no	Ersätter/Replaces	Info
23967	21704967, 21198341	
23969-2		Without impeller



## Servicesatser motor Service kits engine



### D6 E-F (-MY2019)

D6-280A-E, D6-280I-E  
 D6-300A-F, D6-300D-F, D6-300I-F  
 D6-310A-E, D6-310D-E  
 D6-330A-E, D6-330A-F, D6-330D-E, D6-330D-F, D6-330I-E, D6-330I-F  
 D6-370A-E, D6-370A-F, D6-370D-E, D6-370D-F, D6-370I-E, D6-370I-F  
 D6-400A-E, D6-400A-F  
 D6-435D-E, D6-435D-F, D6-435I-E, D6-435I-F

Passar D6 med E-F som sista bokstav / Fits D6 with E-F as last letter

Art. nr/Part no	Ersätter/Replaces
23876	22383876



### D6 G (MY2020-)

D6-300A-G, D6-300I-G, D6-300D-G  
 D6-340A-G, D6-340D-G, D6-340I-G  
 D6-380A-G, D6-380I-G, D6-380D-G  
 D6-400A-G  
 D6-440A-G, D6-440I-G, D6-440I-WJ-G  
 D6-480D-G, D6-480I-G, D6-480I-WJ-G

Passar D6 med G som sista bokstav / Fits D6 with G as last letter

Art. nr/Part no	Ersätter/Replaces	Info
23230	23746230, 24272028	
23228-2		Without impeller



Spare parts from Sweden

## Oljefilter Oil filters



**B18, B20, B21, B23, B25, B30, 22, 30, 31, KAD32,**  
 AQ60F, AQ90, AQ95, AQ105, AQ110  
 AQ120  
 BB30, BB100  
 AQ115A, AQ115B, BB115A, BB115B, BB115C  
 AQ130A, AQ130B, AQ130C, AQ130D  
 MB20A, MB20C, MB20C  
 AQ120B, AQ125A  
 AQ140A, BB140A  
 230A, 230B  
 AQ125B  
 AQ131A, AQ131B, AQ131C, AQ131D  
 AQ145A, AQ145B, BB145A  
 250A, 250B, 251A  
 AQ151A, AQ151B, AQ151C  
 AQ171A, AQ171C  
 AQ165A, AQ170A, AQ170B, AQ170C  
 BB165A, BB170A, BB170B, BB170C  
 AQD21A\*, AQD21B\*  
 MD21A, MD21B  
 MD22L-B, MD22P-B  
 TAMD22P-B  
 TMD22B  
 AD30A  
 AQAD30A  
 MD30A  
 TAMD30A  
 TMD30A  
 AD31A, AD31B, AD31D  
 AD31L-A, AD31P-A  
 AD31XD  
 AQAD31A  
 MD31A  
 TAMD31A, TAMD31B, TAMD31D  
 TAMD31L-A, TAMD31M-A, TAMD31P-A  
 TMD31A, TMD31B, TMD31D  
 KAD32P-A

\* Tidigare utförande/Earlier version  
 Upp till/Up to MO - 103386

Art. nr/Part no	Ersätter/Replaces
14057	3517857, 1266286, 418432, 430143



### 3.0, V6, V8

AQ200B, AQ200C, AQ200D, AQ200F  
 AQ225B, AQ225C, AQ225D, AQ225E, AQ225F, BB225A, BB225AV,  
 BB225B, BB225C  
 AQ255A, AQ255B, AQ260A, AQ260B, BB260AV, BB260B, BB260C,  
 BB261A  
 AQ211A  
 AQ231A, AQ231B, BB231A  
 AQ271A, AQ271B, AQ271C, AQ271D  
 AQ311A, AQ311B  
 430, 430A, 430B, 431A, 431B, 432A  
 500A, 500B, 501A, 501B  
 570, 570A, 571A, 572A  
 740B, BB740A  
 3.0GLM-A, 3.0GLM-B, 3.0GLM-C, 3.0GLP-A, 3.0GLP-B, 3.0GLP-C,  
 3.0GLP-D, 3.0GLP-E, 3.0GLP-J, 3.0GLP-N, 3.0GSM-A, 3.0GSM-B, 3.0GSM-  
 C, 3.0GSP-A, 3.0GSP-B, 3.0GSP-C, 3.0GLMMDA, 3.0GSMBYNCE,  
 3.0GSMLKD, 3.0GSMNCS, 3.0GSMWTR, 3.0GSPBYMCE, 3.0GSPEFS,  
 3.0GSPDKD, 3.0GSPMDA, 3.0GSPNCS, 3.0GSPWTR, 3.0GX1-J, 3.0GX1C-J  
 4.3GL-E, 4.3GL-EF, 4.3GL-G, 4.3GL-GF, 4.3GX1-B, 4.3GX1-BF, 4.3GX1-C,  
 4.3GX1-CF, 4.3GX1-D, 4.3GX1-DF, 4.3GX1-E, 4.3GX1-EF, 4.3GX1-F, 4.3GX1-  
 FF, 4.3GX1-G, 4.3GX1-GF, 4.3OS1-F, 4.3OS1-FF, 4.3OS1-G, 4.3OS1-GF  
 5.0G1PBVCCE, 5.0G1PWTR, 5.0GL-C, 5.0GL-D, 5.0GL-E, 5.0GL-F, 5.0GL-  
 FF, 5.0GL-H, 5.0GL-HF, 5.0GLPBYC, 5.0GLPWTR, 5.0GX1-E, 5.0GX1-EF,  
 5.0GX1-F, 5.0GX1-FF, 5.0GX1-G, 5.0GX1-GF, 5.0OS1-F, 5.0OS1-FF, 5.0OS1-G,  
 5.0OS1-GF  
 5.7GL-C, 5.7GL-D, 5.7GL-E, 5.7GL1MDA, 5.7GL1PLKDCE, 5.7GL1PLKA,  
 5.7GL1PLKD, 5.7GL1PLKE, 5.7GL1PLKR, 5.7GL1PMDA, 5.7GL1PNCS, 5.7Gi-E,  
 5.7Gi-EF, 5.7Gi-F, 5.7Gi-FF, 5.7Gi-G, 5.7Gi-GF, 5.7GiL-E, 5.7GiL-F, 5.7GiL-  
 G, 5.7GI1MDA, 5.7GI1NCCCE, 5.7G1PHUS, 5.7GI1PLKDCE, 5.7G1PMDA,  
 5.7G1PMDACE, 5.7G1PNCACE, 5.7G1PNCBCE, 5.7G1PNCMCE,  
 5.7G1PNCSCCE, 5.7GS1CPLKD, 5.7GS1PBYCCE, 5.7GS1PLKE, 5.7GS1PWTR,  
 5.7GSPBYC, 5.7GSPDKD, 5.7GSPDK, 5.7GSPWTR, 5.7GX1-F, 5.7GX1-  
 FF, 5.7GX1-G, 5.7GX1-GF, 5.7GX1-H, 5.7GX1-HF, 5.7GX1L-F, 5.7GX1L-  
 G, 5.7GX1L-H, 5.7OS1-D, 5.7OS1-DF, 5.7OS1-E, 5.7OS1-EF, 5.7OS1-G,  
 5.7OS1-GF, 5.7OS1-D, 5.7OS1-DF, 5.7OS1-E, 5.7OS1-EF, 5.7OS1-G,  
 5.7OS1-GF  
 7.4GI1NCCCE, 7.4GI1NCSCE, 7.4GI1PLKDCE, 7.4GI1PLKECE,  
 7.4G1PNCACE, 7.4G1PNCBCE, 7.4G1PNCMCE, 7.4G1PNCSCCE,  
 7.4GL1MDM, 7.4GL1NCC, 7.4GL1NCS, 7.4GL1PLKD, 7.4GL1PLKE,  
 7.4GL1PMDA, 7.4GL1PMDM, 7.4GL1PNCA, 7.4GL1PNCB, 7.4GL1PNCM,  
 7.4GL1PNCS, 7.4GS1INCC, 7.4GS1INCS, 7.4GS1XNCB, 7.4GS1XNCM  
 8.1Gi-C, 8.1Gi-CF, 8.1Gi-D, 8.1Gi-DF, 8.1Gi-E, 8.1Gi-EF, 8.1Gi-F, 8.1Gi-  
 FF, 8.1Gi-G, 8.1Gi-GF, 8.1Gi-H, 8.1Gi-HF, 8.1GiL-C, 8.1GiL-D, 8.1GiL-E,  
 8.1GiL-F, 8.1GiL-G, 8.1GiL-H, 8.1GiL-H, 8.1GX1-B, 8.1GX1-BF, 8.1GX1-C, 8.1GX1-  
 CF, 8.1GX1-D, 8.1GX1-DF, 8.1GX1-E, 8.1GX1-EF, 8.1GX1-F, 8.1GX1-FF, 8.1GX1-  
 G, 8.1GX1-GF, 8.1GX1L-B, 8.1GX1L-C, 8.1GX1L-D, 8.1GX1L-E, 8.1GX1L-F,  
 8.1GX1L-G, 8.1OS1-A, 8.1OS1-AF, 8.1OS1-B, 8.1OS1-BF, 8.1OS1-C, 8.1OS1-  
 CF, 8.1OS1-D, 8.1OS1-DF  
 8.2GL1MDM, 8.2GL1PMDA, 8.2GL1PMDM, 8.2GS1XNCB  
 DPX375-CF, DPX385XLKE, DPX415XLKE, DPX420-CF

Art. nr/Part no	Ersätter/Replaces
14440	835440, 3852412



## Oljefilter Oil filters



### 4.3, 5.0, 5.7, 7.4, 8.2

4.3GL-A, 4.3GL-B, 4.3GL-C, 4.3GL-D, 4.3GLPEFS, 4.3GIPEFS, 4.3GXi-A, 4.3GXi-B, 4.3GXi-BF, 4.3GXi-C, 4.3GXi-CF, 4.3GXi-D, 4.3GXi-DF, 4.3GXi-E, 4.3GXi-EF, 4.3OSi-B, 4.3OSi-BF, 4.3OSi-C, 4.3OSi-CF, 4.3OSi-D, 4.3OSi-DF, 4.3OSi-E, 4.3OSi-EF

5.0GIPBYCCE, 5.0GIPEFS, 5.0GIPWTR, 5.0GL-A, 5.0GL-B, 5.0GL-C, 5.0GL-D, 5.0GL-E, 5.0GLPBYC, 5.0GLPEFS, 5.0GLPWTR, 5.0GXi-A, 5.0GXi-B, 5.0GXi-BF, 5.0GXi-C, 5.0GXi-CF, 5.0GXi-D, 5.0GXi-DF, 5.0GXi-E, 5.0GXi-EF, 5.0OSi-B, 5.0OSi-BF, 5.0OSi-C, 5.0OSi-CF, 5.0OSi-D, 5.0OSi-DF, 5.0OSi-E, 5.0OSi-EF

5.7GL-A, 5.7GL-B, 5.7GL-C, 5.7GL-D, 5.7GL-E, 5.7Gi-A, 5.7Gi-B, 5.7Gi-BF, 5.7Gi-C, 5.7Gi-CF, 5.7Gi-D, 5.7Gi-DF, 5.7Gi-E, 5.7Gi-EF, 5.7GiL-A, 5.7GiL-B, 5.7GiL-C, 5.7GiL-D, 5.7GiL-E, 5.7GSICPLKD, 5.7GSiL-A, 5.7GSIPBYCCE, 5.7GSiPEFS, 5.7GSiPLKE, 5.7GSIPWTR, 5.7GSPBYC, 5.7GSPEFS, 5.7GSPWTR, 5.7GXi-A, 5.7GXi-B, 5.7GXi-C, 5.7GXi-CF, 5.7GXi-D, 5.7GXi-DF, 5.7GXi-E, 5.7GXi-EF, 5.7GXi-F, 5.7GXi-FF, 5.7GXiL-A, 5.7GXiL-B, 5.7GXiL-C, 5.7GXiL-D, 5.7GXiL-E, 5.7GXiL-F, 5.7OSi-A, 5.7OSi-AF, 5.7OSi-B, 5.7OSi-BF, 5.7OSi-C, 5.7OSi-CF, 5.7OSi-D, 5.7OSi-DF, 5.7OSXi-A, 5.7OSXi-AF, 5.7OSXi-B, 5.7OSXi-BF, 5.7OSXi-C, 5.7OSXi-CF, 5.7OSXi-D, 5.7OSXi-DF

7.4GIINCCCE, 7.4GIINCSCE, 7.4GIPBYCCE, 7.4GIPEFS, 7.4GIPLK-DCE, 7.4GIPLKECE, 7.4GiPNCACE, 7.4GiPNCBCE, 7.4GiPNCMCE, 7.4GiPNCSCCE, 7.4GIPWTR, 7.4GLINCC, 7.4GLINCS, 7.4GLPLKD, 7.4GLPLKE, 7.4GLPNCA, 7.4GLPNCB, 7.4GLPNCM, 7.4GLPNCS, 7.4GSI-INCS, 7.4GSIPIBYCCE, 7.4GSIPEFS, 7.4GSIPIWTR, 7.4GSIXNCM

8.1Gi-A, 8.1Gi-B, 8.1Gi-BF, 8.1GiL-A, 8.1GiL-B, 8.1GSi-A, 8.1GSiL-A, 8.1GXi-A, 8.1GXi-AF, 8.1GXiL-A

8.2GSIPIBYCCE, 8.2GSIPEFS, 8.2GSIPIWTR, 8.2GSIXNCB

DPX375-A, DPX375-B, DPX375-BF, DPX375-CF, DPX385XBYDCE, DPX385XEFS, DPX385XBYDCE, DPX385XEFS, DPX385XLKE, DPX415XBYDCE, DPX415XEFS, DPX415XLKE, DPX420-A, DPX420-B, DPX420-BF, DPX420-CF

Art. nr/Part no	Ersätter/Replaces
14559	3850559



### 4.3, V6 (GM)

AQ175A, AQ205A  
430A, 430B, 431A, 431B, 432A, 434A  
4.3GIJBYA, 4.3GIJWTR, 4.3GIPBYCCE, 4.3GiPEFS, 4.3GIPLKDCE, 4.3GIPLKECE, 4.3GIPNCACE, 4.3GIPNCBCE, 4.3GIPNCMCE, 4.3GIPNCSCCE, 4.3GIPWTRCE, 4.3GL-A, 4.3GL-B, 4.3GL-C, 4.3GL-D, 4.3GLMMDA, 4.3GLPBYC, 4.3GLPEFS, 4.3GLPLKD, 4.3GLPLKE, 4.3GLPMDA, 4.3GLPNCA, 4.3GLPNCB, 4.3GLPNCS, 4.3GLPWTR, 4.3GSJBYA, 4.3GSJLKD, 4.3GSJNCC, 4.3GSNCS, 4.3GSJWTR, 4.3GSPBYC, 4.3GSPDKD, 4.3GSPDKD, 4.3GSPMDA, 4.3GSPNCA, 4.3GSPNCB, 4.3GSPNCM, 4.3GSPNCS, 4.3GSPWTR

Art. nr/Part no	Ersätter/Replaces
14750	841750



### V8 (FORD)

AQ190, AQ240  
5.0FIPHUECE, 5.0FIPHURCE, 5.0FIPMDA, 5.0FIPMDM, 5.0FIPNCBCE, 5.0FIPNCSCCE, 5.0FLPHUE, 5.0FLPHUR, 5.0FLPMDA, 5.0FLPNCB, 5.0FLPNCS  
5.8FIIHUBCE, 5.8FIIHUECE, 5.8FIPHUECE, 5.8FIPHURCE, 5.8FIPMDA, 5.8FIPMDM, 5.8FIPNCACE, 5.8FIPNCBCE, 5.8FIPNCMCE, 5.8FIPNCSCCE, 5.8FLIHUB, 5.8FLIHUE, 5.8FLINCC, 5.8FLINCS, 5.8FLPHUE, 5.8FLPHUR, 5.8FLPMDA, 5.8FLPNCA, 5.8FLPNCB, 5.8FLPNCM, 5.8FLPNCS, 5.8FSI-INCC, 5.8FSIINCS, 5.8FSIPHUBCE, 5.8FSIPHURCE, 5.8FSIPNCACE, 5.8FSIPNCD, 5.8FSIPNCS

Art. nr/Part no	Ersätter/Replaces
14779	835779





## Oljefilter Oil filters



**MD21B**  
MD21B, AQD21B

Art. nr/Part no	Ersätter/Replaces
14621	21549544, 3581621, 861475



**MD2010, MD2020, DI-13, DI-20**  
MD2010A, MD2010B, MD2010C, MD2010D  
MD2020A, MD2020B, MD2020C, MD2020D  
DI-13A, DI-13B, DI-13F  
DI-20A, DI-20B, DI-20F

Art. nr/Part no	Ersätter/Replaces
14473	861473



**MD2030, MD2040, DI-30, D2-40, D2-50, D2-55, D2-60, D2-75**  
MD2030, MD2030B, MD2030C, MD2030D  
MD2040, MD2040B, MD2040C, MD2040D  
DI-30, DI-30A, DI-30B, DI-30F  
D2-40, D2-40A, D2-40B, D2-40F  
D2-50F  
D2-55, D2-55A, D2-55B, D2-55C, D2-55D, D2-55E, D2-55F  
D2-60F  
D2-75, D2-75A, D2-75B, D2-75C

Art. nr/Part no	Ersätter/Replaces
14525	3840525



**22-serien**  
MD22A  
MD22L  
MD22L-A  
TMD22A

Art. nr/Part no	Ersätter/Replaces
14476	861476



**40, 41, 42, 70**  
MD40A, TMD40A, TAM40A, TMD40B, TAM40B, TMD40C, AQD40A,  
AQAD40A, AD40B, AQAD40B

TMD41A, TAM41A, TMD41B, TAM41B, TMD41D, TAM41D, TMD41L-A,  
TAM41H-A, TAM41H-B, TAM41P, TAM41P-A, D41A, AQD41A,  
AQAD41A, AD41A, D41B, AD41B, AD41B, D41D, AD41D, D41L-A,  
AD41L-A, AD41P-A

TAMD42WJ-A


TAMD70D, TAM70E, THAMD70B, THAMD70C, AQD70BL, AQD70CL,  
AQD70D

Transmission IPS2-A, IPS2-B, IPS3-A

Art. nr/Part no	Ersätter/Replaces
14034	471034



## Oljefilter Oil filters

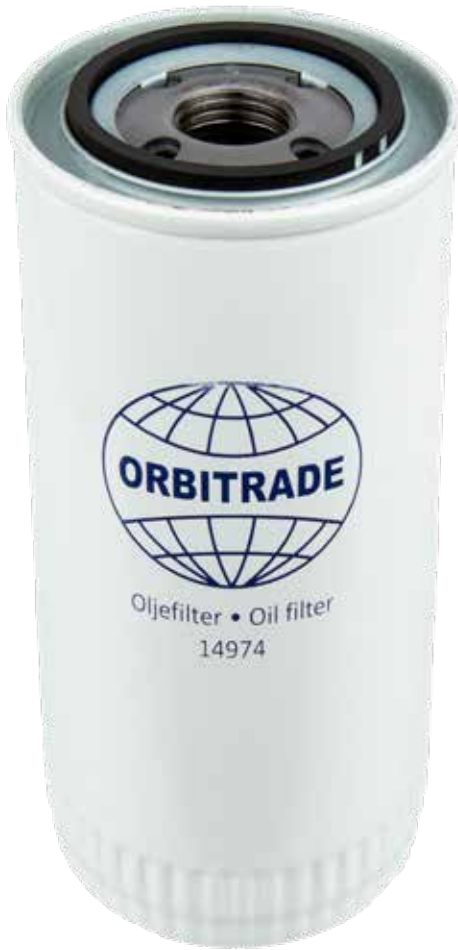

### KAD42, KAD43, KAD44, KAD300, 50, 60, 70 100, 120

KAD42A, KAD42B, KAD42P-A, KAMD42A, KAMD42B, KAMD42P-A, TAMD42B, TAMD42-WJ-A

KAD43P, KAD43P-A, KAD43P-B, KAMD43P, KAMD43P-A, KAMD43P-B

KAD44P, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-B, KAMD44P-C

KAD300-A, KAMD300-A

MD50A, MD50AK, TMD50A

TAMD60A, TAMD60B, TAMD60C

MD70B, TMD70A, TMD70B, MD70C, TMD70C, AQD70B, AQD70C

MD100A, TMD100A, MD100B, MD100B-CC

MD120A, MD120AK, TMD120A, TAMD120A

Art. nr/Part no	Ersätter/Replaces
14974	423135, 4785974



### D3(-MY2009)

D3-110I-A, D3-110I-B, D3-110I-C

D3-130A-A, D3-130A-B, D3-130A-C, D3-130I-A, D3-130I-B, D3-130I-C

D3-160A-A, D3-160A-B, D3-160A-C, D3-160I-A, D3-160I-B, D3-160I-C

D3-190A-B, D3-190A-C, D3-190I-B, D3-190I-C

Art. nr/Part no	Ersätter/Replaces
17305	8692305



### D3 (MY2010-)

D3-110I-D, D3-110I-E, D3-110I-F, D3-110I-G, D3-110I-H

D3-140A-D, D3-140A-E, D3-140A-F, D3-140A-G, D3-140A-H, D3-140I-D,

D3-140I-E, D3-140I-F, D3-140I-G, D3-140I-H

D3-150I-D, D3-150I-E, D3-150I-F, D3-150I-G, D3-150I-H

D3-170A-D, D3-170A-E, D3-170A-F, D3-170A-G, D3-170A-H, D3-170I-D,

D3-170I-E, D3-170I-F, D3-170I-G, D3-170I-H

D3-200A-D, D3-200A-E, D3-200A-F, D3-200A-G, D3-200A-H, D3-200I-D,

D3-200I-E, D3-200I-F, D3-200I-G, D3-200I-H

D3-220A-D, D3-220A-E, D3-220A-F, D3-220A-G, D3-220A-H, D3-220I-D,

D3-220I-E, D3-220I-F, D3-220I-G, D3-220I-H

Art. nr/Part no	Ersätter/Replaces	Info
14490	30788490	Fits MY 2010 and later



## Oljefilter Oil filters



### D4, D6

D4-145I-G  
D4-150A-G  
D4-175I-G  
D4-180I-B, D4-180I-C, D4-180I-D, D4-180I-E, D4-180I-F  
D4-210A-A, D4-210A-B, D4-210I-A, D4-210I-B  
D4-225A-B, D4-225A-C, D4-225A-D, D4-225A-E, D4-225A-F, D4-225I-B,  
D4-225I-C, D4-225I-D, D4-225I-E, D4-225I-F  
D4-230A-G, D4-230I-G  
D4-260A-A, D4-260A-B, D4-260A-C, D4-260A-D, D4-260A-E,  
D4-260D-B, D4-260D-C, D4-260D-D, D4-260D-E, D4-260D-F,  
D4-260I-A, D4-260I-B, D4-260I-C, D4-260I-D, D4-260I-E, D4-260I-F  
D4-270A-G, D4-270I-G  
D4-300A-A, D4-300A-C, D4-300A-D, D4-300A-E, D4-300A-F,  
D4-300A-G, D4-300D-A, D4-300D-C, D4-300D-D, D4-300D-E,  
D4-300D-F, D4-300I-A, D4-300I-C, D4-300I-D, D4-300I-E, D4-300I-F,  
D4-300I-G  
D4-320I-G, D4-320A-G

D6-280A-A, D6-280A-B, D6-280A-C, D6-280A-D, D6-280A-E, D6-280I-A,  
D6-280I-B, D6-280I-C, D6-280I-D, D6-280I-E  
D6-300A-F, D6-300A-G, D6-300D-F, D6-300D-G, D6-300I-F, D6-300I-G  
D6-310A-A, D6-310A-B, D6-310A-C, D6-310A-D, D6-310A-E,  
D6-310D-B, D6-310D-C, D6-310D-D, D6-310D-E, D6-310I-A, D6-310I-B,  
D6-310I-C, D6-310I-D, D6-310I-E  
D6-330A-B, D6-330A-C, D6-330A-D, D6-330A-E, D6-330A-F,  
D6-330D-B, D6-330D-C, D6-330D-D, D6-330D-E, D6-330D-F, D6-330I-B,  
D6-330I-C, D6-330I-D, D6-330I-E, D6-330I-F  
D6-340A-G, D6-340D-G, D6-340I-G  
D6-350A-A, D6-350A-B  
D6-370A-B, D6-370A-C, D6-370A-D, D6-370A-E, D6-370A-F,  
D6-370D-A, D6-370D-B, D6-370D-C, D6-370D-D, D6-370D-E,  
D6-370D-F, D6-370I-A, D6-370I-B, D6-370I-C, D6-370I-D, D6-370I-E,  
D6-370I-F  
D6-380A-G, D6-380D-G, D6-380I-G  
D6-400A-E, D6-400A-F, D6-400A-G  
D6-435D-A, D6-435D-C, D6-435D-D, D6-435D-E, D6-435D-F,  
D6-435I-A, D6-435I-C, D6-435I-D, D6-435I-E, D6-435I-F  
D6-440A-G, D6-440D-G, D6-440I-G, D6-440I-WJ-G  
D6-480D-G, D6-480I-G, D6-480I-WJ-G

Gänga primär/Thread primary (P) = 1" - 12 UNF

Art. nr/Part no	Ersätter/Replaces	Info
17732	22030848, 3582732	Primär/Primary



### D4, D6

D4-145I-G  
D4-150A-G  
D4-175I-G  
D4-180I-B, D4-180I-C, D4-180I-D, D4-180I-E, D4-180I-F  
D4-210A-A, D4-210A-B, D4-210I-A, D4-210I-B  
D4-225A-B, D4-225A-C, D4-225A-D, D4-225A-E, D4-225A-F, D4-225I-B,  
D4-225I-C, D4-225I-D, D4-225I-E, D4-225I-F  
D4-230A-G, D4-230I-G  
D4-260A-A, D4-260A-B, D4-260A-C, D4-260A-D, D4-260A-E,  
D4-260D-B, D4-260D-C, D4-260D-D, D4-260D-E, D4-260D-F,  
D4-260I-A, D4-260I-B, D4-260I-C, D4-260I-D, D4-260I-E, D4-260I-F  
D4-270A-G, D4-270I-G  
D4-300A-A, D4-300A-C, D4-300A-D, D4-300A-E, D4-300A-F,  
D4-300A-G, D4-300D-A, D4-300D-C, D4-300D-D, D4-300D-E,  
D4-300D-F, D4-300I-A, D4-300I-C, D4-300I-D, D4-300I-E, D4-300I-F,  
D4-300I-G  
D4-320I-G, D4-320A-G

D6-280A-A, D6-280A-B, D6-280A-C, D6-280A-D, D6-280A-E, D6-280I-A,  
D6-280I-B, D6-280I-C, D6-280I-D, D6-280I-E  
D6-300A-F, D6-300A-G, D6-300D-F, D6-300D-G, D6-300I-F, D6-300I-G  
D6-310A-A, D6-310A-B, D6-310A-C, D6-310A-D, D6-310A-E,  
D6-310D-B, D6-310D-C, D6-310D-D, D6-310D-E, D6-310I-A, D6-310I-B,  
D6-310I-C, D6-310I-D, D6-310I-E  
D6-330A-B, D6-330A-C, D6-330A-D, D6-330A-E, D6-330A-F,  
D6-330D-B, D6-330D-C, D6-330D-D, D6-330D-E, D6-330D-F, D6-330I-B,  
D6-330I-C, D6-330I-D, D6-330I-E, D6-330I-F  
D6-340A-G, D6-340D-G, D6-340I-G  
D6-350A-A, D6-350A-B  
D6-370A-B, D6-370A-C, D6-370A-D, D6-370A-E, D6-370A-F,  
D6-370D-A, D6-370D-B, D6-370D-C, D6-370D-D, D6-370D-E,  
D6-370D-F, D6-370I-A, D6-370I-B, D6-370I-C, D6-370I-D, D6-370I-E,  
D6-370I-F  
D6-380A-G, D6-380D-G, D6-380I-G  
D6-400A-E, D6-400A-F, D6-400A-G  
D6-435D-A, D6-435D-C, D6-435D-D, D6-435D-E, D6-435D-F,  
D6-435I-A, D6-435I-C, D6-435I-D, D6-435I-E, D6-435I-F  
D6-440A-G, D6-440D-G, D6-440I-G, D6-440I-WJ-G  
D6-480D-G, D6-480I-G, D6-480I-WJ-G

Gänga sekundär/Thread By-pass (S) = 3/4" - 16 UNF

Art. nr/Part no	Ersätter/Replaces	Info
17901	22030852, 21632901, 3582733	Sekundär/By-pass



## Oljefilter Oil filters



**61, 100, 102, 103, 120, 121, 122**

TAMD61A  
TMD100C  
TMD102A, TAMD102A, TAMD102D  
TAMD103A  
TMD120B, TAMD120B  
TMD121C, TAMD121D  
TMD122A, TAMD122A, TAMD122A/C, TAMD122D

Art. nr/Part no	Ersätter/Replaces
I4634	21707134, 466634



**D5, D7, 61, 62, 63, 71, 72, 73, 74, 75, 102, 103, 122**

D5A-T, D5A-TA, D5A-B TA  
D7A-T, D7A-TA, D7A-B TA  
TAMD61A  
TAMD62A  
TAMD63L-A, TAMD63P-A  
TAMD71A, TAMD71B  
TAMD72A, TAMD72P-A, TAMD72WJ-A  
TAMD73P-A, TAMD73WJ-A  
TAMD74A, TAMD74C-A, TAMD74C-B, TAMD74L-A, TAMD74L-B,  
TAMD74P-A, TAMD74P-B  
TAMD75P-A  
TAMD102A, TAMD102D  
TAMD103A  
TAMD122D, TAMD122P-A, TAMD122P-B, TAMD122P-C

Art. nr/Part no	Ersätter/Replaces
I4741	847741



**D9, D11, D12, D13, D16, 162, 163, 165**

D9A2A, D9A2B, D9A2C, D9A2D, D9A2E, D9A2F, D9A2G, D9A2H,  
D9A2J, D9A2K, D9A2L MH, D9A2M MP  
D11A-A, D11A-B, D11A-C, D11A-C (IPS), D11A-C MP, D11A-D MP,  
D11A-E, D11A-E MP, D11B1-A MP, D11B2-A MP, D11B3-A MP, D11B4-A  
MP  
D12C-A MP, D12D-A MH, D12D-A MP, D12D-B MH, D12D-B MP,  
D12D-C MH, D12D-C MP, D12D-D MP, D12D-E MH, D12D-E MP,  
D12D-F MP, D12D-G MH, D12D-G MP, D12D-H MP  
D13B-A MP, D13B-B MP, D13B-C MP, D13B-D MP, D13B-E MH, D13B-E  
MH (FE), D13B-G MP, D13B-H MP, D13B-J MP, D13B-K MP, D13B-L MP,  
D13B-M MP, D13B-N MH, D13B-N MH (FE), D13C1-A MH, D13C1-A  
MP, D13C2-A MH, D13C2-A MP, D13C3-A MP, D13C4-A MP, D13C5-A  
MP  
D16C-A MH, D16C-B MH, D16C-C MH, D16C-D MH, D16C1-E MG,  
D16C1-E MH, D16C1-F MG, D16C1-F MH, D16C2-E MG, D16C2-E MH,  
D16C2-F MH  
TAMD162A, TAMD162B, TAMD162C, TAMD162C-B, TAMD162C-C  
TAMD163A-A, TAMD163P-A  
TAMD165A, TAMD165C

Gänga primär/Thread primary (P) = 1 1/8"-16UN-2B  
Gänga sekundär/Thread by-pass (S) = 1 3/8"-16UNF-2B

Art. nr/Part no	Ersätter/Replaces	Info
I4736	21707133, 23658092, 478736	Primär / Primary
I4556	21707132	Sekundär / Bypass




**Oljefilter backslag / Oil filter gearcases HS25, HS45, HS63, HS80, HS85**

HS25A, HS25A-B, HS25A-C, HS25AE-A  
HS45A, HS45AE, HS45A-B, HS45AE-C, HS45AE-B  
HS63A-A, HS63AE, HS63AE-A, HS63AE-B, HS63AE-C  
HS63IV-A, HS63IVE-A, HS63IVE-D, HS63AE-D, HS63IVE  
HS80AE, HS80AE-A, HS80AE-B, HS80VE, HS80IVE-B  
HS85AE-A, HS85IVE-A, HS85IVE-B, HS85A-A, HS85IVE, HS85IV-A

Art. nr/Part no	Ersätter/Replaces	Info
I4048	3582048, 3582069	kit incl. gaskets



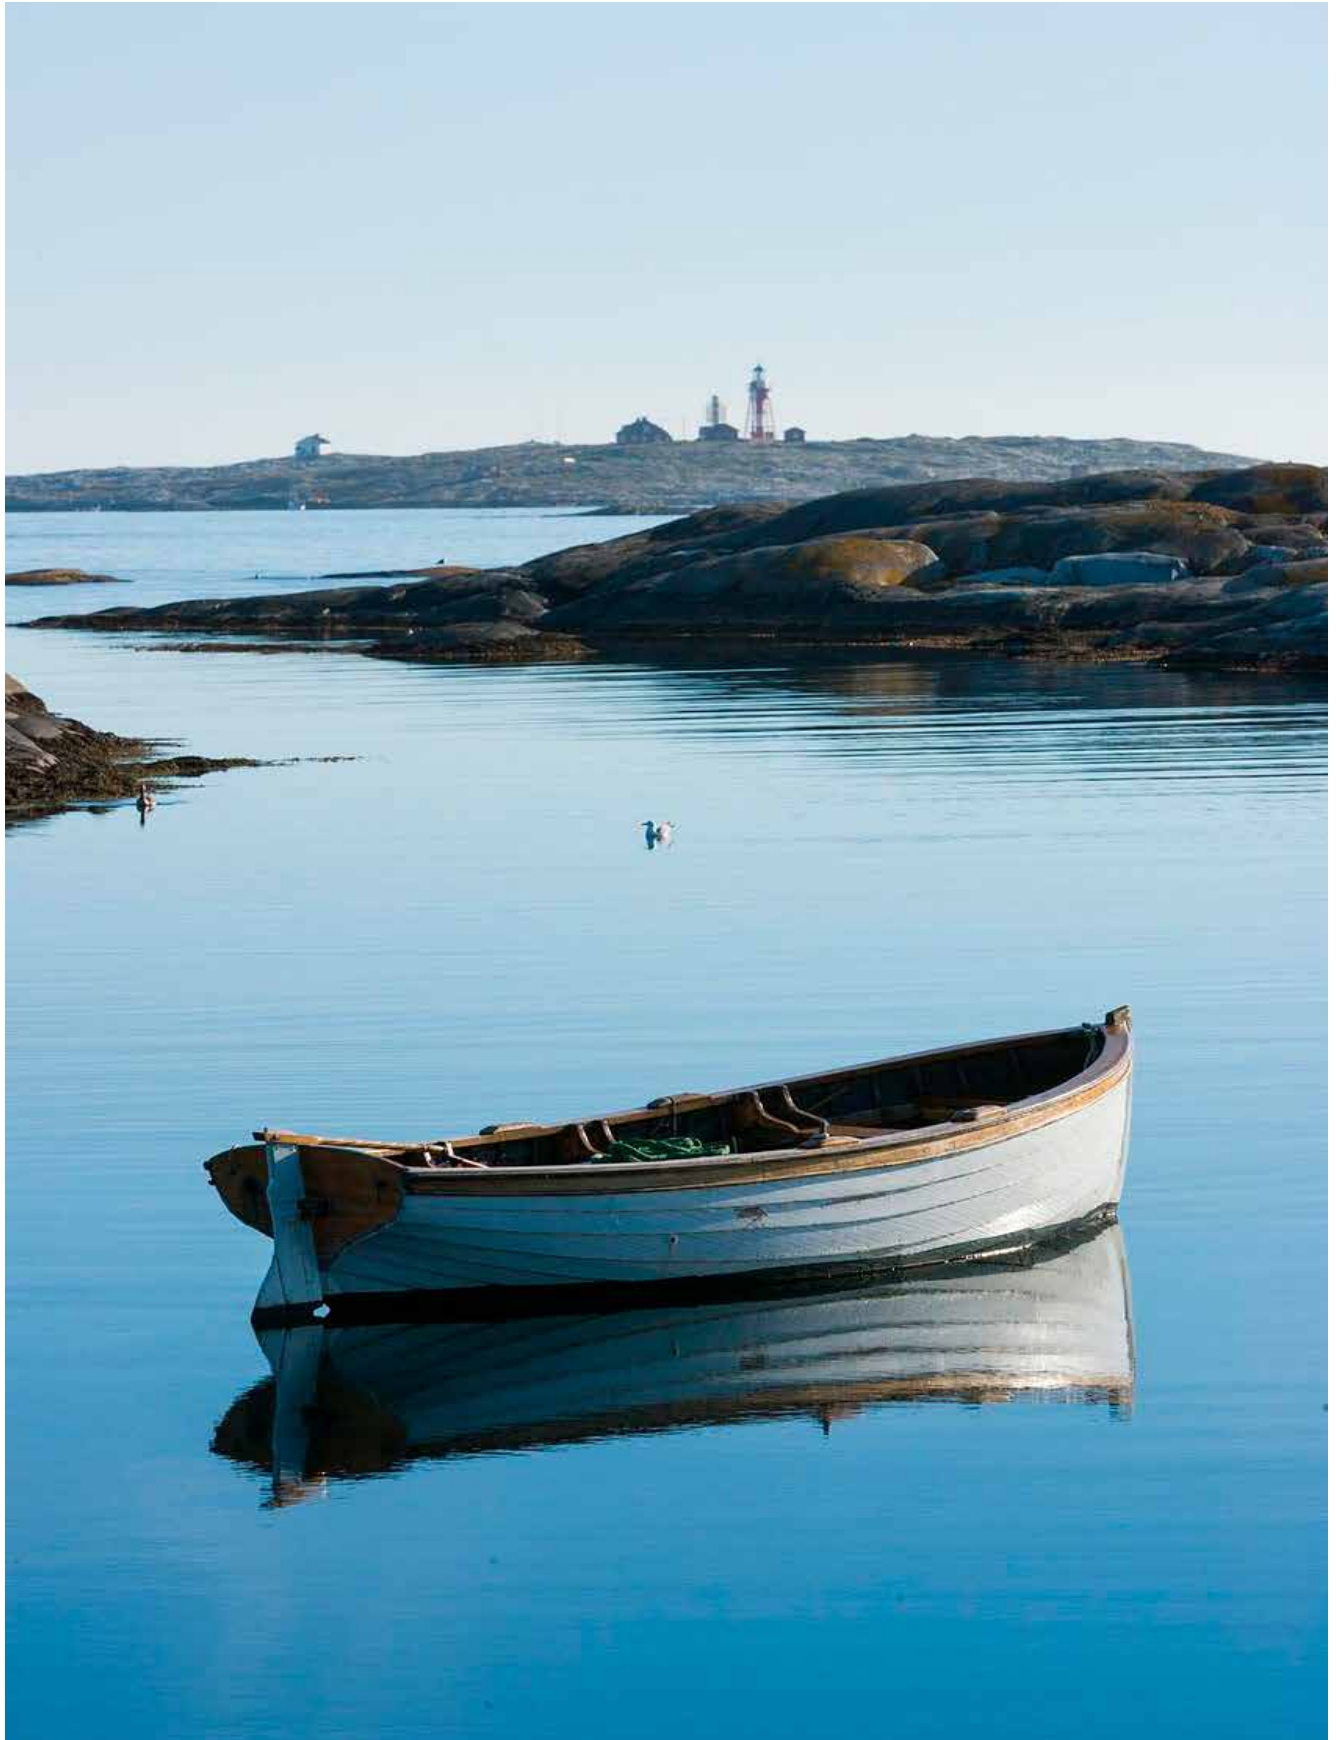

Spare parts from Sweden

## Bränslefilter Fuel filters



### B21, B23, B25, V6, V8

AQ120B, AQ125A  
AQ140A, BB140A  
230A, 230B  
AQ125B  
AQ131A, AQ131B, AQ131C, AQ131D  
AQ145B  
250A, 250B, 251A  
AQ151A, AQ151B, AQ151C  
AQ171A, AQ171C  
AQ175A  
AQ200C, AQ200D  
AQ225B, AQ225C, AQ225D, AQ225E, AQ225F  
BB225A, BB225AV, BB225B, BB225C  
AQ255A, AQ255B  
AQ260A, AQ260B  
BB260A, BB260AV, BB260B, BB260C  
AQ280A  
AQ290A

Packning ingår / Gasket included. Passar som insats i äldre bränslefilter  
OEM nr 841071 / Fits as insert in old fuel filter OEM nr 841071

Art. nr/Part no	Ersätter/Replaces
17162	855952, 841162, 835860



### V6, V8 (-MY1993)

430A, 430B, 431A, 431B, 432A, 434A  
AQ205A  
500A, 500B, 501A, 501B  
570A, 571A, 572A  
740A, 740B  
AQ200F  
AQ211A  
AQ225F, BB225C  
AQ231A, AQ231B, BB231A  
BB260C, BB261A  
AQ271A, AQ271B, AQ271C, AQ275D  
AQ311A, AQ311B

Kan även användas till B20, B21, B23 och B25-motorer som har filterhus  
OEM 855952 monterat /


Can also be used for B20, B21, B23 and B25 engines with filter housing  
OEM 855952 mounted.

Art. nr/Part no	Ersätter/Replaces
17686	855686, PAPFF5510





## Bränslefilter Fuel filters

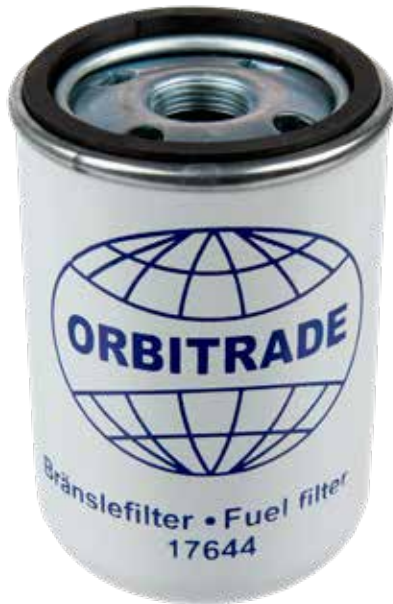

### 3.0, 4.3, 5.0, 5.7, 8.1, V6, V8

3.0GXi-J, 3.0GXi-C  
4.3Gi-200-R, 4.3GXi-225-R, 4.3GXi-B, 4.3GXi-BF, 4.3GXi-C, 4.3GXi-CF, 4.3GXi-D, 4.3GXi-DF, 4.3GXi-E, 4.3GXi-EF, 4.3GXi-F, 4.3GXi-FF, 4.3GXi-G, 4.3GXi-GF, 4.3GXi-J, 4.3GXi-JF, 4.3GXi-P, 4.3GXi-Q, 4.3GXiE-225-R, 4.3GXiE-M, 4.3GXiE-P, 4.3GXiE-Q, 4.3OSi-F, 4.3OSi-FF, 4.3OSi-G, 4.3OSi-GF, 4.3OSi-J, 4.3OSi-JF

V6-200-A, V6-200-C-G, V6-200-C-J, V6-200-C-M, V6-200-C-N, V6-200-C-P, V6-200-CE-N, V6-200-CE-P, V6-200-G, V6-200-J, V6-200-M, V6-200-N, V6-200-P

V6-225-A, V6-225-C-A

V6-240-C-J, V6-240-C-M, V6-240-C-N, V6-240-C-P, V6-240-CE-G, V6-240-CE-J, V6-240-CE-K, V6-240-CE-M, V6-240-CE-N, V6-240-CE-P, V6-240-G, V6-240-J, V6-240-M, V6-240-N, V6-240-P

V6-250-C-O, V6-250-CE-O, V6-250-O

V6-280-C-G, V6-280-C-J, V6-280-C-M, V6-280-C-N, V6-280-C-P, V6-280-CE-G, V6-280-CE-J, V6-280-CE-K, V6-280-CE-M, V6-280-CE-N, V6-280-CE-P, V6-280-G, V6-280-J, V6-280-M, V6-280-N, V6-280-P

5.0GiC-225-S, 5.0GiC-J, 5.0GiCE-225-S, 5.0GiPEFS, 5.0GiPWTR, 5.0GXi-270-R, 5.0GXi-B, 5.0GXi-C, 5.0GXi-CF, 5.0GXi-D, 5.0GXi-DF, 5.0GXi-E, 5.0GXi-F, 5.0GXi-FF, 5.0GXi-G, 5.0GXi-GF, 5.0GXi-J, 5.0GXi-JF, 5.0GXi-P, 5.0GXiE-270-R, 5.0GXiE-M, 5.0GXiE-P, 5.0GXiE-Q, 5.0GXiE-270-R, 5.0GXiE-J, 5.0GXiE-JF, 5.0GXiE-K, 5.0GXiE-KF, 5.0GXiE-M, 5.0GXiE-MF, 5.0GXiE-N, 5.0GXiE-P, 5.0OSi-B, 5.0OSi-BF, 5.0OSi-C, 5.0OSi-CF, 5.0OSi-D, 5.0OSi-DF, 5.0OSi-E, 5.0OSi-EF, 5.0OSi-FF, 5.0OSi-F, 5.0OSi-G, 5.0OSi-GF, 5.0OSi-J, 5.0OSi-JF, 5.0OSiE-J, 5.0OSiE-JF

5.7Gi-300-J, 5.7Gi-300-JF, 5.7Gi-300-N, 5.7Gi-300-P, 5.7Gi-300-R, 5.7Gi-B, 5.7Gi-BF, 5.7Gi-C, 5.7Gi-CF, 5.7Gi-D, 5.7Gi-DF, 5.7Gi-E, 5.7Gi-EF, 5.7Gi-F, 5.7Gi-FF, 5.7Gi-G, 5.7Gi-GF, 5.7GiC-300-J, 5.7GiC-300-JF, 5.7GiC-300-P, 5.7GiC-300-R, 5.7GiCE-300-J, 5.7GiCE-300-JF, 5.7GiCE-300-M, 5.7GiCE-300-MF, 5.7GiCE-300-P, 5.7GiCE-300-R

5.7GiE-300-J, 5.7GiE-300-JF, 5.7GiE-300-K, 5.7GiE-300-KF, 5.7GiE-300-M, 5.7GiE-300-N, 5.7GiE-300-P, 5.7GiE-300-R, 5.7GiL-B, 5.7GiL-D, 5.7GiL-E, 5.7GiL-F, 5.7GiL-G, 5.7GSiL-A, 5.7GSiPEFS, 5.7GSiPWTR, 5.7GXi-320-R, 5.7GXi-A, 5.7GXi-C, 5.7GXi-CF, 5.7GXi-D, 5.7GXi-DF, 5.7GXi-E, 5.7GXi-EF, 5.7GXi-F, 5.7GXi-FF, 5.7GXi-G, 5.7GXi-GF, 5.7GXi-H, 5.7GXi-HF, 5.7GXi-J, 5.7GXi-JF, 5.7GXi-N, 5.7GXi-P, 5.7GXiCE-320-R, 5.7GXiC-J, 5.7GXiC-JF, 5.7GXiC-P, 5.7GXiCE-320-R, 5.7GXiCE-J, 5.7GXiCE-JF, 5.7GXiCE-M, 5.7GXiCE-P, 5.7GXiE-320-R, 5.7GXiE-J, 5.7GXiE-JF, 5.7GXiE-K, 5.7GXiE-KF, 5.7GXiE-M, 5.7GXiE-MF, 5.7GXiE-N, 5.7GXiE-P, 5.7GXiL-A, 5.7GXiL-C, 5.7GXiL-D, 5.7GXiL-E, 5.7GXiL-F, 5.7GXiL-G, 5.7GXiL-H, 5.7OSi-300-J, 5.7OSi-300-JF, 5.7OSi-A, 5.7OSi-AF, 5.7OSi-B, 5.7OSi-BF, 5.7OSi-C, 5.7OSi-CF, 5.7OSi-D, 5.7OSi-DF, 5.7OSi-E, 5.7OSi-EF, 5.7OSi-G, 5.7OSi-GF, 5.7OSiE-300-J, 5.7OSiE-300-JF, 5.7OSXi-A, 5.7OSXi-AF, 5.7OSXi-B, 5.7OSXi-BF, 5.7OSXi-C, 5.7OSXi-CF, 5.7OSXi-D, 5.7OSXi-DF, 5.7OSXi-E, 5.7OSXi-EF, 5.7OSXi-G, 5.7OSXi-GF, 5.7OSXi-J, 5.7OSXi-JF, 5.7OSXiE-J, 5.7OSXiE-JF

8.1Gi-A, 8.1Gi-B, 8.1Gi-BF, 8.1Gi-C, 8.1Gi-CF, 8.1Gi-D, 8.1Gi-DF, 8.1Gi-E, 8.1Gi-EF, 8.1Gi-F, 8.1Gi-FF, 8.1Gi-G, 8.1Gi-GF, 8.1Gi-H, 8.1Gi-HF, 8.1Gi-J, 8.1Gi-JF, 8.1GiC-J, 8.1GiC-JF, 8.1GiC-Q, 8.1GiC-QJ, 8.1GiCE-JF, 8.1GiCE-M, 8.1GiCE-P, 8.1GiCE-Q, 8.1GiE-J, 8.1GiE-JF, 8.1GiE-K, 8.1GiE-KF, 8.1GiE-M, 8.1GiE-MF, 8.1GiE-P, 8.1GiL-A, 8.1GiL-B, 8.1GiL-C, 8.1GiL-D, 8.1GiL-E, 8.1GiL-F, 8.1GiL-G, 8.1GiL-H, 8.1GiS-A, 8.1GiS-L-A, 8.1GXi-A, 8.1GXi-AF, 8.1GXi-B, 8.1GXi-BF, 8.1GXi-C, 8.1GXi-CF, 8.1GXi-D, 8.1GXi-DF, 8.1GXi-E, 8.1GXi-EF, 8.1GXi-F, 8.1GXi-FF, 8.1GXi-G, 8.1GXi-GF, 8.1GXi-J, 8.1GXi-JF, 8.1GXiE-J, 8.1GXiE-JF, 8.1GXiE-K, 8.1GXiE-KF, 8.1GXiE-M, 8.1GXiE-P, 8.1GXiL-A, 8.1GXiL-B, 8.1GXiL-C, 8.1GXiL-D, 8.1GXiL-E, 8.1GXiL-F, 8.1GXiL-G, 8.1IIPSE-JF, 8.1IIPSE-MF, 8.1IIPSE-P, 8.1IIPSE-Q, 8.1IIPSE-JF, 8.1IIPSE-KF, 8.1OSi-A, 8.1OSi-AF, 8.1OSi-B, 8.1OSi-BF, 8.1OSi-C, 8.1OSi-CF, 8.1OSi-D, 8.1OSi-DF, 8.1OSi-J, 8.1OSi-JF, 8.1OSiE-J, 8.1OSiE-JF

DPX375-A, DPX375-B, DPX375-BF, DPX375-CF, DPX420-A, DPX420-B, DPX420-BF, DPX420-CF, DPX420-DF

V8-225-C-A, V8-225-C-B, V8-225-E-A, V8-225-CE-A, V8-225-CE-B, V8-270-A, V8-270-B, V8-270-C-A, V8-270-C-B, V8-270-CE-A, V8-270-CE-B, V8-270-E-A, V8-270-E-B

V8-300-A, V8-300-B, V8-300-C-A, V8-300-C-B, V8-300-C-G, V8-300-C-H, V8-300-C-J, V8-300-C-K, V8-300-C-M, V8-300-C-N, V8-300-C-P, V8-300-C-R, V8-300-C-S, V8-300-CE-A, V8-300-CE-B, V8-300-CE-G, V8-300-CE-H, V8-300-CE-J, V8-300-CE-K, V8-300-CE-M, V8-300-CE-N, V8-300-CE-P, V8-300-CE-R, V8-300-CE-S, V8-300-E-A, V8-300-E-B

V8-320-A, V8-320-B, V8-320-C-A, V8-320-C-B, V8-320-CE-A, V8-320-CE-B, V8-320-E-A, V8-320-E-B

V8-350-C-D, V8-350-C-G, V8-350-C-H, V8-350-C-J, V8-350-C-K, V8-350-C-M, V8-350-C-N, V8-350-C-P, V8-350-C-R, V8-350-C-S, V8-350-CE-D, V8-350-CE-G, V8-350-CE-H, V8-350-CE-J, V8-350-CE-K, V8-350-CE-M, V8-350-CE-N, V8-350-CE-P, V8-350-CE-R, V8-350-CE-S

V8-380-C-A, V8-380-C-B, V8-380-C-D, V8-380-C-J, V8-380-C-K, V8-380-C-M, V8-380-C-N, V8-380-C-R, V8-380-CE-A, V8-380-CE-B, V8-380-CE-D, V8-380-CE-J, V8-380-CE-K, V8-380-CE-M, V8-380-CE-N, V8-380-CE-P, V8-380-CE-R

V8-430-C-J, V8-430-C-K, V8-430-C-M, V8-430-C-N, V8-430-C-P, V8-430-C-R, V8-430-CE-D, V8-430-CE-J, V8-430-CE-K, V8-430-CE-M, V8-430-CE-N, V8-430-CE-P, V8-430-CE-R

Art. nr/Part no	Ersätter/Replaces
17644	3847644



## Bränslefilter Fuel filters



### MD1, MD2, MD3, MD5, MD11, MD17

MD1, MD1A, MD1B  
MD2, MD2A, MD2B  
MD3B  
MD5A, MD5B\*  
MD11C\*, MD11D\*  
MD17C\*, MD17D\*

\*Tidigt utförande/\*Earlier version  
Packning ingår/Gasket included

Art. nr/Part no	Ersätter/Replaces	
17065	876554, 870065, 23686345	Insats / Insert



### MD5, MD7, MD11, MD17, 2001, 2002, 2003, 2003T

MD5B, MD5C\*  
MD7B\*  
MD11C\*, MD11D\*  
MD17C\*, MD17D\*  
2001, 2001AG, 2001B, 21001BG, 2001D, 2001R  
2002, 2002AG, 2002B, 21002BG, 2002D  
2003, 2003 SOLAS, 2003AG, 2003B, 2003B SOLAS, 2003BG  
2003T, 2003TB, 2003TB SOLAS

\*Senare utförande/\*Later version

Art. nr/Part no	Ersätter/Replaces	
17913	21492771, 829913	Spin-on



### MD2010, MD2020, MD2030, MD2040, D1-13, D1-20, D1-30, D2-40, D2-50, D2-55, D2-60, D2-75

MD2010, MD2010B, MD2010-C, MD2010-D  
MD2020, MD2020B, MD2020-C, MD2020-D  
MD2030, MD2030B, MD2030-C, MD2030-D  
MD2040, MD2040B, MD2040-C, MD2030-D

D1-13, D1-13B, D1-13F  
D1-20, D2-20B, D1-20F  
D1-30, D1-30B, D1-30F

D2-40, D2-40B, D2-40F  
D2-50F  
D2-55, D2-55B, D2-55C, D2-55D, D2-55E, D2-55F  
D2-60F  
D2-75, D2-75A, D2-75B, D2-75C, D2-75F

För motorer med nyare fäste (OEM 22444100), använd 17477-1, för äldre (OEM 3884306) använd 17477/ with new bracket (OEM 22444100), use 17477-1, for earlier (OEM 3884306) use 17477

Art. nr/Part no	Ersätter/Replaces
17477	861477
17477-1	861477



### Bränslefilter Fuel filters



**MD6, MD7, 22, 40, 41, KAD42, KAD43, KAD44, KAD300**  
MD6A, MD6B  
MD7A\*

MD22, MD22A, MD22L, MD22L-A, MD22L-B, MD22P-B, TMD22A,  
TMD22B, TMD22P-C, TAMD22P-B

MD40A, TMD40A, TAMD40A, TMD40B, TAMD40B, TMD40C, AQD40A,  
AQAD40A, AD40B, AQAD40B

TMD41A, TAMD41A, TMD41B, TAMD41B, TMD41D, TAMD41D,  
TMD41L-A, TAMD41H-A, TAMD41H-B, TAMD41P, TAMD41P-A, AD41A,  
AQAD41A, D41B, AD41B, AD41BJ, D41D, AD41D, D41L-A, AD41L-A,  
AD41P-A

KAD42A, KAD42B, KAD42P-A, KAMD42A, KAMD42B, KAMD42P-A,  
TAMD42B, TAMD42WJ-A

KAD43P-A, KAD43P-B, KAMD43P, KAMD43P-A, KAMD43P-B

KAD44P, KAD44P-A, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-B,  
KAMD44P-C

KAD300-A, KAMD300-A



**MD6, MD7, 22, 40, 41, KAD42, KAD43, KAD44, KAD300**  
MD6A, MD6B  
MD7A\*

MD22, MD22A, MD22L, MD22L-A, MD22L-B, MD22P-B, TMD22A,  
TMD22B, TMD22P-C, TAMD22P-B

MD40A, TMD40A, TAMD40A, TMD40B, TAMD40B, TMD40C, AQD40A,  
AQAD40A, AD40B, AQAD40B

TMD41A, TAMD41A, TMD41B, TAMD41B, TMD41D, TAMD41D,  
TMD41L-A, TAMD41H-A, TAMD41H-B, TAMD41P, TAMD41P-A, AD41A,  
AQAD41A, D41B, AD41B, AD41BJ, D41D, AD41D, D41L-A, AD41L-A,  
AD41P-A

KAD42A, KAD42B, KAD42P-A, KAMD42A, KAMD42B, KAMD42P-A,  
TAMD42B, TAMD42WJ-A

KAD43P-A, KAD43P-B, KAMD43P, KAMD43P-A, KAMD43P-B

KAD44P, KAD44P-A, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-B,  
KAMD44P-C

KAD300-A, KAMD300-A

Art. nr/Part no	Ersätter/Replaces	Info
17874	21624740, 3840335, 860874, 838593, 243464, Bosch I 457 434 322	Med dräneringsplugg/ With drain plug Höjd/Height: 151mm

Art. nr/Part no	Ersätter/Replaces	Info
17874-I	21624740	Utan dräneringsplugg/ Without drain plug Höjd/Height: 115mm



## Bränslefilter Fuel filters



30, 31, KAD32, 60, 61, 62, 63, 70, 71, 72, 73, 74, 75, 100, 102, 103, 120, 121, 122, D5, D7  
 MD7A\*, MD7B\*\*  
 MD30A, TMD30A, TAMD30A, AD30A, AQAD30A  
 MD31A, TMD31A, TMD31A, TAMD31A, TMD31B, TAMD31B, TAMD31L-A, TAMD31M-A, TAMD31P-A, TMD31D, TAMD31D, TAMD31M, TMD31L-A, AD31, AD31A, AQAD31A, AD31B, AD31D, AD31D-A, AD31L-A, AD31P-A, AD31XD  
 KAD32P, KAD32P-A  
 TAMD60A, TAMD60B, TAMD60C  
 TAMD61A, TAMD62B, TAMD63L-A  
 MD70B, TMD70B, TAMD70B, THAMD70B, TMD70C, TAMD70C, THAMD70C, TAMD70D, TAMD70E, MD70BK, MD70C, AQD70B, AQD70BL, AQD70C, AQD70CL, AQD70D  
 TAMD71A, TAMD71B  
 TAMD72A, TAMD72P-A, TAMD72WJ-A  
 TAMD73P-A, TAMD73WJ-A  
 TAMD74A, TAMD74C-A, TAMD74C-B, TAMD74L-A, TAMD74L-B, TAMD74P-A, TAMD74P-B  
 TAMD75P-A  
 MD100A, TMD100A, MD100B, MD100B-CC, TMD100C  
 TMD102A, TAMD102A, TAMD102D  
 TAMD103A  
 TMD120A, TAMD120A, TMD120B, TAMD120B  
 TMD121C  
 TMD122A, TAMD122A, TAMD122A/C, TAMD122D, TAMD122P-A, TAMD122P-B, TAMD122P-C  
 D5A-T, D5A-TA, D5A-ATA, D5A-B TA  
 D7A-T, D7A-AT, D7A-TA, D7A-ATA, D7C-ATA, D7A-B TA, D7C-B TA, D7C-TA

\*Senare utförande/\*Later version  
 \*\*Tidigare utförande/\*\*Earlier version

Art. nr/Part no	Ersätter/Replaces
17987	21492771, 3825133, 829993, 466987, 243004



100  
 MD100A, MD100B, MD100B-CC  
 TMD100A, TMD100AK, MD100BK

Art. nr/Part no	Ersätter/Replaces
17897	233897



### Bränslefilter Fuel filters

**D3**

D3-110I-A, D3-110I-B, D3-110I-C  
 D3-130A-A, D3-130A-B, D3-130A-C, D3-130I-A, D3-130I-B, D3-130I-C  
 D3-160A-A, D3-160A-B, D3-160A-C, D3-160I-A, D3-160I-B, D3-160I-C  
 D3-190A-B, D3-190A-C, D3-190I-A, D3-190I-B, D3-190I-C

Art. nr/Part no	Ersätter/Replaces
17191	31261191

**D3**

D3-110I-D, D3-110I-E, D3-110I-F, D3-110I-G, D3-110I-H  
 D3-140A-D, D3-140A-E, D3-140A-F, D3-140A-G, D3-140A-H, D3-140I-D,  
 D3-140I-E, D3-140I-F, D3-140I-G, D3-140I-H  
 D3-150I-D, D3-150I-E, D3-150I-F, D3-150I-G, D3-150I-H  
 D3-170A-D, D3-170A-E, D3-170A-F, D3-170A-G, D3-170A-H, D3-170I-D,  
 D3-170I-E, D3-170I-F, D3-170I-G, D3-170I-H  
 D3-200A-D, D3-200A-E, D3-200A-F, D3-200A-G, D3-200A-H, D3-200I-D,  
 D3-200I-E, D3-200I-F, D3-200I-G, D3-200I-H  
 D3-220A-D, D3-220A-E, D3-220A-F, D3-220A-G, D3-220A-H, D3-220I-D,  
 D3-220I-E, D3-220I-F, D3-220I-G, D3-220I-H

Art. nr/Part no	Ersätter/Replaces
17811	21139810

**D4, D6 (-MY2019)**

D4-180I-B, D4-180I-C, D4-180I-D, D4-180I-E, D4-180I-F  
 D4-210A-A, D4-225A-B, D4-210I-A, D4-210I-B  
 D4-225A-C, D4-225A-D, D4-225I-C, D4-225I-D, D4-225A-E, D4-225A-F,  
 D4-225I-B, D4-225I-C, D4-225I-D, D4-225I-E, D4-225I-F  
 D4-260A-A, D4-260A-B, D4-260A-C, D4-260A-D, D4-260A-E, D4-260A-F,  
 D4-260D-B, D4-260D-C, D4-260D-D, D4-260D-E, D4-260D-F, D4-260I-A,  
 D4-260I-B, D4-260I-C, D4-260I-D, D4-260I-E, D4-260I-F  
 D4-300A-A, D4-300A-C, D4-300A-D, D4-300A-E, D4-300A-F, D4-300A-G,  
 D4-300D-A, D4-300D-C, D4-300D-D, D4-300D-E, D4-300D-F, D4-300I-A,  
 D4-300I-C, D4-300I-D, D4-300I-E, D4-300I-F, D4-300I-G

D6-280A-A, D6-280A-B, D6-280A-C, D6-280A-D, D6-280A-E, D6-280I-A,  
 D6-280I-B, D6-280I-C, D6-280I-D, D6-280I-E  
 D6-300A-F, D4-300A-G, D6-300D-F, D6-300I-F  
 D6-310A-A, D6-310A-B, D6-310A-C, D6-310A-D, D6-310A-E, D6-310D-B,  
 D6-310D-C, D6-310D-D, D6-310D-E, D6-310I-A, D6-310I-B, D6-310I-C,  
 D6-310I-D, D6-310I-E  
 D6-330A-B, D6-330A-C, D6-330A-D, D6-330A-E, D6-330A-F, D6-330D-B,  
 D6-330D-C, D6-330D-D, D6-330D-E, D6-330D-F, D6-330I-B, D6-330I-C,  
 D6-330I-D, D6-330I-E, D6-330I-F  
 D6-350A-A, D6-350A-B  
 D6-370A-B, D6-370A-C, D6-370A-D, D6-370A-E, D6-370A-F, D6-370D-A,  
 D6-370D-B, D6-370D-C, D6-370D-D, D6-370D-E, D6-370D-F, D6-370I-A,  
 D6-370I-B, D6-370I-C, D6-370I-D, D6-370I-E, D6-370I-F  
 D6-400A-E, D6-400A-F  
 D6-435I-A, D6-435I-C, D6-435I-D, D6-435I-E, D6-435I-F

Art. nr/Part no	Ersätter/Replaces	Info
17443	21718912, 3583443	Up to MY 2019



## Bränslefilter Fuel filters



### D4, D6 (MY2020-)

D4-145I-G  
D4-150A-G  
D4-175I-G  
D4-230A-G, D4-230I-G  
D4-270A-G, D4-270I-G  
D4-300A-G, D4-300I-G  
D4-320A-G, D4-320I-G

D6-300A-G, D6-300D-G, D6-300I-G  
D6-340A-G, D6-340D-G, D6-340I-G  
D6-380A-G, D6-380D-G, D6-380I-G  
D6-400A-G, D6-400D-G, D6-400I-G  
D6-440A-G, D6-440D-G, D6-440I-G, D6-440I-WJ-G  
D6-480D-G, D6-480I-G, D6-480I-WJ-G

Art. nr/Part no	Ersätter/Replaces	Info
17478	23954708, 22984478, 24215091	Från/from MY 2020



### D9, D11, D12

D9A2A, D9A2B, D9A2C, D9A2D, D9A2E, D9A2F, D9A2G, D9A2H,  
D9A2J, D9A2K

D11A-A, D11A-B, D11A-C, D11A-C (IPS), D11A-C MP, D11A-D, D11A-D  
(IPS), D11A-D MP, D11A-E, D11A-E MP, D11A-E (IPS)

D12C-A MP, D12D-A MH, D12D-A MP, D12D-B MH, D12D-B MP,  
D12D-C MH, D12D-C MP, D12D-D MP, D12D-E MH, D12D-E MP,  
D12D-F MP, D12D-G MH, D12D-G MP, D12D-H MP

Art. nr/Part no	Ersätter/Replaces
17517	3817517

## Vattenseparerande bränslefilter Water separating fuel filter



### Vattenseparerande bränslefilter för bensinmotorer

Spin-on 10 micron. Passar/fits bränslefilter/fuel filter OEM 877765

Art. nr/Part no	Ersätter/Replaces
17633	857633



### CAV bränslefilter CAV fuel filters



#### Bränslefilter CAV universal / Fuel filter CAV universal

Vattenseparerande förfilter som monteras mellan tank och motor / Water separating fuel filter to be mounted between fuel tank and engine.

Utrustad med genomskinlig plastskål för att enkelt kunna se skiktningar samt plugg för dränering av vatten. 4 anslutningar, 2 ingående och 2 utgående samt 2 pluggar.

Equipped with a transparent plastic bowl to easily see any layers and a drain cock to remove water. 4 connections, 2 inlets and 2 outlets, and two plugs.

**Gänga/Thread:** 1/2" x 20 UNF

Nipplar ingår ej / Fuel connectors not included

Art. nr/Part no	Ersätter/Replaces	Info
17109	877767, 1140639, 875542, 821094	Komplett sats / Complete kit
17081		Nippel 8 mm
22141		Nippel 10 mm
17201	3581078	Löst filter CAV



#### Bränslefilter CAV kort modell / Fuel filter CAV short version

Vattenseparerande förfilter som monteras mellan tank och motor / Water separating fuel filter to be mounted between fuel tank and engine.

Utrustad med genomskinlig plastskål för att enkelt kunna se skiktningar samt plugg för dränering av vatten. 4 anslutningar, 2 ingående och 2 utgående samt 2 pluggar.

Equipped with a transparent plastic bowl to easily see any layers and a drain cock to remove water. 4 connections, 2 inlets and 2 outlets, and two plugs.

**Gänga/Thread:** 1/2" x 20 UNF

Nipplar ingår ej / Fuel connectors not included

Art. nr/Part no	Ersätter/Replaces	Info
17108		Komplett sats Complete kit
17081		Nippel 8 mm
22141		Nippel 10 mm
17201	3581078	Löst filter kort
17306	858202	Löst filter långt



Spare parts from Sweden

## CAV filter och packningar CAV filter and gaskets



**B20, B21, B30, 2001, 2002, 2003, 2010, 2020, 2030, 2040, D21, D32, MD5, D1-13, D1-20, D1-30, D2-40, D2-55, D2-75, D3-110, D3-130, D3-160, D3-190**

Filter för CAV vattenavskiljare (typ 296), Passar 17108 och 17109. / Filter insert for CAV water separator (type 296), Fits 17108 and 17109.

10 micron

Art. nr/Part no	Ersätter/Replaces	Info
17201	3581078, 858201, 236628	Höjd/Height 71,5 mm



**B20, B21, B30, 2001, 2002, 2003, 2010, 2020, 2030, 2040, D21, D32, MD5, D1-13, D1-20, D1-30, D2-40, D2-55, D2-75, D3-110, D3-130, D3-160, D3-190**

Långt filter för Cav vattenavskiljare (typ 796)  
Long filters insert for CAV water separator (type 796)


Art. nr/Part no	Ersätter/Replaces	Info
17306	858202, 858306	Höjd/Height 112 mm



**B20, B21, B30, 2001, 2002, 2003, 2010, 2020, 2030, 2040, D21, D32, MD5, D1-13, D1-20, D1-30, D2-40, D2-55, D2-75, D3-110, D3-130, D3-160, D3-190**

Långt filter för Cav vattenavskiljare (typ 796)  
Long filters insert for CAV water separator (type 796)

Art. nr/Part no	Ersätter/Replaces	Info
17202	858202, 858306	Höjd/Height 133 mm

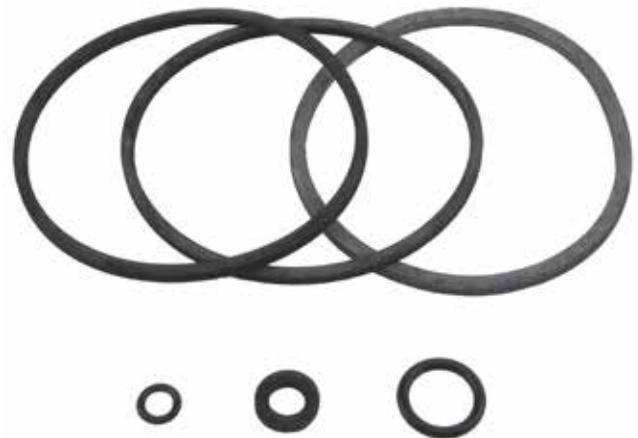

Packningssats för Cav filter  
Gasket kit for Cav fuel filter

Art. nr/Part no	Ersätter/Replaces
22046	N/A



## CAV reservdelar & tillbehör CAV spareparts & accessories



**Bult för ombyggnad av Cav vattenavskiljare till längre modell**  
Long centre bolt to convert Cav filter to longer type

Art. nr/Part no	Ersätter/Replaces	
17307		



**Glasskål för Cav filter / Glass bowl for Cav fuel filter**  
Passar CAV-filter 17109 / Fits CAV filter 17109

Art. nr/Part no	Ersätter/Replaces	
17407	818407	Passar 17109 / Fits 17109



**Glasskål för Cav filter / Glass bowl for Cav fuel filter**  
Passar CAV-filter 17108 / Fits CAV filter 17108

Art. nr/Part no	Info
17408	Passar 17108 / Fits 17108



**Ombyggnadsats CAV-filter**  
Rebuilding kit for CAV filter

Sats med detaljer för att bygga om CAV-filter med plåtkopp till glaskopp /  
Kit containing details to rebuild CAV-filter from steel cup to glass cup.

Art. nr/Part no	Ersätter/Replaces
17002	N/A



**Avtappningsplugg för Cav filter**  
Drain plug for Cav fuel filter

Packning ingår / gasket included

Art. nr/Part no	Ersätter/Replaces	Info
17648	862293, 826648	Passar/Fits 17108 & 17109



**1/2" x 20 UNF gänga/thread**  
Passar/Fits 17108, 17109

Tätningssbricka ingår/Sealing washer is included  
Säljes parvis/Sold as a pair

Art. nr/Part no	Info
22141	Slanganslutning / hose connection 3/8" 10 mm



## CAV reservdelar & tillbehör CAV spareparts & accessories



### Slangnippelsats/Hosetailkit

2 niplar och 2 packningar ingår / 2 connectors and 2 gaskets included

Gänga/thread: M14 x 1,5

Art. nr/Part no	Info
17090	Slanganslutning / hose connection 8 mm
17091	Slanganslutning / hose connection 10 mm



### Slangnippel / Hose tail

Gänga/thread: 1/4" NPT

Art. nr/Part no	Info
17025	Slanganslutning / hose connection 8 mm
17026	Slanganslutning / hose connection 10 mm



### Slangnippelsats till CAV-filter, rak / Hose tail kit CAV-filter, straight

Säljes parvis/Sold as a pair

Gänga/thread: 1/2"-20

Art. nr/Part no	Info
17081	Slanganslutning / hose connection 8 mm rak/straight



### Slangnippelsats för CAV-filter, 90° / Hose tail kit for CAV-filter, 90°

Säljes parvis/Sold as a pair

Gänga/thread: 1/2"-20

Art. nr/Part no	Info
17080	Slanganslutning / hose connection 8 mm, 90°



### 3/8" UNF invändig gänga/ 3/8" UNF internal thread

För 10 mm slang / for 10 mm hose

Art. nr/Part no	Info
17005	Slanganslutning / hose connection 10 mm



### Banjonippelsats/Banjo eye kit

#### Inehåller/Contains:

Banjonippel/Banjo eye, 2 pcs

Hålskruv/Banjo bolt, 2 pcs

Kopparbricka Copper washer, 4 pcs

Art. nr/Part no	Info
17084	Gänga / thread 1/2"-20, slang Ø / hose Ø 6 mm
17085	Gänga / thread 1/2"-20, slang Ø / hose Ø 8 mm
17087	Gänga / thread M14x1,5, slang Ø / hose Ø 6 mm
17088	Gänga / thread M14x1,5, slang Ø / hose Ø 8 mm
17089	Gänga / thread M14x1,5, slang Ø / hose Ø 10 mm



### Backventil/Non return valve

Art. nr/Part no	Info
17096	Slanganslutning / hose connection 10 mm
17098	Slanganslutning / hose connection 8 mm
17099	Slanganslutning / hose connection 6 mm



## Racor vattenseparerande bränslefilter Racor water separating fuel filter



### RACOR 500FG10

Vattenavskiljande bränslefilter för diesel med turbin. 1 st filterinsats 17101, 10 micron ingår.

Water separating fuel filter for diesel with turbine. 1 pcs filter insert 17101, 10 micron included.

**Höjd/Height:** 29.08 cm

**Bredd/Width:** 10.5 cm

**Djup/Depth:** 10.5 cm

**Vikt/Weight:** 1.8 kg

**Inlopp/Inlet - Utlopp/Outlet:** 3/4" - 16 UNF

**Max tryck/pressure:** 15 psi (1.03 bar)

**Max flöde/maximum flow:** 227 lph

Art. nr/Part no	Ersätter/Replaces	Info
17762	22677639, 877762	
17101	861014, 828897, 2010TM-OR	filter 10 micron
17760	3581760, 2010PM-OR	filter 30 micron



### Filter insats / insert RACOR & SEPAR filter

Fits 17762

Höjd/Height 80 mm

Packningar ingår/Rubber seals included

Art. nr/Part no	Ersätter/Replaces	Info
17101	861014, 828897, 2010TM-OR	10 micron
17760	3581760, 2010PM-OR	30 micron



### Filter insats / insert RACOR & SEPAR filter

Fits OEM 3825020 and 3825021

Höjd/Height 110 mm

Packningar ingår/Rubber seals included

Art. nr/Part no	Ersätter/Replaces	Info
17027	3838852, 3825027, 846734, 2040TM-OR	10 micron
17027-30	889419, 2040PM-OR	30 micron



Spare parts from Sweden



Spare parts from Sweden

## Luftfilter Air Filter inserts



### D2-50, D2-55, D2-60, D2-75, MD2020, MD2030, MD2040

D2-50F  
D2-55, D2-55A, D2-55B, D2-55C, D2-55D, D2-55E, D2-55F  
D2-60F  
D2-75A, D2-75B, D2-75C, D2-75F  
MD2020, MD2020B, MD2020-C, MD2020-D  
MD2030, MD2030B, MD2030-C, MD2030-D  
MD2040, MD2040B, MD2040-C, MD2040-D

Art. nr/Part no	Ersätter/Replaces
17509	3580509



### D3

D3-1101-B, D3-1101-C  
D3-130A-B, D3-130A-C, D3-1301-B, D3-1301-C  
D3-160A-B, D3-160A-C, D3-1601-B, D3-1601-C  
D3-190A-B, D3-190A-C, D3-1901-A, D3-1901-B, D3-1901-C

Art. nr/Part no	Ersätter/Replaces	Info
17277	21171277, 3889484	Förstärkt / Reinforced



### D3

D3-1101-D, D3-1101-E, D3-1101-F, D3-1101-G, D3-1101-H  
D3-140A-D, D3-140A-E, D3-140A-F, D3-140A-G, D3-140A-H, D3-1401-D,  
D3-1401-E, D3-1401-F, D3-1401-G, D3-1401-H  
D3-1501-D, D3-1501-E, D3-1501-F, D3-1501-G, D3-1501-H  
D3-170A-D, D3-170A-E, D3-170A-F, D3-170A-G, D3-170A-H, D3-1701-D,  
D3-1701-E, D3-1701-F, D3-1701-G, D3-1701-H  
D3-200A-D, D3-200A-E, D3-200A-F, D3-200A-G, D3-200A-H, D3-2001-D,  
D3-2001-E, D3-2001-F, D3-2001-G, D3-2001-H  
D3-220A-D, D3-220A-E, D3-220A-F, D3-220A-G, D3-220A-H, D3-2201-D,  
D3-2201-E, D3-2201-F, D3-2201-G, D3-2201-H

Art. nr/Part no	Ersätter/Replaces
17288	21379288



### D4, D6, D9, D11

D4-1451-G, D4-150A-G, D4-1751-G  
D4-1801-B, D4-1801-C, D4-1801-D, D4-1801-E, D4-1801-F  
D4-210A-A, D4-225A-B, D4-2101-A, D4-2101-B  
D4-2251-B, D4-225A-B, D4-225A-C, D4-225A-D, D4-2251-C, D4-2251-D,  
D4-225A-E, D4-2251-E, D4-225A-F, D4-2251-F  
D4-230A-G, D4-2301-G  
D4-260A-A, D4-260A-B, D4-260A-C, D4-260A-D, D4-260A-E, D4-260A-F,  
D4-260D-B, D4-260D-C, D4-260D-D, D4-260D-E, D4-260D-F, D4-260D-G,  
D4-2601-A, D4-2601-B, D4-2601-C, D4-2601-D, D4-2601-E, D4-2601-F,  
D4-260A-E, D4-260D-E, D4-2601-E, D4-260A-F, D4-260D-F, D4-2601-F  
D4-270A-G, D4-2701-G  
D4-300A-A, D4-300A-C, D4-300A-D, D4-300A-E, D4-300A-F, D4-300A-G,  
D4-300D-A, D4-300D-C, D4-300D-D, D4-300D-E, D4-300D-F, D4-3001-A,  
D4-3001-C, D4-3001-D, D4-3001-E, D4-3001-F, D4-3001-G  
D4-320A-G, D4-3201-G  
D6-280A-A, D6-280A-B, D6-280A-C, D6-280A-D, D6-280A-E, D6-2801-A,  
D6-2801-B, D6-2801-C, D6-2801-D, D6-2801-E  
D6-300A-F, D6-300A-G, D6-300D-F, D6-300D-G, D6-3001-F, D6-3001-G  
D6-3101-A, D6-310A-A, D6-310A-B, D6-310A-C, D6-310A-D, D6-310A-E,  
D6-310D-B, D6-310D-C, D6-310D-D, D6-3101-B, D6-3101-C, D6-3101-D,  
D6-3101-E, D6-310A-E, D6-310D-E, D6-3101-E  
D6-330A-B, D6-330A-C, D6-330A-D, D6-330A-E, D6-330A-F, D6-330D-B,  
D6-330D-C, D6-330D-D, D6-330D-E, D6-330D-F, D6-3301-B, D6-3301-C,  
D6-3301-D, D6-3301-E, D6-3301-F, D6-330A-E, D6-330D-E  
D6-340A-G, D6-340D-G, D6-3401-G,  
D6-350A-A, D6-350A-B  
D6-370A-B, D6-370A-C, D6-370A-D, D6-370A-E, D6-370A-F, D6-370D-A,  
D6-370D-B, D6-370D-C, D6-370D-D, D6-370D-E, D6-370D-F, D6-3701-A,  
D6-3701-B, D6-3701-C, D6-3701-D, D6-3701-E, D6-3701-F  
D6-380A-G, D6-380D-G, D6-3801-G, D6-400A-E, D6-400A-F, D6-400A-G  
D6-400A-E  
D6-435D-A, D6-435D-D, D6-435D-C, D6-435D-E, D6-435D-F, D6-4351-A,  
D6-4351-C, D6-4351-D, D6-4351-E, D6-4351-F  
D6-440A-G, D6-440D-G, D6-4401-G, D6-4401-WJ-G  
D6-480D-G, D6-4801-G, D6-4801-WJ-G  
D9A2A D9-425, D9-425, D9A2B, D9A2E D9-425, D9A2A D9-500, D9A2A  
D9-500 (R4), D9A2B D9-500 (R5), D9A2D D9-500 (R5)  
D9A2A D9-575, D9A2B D9-575, D9A2F D9-575, D9A2K D9-575  
D9A2A D9A-MH, D9A2A MH, D9A2B MH, D9A2C D9A-MH, D9A2A MP  
D9A2B MP  
D11A-A, D11A-B, D11A-C, D11A-D, D11A-E, D11A-C (IPS), D11A-D (IPS)

Art. nr/Part no	Ersätter/Replaces
17999	21702999, 3818541



## Luftfilter Air filter inserts




### 31, 41, 42

MD31A, TMD31A, TAMD31A, TMD31B, TAMD31B, TMD31D, TAMD31D, TMD31L-A, TAMD31L-A, TAMD31M, TAMD31M-A, TAMD31P, TAMD31P-A, AD31, AD31A, AQAD31A, AD31B, AD31D, AD31D-A, AD31L-A, AD31P-A, AD31XD  
TMD41A, TAMD41A, TMD41B, TAMD41B, TMD41D, TAMD41D, TAMD41H-A, TAMD41H-B, TAMD41P, TAMD41P-A, TMD41L-A, TAMD41L-A, TAMD41M-A, D41A, AD41A, AQD41A, AQAD41A, D41B, AD41B, AD41Bj, D41D, AD41D, D41L-A, AD41P-A, AD41L-A TAMD42B, TAMD42Wj-A

**Mått/measurements:** O.D 200 mm, I.D 93 mm, H 100 mm  
Passar/fits 31 SN-2203129177, 41 SN-2204157885, 42Wj SN-2204216357

Tidigare utförande/Earlier version

Art. nr/Part no	Ersätter/Replaces
17488	858488

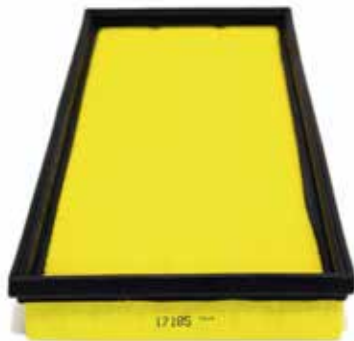

### 30, 40, KAD32, KAD42/43/44, KAD300, 61, 62, 71, 72, 73

MD30A, TMD30A, TAMD30A, AD30A, AQAD30A  
KAD32P, KAD32P-A  
MD40A, TMD40A, TAMD40A, TMD40B, TAMD40B, TMD40C, AQD40A, AQAD40A, AD40B, AQAD40B  
KAD42A, KAD42B, KAD42P-A, KAD42P-B, KAMD42A, KAMD42B, KAMD42P-A  
KAD43P-A, KAD43P-B, KAMD43P-A, KAMD43P-B  
KAD44P, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-B, KAMD44P-C  
KAD300-A, KAMD300-A  
TAMD61A, TAMD62A  
TAMD71A, TAMD71B  
TAMD72A, TAMD72P-A, TAMD72Wj-A  
TAMD73P-A, TAMD73Wj-A

Art. nr/Part no	Ersätter/Replaces
17185	876185, 463505



### 31, 41, D3

TMD31A, TMD31B, TMD31D, TMD31L-A, TAMD31A, TAMD31B, TAMD31D, TAMD31S, TAMD31P, TAMD31P-A, TAMD31M-A, TAMD31L-A, AD31L-A, AD31P-A, AD31A, AQAD31A  
TMD41A, TMD41B, TMD41D, TMD41L-A, TAMD41B, TAMD41D, TAMD41P, TAMD41P-A, TAMD41H-A, TAMD41H-B, TAMD41L-A, TAMD41M-A, D41L-A, AD41L-A, AD41P-A, D41A, AQAD41A, D41B, D41D  
D3-110I-A  
D3-130A-A, D3-130I-A  
D3-160A-A, D3-160I-A

**Mått/measurements:** O.D 155 mm, I.D 93 mm, H 97 mm  
Passar/fits 31 SN2203129178-, 41 SN2204157886-

Senare utförande/Later version

Art. nr/Part no	Ersätter/Replaces
17535	21646645, 3582358



**Luftfilter  
Air filter inserts**



**60, 70, 71, 74, 100, 102, 120, 121, 122, 162, 165**  
 TAMD60A, TAMD60B, TAMD60C  
 MD70C, TAMD70B, TMD70C, TAMD70C, THAMD70C, TAMD70D,  
 TAMD70E, AQD70B, AQD70BL, AQD70C, AQD70CL, AQD70D  
 TAMD71B  
 TAMD74A  
 MD100A, TMD100A, MD100B, MD100B-CC, TMD100C  
 TMD102A  
 MD120A, TAMD120A, TMD120B, TAMD120B  
 TMD121C, TAMD121D  
 TMD122A, TAMD122A, TAMD122A/C, TAMD122D  
 TAMD162A, TAMD162C, TAMD162C-B, TAMD162C-C  
 TAMD165C

Art. nr/Part no	Ersätter/Replaces
17280	842280



**63**  
 TAMD63L-A, TAMD63P-A

Art. nr/Part no	Ersätter/Replaces
17038	3825038



**73, 74, 75**  
 TAMD73P-A, TAMD73WJ-A  
 TAMD74A, TAMD74C-A, TAMD74C-B, TAMD74L-A, TAMD74L-B,  
 TAMD74P-A, TAMD74P-B  
 TAMD75P-A

Art. nr/Part no	Ersätter/Replaces
17952	3838952, 3827167



**D12, D13, D16**  
 D12C-A MP, D12D-A MH, D12D-A MP, D12D-B MH, D12D-B MP,  
 D12D-C MH, D12D-C MP, D12D-D MP, D12D-E MH, D12D-E MP,  
 D12D-F MP, D12D-G MH, D12D-G MP, D12D-H MP  
 D13B-A MP, D13B-B MP, D13B-C MP, D13B-D MP, D13B-E MH, D13B-E  
 MH (FE), D13B-G MP, D13B-H MP, D13B-J MP, D13B-K MP, D13B-L MP,  
 D13B-M MP, D13B-N MH, D13B-N MH (FE), D13C1-A MH, D13C1-A  
 MP, D13C2-A MH, D13C2-A MP, D13C2-B MP, D13C3-A MP, D13C4-A  
 MP, D13C5-A MP, D13C6-A MP  
 D16C-A MH, D16C-B MH, D16C-C MH, D16C-D MH

Art. nr/Part no	Ersätter/Replaces
17919	21196919, 3885441



## Vevhusfilter Crankcase filter



30, 31, 40, 41, KAD32, 60, 63, 70, 71, 72, 73, 74, 75, 100, 103, 120, 121, 163  
AD30A, AQAD30A, MD30A, TAMD30A, TMD30A

AD31A, AD31B, AQAD31A, MD31A, TAMD31A, TAMD31B, TAMD31L-A, TAMD31M-A, TMD31A, TMD31B

KAD32P-A

AD40B, AQAD40A, AQAD40B, AQD40A, MD40A, TAMD40A, TAMD40B, TMD40A, TMD40B, TMD40C

AD41A, AD41B, AQAD41A, D41A, D41B, TAMD41A, TAMD41B, TAMD41P-A, TMD41A, TMD41B

TAMD60B, TAMD60C  
TAMD63L-A, TAMD63P-A

MD70C, AQD70D, TAMD70D, TAMD70E

TAMD71B  
TAMD72P-A, TAMD72WJ-A  
TAMD73P-A, TAMD73WJ-A  
TAMD74A-A, TAMD74A-B, TAMD74C-A, TAMD74C-B, TAMD74L-A, TAMD74L-B, TAMD74P-A, TAMD74P-B  
TAMD75P-A

TMD100A, TMD100C  
TAMD103A-A, TAMD103A-A AUX  
MD120A, TMD120A, TAMD120A, TMD120B, TAMD120B  
TAMD121C, TAMD121D  
TAMD122P-A, TAMD122P-B, TAMD122P-C, TAMD122C, TAMD122D  
TAMD163P-A, TAMD165P-A

DI2C-A MP, DI2D-A MP, DI2D-B MP, DI2D-A MH, DI2D-B MH

Art. nr/Part no	Ersätter/Replaces
14069	876069, 875850



D3

D3-110I-D, D3-110I-E, D3-110I-F, D3-110I-G, D3-110I-H

D3-140A-D, D3-140A-E, D3-140A-F, D3-140A-G, D3-140A-H, D3-140I-D, D3-140I-E, D3-140I-F, D3-140I-G, D3-140I-H

D3-150I-D, D3-150I-E, D3-150I-F, D3-150I-G, D3-150I-H

D3-170A-D, D3-170A-E, D3-170A-F, D3-170A-G, D3-170A-H, D3-170I-D, D3-170I-E, D3-170I-F, D3-170I-G, D3-170I-H

D3-200A-D, D3-200A-E, D3-200A-F, D3-200A-G, D3-200A-H, D3-200I-D, D3-200I-E, D3-200I-F, D3-200I-G, D3-200I-H

D3-220A-D, D3-220A-E, D3-220A-F, D3-220A-G, D3-200A-H, D3-200I-D, D3-200I-E, D3-200I-F, D3-200I-G, D3-200I-H

Art. nr/Part no	Ersätter/Replaces
17879	21368879



## Vevhusfilter Crankcase filter



### D4, D6, D9

D4-145I-G, D4-145A-G, D4-150A-G, D4-175I-G  
 D4-180I-B, D4-180I-C, D4-180I-D, D4-180I-E, D4-180I-F  
 D4-210A-A, D4-210A-B, D4-210I-A, D4-210I-B  
 D4-225A-B, D4-225A-C, D4-225A-D, D4-225A-E, D4-225A-F, D4-225I-B,  
 D4-225I-C, D4-225I-D, D4-225I-E, D4-225I-F, D4-225A-E, D4-225I-E  
 D4-230A-G, D4-230I-G  
 D4-260A-A, D4-260A-B, D4-260A-C, D4-260A-D, D4-260A-E,  
 D4-260A-F, D4-260D-B, D4-260D-C, D4-260D-D, D4-260D-E,  
 D4-260D-F  
 D4-260I-A, D4-260I-B, D4-260I-C, D4-260I-D, D4-260I-E, D4-260I-F  
 D4-270A-G, D4-270I-G  
 D4-300A-A, D4-300A-C, D4-300A-D, D4-300A-E, D4-300A-F,  
 D4-300A-G, D4-300D-A, D4-300D-C, D4-300D-D, D4-300D-E,  
 D4-300D-F, D4-300I-A, D4-300I-C, D4-300I-D, D4-300I-E, D4-300I-F,  
 D4-300I-G  
 D4-320A-G, D4-320I-G

D6-280A-A, D6-280A-B, D6-280A-C, D6-280A-D, D6-280A-E,  
 D6-280A-E, D6-280I-A, D6-280I-B, D6-280I-C, D6-280I-D, D6-280I-E  
 D6-300A-F, D6-300A-G, D6-300D-F, D6-300D-G, D6-300I-F, D6-300I-G  
 D6-310A-A, D6-310A-B, D6-310A-C, D6-310A-D, D6-310A-E,  
 D6-310D-B, D6-310D-C, D6-310D-D, D6-310D-E, D6-310I-B, D6-310I-C,  
 D6-310I-D, D6-310I-E, D6-310A-E  
 D6-330A-B, D6-330A-C, D6-330A-D, D6-330A-E, D6-330A-F,  
 D6-330D-B, D6-330D-C, D6-330D-D, D6-330D-E, D6-330D-F, D6-330I-B,  
 D6-330I-C, D6-330I-D, D6-330I-E, D6-330I-F  
 D6-340A-G, D6-340D-G, D6-340I-G,  
 D6-350A-A, D6-350A-B  
 D6-370A-B, D6-370A-C, D6-370A-D, D6-370A-E, D6-370A-F,  
 D6-370D-A, D6-370D-B, D6-370D-C, D6-370D-D, D6-370D-E,  
 D6-370D-F, D6-370I-A, D6-370I-B, D6-370I-C, D6-370I-D, D6-370I-E,  
 D6-370I-F, D6-370A-E, D6-370D-E  
 D6-380A-G, D6-380D-G, D6-380I-G  
 D6-400A-E, D6-400A-F, D6-400A-G  
 D6-435D-A, D6-435D-D, D6-435D-C, D6-435D-E, D6-435D-F  
 D6-435I-A, D6-435I-C, D6-435I-D, D6-435I-E, D6-435I-F  
 D6-440A-G, D6-440D-G, D6-440I-G, D6-440I-VJ-G  
 D6-480D-G, D6-480I-VJ-G  
 D9A2A, D9-425, D9-500, D9-575, D9-MH, D9-MG, D9A2B, D9-425,  
 D9-500, D9-575, D9-MH, D9A2C, D9-425, D9A2D, D9-500, D9A2E,  
 D9-425

Art. nr/Part no	Ersätter/Replaces
17145	3584145



Spare parts from Sweden

## Termostatsatser Thermostat kits



### B18, B20, B21, B30

AQ60, AQ90, AQ95, AQ95A, AQ110, AQ120B, AQ125A  
BB30, BB100, MB18  
AQ105A  
AQ115A, AQ115B, BB115A, BB115B, BB115C  
AQ130C, AQ130D, MB20A, MB20B, MB20C  
AQ140A, BB140A  
AQ165A, BB165A  
AQ170A, AQ170B, AQ170C, BB170A, BB170B, BB170C

Passar sjöväntenkyllda motorer / Fits seawater cooled engines

Art. nr/Part no	Ersätter/Replaces	Temp.
15791	875791, 831040	55°



### B20

AQ130A, AQ130B, AQ130C

För sjöväntenkyllda motorer / Fits seawater cooled engines.

Art. nr/Part no	Ersätter/Replaces	Temp.
15097	876097, 876080, 875781	60°



### B21, MB10

AQ140A  
MB10A

Art. nr/Part no	Ersätter/Replaces	Temp.
15796	875796, 833366, 829812	60°



### B21, B23, B25

AQ120B, AQ125A, AQ140A  
BB140A  
230A, 230B  
AQ125B  
AQ131A, AQ130B, AQ130C, AQ130D  
AQ145A, AQ145B, BB145A  
250A, 250B, 251A  
AQ151A, AQ151B, AQ151C  
AQ171A, AQ171C

Art. nr/Part no	Ersätter/Replaces	Temp.
15580	875580	82°



### V6, V8

430A, 430B, 431A, 431B, 432A, 434A  
AQ175A, AQ205A  
500A, 501A, 501B, 570A, 571A, 572A  
740A, 740B  
AQ190A (Ford), AQ240A (Ford)  
AQ200A, AQ200C, AQ200D  
AQ200F  
AQ211A  
AQ225A, AQ225B, AQ225C, AQ225D, AQ225E, AQ225F BB225A,  
BB225AV, BB225B, BB225C  
AQ231A, AQ231B, BB231A  
AQ255A, AQ255B  
AQ260A, AQ260B, BB260A, BB260AV, BB260B, BB260C, BB261A  
AQ271A, AQ271B, AQ271C, AQ271D  
AQ280A, AQ290A  
AQ311A, AQ311B

Art. nr/Part no	Ersätter/Replaces	Temp.
15305	876305, 875794, 424299, 835177	62°



## Termostatsatser Thermostat kits



**4.3, 5.0, 5.7, 5.8, 7.4, 8.1**

4.3GIJBYA, 4.3GIJBYA, 4.3GIJWTR, 4.3GIJWTR, 4.3GIPBYCCE, 4.3GIPBYCCE, 4.3GiPEFS, 4.3GIPLKDCE, 4.3GIPLKECE, 4.3GIPNCACE, 4.3GIPNCBCE, 4.3GIPNCMCE, 4.3GIPNCSCE, 4.3GIPWTRCE, 4.3GL-A, 4.3GLMMDA, 4.3GLPBYC, 4.3GLPEFS, 4.3GLPLKD, 4.3GLPLKE, 4.3GLPMDA, 4.3GLPNCA, 4.3GLPNCB, 4.3GLPNCS, 4.3GLPWTR, 4.3GSJBYA, 4.3GSJLKD, 4.3GSJNCC, 4.3GSJNCS, 4.3GSJWTR, 4.3GSPBYC, 4.3GSPLKD, 4.3GSPLKE, 4.3GSPMDA, 4.3GSPNCA, 4.3GSPNCB, 4.3GSPNCM, 4.3GSPNCS, 4.3GSPWTR, 4.3GXi-A, 4.3GXi-B, 4.3GXi-BF, 4.3OSi-B

5.0FIPHUECE, 5.0FIPHURCE, 5.0FiPMDA, 5.0FiPMDM, 5.0FIPNCBCE, 5.0FIPNCSCE, 5.0FLPHUE, 5.0FLPHUE, 5.0FLPHUR, 5.0FLPMDA, 5.0FLPNCB, 5.0FLPNCS, 5.0GIPBYCCE, 5.0GiPEFS, 5.0GiPWTR, 5.0GL-A, 5.0GL-B, 5.0GLPBYC, 5.0GLPEFS, 5.0GLPWTR, 5.0GXi-A, 5.0GXi-B, 5.0GXi-BF, 5.0OSi-B, 5.0OSi-BF

5.7Gi-A, 5.7Gi-B, 5.7Gi-BF, 5.7Giil-A, 5.7Giil-B, 5.7GIIMDA, 5.7GIINCCCE, 5.7GiPHUS, 5.7GIPLKDCE, 5.7GIPLKECE, 5.7GIPMDA, 5.7GIPMDACE, 5.7GIPNCACE, 5.7GIPNCBCE, 5.7GIPNCMCE, 5.7GIPNCSCE, 5.7GL-A, 5.7GL-B, 5.7GLIMDA, 5.7GLIPLKDCE, 5.7GLPLKA, 5.7GLPLKD, 5.7GLPLKE, 5.7GLPLKR, 5.7GLPMDA, 5.7GLPNCS, 5.7GSICPLKD, 5.7Gsi-A, 5.7GsiPBCE, 5.7GsiPEFS, 5.7GsiPLKE, 5.7GsiPWTR, 5.7GSPBYC, 5.7GSPPEFS, 5.7GSPLKD, 5.7GSPLKE, 5.7GSPWTR, 5.7GXi-A, 5.7GXi-B, 5.7GXi-C, 5.7GXi-CF, 5.7GXil-A, 5.7GXil-B, 5.7GXil-C, 5.7OSi-A, 5.7OSi-AF, 5.7OSi-A

5.8FIIHUBCE, 5.8FIIHUECE, 5.8FIPHUECE, 5.8FIPHURCE, 5.8FiPMDA, 5.8FiPMDM, 5.8FIPNCACE, 5.8FIPNCBCE, 5.8FIPNCMCE, 5.8FIPNCSCE, 5.8FLIHUB, 5.8FLIHUE, 5.8FLINCC, 5.8FLINCS, 5.8FLPHUE, 5.8FLPHUR, 5.8FLPMDA, 5.8FLPNCA, 5.8FLPNCB, 5.8FLPNCM, 5.8FLPNCS, 5.8FSI-INCC, 5.8FSIINCS, 5.8FSIPHUBCE, 5.8FSIPHURCE, 5.8FSIPNCACE, 5.8FSIPNCD, 5.8FSIPNCD, 5.8FSIPNCS

7.4GLIMDM, 7.4GLPMDA, 7.4GLPMDM

8.1Gi-A, 8.1Gi-B, 8.1Gi-C, 8.1GiCE-J, 8.1GiCE-M, 8.1GiCE-P, 8.1GiCE-Q, 8.1GiC-J, 8.1GiC-Q, 8.1Gi-D, 8.1Gi-E, 8.1GiE-J, 8.1GiE-K, 8.1GiE-M, 8.1GiE-P, 8.1Gi-F, 8.1Gi-G, 8.1Gi-H, 8.1Giil-A, 8.1Giil-B, 8.1Giil-C, 8.1Giil-D, 8.1Giil-E, 8.1Giil-F, 8.1Giil-G, 8.1Giil-H, 8.1Giil-I, 8.1Giil-J, 8.1Gsi-A, 8.1Gsiil-A8, 1GXi-A, 8.1GXi-B, 8.1GXi-C, 8.1GXi-D, 8.1GXi-E, 8.1GXiE-J, 8.1GXiE-K, 8.1GXiE-M, 8.1GXiE-P, 8.1GXi-G, 8.1GXil-A, 8.1GXil-B, 8.1GXil-C, 8.1GXil-D, 8.1GXil-E, 8.1GXil-F, 8.1GXil-G, 8.1GXil-I, 8.1GXil-J, 8.1OSi-A, 8.1OSi-B, 8.1OSi-C, 8.1OSi-D, 8.1OSiE-J, 8.1OSi-J, 8.2GLPMDA, 8.2GLPMDM

Art. nr/Part no	Ersätter/Replaces	Temp.
15961	3856961	71°



**V6\*,V8\***

430, 430A, 430B, 431A, 431B, 432A, 434A

4.3Gi-200-R, 4.3GIJBYA, 4.3GIJWTR, 4.3GIPBYCCE, 4.3GIPEFS, 4.3GIPLKDCE, 4.3GIPLKECE, 4.3GIPNCACE, 4.3GIPNCMCE, 4.3GIPNCSCE, 4.3GIPWTRCE

4.3GL-A, 4.3GL-B, 4.3GL-C, 4.3GL-D, 4.3GL-E, 4.3GL-EF, 4.3GL-G, 4.3GL-G, 4.3GL-GF, 4.3GL-J, 4.3GL-JF, 4.3GL-P

4.3GLMMDA, 4.3GLPBYC, 4.3GLPEFS, 4.3GLPLKD, 4.3GLPLKE, 4.3GLPMDA, 4.3GLPNCA, 4.3GLPNCB, 4.3GLPNCS, 4.3GLPWTR

4.3GSJBYA, 4.3GSJLKD, 4.3GSJNCC, 4.3GSJNCS, 4.3GSJWTR, 4.3GSPBYC, 4.3GSPLKD, 4.3GSPLKE, 4.3GSPMDA, 4.3GSPNCA, 4.3GSPNCB, 4.3GSPNCM, 4.3GSPNCS, 4.3GSPWTR

4.3GXi-225-R, 4.3GXi-A, 4.3GXi-B, 4.3GXi-BF, 4.3GXi-C, 4.3GXi-CF, 4.3GXi-D, 4.3GXi-DF, 4.3GXi-E, 4.3GXi-EF, 4.3GXi-F, 4.3GXi-G, 4.3GXi-GF, 4.3GXi-I, 4.3GXi-JF, 4.3GXi-P, 4.3GXi-Q, 4.3GXiE-225-R, 4.3GXiE-M, 4.3GXiE-P, 4.3GXiE-Q

4.3OSi-BF, 4.3OSi-CF, 4.3OSi-DF, 4.3OSi-E, 4.3OSi-EF, 4.3OSi-F, 4.3OSi-FF, 4.3OSi-G, 4.3OSi-GF, 4.3OSi-I, 4.3OSi-JF

V6-200-A, V6-225-A, V6-225-E-A

500B, 501B, 570, 570A, 572A

5.0FIPHUECE, 5.0FIPHURCE, 5.0FiPMDA, 5.0FiPMDM, 5.0FIPNCBCE, 5.0FIPNCSCE

5.0FLPHUE, 5.0FLPHUR, 5.0FLPMDA, 5.0FLPNCB, 5.0FLPNCS

5.0GiC-J, 5.0GIPBYCCE, 5.0GIPEFS, 5.0GIPWTR

5.0GL-A, 5.0GL-B, 5.0GL-C, 5.0GL-D, 5.0GL-E, 5.0GL-F, 5.0GL-FF, 5.0GL-H, 5.0GL-HF, 5.0GL-J, 5.0GL-JF, 5.0GLPBYC, 5.0GLPEFS, 5.0GLPWTR

5.0GXi-270-R, 5.0GXi-A, 5.0GXi-B, 5.0GXi-BF, 5.0GXi-C, 5.0GXi-CF, 5.0GXi-D, 5.0GXi-DF, 5.0GXi-E, 5.0GXi-EF, 5.0GXi-F, 5.0GXi-FF, 5.0GXi-G, 5.0GXi-GF, 5.0GXi-I, 5.0GXi-JF, 5.0GXi-N, 5.0GXi-P, 5.0GXiC-J, 5.0GXiC-JF, 5.0GXiE-J, 5.0GXiE-JF, 5.0GXiE-M, 5.0GXiE-MF, 5.0GXiE-270-R, 5.0GXiE-J, 5.0GXiE-JF, 5.0GXiE-K, 5.0GXiE-KF, 5.0GXiE-M, 5.0GXiE-MF, 5.0GXiE-N, 5.0GXiE-P

5.0OSi-B, 5.0OSi-BF, 5.0OSi-C, 5.0OSi-CF, 5.0OSi-D, 5.0OSi-DF, 5.0OSi-E, 5.0OSi-EF, 5.0OSi-F, 5.0OSi-FF, 5.0OSi-G, 5.0OSi-GF, 5.0OSi-I, 5.0OSi-JF, 5.0OSiE-J, 5.0OSiE-JF

5.7Gi-300-N, 5.7Gi-300-P, 5.7Gi-300-R, 5.7Gi-A, 5.7Gi-B, 5.7Gi-BF, 5.7Gi-C, 5.7Gi-CF, 5.7Gi-D, 5.7Gi-DF, 5.7Gi-E, 5.7Gi-EF, 5.7Gi-F, 5.7Gi-FF, 5.7Gi-G, 5.7Gi-GF, 5.7GiC-300-J, 5.7GiC-300-JF, 5.7GiCE-300-J, 5.7GiCE-300-JF, 5.7GiCE-300-M, 5.7GiCE-300-MF, 5.7GiE-300-J, 5.7GiE-300-JF, 5.7GiE-300-K, 5.7GiE-300-KF, 5.7GiE-300-M, 5.7GiE-300-N, 5.7GiE-300-P, 5.7GiE-300-R



## Termostatsatser Thermostat kits

5.7GiL-A, 5.7GiL-B, 5.7GiL-C, 5.7GiL-D, 5.7GiL-E, 5.7GiL-F, 5.7GiL-G,  
5.7GIIMDA, 5.7GIINCCCE, 5.7GIPHUS, 5.7GIPLKDCE, 5.7GIPLKECE,  
5.7GIPMDA, 5.7GIPMDACE, 5.7GIPNCACE, 5.7GIPNCBCE, 5.7GIPNCMCE,  
5.7GIPNCSCCE, 5.7GL-A, 5.7GL-B, 5.7GL-C, 5.7GL-D, 5.7GL-E, 5.7GLIMDA,  
5.7GLIPLKDCE, 5.7GLPLKA, 5.7GLPLKD, 5.7GLPLKE, 5.7GLPLKR,  
5.7GLPMDA, 5.7GLPNCS  
5.7GSICPLKD, 5.7GSIL-A, 5.7GSIPBYCCE, 5.7GSIPEFS, 5.7GSIPLKE,  
5.7GSPWTR, 5.7GSPBYC, 5.7GSPEFS, 5.7GSPLKD, 5.7GSPLKE, 5.7GSPWTR  
5.7GX-i-320-R, 5.7GX-i-A, 5.7GX-i-B, 5.7GX-i-C, 5.7GX-i-CF, 5.7GX-i-D, 5.7GX-i-  
DF, 5.7GX-i-E, 5.7GX-i-EF, 5.7GX-i-F, 5.7GX-i-FF, 5.7GX-i-G, 5.7GX-i-GF, 5.7GX-i-H,  
5.7GX-i-HF, 5.7GX-i-J, 5.7GX-i-JF, 5.7GX-i-N, 5.7GX-i-P, 5.7GX-i-CJ, 5.7GX-i-CJF,  
5.7GX-iCE-J, 5.7GX-iCE-JF, 5.7GX-iCE-M, 5.7GX-iE-320-R, 5.7GX-iE-J, 5.7GX-iE-  
JF, 5.7GX-iE-K, 5.7GX-iE-KF, 5.7GX-iE-M, 5.7GX-iE-MF, 5.7GX-iE-N, 5.7GX-iE-P,  
5.7GX-iL-A, 5.7GX-iL-B, 5.7GX-iL-C, 5.7GX-iL-D, 5.7GX-iL-E, 5.7GX-iL-F, 5.7GX-iL-  
G, 5.7GX-iL-H  
5.7OSi-300-JF, 5.7OSi-A, 5.7OSi-AF, 5.7OSi-B, 5.7OSi-BF, 5.7OSi-C, 5.7OSi-CF,  
5.7OSi-D, 5.7OSi-DF, 5.7OSi-E, 5.7OSi-EF, 5.7OSi-G, 5.7OSi-GF, 5.7OSiE-300-J,  
5.7OSiE-300-JF, 5.7OSXi-A, 5.7OSXi-AF, 5.7OSXi-B, 5.7OSXi-BF, 5.7OSXi-C,  
5.7OSXi-CF, 5.7OSXi-DF, 5.7OSXi-E, 5.7OSXi-EF, 5.7OSXi-G, 5.7OSXi-GF,  
5.7OSXi-J, 5.7OSXi-JF, 5.7OSXiE-J, 5.7OSXiE-JF  
5.8FIIHUBCE, 5.8FIIHUECE, 5.8FIPHUECE, 5.8FIPHURCE, 5.8FIPMDA,  
5.8FIPMDM, 5.8FIPNCACE, 5.8FIPNCBCE, 5.8FIPNCMCE, 5.8FIPNCSCCE,  
5.8FLIHUB, 5.8FLIHUE, 5.8FLINCC, 5.8FLINCC, 5.8FLPHUE, 5.8FLPHUR,  
5.8FLPMDA, 5.8FLPNCA, 5.8FLPNCB, 5.8FLPNCM, 5.8FLPNCS, 5.8FSIINCC,  
5.8FSIINCS, 5.8FSIPHUBCE, 5.8FSIPHURCE, 5.8FSIPNCACE, 5.8FSIPNCD,  
5.8FSIPNCS  
V8-270-A, V8-270-B, V8-270-E-A, V8-270-E-B  
V8-300-A, V8-300-B, V8-300-E-A, V8-300-E-B  
V8-320-B, V8-320-E-A, V8-320-E-B  
740B, BB740A  
7.4GIINCCCE, 7.4GIINCSCE, 7.4GIPBYCCE, 7.4GIPEFS, 7.4GIPLKDCE,  
7.4GIPLKECE, 7.4GIPNCACE, 7.4GIPNCBCE, 7.4GIPNCBCE, 7.4GIPNCMCE,  
7.4GIPNCSCCE, 7.4GIPWTR  
7.4GLIMDM, 7.4GLINCC, 7.4GLINCS, 7.4GLPLKD, 7.4GLPLKE, 7.4GLPMDA,  
7.4GLPMDM, 7.4GLPNCA, 7.4GLPNCB, 7.4GLPNCM, 7.4GLPNCS  
7.4GSIINCC, 7.4GSIINCS, 7.4GSIPEFS, 7.4GSIPEFS, 7.4GSIPEFS,  
7.4GSIPEFS, 7.4GSIPEFS  
8.1Gi-A, 8.1Gi-B, 8.1Gi-BF, 8.1Gi-C, 8.1Gi-CF, 8.1Gi-D, 8.1Gi-DF, 8.1Gi-E,  
8.1Gi-EF, 8.1Gi-F, 8.1Gi-FF, 8.1Gi-G, 8.1Gi-GF, 8.1Gi-H, 8.1Gi-HF, 8.1Gi-J, 8.1Gi-JF,  
8.1GiC-J, 8.1GiC-JF, 8.1GiC-Q, 8.1GiC-Q, 8.1GiCE-J, 8.1GiCE-JF, 8.1GiCE-M,  
8.1GiCE-P, 8.1GiCE-Q, 8.1GiE-J, 8.1GiE-JF, 8.1GiE-K, 8.1GiE-KF, 8.1GiE-M,  
8.1GiE-MF, 8.1GiE-P, 8.1GiL-A, 8.1GiL-B, 8.1GiL-C, 8.1GiL-D, 8.1GiL-E, 8.1GiL-F,  
8.1GiL-G, 8.1GiL-H, 8.1GiL-A  
8.1GSi-A, 8.1GSi-A, 8.1GX-i-A, 8.1GX-i-AF, 8.1GX-i-B, 8.1GX-i-BF, 8.1GX-i-C,  
8.1GX-i-CF, 8.1GX-i-D, 8.1GX-i-DF, 8.1GX-i-E, 8.1GX-i-EF, 8.1GX-i-F, 8.1GX-i-FF,  
8.1GX-i-G, 8.1GX-i-GF, 8.1GX-i-J, 8.1GX-i-JF, 8.1GX-iE-J, 8.1GX-iE-JF, 8.1GX-iE-  
K, 8.1GX-iE-KF, 8.1GX-iE-M, 8.1GX-iE-P, 8.1GX-iL-A, 8.1GX-iL-B, 8.1GX-iL-C,  
8.1GX-iL-D, 8.1GX-iL-E, 8.1GX-iL-F, 8.1GX-iL-G, 8.1OSi-A, 8.1OSi-AF, 8.1OSi-B,  
8.1OSi-BF, 8.1OSi-C, 8.1OSi-CF, 8.1OSi-D, 8.1OSi-DF, 8.1OSi-J, 8.1OSi-JF,  
8.1OSiE-J, 8.1OSiE-JF  
8.1IPSCE-JF, 8.1IPSCE-MF, 8.1IPSCE-P, 8.1IPSCE-Q, 8.1IPSE-JF, 8.1IPSE-KF  
8.2GLIMDM, 8.2GLPMDA, 8.2GLPMDM, 8.2GSIPBYCCE, 8.2GSIPEFS,  
8.2GSIPEFS, 8.2GSIPEFS  
DPX375-A, DPX375-B, DPX375-BF, DPX375-CF  
DPX385XEF, DPX385XLKE  
DPX415XBYDCE, DPX415XEF, DPX415XLKE  
DPX420-A, DPX420-B, DPX420-BF, DPX420-CF, DPX420-DF

\*Med Volvo-Penta sötvattenkyllning/With Volvo-Penta fresh-water cooling

Art. nr/Part no	Ersätter/Replaces	Temp.
15788	3831426, 875788, 824200, 1544389	71°



**MD1, MD2, MD3, MD6, MD7 MD11, MD17**

För motorer med Martec eller Sen-dure sötvattenkyllning  
For engines with Martec or Sen-dure fresh-water cooling

O-ringar för kylkanal ingår/O-rings for cooling channel included

Art. nr/Part no	Ersätter/Replaces	Temp.
15780	875780	75°



**MD1B, MD2B, MD3B, MD11, MD17**

MD2B, AQD2B  
MD3B  
MD11C, MD11D  
MD17C, MD17D

För sjövattnenkylda motorer / For seawater cooled engines

Art. nr/Part no	Ersätter/Replaces	Temp.
15097	876080, 876097, 875790, 875781, 833366, 824912	60°



Spare parts from Sweden

## Termostatsatser Thermostat kits



**MD5**  
MD5A, MD5B, MD5C

Passar sjövätkyllda motorer / Fits seawater cooled engines

Art. nr/Part no	Ersätter/Replaces	Temp.
15783	875783	60°



**MD11, MD17**  
MD11C, MD11D  
MD17C, MD17D

Passar motorer med Volvo Penta original sötvattenkyllning / Fits engines with Volvo Penta original freshwater cooling

Art. nr/Part no	Ersätter/Replaces	Temp.
15784	877349, 875784, 838501	74°



**MD6, MD7**  
MD6A, MD6B  
MD7A, MD7B

Passar sjövätkyllda motorer / Fits seawater cooled engines

Art. nr/Part no	Ersätter/Replaces	Temp.
15796	875796, 833366, 829812	60°



**MD19, MD21, MD27, MD29, MD32**  
MD19, AQD19  
MD21A, MD21B, AQD21A, AQD21B  
MD27, AQD27  
MD29, MD29A, AQD29, AQD29A  
MD32A, AQD32A

Art. nr/Part no	Ersätter/Replaces	Temp.
15785	875785, 833826	71°



## Termostatsatser Thermostat kits



### 2001, 2002, 2003

2001, 2002, 2003  
2001, 2001AG, 2001B, 2001BG, 2001D, 2001R  
2002, 2002AG, 2002B, 2002BG, 2002D  
2003, 2003 SOLAS, 2003AG, 2003B, 2003B SOLAS, 2003BG, 2003D,  
2003R, 2003R SOLAS

Passar sjövätkyllda motorer / Fits seawater cooled engines

Art. nr/Part no	Ersätter/Replaces	Temp.
15779	877355, 875779	60°



### MD2030, MD2040, D2-55

MD2030, MD2030B, MD2030-C, MD2030-D  
MD2040, MD2040B, MD2040-C, MD2040-D  
D2-55, D2-55B

Art. nr/Part no	Ersätter/Replaces	Temp.
15263	3580365	82°



### 2002, 2003, 2003T

2002, 2002AG, 2002B, 2002BG, 2002D  
2003, 2003 SOLAS, 2003B, 2003B SOLAS, 2003D, 2003R, 2003R SOLAS  
2003T, 2003TB, 2003TB SOLAS, 2003TR

För motorer med Volvo Penta original färskvattenkyllning (med remdriven pump) / Fits engines with Volvo Penta original fresh water cooling (with belt driven pump)

Art. nr/Part no	Ersätter/Replaces	Temp.
15909	875795	75°



### MD22, TMD22, TAMD22

MD22, MD22A, MD22L, MD22P  
TMD22A, TMD22B, TMD22P-B, TMD22P-C  
TAMD22P-B

Art. nr/Part no	Ersätter/Replaces	Temp.
14419	6210419	82°



## Termostatsatser Thermostat kits



### 30, 40, 60, 70, 100, 102, 103, 120, 121, 122

MD30A, TMD30A, TAMD30A, AD30A, AQAD30A  
MD40A, TMD40A, TAMD40A, TMD40B, TAMD40B, TMD40C, AQD40A,  
AQAD40A, AD40B, AQAD40B  
TAMD60A, TAMD60B, TAMD60C  
MD70B, MD70C, TMD70B, TAMD70B, THAMD70B, TMD70C, TAMD70C,  
THAMD70C, TAMD70D, TAMD70E, AQD70B, AQD70BL, AQD70C,  
AQD70CL, AQD70D  
MD100A, MD100B, MD100B-CC, TMD100A, TMD100C  
TMD102A, TAMD102A, TAMD102D  
TAMD103A  
MD120A, TMD120A, TAMD120A, TAMD120B  
TMD121C, TAMD121B, TAMD121D  
TMD122A, TAMD122A, TAMD122P-A, TAMD122P-B, TAMD122P-C

2 st termostater åtgår till 30, 40, 70. Antingen 2 st 15787 eller 1 st 15787 och 1 st 15788 / 2 pcs thermostats required for 30, 40, 70. Either 2 pcs 15787 or 1 pc 15787 and 1 pc 15788

3 st termostater åtgår till 100, 102, 103, 120, 121, 122. Antingen 3 st 15787 eller 2 st 15787 och 1 st 15788 / 3 pcs thermostats required for 100, 102, 103, 120, 121, 122. Either 3 pc 15787 or 2 pc 15787 and 1 pc 15788

Art. nr/Part no	Ersätter/Replaces	Temp.
15787	3831425, 875787, 824200, 1544297	76°

### 40, 60, 70, 100, 102, 120, 121, 122

MD40A, TMD40A, TAMD40A, TMD40B, TAMD40B, TMD40C, AQD40A,  
AQAD40A, AD40B, AQAD40B  
TAMD60A, TAMD60B, TAMD60C  
MD70B, TMD70B, TAMD70B, THAMD70B, MD70C, TMD70C, TAMD70C,  
THAMD70C, TAMD70D, AQD70B, AQD70BL, AQD70C, AQD70CL, AQD70D  
MD100A, TMD100A, MD100B, MD100B-CC, TMD100C  
TMD102A  
MD120A, TMD120A, TAMD120A, TAMD120B  
TMD121C, TAMD121D  
TMD122A, TAMD122A, TAMD122A/C, TAMD122P-A, TAMD122P-B,  
TAMD122P-C

2 st termostater åtgår till 30, 40, 70. Antingen 2 st 15787 eller 1 st 15787 och 1 st 15788 / 2 pcs thermostats required for 30, 40, 70. Either 2 pcs 15787 or 1 pc 15787 and 1 pc 15788

3 st termostater åtgår till 100, 102, 103, 120, 121, 122. Antingen 3 st 15787 eller 2 st 15787 och 1 st 15788 / 3 pcs thermostats required for 100, 102, 103, 120, 121, 122. Either 3 pc 15787 or 2 pc 15787 and 1 pc 15788

Art. nr/Part no	Ersätter/Replaces	Temp.
15788	3831426, 875788, 824200, 1544389	70°



## Termostatsatser Thermostat kits



**31, 41, KAD32, KAD42, KAD43, KAD44, KAD300, 100, 120, 102, 103, 121, 122**  
 MD31A, TMD31A, TAMD31A, TMD31B, TAMD31B, TMD31D, TAMD31D, TAMD31S, TMD31L-A, TAMD31L-A, TAMD31M-A, TAMD31P-A, AD31, AD31B, AD31D, AD31D-A, AD31L-A, AD31P-A, AD31XD  
 TMD41A, TAMD41A, TMD41B, TAMD41B, TMD41D, TAMD41D, TMD41L-A, TAMD41H-A, TAMD41H-B, TAMD41P, TAMD41P-A, AD41A, D41B, AD41B, AD41Bj, D41D, AD41D, D41L-A, AD41L-A, AD41P-A  
 KAD32P, KAD32P-A  
 KAD42A, KAD42B, KAD42P-A, KAMD42A, KAMD42B, KAMD42P-A, TAMD42B, TAMD42WJ-A  
 KAD43P-A, KAD43P-B, KAD43P-C, KAMD43P, KAMD43P-A, KAMD43P-B, KAD44P, KAD44P-B, KAD44P-C, KAMD44P, KAMD44P-A, KAMD44P-B, KAMD44P-C  
 KAD300-A, KAMD300-A  
 TMD100C  
 TMD102A, TAMD102A, TAMD102D  
 TAMD103A, TAMD103A-A, TAMD103A-A AUX  
 TMD120B  
 TMD121C, TAMD121D  
 TMD122A, TAMD122A, TAMD122A/C, TAMD122D, TAMD122P-A, TAMD122P-B, TAMD122P-C

Art. nr/Part no	Ersätter/Replaces	Temp.
15269	3831424, 467015, 876128, 875849, 273952	82°



**31, 41, KAD32, KAD42, KAD43, KAD44, KAD300**  
 MD31A, TMD31A, TAMD31A, TMD31B, TAMD31B, TMD31D, TAMD31D, TAMD31S, TMD31L-A, TAMD31L-A, TAMD31M-A, TAMD31P-A, AD31, AD31A, AD31B, AD31D, AD31D-A, AD31L-A, AD31P-A, AD31XD  
 TMD41A, TAMD41A, TMD41B, TAMD41B, TMD41D, TAMD41D, TMD41L-A, TAMD41P, TAMD41H-A, TAMD41H-B, TAMD41P-A, AD41A, AQAD41A, D41B, AD41B, AD41Bj, D41D, AD41D, D41L-A, AD41L-A, AD41P-A  
 KAD32P, KAD32P-A  
 KAD42A, KAD42B, KAD42P-A, KAMD42A, KAMD42B, KAMD42P-A, KAMD42B, TAMD42WJ-A  
 KAD43P-A, KAD43P-B, KAMD43P, KAMD43P-A, KAMD43P-B  
 KAD44P, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-B, KAMD44P-C  
 KAD300-A, KAMD300-A

Packning till termostathus / Thermostat housing gasket

Art. nr/Part no	Ersätter/Replaces
14807	838807



**61, 62, 71, 72, 73, 74, 75, 162, 163, 165**  
 TAMD61A  
 TAMD62A  
 TAMD71A, TAMD71B  
 TAMD72A, TAMD72P-A, TAMD72WJ-A  
 TAMD73P-A, TAMD73WJ-A  
 TAMD74A, TAMD74C-A, TAMD74C-B, TAMD74L-A, TAMD74L-B, TAMD74P-A, TAMD74P-B  
 TAMD75P-A  
 TAMD162C-C  
 TAMD163A-A, TAMD163P-A  
 TAMD165A, TAMD165C, TAMD165P

Art. nr/Part no	Ersätter/Replaces	Temp.
15110	3839110, 1661993	76°



**D3**  
 D3-110I-A, D3-110I-B, D3-110I-C, D3-110I-D, D3-110I-E, D3-110I-F, D3-110I-G, D3-110I-H  
 D3-130A-A, D3-130A-B, D3-130A-C, D3-130I-A, D3-130I-B, D3-130I-C  
 D3-140A-D, D3-140A-E, D3-140A-F, D3-140A-G, D3-140A-H, D3-140I-D, D3-140I-E, D3-140I-F, D3-140I-G, D3-140I-H  
 D3-150I-D, D3-150I-E, D3-150I-F, D3-150I-G, D3-150I-H  
 D3-160A-A, D3-160A-B, D3-160A-C, D3-160I-A, D3-160I-B, D3-160I-C  
 D3-170A-D, D3-170A-E, D3-170A-F, D3-170A-G, D3-170A-H, D3-170I-D, D3-170I-E, D3-170I-F, D3-170I-G, D3-170I-H  
 D3-190A-B, D3-190A-C, D3-190I-A, D3-190I-B, D3-190I-C  
 D3-200A-D, D3-200A-E, D3-200A-F, D3-200A-G, D3-200A-H, D3-200I-D, D3-200I-E, D3-200I-F, D3-200I-G, D3-200I-H  
 D3-220A-D, D3-220A-E, D3-220A-F, D3-220A-G, D3-220A-H, D3-220I-D, D3-220I-E, D3-220I-F, D3-220I-G, D3-220I-H

Art. nr/Part no	Ersätter/Replaces	Temp.
15261	3840816, 3584474	80°



## Termostatsatser Thermostat kits



### D4, D6, 63, 122

D4-145I-G  
 D4-150A-G  
 D4-175I-G  
 D4-180I-B, D4-180I-C, D4-180I-D, D4-180I-E, D4-180I-F  
 D4-210A-A, D4-225A-B, D4-210I-A, D4-210I-B  
 D4-225A-B, D4-225A-C, D4-225A-D, D4-225A-E, D4-225A-F, D4-225I-B,  
 D4-225I-C, D4-225I-D, D4-225I-E, D4-225I-F  
 D4-230A-G, D4-230I-G  
 D4-260A-A, D4-260A-B, D4-260A-C, D4-260A-D, D4-260A-E, D4-260A-F,  
 D4-260D-B, D4-260D-C, D4-260D-D, D4-260D-E, D4-260D-F, D4-260I-A,  
 D4-260I-B, D4-260I-C, D4-260I-D, D4-260I-F  
 D4-270A-G, D4-270I-G  
 D4-300A-A, D4-300A-C, D4-300A-D, D4-300A-E, D4-300A-F, D4-300A-G,  
 D4-300D-A, D4-300D-C, D4-300D-D, D4-300D-E, D4-300D-F, D4-300I-A,  
 D4-300I-C, D4-300I-D, D4-300I-E, D4-300I-F, D4-300I-G  
 D4-320I-G, D4-320A-G  
 D6-280A-A, D6-280A-B, D6-280A-C, D6-280A-D, D6-280A-E, D6-280I-A,  
 D6-280I-B, D6-280I-C, D6-280I-D, D6-280I-E  
 D6-300A-F, D6-300A-G, D6-300D-F, D6-300D-G, D6-300I-F, D6-300I-G  
 D6-310A-A, D6-310A-B, D6-310A-C, D6-310A-D, D6-310A-E, D6-310D-B,  
 D6-310D-C, D6-310D-D, D6-310D-E, D6-310I-A, D6-310I-B, D6-310I-C,  
 D6-310I-D, D6-310I-E  
 D6-330A-B, D6-330A-C, D6-330A-D, D6-330A-E, D6-330A-F, D6-330D-B,  
 D6-330D-C, D6-330D-D, D6-330D-E, D6-330D-F, D6-330I-B, D6-330I-C,  
 D6-330I-D, D6-330I-E, D6-330I-F  
 D6-340A-G, D6-340D-G, D6-340I-G  
 D6-350A-A, D6-350A-B  
 D6-370A-B, D6-370A-C, D6-370A-D, D6-370A-E, D6-370A-F, D6-370D-A,  
 D6-370D-B, D6-370D-C, D6-370D-D, D6-370D-E, D6-370D-F, D6-370I-A,  
 D6-370I-B, D6-370I-C, D6-370I-D, D6-370I-E, D6-370I-F  
 D6-380A-G, D6-380I-G, D6-380D-G  
 D6-400A-E, D6-400A-F, D6-400A-G  
 D6-435D-A, D6-435D-C, D6-435D-D, D6-435D-E, D6-435D-F, D6-435I-A,  
 D6-435I-C, D6-435I-D, D6-435I-E, D6-435I-F  
 D6-440A-G, D6-440D-G, D6-440I-G, D6-440I-WJ-G  
 D6-480A-G, D6-480D-G, D6-480I-G, D6-480I-WJ-G

TAMD63L-A, TAMD63P-A  
 TMD122A, TAMD122A, TAMD122A/C

Art. nr/Part no	Ersätter/Replaces	Temp.
15266	8149182	82°



## Impellersatser Impeller kits



**MB2/50S**  
MB2/50S

Med uttag för brytpinne/for key  
Utdragningsverktyg medföljer/Impeller removal tool included

Art. nr/Part no	Ersätter/Replaces	Info
15413	3555413	Ø 39,5 mm, H=14 mm



**MB10**  
MB10A

Tidigare utförande av sjövattpump med glidlagrad axel / Earlier version of seawater pump with plain bearing

Art. nr/Part no	Ersätter/Replaces	Info
15807	3586494, 875807, 876689, 803729, JP 09-806B	O.D 39 mm, I.D 9,5 mm H=19 mm



**MB10**  
MB10A

För kullagrad sjövattpump / For seawater pump w ball bearings  
Impeller:

Art. nr/Part no	Ersätter/Replaces	Info
15583	21951342, 3586496, 875583, JP 09-1026B	O.D 39 mm, I.D 12 mm H=19 mm



**B16, B18, B20**

AQ80  
BB25, BB70  
MB16  
AQ60F, AQ90, AQ95, AQ95A, AQ110  
AQ120  
BB30, BB100,  
MB18, MB20A, MB20B, MB20C  
AQ105A  
AQ115A, AQ115B, BB115, BB115B, BB115C  
AQ130A, AQ130B, AQ130C, AQ130D

Art. nr/Part no	Ersätter/Replaces	Info
15808	22222936, 21951344, 3593659, 875808, 3580066, 897055, 804696, 876690	O.D 50 mm, H=22 mm



**B21, B23, B25, B30, MD21, MD32**

AQ120B, AQ125A  
BB140A  
230A, 230B  
AQ125B  
AQ131A, AQ131B, AQ131C, AQ131D  
AQ145A, AQ145B  
BB145A  
250A, 250B, 251A  
AQ151A, AQ151B, AQ151C  
AQ171A, AQ171C  
AQ165A, AQ170A, AQ170B, AQ170C  
BB165A, BB170A, BB170B, BB170C  
AQD21A\*, AQD21B  
MD 21A \*, MD 21B

\*Från/From MO 103387 -

Med kilspår/With key groove

Art. nr/Part no	Ersätter/Replaces	Info
15575	21951350, 875575, 831182	O.D 57,1 mm, H=31,5 mm



## Impellersatser Impeller kits



### 3.0, B20, V6, V8

AQ115A, AQ115B, BB115A, BB115B  
 AQ130A, AQ130B, AQ130C, AQ130D  
 AQ165A, AQ170A, AQ170B, AQ170C  
 3.0GLM-A, 3.0GLM-B, 3.0GLM-C, 3.0GLP-A, 3.0GLP-B, 3.0GLP-C,  
 3.0GSM-A, 3.0GSM-B, 3.0GSM-C, 3.0GSM-LKD, 3.0GSMNCS, 3.0GSP-A,  
 3.0GSP-B, 3.0GSP-C, 3.0GSPEFS, 3.0GSPLKD, 3.0GSPNCS  
 AQ175A  
 4.3GJWTR, 4.3GIPEFS, 4.3GIPLKDCE, 4.3GIPLKECE, 4.3GIPNCACE,  
 4.3GIPNCBCE, 4.3GIPNCMCE, 4.3GIPNCSCE, 4.3GIPWTRCE, 4.3GL-  
 A, 4.3GL-B, 4.3GL-C, 4.3GL-D, 4.3GLMMDA, 4.3GLPEFS,  
 4.3GLPLKD, 4.3GLPLKE, 4.3GLPMDA, 4.3GLPNCA, 4.3GLPNCB,  
 4.3GLPNCS, 4.3GLPWTR, 4.3GSJNCS, 4.3GSJWTR, 4.3GSPLKD,  
 4.3GSPKE, 4.3GSPMDA, 4.3GSPNCA, 4.3GSPNCB, 4.3GSPWTR,  
 4.3GXi-A, 4.3GXi-B, 4.3GXi-BF, 4.3GXi-C, 4.3GXi-CF, 4.3GXi-D, 4.3GXi-  
 DF, 4.3GXi-E, 4.3GXi-EF, 4.3OSi-B, 4.3OSi-BF, 4.3OSi-C, 4.3OSi-CF,  
 4.3OSi-D, 4.3OSi-DF, 4.3OSi-E, 4.3OSi-EF  
 500A, 501A, 571A  
 AQ200C, AQ200D, AQ200F  
 AQ211A  
 AQ225C, AQ225D, AQ225E, AQ225F  
 AQ231A, AQ231B  
 AQ255A, AQ255B  
 AQ260A, AQ260B  
 AQ271A, AQ271B, AQ271C, AQ271D  
 5.0FIPHUECE, 5.0FIPHURCE, 5.0FIPMDA, 5.0FIPMDM, 5.0FIPNCBCE,  
 5.0FIPNCSCE, 5.0FLPHUE, 5.0FLPHUR, 5.0FLPMDA, 5.0FLPNCB,  
 5.0FLPNCS, 5.0GIPEFS, 5.0GIPWTR, 5.0GL-A, 5.0GL-B, 5.0GL-C, 5.0GL-  
 D, 5.0GL-E, 5.0GLPEFS, 5.0GLPWTR, 5.0GXi-A, 5.0GXi-B, 5.0GXi-BF,  
 5.0GXi-C, 5.0GXi-CF, 5.0GXi-D, 5.0GXi-DF, 5.0GXi-E, 5.0GXi-EF,  
 5.0OSi-B, 5.0OSi-BF, 5.0OSi-C, 5.0OSi-CF, 5.0OSi-D, 5.0OSi-DF, 5.0OSi-E,  
 5.0OSi-EF  
 5.7Gi-A, 5.7Gi-B, 5.7Gi-BF, 5.7Gi-C, 5.7Gi-CF, 5.7Gi-D, 5.7Gi-DF, 5.7Gi-E,  
 5.7Gi-EF, 5.7GiL-A, 5.7GiL-B, 5.7GiL-C, 5.7GiL-D, 5.7GiL-E, 5.7GIIMDA,  
 5.7GIINCCCE, 5.7GIPHUS, 5.7GIPLKDCE, 5.7GIPLKECE, 5.7GIPMDA,  
 5.7GIPMDACE, 5.7GIPNCACE, 5.7GIPNCBCE, 5.7GIPNCMCE,  
 5.7GL-A, 5.7GL-B, 5.7GL-C, 5.7GL-D, 5.7GL-E, 5.7GLIMDA, 5.7GLIPLK-  
 DCE, 5.7GLPLKA, 5.7GLPLKD, 5.7GLPLKE, 5.7GLPLKR, 5.7GLPMDA,  
 5.7GLPNCS, 5.7GSICPLKD, 5.7GSiL-A, 5.7GSiPEFS, 5.7GSiPLKE,  
 5.7GSIPWTR, 5.7GSPEFS, 5.7GSPLKD, 5.7GSPLKE, 5.7GSPWTR, 5.7GXi-  
 A, 5.7GXi-B, 5.7GXi-C, 5.7GXi-CF, 5.7GXi-D, 5.7GXi-DF, 5.7GXi-E,

5.7GXi-EF, 5.7GXi-F, 5.7GXi-FF, 5.7GXiL-A, 5.7GXiL-B, 5.7GXiL-C,  
 5.7GXiL-D, 5.7GXiL-E, 5.7GXiL-F, 5.7OSi-A, 5.7OSi-AF, 5.7OSi-B, 5.7OSi-  
 BF, 5.7OSi-C, 5.7OSi-CF, 5.7OSi-D, 5.7OSi-DF, 5.7OSXi-A, 5.7OSXi-AF,  
 5.7OSXi-B, 5.7OSXi-BF, 5.7OSXi-C, 5.7OSXi-CF, 5.7OSXi-D, 5.7OSXi-  
 DF  
 5.8FIPHUBCE, 5.8FIPHUECE, 5.8FIPHURCE, 5.8FIPMDA, 5.8FIPMDM,  
 5.8FIPNCACE, 5.8FIPNCBCE, 5.8FIPNCMCE, 5.8FIPNCSCE, 5.8FLIHUB,  
 5.8FLIHUE, 5.8FLINCC, 5.8FLINCS, 5.8FLPHUE, 5.8FLPHUR,  
 5.8FLPMDA, 5.8FLPNCA, 5.8FLPNCB, 5.8FLPNCM, 5.8FLPNCS, 5.8FSI-  
 INCC, 5.8FSIINCS, 5.8FSIPHUBCE, 5.8FSIPHURCE, 5.8FSIPNCACE,  
 5.8FSIPNCD, 5.8FSIPNCS  
 7.4GIINCCCE, 7.4GIINCSCE, 7.4GIPEFS, 7.4GIPLKDCE, 7.4GIPLKECE,  
 7.4GIPNCACE, 7.4GIPNCBCE, 7.4GIPNCMCE, 7.4GIPNCSCE,  
 7.4GIPWTR, 7.4GLIMDM, 7.4GLINCC, 7.4GLPLKD, 7.4GLPLKE,  
 7.4GLPMDA, 7.4GLPMDM, 7.4GLPNCA, 7.4GLPNCB, 7.4GLPNCM,  
 7.4GLPNCS, 7.4GLPNCC, 7.4GLPNCS, 7.4GSIINCC, 7.4GSIINCS,  
 7.4GSIPEFS, 7.4GSIWTR, 7.4GSIXNCB, 7.4GSIXNCS  
 8.1Gi-A, 8.1Gi-B, 8.1Gi-BF, 8.1Gi-C, 8.1Gi-CF, 8.1Gi-D, 8.1Gi-DF, 8.1Gi-E,  
 8.1Gi-EF, 8.1Gi-FF, 8.1GiL-A, 8.1GiL-B, 8.1GiL-C, 8.1GiL-D, 8.1GiL-E,  
 8.1GiL-F, 8.1Gsi-A, 8.1Gsi-AF, 8.1Gsi-B, 8.1Gsi-BF, 8.1Gsi-C, 8.1Gsi-  
 CF, 8.1Gsi-D, 8.1Gsi-DF, 8.1Gsi-E, 8.1Gsi-EF, 8.1GXiL-A, 8.1GXiL-B,  
 8.1GXiL-C, 8.1GXiL-D, 8.1GXiL-E, 8.1OSi-A, 8.1OSi-AF, 8.1OSi-B,  
 8.1OSi-BF, 8.1GLIMDM, 8.1GLPMDA, 8.1GLPMDM, 8.1GSIPEFS,  
 8.1GSIWTR, 8.1GSIXNCB  
 DPX375-A, DPX375-B, DPX375BF, DPX375-CF  
 DPX385XEF, DPX385XLKE  
 DPX415XEF, DPX415XLKE  
 DPX420-A, DPX420-B, DPX420-BF, DPX420-CF, DPX420-DF

V8 - För pump monterad på vevaxeln med fyra skruvar i locket / Fits pump mounted on the crankshaft and four bolts in the end cover  
 \* Upp till MO -103386

Art. nr/Part no	Ersätter/Replaces	Info
15811	21951348, 21951346, 21213660, 3862567, 3862281, 3858256, 875811, 829940, 876243, 3855546, 3856039, 877400	OD 57 mm, H= 31 mm



### V8 Ford

AQ190A, AQ240A

För pump med remdrift/For pump with belt drive

Art. nr/Part no	Ersätter/Replaces	Info
15874	835874	OD 64 mm, H= 41 mm



## Impellersatser Impeller kits



### 3.0, V6, V8

AQ200B, AQ200C  
AQ225B, AQ225C  
AQ255A, AQ255B  
3.0GLMMDA, 3.0GSMNCS, 3.0GSPMDA, 3.0GSPNCS  
4.3GLMMDA, 4.3GLPMDA, 4.3GSPMDA  
5.0FiPMDA, 5.0FiPMDM, 5.0FLPMDA  
5.7GIIMDA, 5.7GIPMDA, 5.7GIPMDACE, 5.7GLIMDA, 5.7GLPMDA  
5.8FiPMDA, 5.8FiPMDM, 5.8FLPMDA  
7.4GLIMDM, 7.4GLPMDA, 7.4GLPMDM  
8.2GLIMDM, 8.2GLPMDA, 8.2GLPMDM

För pump med remdrift/For pump with belt drive  
Impeller 61 mm H = 31,5 mm

Art. nr/Part no	Ersätter/Replaces	Info
15512	3854286, 835512	OD 61 mm, H=31,5 mm



### V6, V8

430, 430A, 430B, 431A, 431B, 432A, 434A  
AQ205A, AQ205LB  
500B, 501B  
570, 570A, 571A, 572A  
740B, BB740A  
AQ200D, AQ200F  
AQ225D, AQ225E, AQ225F, BB225A, BB225AV, BB225B  
BB231A  
AQ260A, AQ260B, BB260A, BB260AV, BB260B, BB260C, BB261A  
AQ271A, AQ271B, AQ271C, AQ271D  
AQ290A  
AQ311A, AQ311B

V8: För vevaxelmonterad sjövattnepump med sex skruvar i impellerlocket /  
V8: Pump mounted on crankshaft with six screws in impeller cover

Art. nr/Part no	Ersätter/Replaces	Info
15120	876120, 834794	OD 57 mm, H=50 mm



### 3.0, V6, V8

3.0GLP-D, 3.0GLP-E, 3.0GLP-J, 3.0GLP-N, 3.0GXi-J, 3.0GXi-C  
V6-200-A, V6-225-A, V6-225-E-A  
4.3GL-E, 4.3GL-EF, 4.3GL-G, 4.3GL-GF, 4.3GL-J, 4.3GL-JF, 4.3GL-P, 4.3Gi-  
200-R, 4.3GXi-225-R, 4.3GXi-225-S, 4.3GXIE-225-R, 4.3GXIE-225-S,  
4.3GXi-F, 4.3GXi-FF, 4.3GXi-G, 4.3GXi-GF, 4.3GXi-J, 4.3GXi-JF, 4.3GXi-P,  
4.3GXi-Q, 4.3GXIE-M, 4.3GXIE-P, 4.3GXIE-Q, 4.3OSi-F, 4.3OSi-FF, 4.3OSi-  
G, 4.3OSi-GF, 4.3OSi-J, 4.3OSi-JF  
V8-225-C-A, V8-225-C-B, V8-225-CE-A, V8-225-CE-B  
V8-270-A, V8-270-B, V8-270-C-A, V8-270-C-B, V8-270-CE-A, V8-270-CE-B,  
V8-270-E-A, V8-270-E-B  
V8-300-A, V8-300-B, V8-300-C-A, V8-300-C-B, V8-300-CE-A, V8-300-CE-B,  
V8-300-E-A, V8-300-E-B  
V8-320-A, V8-320-B, V8-320-C-A, V8-320-C-B, V8-320-E-A, V8-320-E-B  
V8-380-C-B, V8-380-CE-A  
5.0GL-F, 5.0GL-FF, 5.0GL-H, 5.0GL-HF, 5.0GL-I, 5.0GL-J, 5.0GL-L, 5.0GL-H,  
5.0GL-JF, 5.0GiC-J, 5.0GiC-225-S, 5.0GXi-270-R, 5.0GXi-F, 5.0GXi-FF,  
5.0GXi-G, 5.0GXi-GF, 5.0GXi-J, 5.0GXi-JF, 5.0GXi-N, 5.0GXi-P, 5.0GXiC-  
270-R, 5.0GXiC-J, 5.0GXiC-JF, 5.0GXiC-P, 5.0GXICE-270-R, 5.0GXICE-  
J, 5.0GXICE-JF, 5.0GXICE-M, 5.0GXICE-MF, 5.0GXICE-P, 5.0GXICE-270-R,  
5.0GXIE-J, 5.0GXIE-JF, 5.0GXIE-K, 5.0GXIE-KF, 5.0GXIE-M, 5.0GXIE-MF,  
5.0GXIE-N, 5.0GXIE-P, 5.0OSi-F, 5.0OSi-FF, 5.0OSi-G, 5.0OSi-GF, 5.0OSi-J,  
5.0OSi-JF, 5.0OSIE-J, 5.0OSIE-JF  
5.7Gi-300-J, 5.7Gi-300-JF, 5.7Gi-300-N, 5.7Gi-300-P, 5.7Gi-300-R, 5.7Gi-F,  
5.7Gi-FF, 5.7Gi-G, 5.7Gi-GF, 5.7GiC-300-J, 5.7GiC-300-JF, 5.7GiC-300-P,  
5.7GiC-300-R, 5.7GiC-300-J, 5.7GiC-300-JF, 5.7GiC-300-M, 5.7GiC-  
300-MF, 5.7GiC-300-J, 5.7GiC-300-JF, 5.7GiC-300-K, 5.7GiC-300-M,  
5.7GiC-300-N, 5.7GiC-300-P, 5.7GiC-300-R, 5.7GiL-F, 5.7GiL-G,  
5.7GXi-320-R, 5.7GXi-G, 5.7GXi-GF, 5.7GXi-H, 5.7GXi-HF, 5.7GXi-J,  
5.7GXi-JF, 5.7GXi-N, 5.7GXi-P, 5.7GXiC-320-R, 5.7GXiC-J, 5.7GXiC-JF,  
5.7GXiC-P, 5.7GXiC-320-R, 5.7GXICE-J, 5.7GXICE-JF, 5.7GXICE-M,  
5.7GXICE-P, 5.7GXIE-320-R, 5.7GXIE-J, 5.7GXIE-JF, 5.7GXIE-K, 5.7GXIE-  
KF, 5.7GXIE-M, 5.7GXIE-MF, 5.7GXIE-N, 5.7GXIE-P, 5.7GXIL-G, 5.7GXIL-  
H, 5.7OSi-300-J, 5.7OSi-300-JF, 5.7OSi-G, 5.7OSi-GF, 5.7OSIE-300-J,  
5.7OSIE-300-JF, 5.7OSXi-E, 5.7OSXi-EF, 5.7OSXi-G, 5.7OSXi-GF, 5.7OSXi-  
J, 5.7OSXi-JF, 5.7OSXiE-J, 5.7OSXiE-JF  
8.1Gi-G, 8.1Gi-GF, 8.1Gi-H, 8.1Gi-HF, 8.1Gi-J, 8.1Gi-JF, 8.1GiC-J, 8.1GiC-JF,  
8.1GiC-Q, 8.1GiC-J, 8.1GiC-JF, 8.1GiC-M, 8.1GiC-P, 8.1GiC-Q,  
8.1GiE-J, 8.1GiE-JF, 8.1GiE-K, 8.1GiE-KF, 8.1GiE-M, 8.1GiE-MF, 8.1GiE-P,  
8.1GiL-G, 8.1GiL-H, 8.1GXi-G, 8.1GXi-GF, 8.1GXi-F, 8.1GXi-FF, 8.1GXi-  
J, 8.1GXi-JF, 8.1GXiE-J, 8.1GXiE-JF, 8.1GXiE-K, 8.1GXiE-KF, 8.1GXiE-M,  
8.1GXiE-P, 8.1GXIL-F, 8.1GXIL-G, 8.1IPCE-JF, 8.1IPCE-MF, 8.1IPCE-P,  
8.1IPCE-Q, 8.1IPSE-JF, 8.1IPSE-KF, 8.1OSi-C, 8.1OSi-CF, 8.1OSi-D, 8.1OSi-  
DF, 8.1OSi-J, 8.1OSi-JF, 8.1OSiE-J, 8.1OSiE-JF

Med splines/With splines

Art. nr/Part no	Ersätter/Replaces	Info
15662	21951352, 3593660	OD 57 mm, H=48 mm



Spare parts from Sweden

## Impellersatser Impeller kits




**V6-200, V6-240, V6-300, V8-350, V8-380, V8-430**

5.7Gi-300-J

V6-200-C-G, V6-200-C-J, V6-200-C-M, V6-200-C-N, V6-200-C-P,  
V6-200-CE-N, V6-200-CE-P, V6-200-G, V6-200-J, V6-200-M, V6-200-N,  
V6-200-P  
V6-240-C-G, V6-240-C-J, V6-240-C-M, V6-240-C-N, V6-240-C-P,  
V6-240-CE-G, V6-240-CE-J, V6-240-CE-K, V6-240-CE-M, V6-240-CE-N,  
V6-240-CE-P, V6-240-G, V6-240-J, V6-240-M, V6-240-N, V6-240-P  
V6-250-C-O, V6-250-CE-O, V6-250-O  
V6-280-C-G, V6-280-C-J, V6-280-C-M, V6-280-C-N, V6-280-C-P,  
V6-280-CE-G, V6-280-CE-J, V6-280-CE-K, V6-280-CE-M, V6-280-CE-N,  
V6-280-CE-P, V6-280-G, V6-280-J, V6-280-M, V6-280-N, V6-280-P  
V8-300-C-G, V8-300-C-H, V8-300-C-J, V8-300-C-K, V8-300-C-M,  
V8-300-C-N, V8-300-C-P, V8-300-C-R, V8-300-C-S, V8-300-CE-G,  
V8-300-CE-H, V8-300-CE-J, V8-300-CE-K, V8-300-CE-M, V8-300-CE-N,  
V8-300-CE-P, V8-300-CE-R, V8-300-CE-S  
V8-350-C-D, V8-350-C-G, V8-350-C-H, V8-350-C-J, V8-350-C-K,  
V8-350-C-M, V8-350-C-N, V8-350-C-P, V8-350-C-S, V8-350-C-S,  
V8-350-CE-D, V8-350-CE-G, V8-350-CE-H, V8-350-CE-J, V8-350-CE-K,  
V8-350-CE-M, V8-350-CE-N, V8-350-CE-P, V8-350-CE-R, V8-350-CE-S  
V8-380-C-A, V8-380-C-B, V8-380-C-D, V8-380-C-J, V8-380-C-K, V8-380-C-  
M, V8-380-C-N, V8-380-C-R, V8-380-CE-A, V8-380-CE-A, V8-380-CE-B,  
V8-380-CE-D, V8-380-CE-J, V8-380-CE-K, V8-380-CE-M, V8-380-CE-N,  
V8-380-CE-R  
V8-430-C-J, V8-430-C-K, V8-430-C-M, V8-430-C-N, V8-430-C-R,  
V8-430-CE-D, V8-430-CE-J, V8-430-CE-K, V8-430-CE-M, V8-430-CE-N,  
V8-430-CE-R

Satsen innehåller impeller, o-ring till lock, skruvar, brickor, o-ringar till lock samt glycerin / The kit includes impeller, o-ring for end cap, bolts, washers, o-rings for end cap and glycerin. Med splines/With splines

Art. nr/Part no	Ersätter/Replaces	Info
15545	21700445	OD 57 mm, H=48 mm

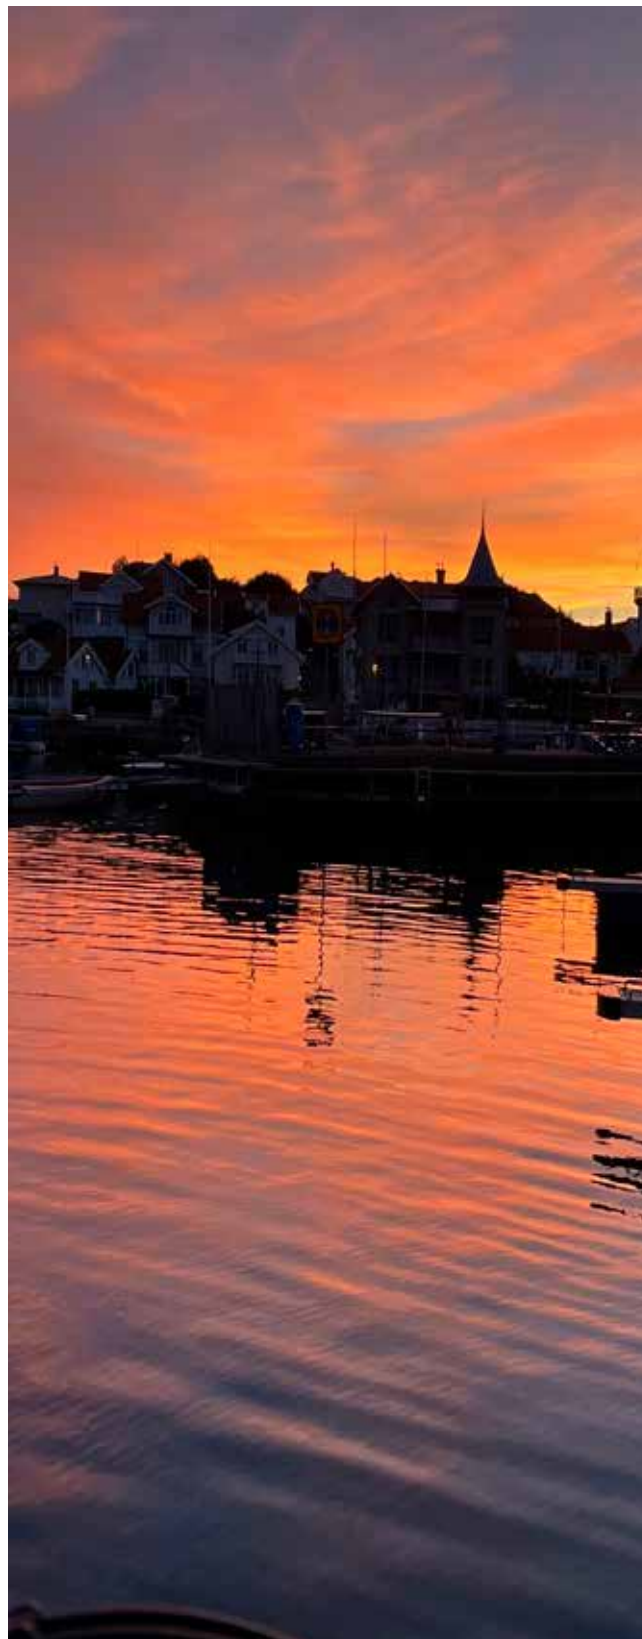

Spare parts from Sweden

## Impellersatser Impeller kits



### MD1, MD2, MD5, MD6, MD7, MD11, 2001, 2002, 2003

MD1, MD1A  
MD2, MD2A  
MD5A, MD5B, MD5C  
MD6B  
MD7A, MD7B  
MD11C, MD11D  
2001, 2001AG, 2001B, 2001BG, 2001D, 2001R  
2002, 2002AG, 2002B, 2002BG, 2002D  
2003, 2003B, 2003D, 2003R

Art. nr/Part no	Ersätter/Replaces	Info
15583	21951342, 3586496, 875583, JP 09-1026B	OD 39 mm, H=19 mm, axel/shaft 12 mm



### MD1, MD2, MD6, 2010, 2020

MD1A, MD1B  
AQD2B, MD2, MD2A, MD2B  
MD6A  
MD2010A, MD2010B\*  
MD2020A, MD2020B\*

Tidigare utförande med glidlager/Earlier version with plain bearing  
\* SN- 5101203007

Art. nr/Part no	Ersätter/Replaces	Info
15807	3586494, 875807, 876689, 803729, JP 09-806B	OD 39 mm, H=19 mm, axel/shaft 9,5 mm



### MD2, MD3, MD11, MD17, MD21, MD2010, MD2020, MD2030, MD2040, D1, D2

MD2B\*, AQD2B\*  
MD3B\*  
MD11C\*, MD11D\*  
MD17C, MD17D  
MD21A, AQD21A  
MD2010\*\*, MD2010B\*\*, MD2010-C, MD2010-D  
MD2020\*\*, MD2020B\*\*, MD2020-C, MD2020-D  
MD2030\*\*, MD2030B, MD2030-C, MD2030-D  
MD2040\*\*, MD2040B, MD2040-C, MD2040-D  
D1-13, D1-13B, D1-13F,  
D1-20, D1-20B, D1-20F,  
D1-30, D1-30B, D1-30F,  
D2-40, D2-40B, D2-40F

\* Fits seawater pump with ball bearings  
\*\* SN5101203008-

Art. nr/Part no	Ersätter/Replaces	Info
15808	22222936, 21951344, 3593659, 875808, 3580066, 897055, 804696, 876690	OD 50 mm, H=22 mm



### D2-50, D2-55, D2-75, MD21, MD22, 2003T

D2-50F  
D2-55, D2-55A, D2-55B, D2-55C, D2-55D, D2-55E  
D2-75A, D2-75B, D2-75C  
2003T, 2003TB  
AQD21A\*, MD21A\*  
MD22A, MD22L-A, MD22L-B, MD22P-B, TMD22A, TMD22B

\* SN-103386  
Med splines/with splines.

Art. nr/Part no	Ersätter/Replaces	Info
15811	21951348, 21951346, 21213660, 3862567, 3862281, 3858256, 875811, 829940, 876243, 3855546, 3856039, 877400	OD 57 mm, H=31 mm



## Impellersatser Impeller kits



### MD29, MD32, 30, 31, 40, 41, KAD32, KAD42, KAD43, KAD44, KAD300, 60, 70, 100, 120, D4, D5, D7

MD29, MD29A, AQD29, AQD29A  
MD32A, AQD32A  
MD30A, TMD30A, TAMD30A, AD30A, AQAD30A  
MD31A, TMD31A, TAMD31A, TMD31B, TAMD31B, TMD31D, TAMD31D, TMD31L-A, TAMD31L-A, TAMD31S, TAMD31M, TAMD31M-A, TAMD31P-A, AD31, AD31A, AQAD31A, AD31B, AD31D, AD31D-A, AD31L-A, AD31P-A, AD31XD  
KAD32P, KAD32P-A  
MD40A, TMD40A, TAMD40A, TMD40B, TAMD40B, TMD40C, AQD40A, AQAD40A, AD40B, AQAD40B  
TMD41A, TAMD41A, TMD41B, TAMD41B, TMD41D, TAMD41D, TMD41L-A, TAMD41H-A, TAMD41H-B, TAMD41P, TAMD41P-A, D41A, AD41A, AQAD41A, D41B, AD41B, AD41Bj, D41D, AD41D, D41L-A, AD41L-A, AD41P-A  
KAD42A, KAD42B, KAD42P-A, KAMD42A, KAMD42B, KAMD42P-A, TAMD42B, TAMD42WJ-A  
KAD43P-A, KAD43P-B, KAMD43P, KAMD43P-A, KAMD43P-B  
KAD44P, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-B, KAMD44P-C  
KAD300A, KAD300-A, KAMD300-A  
TAMD60A, TAMD60B, TAMD60C  
MD70B, MD70BK, TMD70B, TAMD70B, THAMD70B, MD70C, TMD70C, TAMD70C, THAMD70C, TAMD70D, TAMD70E, AQD70B, AQD70BL, AQD70C, AQD70CL, AQD70D  
MD100A\*, MD100B\*, TMD100A\*, MD100B-CC\*  
MD120A\*, TMD120A\*, TAMD120A\*, TMD120B\*, TAMD120B\*  
D4-145I-G, D4-150A-G, D4-175I-G  
D4-180I-F  
D4-225A-E, D4-225A-F, D4-225I-F  
D4-230A-G, D4-230I-G  
D4-260A-E, D4-260A-F, D4-260D-F, D4-260I-F  
D4-270A-G, D4-270I-G  
D4-300A-E, D4-300A-F, D4-300A-G, D4-300D-E, D4-300D-F, D4-300I-F, D4-300I-G  
D4-320A-G, D4-320I-G  
D5A-B TA, D5A-T, D5A-TA  
D7A-B TA, D7A-T, D7A-TA

\*) till länsypump / for bilge pump

Passar D4 med SN2004033317- / Fits D4 with SN2004033317-  
Till sjövattpump med sex skruvar i pumplocket / For seawater pump with six bolts on the end cover

Art. nr/Part no	Ersätter/Replaces	Info
15593	21951356, 3841697, 877061, 875593, 807904, 24139377	O.D 65 mm, H=50 mm



40, 61, 62, 71, 72, 73, 100, 102, 120, 121, 122, D11  
TAMD40A, AQD40A, AQAD40A, TAMD40B, AD40B, AQAD40B  
TAMD61A  
TAMD62A  
TAMD71A, TAMD71B  
TAMD72A, TAMD72P-A, TAMD72WJ-A  
TAMD73P-A, TAMD73WJ-A  
TMD100C  
TMD102A, TAMD102A, TAMD102D  
MD120A, TMD120A, TAMD120A, TMD120B, TAMD120B  
TMD121C, TAMD121D  
TMD122A  
D11A-C (IPS), D11A-C MP, D11A-D MP, D11A-E MP, D11B2-A MP

Till sjövattpump med fem skruvar i pumplocket / For seawater pump with five bolts on the end cover

Art. nr/Part no	Ersätter/Replaces	Info
15660	21730344, 875736, 875660, 825942	OD 95 mm, H=63 mm



71, 73, 74, 75  
TAMD71B  
TAMD73P-A, TAMD73WJ-A  
TAMD74A, TAMD74C-A, TAMD74C-B, TAMD74L-A, TAMD74L-B, TAMD74P-A, TAMD74P-B  
TAMD75P-A

Med splines/With splines

Art. nr/Part no	Ersätter/Replaces	Info
15362	21951362, 877066	OD 95,5 mm, H=63 mm



## Impellersatser Impeller kits



### D3

D3-110I-A, D3-110I-B, D3-110I-C, D3-110I-D, D3-110I-E, D3-110I-F, D3-110I-G, D3-110I-H  
 D3-130A-A, D3-130A-B, D3-130A-C, D3-130I-A, D3-130I-B, D3-130I-C  
 D3-140A-D, D3-140A-E, D3-140A-F, D3-140A-G, D3-140A-H, D3-140I-D, D3-140I-E, D3-140I-F, D3-140I-G, D3-140I-H  
 D3-150I-D, D3-150I-E, D3-150I-F, D3-150I-G, D3-150I-H  
 D3-160A-A, D3-160A-B, D3-160A-C, D3-160I-A, D3-160I-B, D3-160I-C  
 D3-170A-D, D3-170A-E, D3-170A-F, D3-170A-G, D3-170A-H, D3-170I-D, D3-170I-E, D3-170I-F, D3-170I-G, D3-170I-H  
 D3-190A-B, D3-190A-C, D3-190I-A, D3-190I-B, D3-190I-C  
 D3-200A-D, D3-200A-E, D3-200A-F, D3-200A-G, D3-200A-H, D3-200I-D, D3-200I-E, D3-200I-F, D3-200I-G, D3-200I-H  
 D3-220A-D, D3-220A-E, D3-220A-F, D3-220A-G, D3-220A-H, D3-220I-D, D3-220I-E, D3-220I-F, D3-220I-G, D3-220I-H

Med splines/With splines

Art. nr/Part no	Ersätter/Replaces	Info
15662	21951352, 3593660	OD 57 mm, H=48 mm



### D4

D4-180I-B, D4-180I-C, D4-180I-D, D4-180I-E, D4-180I-F  
 D4-210A-A, D4-210A-B, D4-210I-A, D4-210I-B  
 D4-225A-B, D4-225A-C, D4-225A-D, D4-225A-F, D4-225I-B, D4-225I-C, D4-225I-D, D4-225I-E, D4-225I-F  
 D4-260A-A, D4-260A-B, D4-260A-C, D4-260A-D, D4-260D-B, D4-260D-C, D4-260D-F, D4-260I-F  
 D4-260D-D, D4-260I-A, D4-260I-B, D4-260I-C, D4-260I-D, D4-260I-E  
 D4-300A-A, D4-300A-C, D4-300A-D, D4-300A-F, D4-300D-A, D4-300D-C, D4-300D-D, D4-300D-F, D4-300I-A, D4-300I-C, D4-300I-D, D4-300I-E, D4-300I-F

Impellersats passande tidiga Volvo Penta D4 med sjövattpump 3584062, t.o.m SN2004033316 / Impeller kit that fits early Volvo Penta D4 with seawater pump 3584062, up to SN2004033316

Art. nr/Part no	Ersätter/Replaces	Info
15475	3588475	OD 65 mm, H=50 mm



### D6

D6-280A-A, D6-280A-B, D6-280A-C, D6-280A-D, D6-280A-E, D6-280I-A, D6-280I-B, D6-280I-C, D6-280I-D, D6-280I-E  
 D6-300I-F  
 D6-310I-A, D6-310A-A, D6-310A-B, D6-310A-C, D6-310A-D, D6-310A-E, D6-310D-B, D6-310D-C, D6-310D-D, D6-310D-E, D6-310I-A, D6-310I-B, D6-310I-C, D6-310I-D, D6-310I-E  
 D6-330A-B, D6-330A-C, D6-330A-D, D6-330A-E, D6-330A-F, D6-330D-B, D6-330D-C, D6-330D-D, D6-330D-E, D6-330D-F, D6-330I-B, D6-330I-C, D6-330I-D, D6-330I-E, D6-330I-F  
 D6-350A-A, D6-350A-B  
 D6-370A-B, D6-370A-C, D6-370A-D, D6-370A-E, D6-370A-F, D6-370D-A, D6-370D-B, D6-370D-C, D6-370D-D, D6-370D-E, D6-370D-F, D6-370I-A, D6-370I-B, D6-370I-C, D6-370I-D, D6-370I-E, D6-370I-F  
 D6-435D-A, D6-435D-C, D6-435D-D, D6-435D-E, D6-435D-F, D6-435I-A, D6-435I-C, D6-435I-D, D6-435I-E, D6-435I-F

Med splines/With splines

För sjövattpump/For sea water pump 21380890

Art. nr/Part no	Ersätter/Replaces	Info
15573	3593573, 3819486	OD 65 mm, H=75 mm



## Impellersatser Impeller kits



### D6, D8, 63

D6-280A-A, D6-280A-B, D6-280A-C, D6-280A-D, D6-280A-E, D6-280I-A, D6-280I-B, D6-280I-C, D6-280I-D, D6-280I-E  
 D6-300A-F, D6-300A-G, D6-300D-F, D6-300D-G, D6-300I-G  
 D6-310A-A, D6-310A-B, D6-310A-C, D6-310A-D, D6-310A-E, D6-310D-B, D6-310D-C, D6-310D-D, D6-310D-E, D6-310I-A, D6-310I-B, D6-310I-C, D6-310I-D, D6-310I-E  
 D6-330A-B, D6-330A-C, D6-330A-D, D6-330A-E, D6-330A-F, D6-330D-B, D6-330D-C, D6-330D-D, D6-330D-E, D6-330D-F, D6-330I-B, D6-330I-C, D6-330I-D, D6-330I-E, D6-330I-F  
 D6-340A-G, D6-340D-G, D6-340I-G  
 D6-370A-E, D6-370A-F, D6-370D-A, D6-370D-B, D6-370D-C, D6-370D-D, D6-370D-E, D6-370D-F  
 D6-380A-G, D6-380D-G, D6-380I-G  
 D6-400A-E, D6-400A-F, D6-400A-G  
 D6-435D-A, D6-435D-C, D6-435D-D, D6-435D-E, D6-435D-F  
 D6-440A-G, D6-440D-G, D6-440I-G, D6-440I-WJ-G  
 D6-480I-G, D6-480I-WJ-G  
 D8A1-A MP, D8A2-A MP, D8A3-A MP, D8A4-A MP, D8A5-A MP, D8A6-A MP  
 TAMD63L-A, TAMD63P-A

Passar sjövattenpump med 1" axel. Med splines, urdragningshylsa ingår / Fits seawater pump with 1" shaft. With splines, removal tool included

För sjövattenpumpar/For seawater pumps 21419376, 22901578, 3836563

Art. nr/Part no	Ersätter/Replaces	Info
15649	24139373, 22994993, 21951358, 21422649, 876771, 3887761, 21958592, 22000061	OD 66 mm, H=80 mm



### D9, D11

D9A-MH, D9A2A, D9A2B, D9A2C, D9A2D, D9A2E, D9A2F, D9A2G, D9A2H, D9A2J, D9A2K, D9A2L MH, D9A2M MP  
 D11A-A, D11A-B, D11A-C, D11A-C (IPS), D11A-C MP, D11A-D, D11A-D MP, D11A-E, D11A-E MP, D11B1-A MP, D11B2-A MP, D11B3-A MP, D11B4-A MP, D11C1-A MP, D11C2-A MP, D11C3-A MP, D11C4-A MP

Med splines/With splines

Art. nr/Part no	Ersätter/Replaces	Info
15587	21730348, 3817587	OD 65 mm H=75 mm



### 102, 103, 120, 122

TAMD102A, TAMD102D  
 TAMD103A, TAMD103A-A  
 MD120A, TMD120A, TMD120B, TAMD120A, TAMD120B  
 TAMD122A, TAMD122A/C, TAMD122D, TAMD122P-A, TAMD122P-B, TAMD122P-C

Med splines/With splines

Art. nr/Part no	Ersätter/Replaces	Info
15814	875814, 875697	OD 94,5 mm H=88 mm



## Impellersatser Impeller kits



### D12, D13, D16

D12C-A MP, D12D-A MH, D12D-A MP, D12D-B MH, D12D-B MP, D12D-C MH, D12D-C MP, D12D-E MH, D12D-E MP, D12D-F MP, D12D-G MH, D12D-G MP, D12D-H MP

D13B-A MP, D13B-B MP, D13B-C MH, D13B-C MP, D13B-D MP, D13B-E MH, D13B-E MH (FE), D13B-G MP, D13B-H MP, D13B-J MP, D13B-K MP, D13B-L MP, D13B-M MP, D13B-N MH, D13B-N MH (FE), D13C1-A MH, D13C1-A MP, D13C2-A MH, D13C2-A MP, D13C3-A MP, D13C4-A MP, D13C4-B MP, D13C5-A MP, D13C6-A MP, D13C7-B MP, D13C8-B MP

D16C-A MH, D16C-B MH, D16C-C MH, D16C-D MH, D16C1-E MG, D16C1-E MH, D16C1-F MG, D16C1-F MH

Impeller 95,5 mm H = 95 mm  
Med splines/With splines

Art. nr/Part no	Ersätter/Replaces	
15459	3830459	



Impellerfett / Impeller lubricant  
Glycerin

Art. nr/Part no	Ersätter/Replaces	Fpk/Pack
23005	3862178	1
23005-50	3862178	50



Spare parts from Sweden

## In-peller toolkit In-peller verktyg



### In-peller toolkit

Specialverktyg för insättning av impellrar. Gör inte bara impellerbytet lättare utan är också en säkerhet vid akut impellerbyte till havs. Fungerar på alla typer av impellrar.

Special tools for inserting impellers. Makes the impeller change easy, and is also a safety tool if an impeller change has to be done in an emergency situation. Works on all types of impellers

Art. nr/Part no	Information
950-9400	Sats med 5 verktygsstorlekar: 40, 51, 57, 65 and 95 mm / Kit incl 5 tool sizes: 40, 51, 57, 65 and 95 mm



### In-peller tool 40

För/For impeller diameter: 40mm

Art. nr/Part no	Info
950-9440	Diameter 40 mm



### In-peller tool 51

För/For impeller diameter: 51 mm

Art. nr/Part no	Info
950-9451	Diameter 51 mm



### In-peller tool 57

För/For impeller diameter: 57mm

Art. nr/Part no	Info
950-9457	Diameter 57 mm



### In-peller tool 65

För/For impeller diameter: 65mm

Art. nr/Part no	Info
950-9465	Diameter 65 mm




### In-peller tool 95

För/For impeller diameter: 95mm

Art. nr/Part no	Info
950-9495	Diameter 95 mm



## Impellerurdragare Impeller pullers

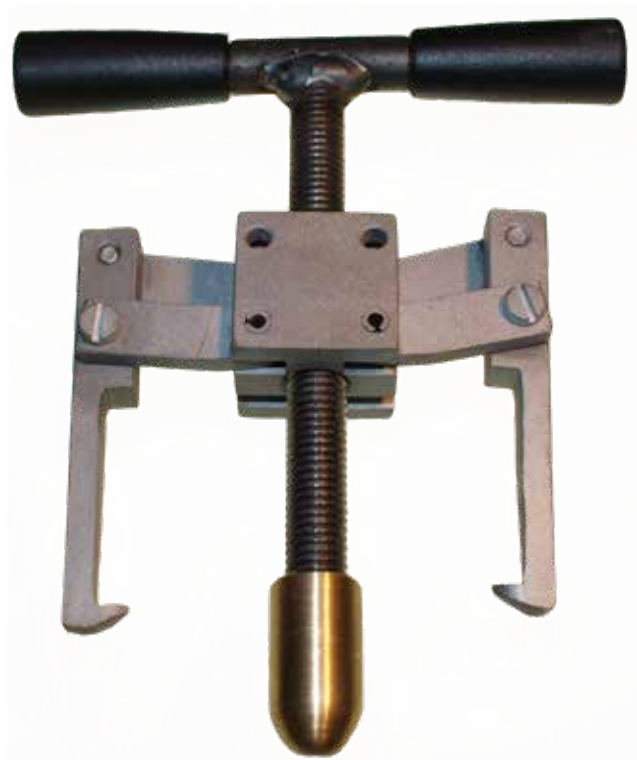

### Impellerurdragare / Impeller puller

Fungerar på alla typer av impellrar/Works on all types of impellers

Art. nr/Part no

15999



### IMPELLERURDRAGARE/IMPELLER PULLER

Passar D4, D6, D9 i trånga utrymmen/Fits D4, D6, D9 in tight spaces

Art. nr/Part no

15999-1



Spare parts from Sweden

## Sjövattenpumpar Sea water pumps



**MB10**  
MB10A

Kullagrad pump. Ersätter tidigare utförande med glidlager  
Ball bearing pump. Replacement for earlier version with plain bearing. Monteringsatts ingår/Installation kit included

Art. nr/Part no	Ersätter/Replaces
15883	858065, 833883, 833415, 833522, 858065, 840076



**B21, B23, B25**

AQ120B, AQ125A, AQ125B  
AQ140A, BB140A  
AQ145A, AQ145B, BB145A  
230A, 230B, B230, B230E, B230FB, B230FX  
AQ131A, AQ131B, AQ131C, AQ131D  
AQ151A, AQ151B, AQ151C  
AQ171A, AQ171C  
250A, 250B

Art. nr/Part no	Ersätter/Replaces
15578	855578, 828026



**B18, B20**

AQ60F, AQ90, AQ95, AQ95A, AQ110, AQ120  
BB30, BB100  
MB18  
AQ105A  
AQ115A, AQ115B, BB115A, BB115B, BB115C  
AQ130A, AQ130B, AQ130C, AQ130D  
MB20A, MB20B, MB20C

Kullagrad pump. Ersätter tidigare utförande med glidlager / Ball bearing pump.  
Replacement for earlier version with plain bearing. Monteringsatts ingår / Installation kit included.

Art. nr/Part no	Ersätter/Replaces
15895	829895, 825916



**V6, V8**

430, 430A, 430B, 431A, 431B, 432A, 434A  
AQ175A, AQ205A, AQ205LB  
500A, 500B, 501A, 501B, 570A, 571A, 572A  
AQ200C, AQ200D, AQ200F  
AQ211A  
AQ225C, AQ225D, AQ225E, AQ225F, BB225A, BB225AV, BB225B, BB225C  
AQ231A, AQ231B, 231LB, BB231A  
AQ255A, AQ255B  
AQ260A, AQ260B, BB260AV, BB260B, BB260C, BB261A  
AQ271A, AQ271B, AQ271C, AQ271D, 271LB  
AQ290A  
AQ311A, AQ311B  
740A, BB740A, 740B

High speed pump, monterad på vevaxel med fyra skruvar i locket / High speed pump crankshaft mounted with four bolts in end cover

Art. nr/Part no	Ersätter/Replaces
15952	857451, 855722



## Sjövattenpumpar Sea water pumps



### 3.0, V6, V8

3.0GSMEFS, 3.0GSPEFS  
 4.3GiPEFS, 4.3GXi-A, 4.3GXi-B, 4.3GXi-BF, 4.3GXi-C, 4.3GXi-CF, 4.3GXi-D,  
 4.3GXi-DF, 4.3GXi-E, 4.3GXi-EF, 4.3OSi-B, 4.3OSi-C, 4.3OSi-CF, 4.3OSi-D,  
 4.3OSi-DF, 4.3OSi-E, 4.3OSi-EF  
 5.0GiPEFS, 5.0GXi-A, 5.0GXi-B, 5.0GXi-BF, 5.0GXi-C, 5.0GXi-CF, 5.0GXi-D,  
 5.0GXi-DF, 5.0GXi-E, 5.0GXi-EF, 5.0OSi-B, 5.0OSi-BF, 5.0OSi-C, 5.0OSi-CF,  
 5.0OSi-D, 5.0OSi-DF, 5.0OSi-E, 5.0OSi-EF  
 5.7Gi-A, 5.7Gi-B, 5.7Gi-BF, 5.7Gi-C, 5.7Gi-CF, 5.7Gi-D, 5.7Gi-DF, 5.7Gi-E, 5.7Gi-  
 EF, 5.7Gii-A, 5.7Gii-B, 5.7Gii-C, 5.7Gii-D, 5.7Gii-E, 5.7GSii-A, 5.7GSiiPEFS  
 5.7GXi-A, 5.7GXi-B, 5.7GXi-C, 5.7GXi-CF, 5.7GXi-D, 5.7GXi-DF, 5.7GXi-E,  
 5.7GXi-F, 5.7GXi-FF, 5.7GXii-A, 5.7GXii-B, 5.7GXii-C, 5.7GXii-D, 5.7GXii-E,  
 5.7GXii-F  
 5.7OSi-A, 5.7OSi-AF, 5.7OSi-B, 5.7OSi-BF, 5.7OSi-C, 5.7OSi-CF, 5.7OSi-D,  
 5.7OSi-DF, 5.7OSXi-A, 5.7OSXi-AF, 5.7OSXi-B, 5.7OSXi-BF, 5.7OSXi-C,  
 5.7OSXi-CF, 5.7OSXi-D, 5.7OSXi-DF

Art. nr/Part no	Ersätter/Replaces
15599	21214599, 3857202, 3862482, 3812693



### V6, V8

4.3GL-E, 4.3GL-EF  
 5.0GL-F, 5.0GL-FF

Art. nr/Part no	Ersätter/Replaces
15090	21255090



### V6, V8

4.3GL-G, 4.3GL-GF, 4.3GL-J, 4.3GL-JF, 4.3GL-P  
 4.3GXi-225-R, 4.3Gi-200-R, 4.3GXi-F, 4.3GXi-FF, 4.3OSi-F, 4.3OSi-FF,  
 4.3GXi-G, 4.3GXi-GF, 4.3OSi-G, 4.3OSi-GF, 4.3GXi-J, 4.3GXi-JF, 4.3OSi-J,  
 4.3OSi-JF, 4.3GXi-P, 4.3GXi-Q, 4.3GXiE-225-R, 4.3GXiE-225-S, 4.3GXiE-  
 M, 4.3GXiE-P, 4.3GXiE-Q  
 5.0GL-H, 5.0GL-HF, 5.0GL-J, 5.0GL-JF, 5.0GXi-270-R, 5.0GXi-F, 5.0GXi-FF,  
 5.0OSi-F, 5.0OSi-FF, 5.0GXi-G, 5.0GXi-GF, 5.0OSi-G, 5.0OSi-GF, 5.0GXi-J,  
 5.0GXi-JF, 5.0OSi-J, 5.0OSi-JF, 5.0GXi-N, 5.0GXi-P, 5.0GXiC-270-R,  
 5.0GiC-225-S, 5.0GXiC-J, 5.0GXiC-JF, 5.0GiC-J, 5.0GiC-JF, 5.0GXiC-P,  
 5.0GXiC-270-R, 5.0GiC-225-S, 5.0GXiC-E, 5.0GXiC-EJ, 5.0GXiC-EJF, 5.0GXiC-E-M,  
 5.0GXiC-E-MF, 5.0GiC-E, 5.0GiC-EJ, 5.0GiC-EJF, 5.0GiC-E-M, 5.0GiC-E-MF, 5.0GXiC-E-  
 P, 5.0GXiE-270-R, 5.0GXiE-JF, 5.0GXiE-J, 5.0OSiE-JF, 5.0OSiE-J, 5.0GXiE-K,  
 5.0GXiE-KF, 5.0GXiE-M, 5.0GXiE-MF, 5.0GXiE-N, 5.0GXiE-P  
 5.7Gi-300-J, 5.7Gi-300-JF, 5.7OSi-300-J, 5.7OSi-300-JF, 5.7GXi-J, 5.7GXi-  
 JF, 5.7OSXi-J, 5.7OSXi-JF, 5.7Gi-300-N, 5.7GXi-N, 5.7Gi-300-P, 5.7GXi-P,  
 5.7Gi-300-R, 5.7GXi-320-R, 5.7Gi-F, 5.7Gi-FF, 5.7GXi-G, 5.7GXi-GF,  
 5.7OSi-E, 5.7OSi-EF, 5.7OSXi-E, 5.7OSXi-EF, 5.7Gi-G, 5.7Gi-GF, 5.7GXi-H,  
 5.7GXi-HF, 5.7OSi-G, 5.7OSi-GF, 5.7OSXi-G, 5.7OSXi-GF, 5.7GiC-300-J,  
 5.7GiC-300-JF, 5.7GXiC-J, 5.7GXiC-JF, 5.7GiC-300-P, 5.7GXiC-P, 5.7GiC-  
 300-R, 5.7GXiC-320-R, 5.7GiC-300-J, 5.7GiC-300-JF, 5.7GXiC-E, 5.7GXiC-EJ,  
 5.7GXiC-EJF, 5.7GiC-300-M, 5.7GiC-300-MF, 5.7GXiC-E-M, 5.7GXiC-E-  
 MF, 5.7GiC-300-P, 5.7GXiC-E-P, 5.7GiC-300-R, 5.7GXiC-E-320-R, 5.7GiE-  
 300-J, 5.7GiE-300-JF, 5.7GXiE-J, 5.7GXiE-JF, 5.7OSiE-300-J, 5.7OSiE-300-JF,  
 5.7OSXiE-J, 5.7OSXiE-JF, 5.7GiE-300-K, 5.7GiE-300-KF, 5.7GXiE-K,  
 5.7GXiE-KF, 5.7GiE-300-M, 5.7GiE-300-MF, 5.7GXiE-M, 5.7GXiE-MF,  
 5.7GXiE-N, 5.7GiE-300-N, 5.7GiE-300-P, 5.7GXiE-P, 5.7GiE-300-R,  
 5.7GXiE-320-R, 5.7GiL-F, 5.7GXii-G, 5.7GiL-G, 5.7GXii-H  
 V6-200-A, V6-225-A, V6-225-E-A  
 V8-225-C-A, V8-300-C-A, V8-320-C-A, V8-225-C-B, V8-300-C-B,  
 V8-320-C-B, V8-225-CE-A, V8-300-CE-A, V8-320-CE-A, V8-225-CE-B,  
 V8-300-CE-B, V8-320-CE-B, V8-270-A, V8-270-B, V8-270-C-A, V8-270-C-B,  
 V8-270-CE-A, V8-270-CE-B, V8-270-E-A, V8-270-E-B, V8-300-A, V8-320-A,  
 V8-300-B, V8-320-B, V8-300-E-A, V8-320-E-A, V8-300-E-B, V8-320-E-B

Art. nr/Part no	Ersätter/Replaces
15799	21212799



Spare parts from Sweden

## Sjövattenpumpar Sea water pumps



### V6,V8

4.3GL-A, 4.3GL-B, 4.3GL-C, 4.3GL-D  
4.3GIJWTR, 4.3GIJWTRCE  
4.3GLPEFS, 4.3GLPWTR  
4.3GSJWTR, 4.3GSPWTR  
5.0GL-A, 5.0GL-B, 5.0GL-C, 5.0GL-D, 5.0GL-E  
5.0GLPEFS, 5.0GLPWTR  
5.0GiPWTR  
5.7GL-A, 5.7GL-B, 5.7GL-C, 5.7GL-D, 5.7GL-E  
5.7GSPEFS, 5.7GSPWTR  
5.7GSIPWTR

Art. nr/Part no	Ersätter/Replaces
15596	21214596, 3812697, 3862487, 3858229



### V8 Big block

8.1Gi-G, 8.1Gi-GF, 8.1Gi-H, 8.1Gi-HF, 8.1Gi-J, 8.1Gi-JF  
8.1GiC-J, 8.1GiC-JF, 8.1GiC-Q  
8.1GiCE-J, 8.1GiCE-JF, 8.1GiCE-M, 8.1GiCE-P, 8.1GiCE-Q  
8.1GiE-J, 8.1GiE-JF, 8.1GiE-P, 8.1GiE-K, 8.1GiE-KF, 8.1GiE-M, 8.1GiE-MF,  
8.1GiE-P  
8.1Gil-G, 8.1Gil-H  
8.1GXi-F, 8.1GXi-FF, 8.1GXi-G, 8.1GXi-GF, 8.1GXi-J, 8.1GXi-JF  
8.1GXiE-J, 8.1GXiE-JF, 8.1GXiE-K, 8.1GXiE-KF, 8.1GXiE-M, 8.1GXiE-P  
8.1GXil-F, 8.1GXil-G  
8.1IPSCE-JF, 8.1IPSCE-MF, 8.1IPSCE-P, 8.1IPSCE-Q, 8.1IPSE-JF, 8.1IPSE-KF  
8.1OSi-C, 8.1OSi-CF, 8.1OSi-D, 8.1OSi-DF, 8.1OSi-J, 8.1OSi-JF

Art. nr/Part no	Ersätter/Replaces
15800	21212800



### V8 Big block

8.1Gi-A, 8.1Gi-B, 8.1Gi-BF, 8.1Gi-C, 8.1Gi-CF, 8.1Gi-D, 8.1Gi-DF, 8.1Gi-E,  
8.1Gi-EF, 8.1Gi-F, 8.1Gi-FF  
8.1Gil-A, 8.1Gil-B, 8.1Gil-C, 8.1Gil-D, 8.1Gil-E, 8.1Gil-F  
8.1GSi-A, 8.1GSiL-A  
8.1GXi-A, 8.1GXi-AF, 8.1GXi-B, 8.1GXi-BF, 8.1GXi-C, 8.1GXi-CF, 8.1GXi-  
D, 8.1GXi-DF, 8.1GXi-E, 8.1GXi-EF  
8.1GXil-A, 8.1GXil-B, 8.1GXil-C, 8.1GXil-D, 8.1GXil-E  
8.1OSi-A, 8.1OSi-AF, 8.1OSi-B, 8.1OSi-BF  
DPX375-A, DPX375-B, DPX375-BF, DPX375-CF  
DPX420-A, DPX420-B, DPX420-BF, DPX420-CF

Art. nr/Part no	Ersätter/Replaces
15801	21214601, 3812695, 3862484



## Sjövattenpumpar Sea water pumps



### MD1, MD2, MD5, MD6, MD7, MD11

MD1, MD1A, MD1B  
MD2, MD2A, MD2B, AQD2B  
MD5A, MD5B, MD5C  
MD6A, MD6B  
MD7A, MD7B  
MD11C, MD11D

Kullagrad pump. Ersätter tidigare utförande med glidlager / Ball bearing pump. Replacement for earlier version with plain bearing, Monteringssats ingår. Obs, använd klack 15879 till MD5. Säljes separat / Installation kit included. NB use clamp 15879 for MD5. Sold separately.

Art. nr/Part no	Ersätter/Replaces
15883	858065, 833883, 833415, 833522, 858065, 840076



### MD3, MD17

MD3B  
MD17C, MD17D

Kullagrad pump. Ersätter tidigare utförande med glidlager. Monteringssats ingår / Ball bearing pump. Replacement for earlier version with plain bearing. Installation kit included

Art. nr/Part no	Ersätter/Replaces
15895	829895, 825916




### MD2010, MD2020, MD2030, MD2040, DI-13, DI-20

MD2010, MD2010B, MD2010-C, MD2010-D  
MD2020, MD2020B, MD2020-C, MD2020-D  
MD2030-C\*), MD2030-D\*)  
MD2040-C\*), MD2040-D\*)  
DI-13, DI-13A, DI-13B, DI-13F  
DI-20, DI-20A, DI-20B, DI-20F

\*) Tidiga motorer / Earlier engines

Art. nr/Part no	Ersätter/Replaces
15654	3593654, 3580944

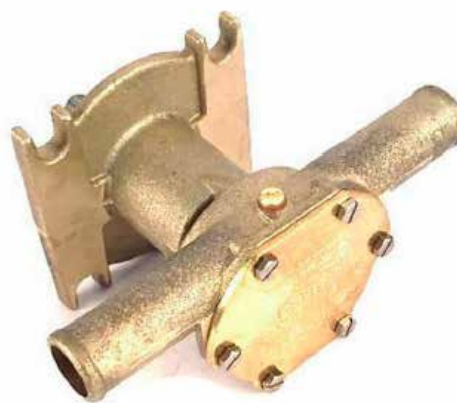

### MD2030, MD2040, DI-30, D2-40

MD2010-C\*), MD2010-D\*)  
MD2020-C\*), MD2020-D\*)  
MD2030A, MD2030B, MD2030-C\*), MD2030-D\*)  
MD2040A, MD2040B, MD2040-C\*), MD2040-D\*)  
DI-30A, DI-30B, DI-30F  
D2-40A, D2-40B, D2-40F

\*) Senare motorer / Later engines

Art. nr/Part no	Ersätter/Replaces
15655	3593655, 3580945, 3580223, 3580222



Spare parts from Sweden

## Sjövattenpumpar Sea water pumps



### D2-50, D2-55, D2-60, D2-75

D2-50F  
D2-55, D2-55B, D2-55C, D2-55D, D2-55E, D2-55F  
D2-60F  
D2-75, D2-75B, D2-75C, D2-75F

Inlopp/intake 26 mm, Utlopp/Outlet 32 mm

Art. nr/Part no	Ersätter/Replaces
I5089	24708055, 3583089



### 31, 41

MD31A, TMD31A, TAMD31A, TMD31B, TAMD31B, AD31, AD31B  
TMD41A, TMD41A, TAMD41A, TMD41B, TAMD41B, AD41A, D41B,  
AD41B


Art. nr/Part no	Ersätter/Replaces
I5843	858469



### 22

MD22, MD22A, MD22L, MD22L-A, TMD22A

Art. nr/Part no	Ersätter/Replaces
I5824	859824

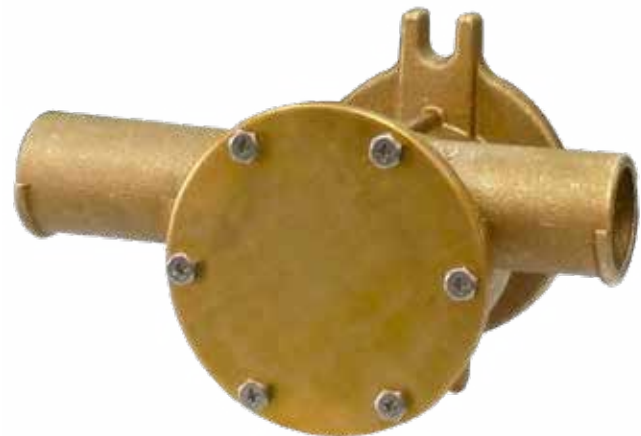

### 31, 41, KAD32, KAD42, KAD43, KAD44, KAD300

MD31A, AD31B, TMD31B, TAMD31B, TMD31D, TAMD31D, TMD31L-A,  
TAMD31L-A, TAMD31M, TAMD31M-A, TAMD31P-A, TAMD31S, AD31D,  
AD31D-A, AD31L-A, AD31P-A, AD31XD  
KAD32, KAD32P-A  
AD41A, AD41B, AD41BJ, AD41D, AD41L-A, AD41P-A, D41B, D41D,  
D41L-A, TMD41L-A, TAMD41L-A, TMD41B, TAMD41B, TMD41D,  
TAMD41D, TAMD41H-A, TAMD41H-B, TAMD41M-A, TAMD41P,  
TAMD41P-A  
KAD42A, KAD42B, KAD42P-A, KAMD42A, KAMD42B, TAMD42B,  
KAMD42P-A, TAMD42WJ-A  
KAD43P-A, KAD43P-B, KAMD43P-A, KAMD43P-B,  
KAD44P, KAD44P-A, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-B,  
KAMD44P-C  
KAD300-A, KAMD300-A

Art. nr/Part no	Ersätter/Replaces
I5115	3583115, 3581558, 10-24524-12



## Sjövattenpumpar Sea water pumps



### D3

D3-110I-A, D3-110I-B, D3-110I-C  
 D3-130A-A, D3-130A-B, D3-130A-C, D3-130I-A, D3-130I-B, D3-130I-C  
 D3-160A-A, D3-160A-B, D3-160A-C, D3-160I-A, D3-160I-B, D3-160I-C  
 D3-190A-B, D3-190A-C, D3-190I-B, D3-190I-C

Art. nr/Part no	Ersätter/Replaces
15637	21141637



### D4

D4-180I-B, D4-180I-C, D4-180I-D, D4-180I-E, D4-180I-F  
 D4-210A-A, D4-210A-B, D4-210I-A, D4-210I-B  
 D4-225A-B, D4-225A-C, D4-225A-D, D4-225I-B, D4-225I-C, D4-225I-D,  
 D4-225I-E, D4-225I-F  
 D4-260A-A, D4-260A-B, D4-260A-C, D4-260A-D, D4-260D-B, D4-260D-C,  
 D4-260D-D  
 D4-260I-A, D4-260I-B, D4-260I-C, D4-260I-D, D4-260I-E, D4-260I-F  
 D4-300A-A, D4-300A-C, D4-300A-D, D4-300D-A, D4-300D-C, D4-300D-D  
 D4-300I-A, D4-300I-C, D4-300I-D, D4-300I-E, D4-300I-F

Art. nr/Part no	Ersätter/Replaces
15062	3584062



### D3

D3-110I-D, D3-110I-E, D3-110I-F, D3-110I-G, D3-110I-H  
 D3-140A-D, D3-140A-E, D3-140A-F, D3-140A-G, D3-140A-H, D3-140I-D,  
 D3-140I-E, D3-140I-F, D3-140I-G, D3-140I-H  
 D3-150I-D, D3-150I-E, D3-150I-F, D3-150I-G, D3-150I-H  
 D3-170A-D, D3-170A-E, D3-170A-F, D3-170A-G, D3-170A-H, D3-170I-D,  
 D3-170I-E, D3-170I-F, D3-170I-G, D3-170I-H  
 D3-200A-D, D3-200A-E, D3-200A-F, D3-200A-G, D3-200A-H, D3-200I-D,  
 D3-200I-E, D3-200I-F, D3-200I-G, D3-200I-H  
 D3-220A-D, D3-220A-E, D3-220A-F, D3-220A-G, D3-220A-H, D3-220I-D,  
 D3-220I-E, D3-220I-F, D3-220I-G, D3-220I-H

Art. nr/Part no	Ersätter/Replaces
15102	21379102, 21106041



### D4, D6

D4-145I-G, D4-150A-G, D4-175I-G, D4-180I-F  
 D4-225A-E, D4-225A-F, D4-225I-F  
 D4-230A-G, D4-230I-G  
 D4-260A-E, D4-260A-F, D4-260D-E, D4-260D-F, D4-260I-F  
 D4-270A-G, D4-270I-G  
 D4-300A-E, D4-300A-F, D4-300A-G, D4-300D-E, D4-300D-F, D4-300I-F,  
 D4-300I-G, D4-320I-G  
 D6-300D-G, D6-300I-G  
 D6-340A-G, D6-340D-G, D6-340I-G  
 D6-380A-G, D6-380D-G, D6-380I-G  
 D6-400A-G  
 D6-440A-G, D6-440D-G, D6-440I-G, D6-440I-WJ-G  
 D6-480D-G, D6-480I-G, D6-480I-WJ-G

Art. nr/Part no	Ersätter/Replaces
15374	22901573, 21419374



## Sjövattenpumpar Sea water pumps



### D6

D6-280A-A, D6-280A-B, D6-280A-C, D6-280A-D, D6-280I-A, D6-280I-B, D6-280I-C, D6-280I-D, D6-280I-E  
D6-300I-F  
D6-310A-A, D6-310D-B, D6-310D-C, D6-310D-D, D6-310I-A, D6-310I-B, D6-310I-C, D6-310I-D, D6-310I-E  
D6-330A-B, D6-330A-C, D6-330A-D, D6-330D-B, D6-330D-C, D6-330D-D, D6-330I-B, D6-330I-C, D6-330I-D, D6-330I-E, D6-330I-F  
D6-350A-A, D6-350A-B  
D6-370A-B, D6-370A-C, D6-370A-D, D6-370D-A, D6-370D-B, D6-370D-C, D6-370D-D, D6-370I-A, D6-370I-B, D6-370I-C, D6-370I-D, D6-370I-E, D6-370I-F  
D6-435D-A, D6-435D-C, D6-435D-D, D6-435I-A, D6-435I-C, D6-435I-D, D6-435I-E, D6-435I-F

Art. nr/Part no	Ersätter/Replaces
15890	21380890, 3589907



### D6

D6-280A-E  
D6-300A-F, D6-300A-G, D6-300D-F, D6-300D-G  
D6-310A-E, D6-310D-E  
D6-330A-E, D6-330A-F, D6-330D-E, D6-330D-F  
D6-340D-G, D6-340I-G  
D6-370A-E, D6-370A-F, D6-370D-E, D6-370D-F  
D6-380A-G, D6-380D-G, D6-380I-G  
D6-400A-E, D6-400A-F, D6-400A-G  
D6-435D-E, D6-435D-F  
D6-440A-G, D6-440D-G, D6-440I-WJ-G  
D6-480D-G, D6-480I-G, D6-480I-WJ-G

Art. nr/Part no	Ersätter/Replaces
15376	24219064, 22901578, 21419376



### D5, D7

D5A-B TA, D5A-T, D5A-TA  
D7A-B TA, D7A-T, D7A-TA, D7C-B TA, D7C-TA

Art. nr/Part no	Ersätter/Replaces
15288	3838288



## Sjövattenpumpar Sea water pumps



### D11

D11A-C (IPS), D11A-C MP  
D11A-D (IPS), D11A-D MP  
D11A-E MP  
D11B2-A MP (IPS)


Art. nr/Part no	Ersätter/Replaces
15723	21219723



### D13

D13B-A MP, D13B-B MP, D13B-C MP, D13B-D MP, D13B-E MH, D13B-E MH (FE), D13B-G MP, D13B-H MP, D13B-J MP, D13B-K MP, D13B-K MP (IPS), D13B-L MP, D13B-M MP, D13B-N MH, D13B-N MH (FE), D13C1-A MH, D13C1-A MP, D13C2-A MP, D13C2-B MP, D13C3-A MP, D13C4-A MP, D13C4-B MP, D13C5-A MP, D13C6-A MP, D13C7-B MP, D13C8-B MP

Art. nr/Part no	Ersätter/Replaces
15848	24346050, 3886848

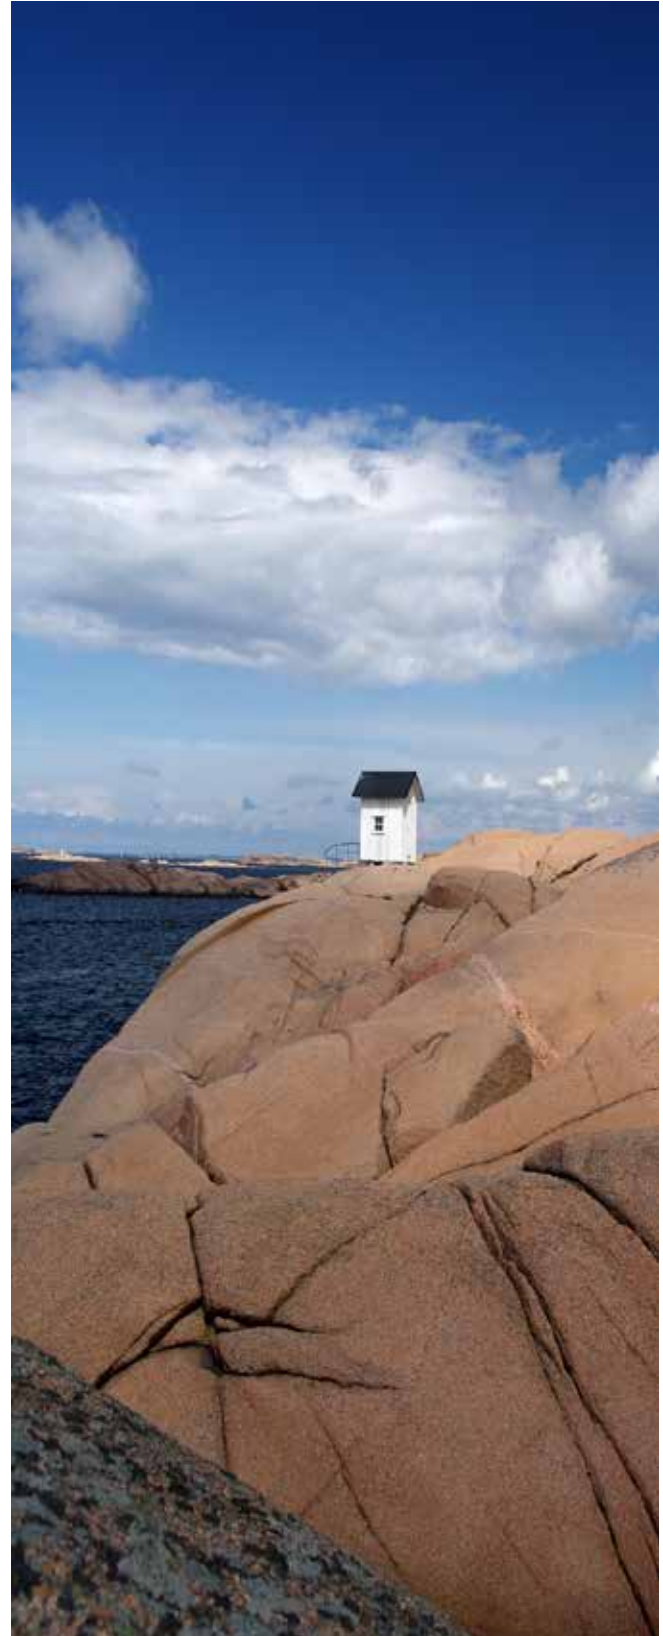

Spare parts from Sweden

## Reparationssatser sjövattpumpar Repair kits sea water pumps



**MB10**  
MB10A

Impeller I5807 passar/fits. Beställes separat/ordered separately.  
Tidigare utförande med glidlager/Earlier version with plain bearing

Art. nr/Part no	Ersätter/Replaces
22076	N/A



**B18, B20**

AQ60F, AQ90, AQ95, AQ95A, AQ110  
AQ120  
BB30, BB100  
MB18, MB20A, MB20B, MB20C  
AQ105A  
AQ115A, AQ115B, BB115, BB115B, BB115C  
AQ130A, AQ130B, AQ130C, AQ130D

Impeller I5808 passar/fits. Beställes separat/ordered separately.  
För kullagrad pump/For pump with ball bearing  
Kam ingår ej/Cam not included

Art. nr/Part no	Ersätter/Replaces
15698	875698, 21951420, 21951302



**B18, B20**

AQ60F, AQ90, AQ95, AQ95A, AQ110  
AQ120  
BB30, BB100  
MB18, MB20A, MB20B, MB20C  
AQ105A  
AQ115A, AQ115B, BB115, BB115B, BB115C  
AQ130A, AQ130B, AQ130C, AQ130D

Impeller I5808 passar/fits. Beställes separat/ordered separately.  
För pump utan kullager/For pump without ball bearing

Art. nr/Part no	Ersätter/Replaces
22073	N/A



**B30, MD21**

AQ165A, BB165A  
AQ170A, AQ170B, AQ170C  
BB170A, BB170B, BB170C  
AQD21A\*, AQD21B  
MD21A\*, MD21B

\* Från / From SN103387-

Impeller I5575 passar/fits. Beställes separat/ordered separately.  
Axel med kilspår/Shaft with key groove. Kam ingår ej/Cam not included

Art. nr/Part no	Ersätter/Replaces
15383	875383



## Reparationsatser sjövattpumpar Repair kits sea water pumps



### B21, B23, B25

AQ120B, AQ125A, AQ125B  
AQ140A, BB140A  
230A, 230B  
AQ131A, AQ131B, AQ131C, AQ131D  
AQ145A, AQ145B, BB145A  
250A, 250B, 251A  
AQ151A, AQ151B, AQ151C  
AQ171A, AQ171C

Impeller 15575 passar/fits. Beställes separat/ordered separately. Kam ingår ej/  
Cam not included

Art. nr/Part no	Ersätter/Replaces
15574	876081, 875574



### V6, V8

430, 430A, 430B, 431A, 431B, 432A, 434A  
AQ175A, AQ205A, AQ205LB  
AQ200C, AQ200D, AQ200F  
AQ211A  
AQ225C, AQ225D, AQ225E, AQ225F, BB225A, BB225AV, BB225B,  
BB225C  
AQ231A, AQ231B, BB231A  
500B, 501B  
AQ255A, AQ255B  
AQ260A, AQ260B, BB260AV, BB260B, BB260C, BB261A  
AQ271A, AQ271B, AQ271C, AQ271D, 271LB  
AQ290A  
AQ311A, AQ311B  
570A, 571A, 572A  
740A, BB740A, 740B

För sjövattpump monterad på vevaxeln med sex skruvar i impellerlocket.  
Impeller 15811 och skruvsats 15335 passar och beställes separat.

For seawater pump mounted on crankshaft with six bolts on end cover. Impel-  
ler 15811 and screw kit 15335 fits and can be ordered separately

Art. nr/Part no	Ersätter/Replaces	Info
15016	1 x 181355 + 1 x 809441	För pump 855722, 856513



### V6, V8

AQ175A, AQ205A, AQ205LB  
430, 430A, 430B, 431A, 431B, 432A, 434A  
AQ200C, AQ200D, AQ200F  
AQ211A  
AQ225C, AQ225D, AQ225E, AQ225F, BB225A, BB225AV, BB225B,  
BB225C  
AQ231A, AQ231B, BB231A, 231LB  
AQ255A, AQ255B  
AQ260A, AQ260B, BB260AV, BB260B, BB260C, BB261A  
AQ271A, AQ271B, AQ271C, AQ271D, 271LB  
AQ290A  
AQ311A, AQ311B  
500A, 500B, 501A, 501B  
570, 570A, 571A, 572A  
740B, BB740A

För sjövattpump monterad på vevaxeln med fyra skruvar i impellerlocket.  
Impeller 15811 och skruvsats 15334 passar och beställes separat.

For seawater pump mounted on crankshaft with four bolts on end cover.  
Impeller 15811 and screw kit 15334 fits and can be ordered separately

Art. nr/Part no	Ersätter/Replaces	Info
15012	1 x 183861 + 1 x 827247	För pump 857451



### 290A, 740A

AQ290A  
740A

För sjövattpump med sex skruvar i impellerlocket. Impeller 15593 och kam  
15011 passar och beställes separat. / For seawater pump with six bolts in the  
end cover. Impeller 15593 and cam 15011 fits and can be ordered separately.

22136 = sats utan axel,/kit without shaft, 22136-2 = sats med axel/kit incl shaft

Art. nr/Part no	Ersätter/Replaces
22136	877373, 876088, 876529, 875759
22136-2	877373, 876088, 876529, 875759
15011	827011



Spare parts from Sweden

## Reparationssatser sjövattenpumpar Repair kits sea water pumps



### MD1, MD2, MD6

MD1A, MD1B  
AQD2B, MD2A, MD2, MD2A, MD2B  
MD6A

Impeller 15807 passar/fits. Beställes separat/ordered separately.  
Tidigare utförande med glidlager/Ealier version with plain bearing

Art. nr/Part no	Ersätter/Replaces
22076	N/A



### MD3, MD17

MD3B  
MD17C, MD17D

Impeller 15808 passar/fits. Beställes separat/ordered separately.  
Tidigare utförande med glidlager/Ealier version with plain bearing

Art. nr/Part no	Ersätter/Replaces
22073	N/A



### MD3, MD17

MD3B  
MD17C, MD17D

Impeller 15808 passar/fits. Beställes separat/ordered separately.  
För kullagrad pump/For pump with ball bearing

Art. nr/Part no	Ersätter/Replaces
15698	21951420, 875698



### MD5, MD6, MD7, MD11

MD5A, MD5B, MD5C  
MD6B  
MD7A, MD7B  
MD11C, MD11D

Impeller 15583 passar/fits. Beställes separat/ordered separately.  
För pumpar med glidlager/For pumps with plain bearing

Art. nr/Part no	Ersätter/Replaces
15584	21951422, 875584



### 2001, 2002, 2003

2001, 2001AG, 2001B, 2001BG, 2001D, 2001R  
2002, 2002AG, 2002B, 2002BG, 2002D  
2003, 2003AG, 2003B, 2003BG, 2003R

Impeller 15583 passar/fits. Beställes separat/ordered separately.  
Passar ej 2003T / Does not fit 2003T.

Art. nr/Part no	Ersätter/Replaces
15756	21951414, 875756



## Reparationssatser sjövattpumpar Repair kits sea water pumps



**MD2010, MD2020, MD2030, MD2040, DI-13, DI-20**  
 MD2010, MD2010B, MD2010-C, MD2010-D  
 MD2020, MD2020B, MD2020-C, MD2020-D  
 MD2030-C\*), MD2030-D\*)  
 MD2040-C\*), MD2040-D\*)  
 DI-13, DI-13A, DI-13B, DI-13F  
 DI-20, DI-20A, DI-20B, DI-20F

\*) Tidiga motorer / Earlier engines  
**Passar/Fits pump: 3593654**

Art. nr/Part no	Ersätter/Replaces	Info
23035	N/A	Med axel / including shaft
23035-1	N/A	Utan axel / without shaft



**MD2010, MD2020, MD2030, MD2040, DI-30, D2-40**  
 MD2010-C\*), MD2010-D\*)  
 MD2020-C\*), MD2020-D\*)  
 MD2030A, MD2030B, MD2030-C\*), MD2030-D\*)  
 MD2040A, MD2040B, MD2040-C\*), MD2040-D\*)  
 DI-30A, DI-30B, DI-30F  
 D2-40A, D2-40B, D2-40F

\*) Senare motorer  
**Passar/Fits pump: 3593655**

Art. nr/Part no	Ersätter/Replaces	Info
23418	N/A	Med axel / including shaft
23418-1	N/A	Utan axel / without shaft



**D2-50, D2-55, D2-60, D2-75**  
 D2-50F  
 D2-55, D2-55B, D2-55C, D2-55D, D2-55E, D2-55F  
 D2-60F  
 D2-75, D2-75B, D2-75C, D2-75F

Art. nr/Part no	Ersätter/Replaces	Info
23038	N/A	Med axel / including shaft
23038-1	N/A	Utan axel / without shaft



**30, 31, 40, 41, KAD32, KAD42, KAD43, KAD44, KAD300**  
 MD30A, TMD30A, TAMMD30A, AD30A, AQAD30A  
 MD31A, TMD31A, TAMMD31A, TMD31B, TAMMD31B, TMD31D, TAMMD31D,  
 TAMMD31L-A, TAMMD31M, TAMMD31M-A, TAMMD31P-A, TAMMD31S, AD31,  
 AD31B, AD31D, AD31D-A, AD31L-A, AD31P-A, AD31XD  
 KAD32P, KAD32P-A  
 MD40A, TMD40A, TAMMD40A, TMD40B, TAMMD40B, TMD40C, AD40B,  
 AQD40A, AQAD40A, AQAD40B  
 TAMMD41A, TMD41B, TAMMD41B, TMD41D, TAMMD41D, TAMMD41H-A,  
 TAMMD41H-B, TMD41L-A, TAMMD41P, TAMMD41P-A, D41B, AD41A, AD41B,  
 AD41BJ, D41D, AD41D, D41L-A, AD41L-A, AD41P-A  
 KAD42A, KAD42B, KAD42P-A, KAMD42A, KAMD42B, KAMD42P-A,  
 TAMMD42B, TAMMD42WJ-A  
 KAD43P-A, KAD43P-B, KAMD43P, KAMD43P-A, KAMD43P-B  
 KAD44P, KAD44P-A, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-B,  
 KAMD44P-C  
 KAD300-A, KAMD300-A

För sjövattpump med sex skruvar i impellerlocket. Impeller 15593 och kam 15011 passar och beställs separat. / For seawater pump with six bolts in the end cover. Impeller 15593 and cam 15011 fits and can be ordered separately.  
 Passar sjövattpumpar/fits seawater pumps 3583145, 3581558, 861198, 3583085

22136 = sats utan axel,/kit without shaft, 22136-2 = sats med axel/kit incl shaft

Art. nr/Part no	Ersätter/Replaces
22136	877373, 876088, 876529, 875759
22136-2	877373, 876088, 876529, 875759
15011	827011



Spare parts from Sweden

## Reparationsatser sjövattenpumpar Repair kits sea water pumps



**40**  
MD40A, TMD40A, TAMD40A, TMD40B, TAMD40C  
AD40B, AQD40A, AQAD40A, AQAD40B

För pump med fem skruvar /For pump with five screws in cover Impeller  
I5560 passar/fits. Beställes separat/ordered separately.

Art. nr/Part no	Ersätter/Replaces
22137	875769, 875712



**D3**  
D3-110I-A, D3-110I-B, D3-110I-C  
D3-130A-A, D3-130A-B, D3-130A-C, D3-130I-A, D3-130I-B, D3-130I-C  
D3-160A-A, D3-160A-B, D3-160A-C, D3-160I-A, D3-160I-B, D3-160I-C  
D3-190A-B, D3-190A-C, D3-190I-A, D3-190I-B, D3-190I-C

Slitagesats/Wear kit

Art. nr/Part no	Ersätter/Replaces
22384	21951384



**D3**  
D3-110I-A, D3-110I-B, D3-110I-C  
D3-130A-A, D3-130A-B, D3-130A-C, D3-130I-A, D3-130I-B, D3-130I-C  
D3-160A-A, D3-160A-B, D3-160A-C, D3-160I-A, D3-160I-B, D3-160I-C  
D3-190A-B, D3-190A-C, D3-190I-A, D3-190I-B, D3-190I-C

Axelkit/Shaft kit

Art. nr/Part no	Ersätter/Replaces
22439	21951439



**D3**  
D3-110I-D, D3-110I-E, D3-110I-F, D3-110I-G, D3-110I-H  
D3-140A-D, D3-140A-E, D3-140A-F, D3-140A-G, D3-140A-H, D3-140I-D,  
D3-140I-E, D3-140I-F, D3-140I-G, D3-140I-H  
D3-150I-D, D3-150I-E, D3-150I-F, D3-150I-G, D3-150I-H  
D3-170A-D, D3-170A-E, D3-170A-F, D3-170A-G, D3-170A-H, D3-170I-D,  
D3-170I-E, D3-170I-F, D3-170I-G, D3-170I-H  
D3-200A-D, D3-200A-E, D3-200A-F, D3-200A-G, D3-200A-H, D3-200I-D,  
D3-200I-E, D3-200I-F, D3-200I-G, D3-200I-H  
D3-220A-D, D3-220A-E, D3-220A-F, D3-220A-G, D3-220A-H, D3-220I-D,  
D3-220I-E, D3-220I-F, D3-220I-G, D3-220I-H

Slitagesats/Wear kit

Art. nr/Part no	Ersätter/Replaces
22386	21951386



**D3**  
D3-110I-D, D3-110I-E, D3-110I-F, D3-110I-G, D3-110I-H  
D3-140A-D, D3-140A-E, D3-140A-F, D3-140A-G, D3-140A-H, D3-140I-D,  
D3-140I-E, D3-140I-F, D3-140I-G, D3-140I-H  
D3-150I-D, D3-150I-E, D3-150I-F, D3-150I-G, D3-150I-H  
D3-170A-D, D3-170A-E, D3-170A-F, D3-170A-G, D3-170A-H, D3-170I-D,  
D3-170I-E, D3-170I-F, D3-170I-G, D3-170I-H  
D3-200A-D, D3-200A-E, D3-200A-F, D3-200A-G, D3-200A-H, D3-200I-D,  
D3-200I-E, D3-200I-F, D3-200I-G, D3-200I-H  
D3-220A-D, D3-220A-E, D3-220A-F, D3-220A-G, D3-220A-H, D3-220I-D,  
D3-220I-E, D3-220I-F, D3-220I-G, D3-220I-H

Komplett reparationsatset/Complete repair kit

Art. nr/Part no	Ersätter/Replaces
22400	N/A



## Reparationskit s jvattenpumpar Repair kits for sea water pumps



### D4

D4-180I-B, D4-180I-C, D4-180I-D, D4-180I-E, D4-180I-F  
 D4-210A-A, D4-210A-B, D4-210I-A, D4-210I-B  
 D4-225A-B, D4-225A-C, D4-225A-D, D4-225I-B, D4-225I-C, D4-225I-D,  
 D4-225I-E, D4-225I-F  
 D4-260A-A, D4-260A-B, D4-260A-C, D4-260A-D, D4-260D-B, D4-260D-C,  
 D4-260D-D, D4-260I-A, D4-260I-B, D4-260I-C, D4-260I-D, D4-260I-E,  
 D4-260I-F  
 D4-300A-A, D4-300A-C, D4-300A-D, D4-300D-A, D4-300D-C, D4-300D-D,  
 D4-300I-A, D4-300I-C, D4-300I-D, D4-300I-E, D4-300I-F

Art. nr/Part no	Ers�tter/Replaces	
22999	21418999	Lock ing�r ej. Se art.nr 22613 / End cap is not included. See part. no 22613.



### D4

D4-180I-B, D4-180I-C, D4-180I-D, D4-180I-E, D4-180I-F  
 D4-210A-A, D4-210A-B, D4-210I-A, D4-210I-B  
 D4-225A-B, D4-225A-C, D4-225A-D, D4-225I-B, D4-225I-C, D4-225I-D,  
 D4-225I-E, D4-225I-F  
 D4-260A-A, D4-260A-B, D4-260A-C, D4-260A-D, D4-260D-B, D4-260D-C,  
 D4-260D-D, D4-260I-A, D4-260I-B, D4-260I-C, D4-260I-D, D4-260I-E,  
 D4-260I-F  
 D4-300A-A, D4-300A-C, D4-300A-D, D4-300D-A, D4-300D-C, D4-300D-D,  
 D4-300I-A, D4-300I-C, D4-300I-D, D4-300I-E, D4-300I-F

Skrudar ing r/Bolts are included

Art. nr/Part no	Ers�tter/Replaces
22613	3583613



### D4

D4-145I-G  
 D4-150A-G  
 D4-175I-G  
 D4-180I-B, D4-180I-C, D4-180I-D, D4-180I-E, D4-180I-F  
 D4-210A-A, D4-210A-B, D4-210I-A, D4-210I-B  
 D4-225A-B, D4-225A-C, D4-225A-D, D4-225A-E, D4-225A-F, D4-225I-B,  
 D4-225I-C, D4-225I-D, D4-225I-E, D4-225I-F  
 D4-230A-G, D4-230I-G  
 D4-260A-A, D4-260A-B, D4-260A-C, D4-260A-D, D4-260A-E, D4-260A-F,  
 D4-260D-B, D4-260D-C, D4-260D-E, D4-260D-F, D4-260I-A, D4-260I-B,  
 D4-260I-C, D4-260I-D, D4-260I-E, D4-260I-F  
 D4-270A-G, D4-270I-G  
 D4-300A-A, D4-300A-C, D4-300A-D, D4-300A-E, D4-300A-F, D4-300A-G,  
 D4-300D-A, D4-300D-C, D4-300D-D, D4-300D-E, D4-300D-F, D4-300I-A,  
 D4-300I-C, D4-300I-D, D4-300I-E, D4-300I-F, D4-300I-G  
 D4-320A-G, D4-320I-G

Slitagesats/Wear kit

Art. nr/Part no	Ers�tter/Replaces
22392	21951392



### D4

D4-145I-G  
 D4-150A-G  
 D4-175I-G  
 D4-180I-B, D4-180I-C, D4-180I-D, D4-180I-E, D4-180I-F  
 D4-210A-A, D4-210A-B, D4-210I-A, D4-210I-B  
 D4-225A-B, D4-225A-C, D4-225A-D, D4-225A-E, D4-225A-F, D4-225I-B,  
 D4-225I-C, D4-225I-D, D4-225I-E, D4-225I-F  
 D4-230A-G, D4-230I-G  
 D4-260A-A, D4-260A-B, D4-260A-C, D4-260A-D, D4-260A-E, D4-260A-F,  
 D4-260D-B, D4-260D-C, D4-260D-E, D4-260D-F, D4-260I-A, D4-260I-B,  
 D4-260I-C, D4-260I-D, D4-260I-E, D4-260I-F  
 D4-270A-G, D4-270I-G  
 D4-300A-A, D4-300A-C, D4-300A-D, D4-300A-E, D4-300A-F, D4-300A-G,  
 D4-300D-A, D4-300D-C, D4-300D-D, D4-300D-E, D4-300D-F, D4-300I-A,  
 D4-300I-C, D4-300I-D, D4-300I-E, D4-300I-F, D4-300I-G  
 D4-320A-G, D4-320I-G

Axelkit/Shaft kit

Art. nr/Part no	Ers�tter/Replaces
22453	21951453



## Reparationsatser sjövattenpumpar Repair kits for sea water pumps



### D6, D8

D6-280A-E  
D6-300A-E, D6-300A-F, D6-300A-G, D6-300D-F, D6-300D-G, D6-300I-G  
D6-310A-E, D6-310D-E  
D6-330A-E, D6-330A-F, D6-330D-E, D6-330D-F  
D6-340A-G, D6-340D-G, D6-340I-G  
D6-370A-E, D6-370A-F, D6-370D-E, D6-370D-F  
D6-380A-G, D6-380D-G, D6-380I-G  
D6-400A-E, D6-400A-F, D6-400A-G  
D6-435D-E, D6-435D-F  
D6-440A-G, D6-440D-G, D6-440I-G, D6-440I-WJ-G  
D6-480I-G, D6-480I-WJ-G  
D8A1-A MP, D8A2-A MP, D8A3-A MP, D8A4-A MP, D8A5-A MH, D8A6-A MH

Slitagesats/Wear kit

Art. nr/Part no	Ersätter/Replaces
22404	21951404



### D6

D6-280A-A, D6-280A-B, D6-280A-C, D6-280A-D, D6-280A-E, D6-280I-A, D6-280I-B, D6-280I-C, D6-280I-D, D6-280I-E  
D6-300A-F, D6-300A-G, D6-300D-F, D6-300D-G, D6-300I-F, D6-300I-G  
D6-310A-B, D6-310A-C, D6-310A-D, D6-310A-E, D6-310D-B, D6-310D-C, D6-310D-D, D6-310D-E, D6-310I-A, D6-310I-B, D6-310I-C, D6-310I-D, D6-310I-E  
D6-330A-B, D6-330A-C, D6-330A-D, D6-330A-E, D6-330A-F, D6-330D-B, D6-330D-C, D6-330D-D, D6-330D-E, D6-330D-F, D6-330I-B, D6-330I-C, D6-330I-D, D6-330I-E, D6-330I-F  
D6-340A-G, D6-340D-G, D6-340I-G  
D6-350A-A, D6-350A-B  
D6-370A-C, D6-370A-D, D6-370A-E, D6-370A-F, D6-370D-A, D6-370D-B, D6-370D-C, D6-370D-D, D6-370D-E, D6-370D-F, D6-370I-B, D6-370I-C, D6-370I-D, D6-370I-E, D6-370I-F  
D6-380A-G, D6-380D-G, D6-380I-G  
D6-400A-E, D6-400A-F, D6-400A-G  
D6-435D-A, D6-435D-C, D6-435D-D, D6-435D-E, D6-435D-F, D6-435I-A, D6-435I-C, D6-435I-D, D6-435I-E, D6-435I-F  
D6-440A-G, D6-440D-G, D6-440I-G, D6-440I-WJ-G, D6-440D-G  
D6-480I-G, D6-480I-WJ-G

Axelkit/Shaft kit

Art. nr/Part no	Ersätter/Replaces	Info
22465	24219212, 22994989, 21951465	1" axel/shaft



### D16

D16C-A MH, D16C-A MG, D16C-B MH, D16C-C MH, D16C-D MH  
D16C-E MG, D16C-E MH, D16C-F MG, D16C-F MH

Passar sjövattenpumpar/fits seawater pumps OEM 22905155, 3589104

Art. nr/Part no	Ersätter/Replaces
23060	N/A



### D12, D13, D16

D12C-A MP, D12D-A MH, D12D-A MG, D12D-B MH, D12D-B MP, D12D-C MH, D12C-A MP, D12D-A MP, D12D-B MP, D12D-C MP, D12D-D MP, D12D-E MH, D12D-E MP, D12D-F MP, D12D-G MP, D12D-G MH, D12D-H MP, D13B-A MP, D13B-B MP, D13B-C MP, D13B-D MP, D13B-E MH, D13B-E MH (FE), D13B-G MP, D13B-H MP, D13B-J MP, D13B-K MP, D13B-L MP, D13B-M MP, D13B-N MH, D13B-N MH (FE), D13C1-A MH, D13C1-A MP, D13C2-A MP, D13C2-B MP, D13C3-A MP, D13C4-A MP, D13C4-B MP, D13C5-A MP, D13C6-A MP, D13C7-B MP, D13C8-B MP  
D16C-A MH, D16C-A MG, D16C-B MH, D16C-C MH, D16C-D MH, D16C-E MG, D16C-E MH, D16C-F MG, D16C-F MH

Passar sjövattenpumpar/fits seawater pumps OEM 3838207, 24346055, 865295, 3886848, 22905150, 23271274, 3589104, 22905155

Art. nr/Part no	Ersätter/Replaces
23040	N/A



Spare parts from Sweden

## Lock sjövattenpump End cover seawater pump



**31, 42, KAD32, KAD42, KAD43, KAD44, KAD300, D4, D6**  
 TMD31L-A, TAMD31L-A, TAMD31M-A, TAMD31P-A, TAMD31S, AD31L-A,  
 AD31P-A, TAMD41H-A, TAMD41H-B, TAMD41P, TAMD41P-A, TAMD41M-A,  
 TMD41L-A, TAMD41L-A, AD41A, AD41B, D41L-A, AD41L-A, AD41P-A  
 KAD42P-A, KAMD42P-A, TAMD42VJ-A  
 KAD43P-A, KAD43P-B, KAMD43P, KAMD43P-A, KAMD43P-B  
 KAD44P, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-B, KAMD44P-C  
 KAD32P, KAD32P-A  
 KAD300-A, KAMD300-A  
 D4-180I-F, D4-225A-E, D4-225A-F, D4-225I-F  
 D4-260A-E, D4-260A-F, D4-260D-E, D4-260D-F, D4-260I-F  
 D4-300A-E, D4-300A-F, D4-300D-E, D4-300D-F, D4-300I-F  
 D6-280A-E, D6-300A-F, D6-300D-F, D6-310A-E, D6-310D-E  
 D6-330A-E, D6-330A-F, D6-330D-E, D6-330D-F  
 D6-370A-E, D6-370A-F, D6-370D-E, D6-370D-F  
 D6-400A-E, D6-400A-F, D6-435D-E, D6-435D-F  
 D8A1-A MP, D8A2-A MP, D8A3-A MP, D8A4-A MP

Art. nr/Part no	Ersätter/Replaces
15150	3581617



**MD2010, MD2020, MD2030, MD2040, D1, D2**  
 MD2010, MD2010B, MD2010-C, MD2010-D  
 MD2020, MD2020B, MD2020-C, MD2020-D  
 MD2030, MD2030B, MD2030-C, MD2030-D  
 MD2040, MD2040B, MD2040-C, MD2040-D  
 D1-13, D1-13B, D1-13F  
 D1-20, D1-20B, D1-20F  
 D1-30, D1-30A, D1-30B, D1-30F  
 D2-40, D2-40A, D2-40B, D2-40F

Art. nr/Part no	Ersätter/Replaces
15386	840386, 01-45282

## Monteringsklack sjövattenpump Clamp seawater pump



**B18, B20, MB10, MD1, MD2, MD3, MD6, MD7, MD11, MD17**  
 AQ60, AQ90, AQ95, AQ95A, AQ110, AQ120  
 BB30, BB100  
 MB10A, MB18, MB20A, MB20B, MB20C  
 AQ105A, AQ115A, AQ115B, BB115A, BB115B, BB115C  
 AQ130A, AQ130B, AQ130C, AQ130D  
 MD1, MD1A, MD1B  
 MD2, MD2A, MD2B, AQD2B  
 MD3B  
 MD6A, MD6B  
 MD7A, MD7B  
 MD11C, MD11D  
 MD17C, MD17D

Art. nr/Part no	Ersätter/Replaces
15878	833878



**MD5**  
 MD5A, MD5B, MD5C

Art. nr/Part no	Ersätter/Replaces
15879	833879



## Reservdelar sjövattpumpar Spare parts for sea water pumps

### Medbringare (korsstycke vattenspumpar) Cross piece seawater pump



**B18, B20, B21, B23, B25, B30, MD3, MD17, D21**  
 AQ60F, AQ90, AQ95, AQ95A, AQ110  
 BB30, BB100, MB18, MB20A, MB20B, MB20C  
 AQ105A, AQ115A, AQ115B, BB115A, BB115B, BB115C  
 AQ120, AQ120B, AQ125A, AQ125B  
 AQ130A, AQ130B, AQ130C, AQ130D  
 AQ140A, BB140A  
 230A, 230B  
 AQ131A, AQ131B, AQ131C, AQ131D  
 AQ145A, AQ145B, BB145A  
 250A, 250B, 251A  
 AQ151A, AQ151B, AQ151C  
 AQ171A, AQ171C  
 AQ165A, AQ170A, AQ170B, AQ170C  
 BB165A, BB170A, BB170B, BB170C  
 MD3B  
 MD17C, MD17D  
 MD21A\*, AQD21A\*, MD21B, AQD21B

\*För impeller med kil/For impeller with key. Från/From SN 103387-

Art. nr/Part no	Ersätter/Replaces
15109	831009, 806256



**31, 41, KAD32, KAD42, KAD43, KAD44, KAD300**  
 MD31A, TMD31A, TAMD31A, TMD31B, TAMD31B, TMD31D, TAMD31D,  
 TAMD31L-A, TAMD31M-A, TAMD31P-A, TAMD31S, AD31A, AD31A,  
 AQAD31A, AD31B, AQAD31B, AD31D, AD31D-A, AD31L-A, AD31P-A,  
 AD31XD  
 TMD41A, TAMD41A, TMD41B, TAMD41B, TMD41D, TAMD41D,  
 TAMD41H-A, TAMD41H-B, TAMD41P, TAMD41P-A, TMD41L-A, AD41A,  
 AQAD41A, D41B, AQAD41B, AD41B, AD41B, D41D, AD41D, D41L-A,  
 AD41L-A, AD41P-A  
 KAD32P, KAD32P-A  
 KAD42A, KAD42B, KAD42P-A, KAMD42A, KAMD42B, KAMD42P-A,  
 TAMD42B, TAMD42VJ-A  
 KAD43P-A, KAD43P-B, KAMD43P-A  
 KAD44P, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-B, KAMD44P-C,  
 KAD300, KAD300A, KAMD300A

För sjövattpump med fem skruvar i locket/For pump with five bolts in end cover

Art. nr/Part no	Ersätter/Replaces
15467	858467

### Skrusatser lock End cover screw kits



**3.0, 4.3, 5.0, 5.7, 8.1**  
 3.0GLM-A, 3.0GLM-B, 3.0GLM-C, 3.0GLP-A, 3.0GLP-B, 3.0GLP-C,  
 3.0GSM-A, 3.0GSM-B, 3.0GSM-C, 3.0GSP-A, 3.0GSP-B, 3.0GSP-C,  
 3.0GSPEFS  
 4.3GIJWTR, 4.3GIPEFS, 4.3GL-A, 4.3GL-B, 4.3GL-C, 4.3GL-D, 4.3GLPEFS,  
 4.3GLPWTR, 4.3GSJWTR, 4.3GSPWTR, 4.3GXi-A, 4.3GXi-B, 4.3GXi-BF,  
 4.3GXi-C, 4.3GXi-CF, 4.3GXi-D, 4.3GXi-DF, 4.3GXi-E, 4.3GXi-EF,  
 4.3OSi-B, 4.3OSi-BF, 4.3OSi-C, 4.3OSi-CF, 4.3OSi-D, 4.3OSi-DF, 4.3OSi-E,  
 4.3OSi-EF  
 5.0GiPEFS, 5.0GiPWTR, 5.0GL-A, 5.0GL-B, 5.0GL-C, 5.0GL-D, 5.0GL-E,  
 5.0GLPEFS, 5.0GLPWTR, 5.0GXi-A, 5.0GXi-B, 5.0GXi-BF, 5.0GXi-C,  
 5.0GXi-CF, 5.0GXi-D, 5.0GXi-DF, 5.0GXi-E, 5.0GXi-EF, 5.0OSi-B, 5.0OSi-BF,  
 5.0OSi-C, 5.0OSi-CF, 5.0OSi-D, 5.0OSi-DF, 5.0OSi-E, 5.0OSi-EF  
 5.7Gi-A, 5.7Gi-B, 5.7Gi-BF, 5.7Gi-C, 5.7Gi-CF, 5.7Gi-D, 5.7Gi-DF, 5.7Gi-E,  
 5.7Gi-EF, 5.7GiL-A, 5.7GiL-B, 5.7GiL-C, 5.7GiL-D, 5.7GiL-E, 5.7GL-A, 5.7GL-B,  
 5.7GL-C, 5.7GL-D, 5.7GL-E, 5.7GSIPEFS, 5.7GSIPWTR, 5.7GSPEFS,  
 5.7GXi-A, 5.7GXi-B, 5.7GXi-C, 5.7GXi-CF, 5.7GXi-D, 5.7GXi-DF, 5.7GXi-E,  
 5.7GXi-EF, 5.7GXi-F, 5.7GXil-C, 5.7GXil-D, 5.7GXil-E, 5.7GXil-F,  
 5.7OSi-A, 5.7OSi-AF, 5.7OSi-B, 5.7OSi-BF, 5.7OSi-C, 5.7OSi-CF, 5.7OSi-D,  
 5.7OSi-DF, 5.7OSXi-A, 5.7OSXi-AF, 5.7OSXi-B, 5.7OSXi-BF, 5.7OSXi-C,  
 5.7OSXi-CF, 5.7OSXi-D, 5.7OSXi-DF  
 7.4GiPEFS, 7.4GiPWTR, 7.4GSIPEFS, 7.4GSIPWTR  
 8.1Gi-A, 8.1Gi-B, 8.1Gi-BF, 8.1Gi-C, 8.1Gi-CF, 8.1Gi-D, 8.1Gi-DF, 8.1Gi-E,  
 8.1Gi-EF, 8.1Gi-F, 8.1Gi-FF, 8.1GiL-A, 8.1GiL-B, 8.1GiL-C, 8.1GiL-D, 8.1GiL-E,  
 8.1GiL-F, 8.1GSi-A, 8.1GSiL-A, 8.1GXi-A, 8.1GXi-AF, 8.1GXi-B, 8.1GXi-BF,  
 8.1GXi-C, 8.1GXi-CF, 8.1GXi-D, 8.1GXi-DF, 8.1GXi-E, 8.1GXi-EF,  
 8.1GXil-A, 8.1GXil-B, 8.1GXil-C, 8.1GXil-D, 8.1GXil-E, 8.1OSi-A, 8.1OSi-AF,  
 8.1OSi-B, 8.1OSi-BF  
 8.2GSIPEFS, 8.2GSIPWTR  
 DPX375-A, DPX375-B, DPX375-BF, DPX375-CF  
 DPX385XEFS  
 DPX415XEFS  
 DPX420-A, DPX420-B, DPX420-BF, DPX420-CF

Passar sjövattpumpar / fits seawater pumps OEM: 3861417, 3862485, 3812696, 3858229, 3862487, 3812697, 21214596, 21214599, 3857202, 3862482, 3812693, 3858229, 3862487, 3812697, 3862484, 3812695, 21214601

Art. nr/Part no	Ersätter/Replaces	Info
15080	22125080, 21214599, 21214596	Sats/kit 5 pcs M6 x 12



Spare parts from Sweden

## Reservdelar sjövattenpumpar Spare parts for sea water pumps



### V6, V8

AQ175A, AQ205A, AQ205LB  
430A, 430B, 431A, 431B, 432A, 434A  
AQ200D, AQ200F  
AQ211A  
AQ225D, AQ225F, BB225A, BB225AV, BB225B, BB225C  
AQ231A, AQ231B  
AQ255B, AQ260A, BB260A, BB260AV, BB260B, BB260C  
AQ271A, AQ271B, AQ271C, AQ271D, 271LB  
AQ290A  
AQ311A, AQ311B  
500A, 500B, 501A, 501B, 570, 570A, 571A, 572A  
740B

Passar sjövattenpumpar/fits seawater pump 857451, 841640, 856952 - 4 skruvar åtgår/ 4 bolts required. Passar sjövattenpump / fits seawater pump 855722 - 6 skruvar åtgår / 4 bolts required.

Art. nr/Part no	Ersätter/Replaces	Info
15335	855728	Sats/kit 6 pcs M4 x 8



### MD1, MD2, MD3, MD5, MD6, MD7, MD11, MD17, 2001, 2002, 2003, 2003T, MD2010, MD2020, MD2030, MD2040, D1, D2

MD1B, MD2B, AQD2B, MD3B  
MD5A, MD5B, MD5C  
MD6A, MD7A, MD7B  
MD11C, MD11D  
MD17C, MD17D  
2001, 2001AG, 2001B, 2001BG, 2001D, 2001R  
2002, 2002AG, 2002B, 2002BG, 2002D  
2003, 2003 SOLAS, 2003B, 2003B SOLAS, 2003D, 2003R, 2003R SOLAS  
2003T, 2003TB, 2003TB SOLAS, 2003TB, 2003TB SOLAS, 2003TR  
MD2010, MD2010B, MD2010-C, MD2010-D  
MD2020, MD2020B, MD2020-C, MD2020-D  
MD2030, MD2030B, MD2030-C, MD2030-D  
MD2040, MD2040B, MD2040-C, MD2040-D  
D1-13, D1-13B, D1-13F  
D1-20, D1-20B, D1-20F  
D1-30, D1-30B, D1-30F  
D2-40, D2-40B, D2-40F

Art. nr/Part no	Ersätter/Replaces	Info
15384	21951302	Sats/kit 6 pcs M4 x 8



### 22, 30, 31, 32, 40, 41, 42, 43, 44, 300, D2, D3, D4, D6, D8

MD22L, MD22P, TMD22B, TMD22P-C, TAMD22P-B  
MD30A, TMD30A, TAMD30A, AD30A, AQAD30A  
MD31A, TMD31A, TAMD31A, TMD31B, TAMD31B, TMD31D, TAMD31D,  
TMD31L-A, TAMD31L-A, TAMD31M, TAMD31M-A, TAMD31P-A, TAMD31S,  
AD31, AD31B, AD31D, AD31D-A, AD31L-A, AD31P-A, AD31XD  
KAD32P, KAD32P-A  
MD40A, TMD40A, TAMD40A, TMD40B, TAMD40B, TMD40C, AQD40A,  
AQAD40A, AD40B, AQAD40B  
TMD41A, TAMD41A, TMD41B, TAMD41B, TMD41D, TAMD41D, TAMD41H-A,  
TAMD41H-B, TAMD41P, TAMD41P-A, TMD41L-A, AD41A, D41B, AD41B,  
AD41BJ, D41D, AD41D, D41L-A, AD41L-A, AD41P-A  
KAD42A, KAD42B, KAD42P-A, KAMD42A, KAMD42B, KAMD42P-A,  
TAMD42B, TAMD42WJ-A  
KAD43P-A, KAD43P-B, KAMD43P, KAMD43P-A, KAMD43P-B  
KAD44P, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-B, KAMD44P-C  
KAD300, KAD300-A, KAMD300-A  
TAMD63L-A, TAMD63P-A  
D2-50F, D2-55, D2-55B, D2-55C, D2-55D, D2-55E, D2-55F  
D2-60F, D2-75, D2-75B, D2-75C, D2-75F  
D3-110I-B, D3-110I-C  
D3-130A-A, D3-130A-B, D3-130A-C, D3-130I-A, D3-130I-B, D3-130I-C  
D3-160A-A, D3-160A-B, D3-160A-C, D3-160I-A, D3-160I-B, D3-160I-C  
D3-190A-B, D3-190A-C, D3-190I-A, D3-190I-B, D3-190I-C  
D4-145I-G, D4-150A-G, D4-175I-G  
D4-180I-B, D4-180I-C, D4-180I-D, D4-180I-E, D4-180I-F  
D4-210A-A, D4-210A-B, D4-210I-A, D4-210I-B  
D4-225A-C, D4-225A-D, D4-225A-E, D4-225A-F, D4-225I-B, D4-225I-C,  
D4-225I-D, D4-225I-E, D4-225I-F  
D4-230A-G, D4-230I-G  
D4-260A-A, D4-260A-B, D4-260A-C, D4-260A-D, D4-260A-E, D4-260A-F,  
D4-260D-B, D4-260D-C, D4-260D-D, D4-260D-E, D4-260D-F, D4-260I-A,  
D4-260I-B, D4-260I-C, D4-260I-D, D4-260I-E, D4-260I-F  
D4-270A-G, D4-270I-G  
D4-300A-A, D4-300A-C, D4-300A-D, D4-300A-E, D4-300A-F, D4-300A-G,  
D4-300D-A, D4-300D-C, D4-300D-D, D4-300D-E, D4-300D-F, D4-300I-A,  
D4-300I-C, D4-300I-D, D4-300I-E, D4-300I-F, D4-300I-G  
D4-320A-G, D4-320I-G  
D6-280A-E  
D6-300A-F, D6-300A-G, D6-300D-F, D6-300D-G, D6-300I-G  
D6-310A-E, D6-310D-E  
D6-330A-E, D6-330A-F, D6-330D-E, D6-330D-F, D6-340A-G, D6-340D-G,  
D6-340I-G  
D6-370A-E, D6-370A-F, D6-370D-E, D6-370D-F  
D6-380A-G, D6-380D-G, D6-380I-G  
D6-400A-E, D6-400A-F, D6-400A-G  
D6-435D-E, D6-435D-F  
D6-440A-G, D6-440D-G, D6-440I-G, D6-440I-WJ-G  
D6-480D-G, D6-480I-G, D6-480I-WJ-G  
D8A1-I-A MP, D8A2-A MP, D8A3-A MP, D8A4-A MP, D8A5-A MP, D8A6-A MP

Art. nr/Part no	Ersätter/Replaces	Info
15334	21951334	Sats/kit 6 pcs M5 x 8



Spare parts from Sweden

## Reservdelar sjövattpumpar Spare parts for sea water pumps

### Skrusatsar lock End cover screw kits



40, 71, 73, 74, 75

MD40A, TMD40A, TAMD40A, TMD40B, TAMD40B, TMD40C, AQD40A, AQAD40A, AD40B, AQAD40B  
TAMD71B  
TAMD73P-A, TAMD73WJ-A  
TAMD74A, TAMD74C-A, TAMD74C-B, TAMD74L-A, TAMD74L-B,  
TAMD74P-A, TAMD74P-B  
TAMD75P-A

Art. nr/Part no	Ersätter/Replaces	Info
15338	2195338	Sats/kit 5 pcs M6 x 12

### Stödbricka Supporting washer



2003, 2003T, 30, 40, 31, 41, KAD32, 42, 43, 44, 300, 740A

2003/2003B/2003R/2003TB SOLAS, 2003T, 2003TR, 2003TB  
MD30A, TMD30A, TAMD30A, AQAD30A  
MD40A, AQD40A, TMD40A, TMD40B, TMD40C  
AD31B, TMD31B, TAMD31B, TMD31D, TAMD31D, AD31D-A, AD31XD,  
TAMD31M, AD31L-A, AD31P-A, TAMD31L-A, TAMD31M-A, TAMD31P,  
TAMD31P-A, TAMD31S, TMD31L-A, TAMD31L-A, TAMD31S  
TAMD41A, TAMD41B, TMD41A, TMD41B, AD41A, AD41B, D41B, AD41Bj,  
TAMD41H-A, TAMD41H-B, TAMD41P-A, TMD41L-A, TAMD41M-A, AD41L-A,  
AD41P-A, D41L-A, AD41P-B  
KAD32P  
KAD42A, KAMD42A, KAD42P-A, KAMD42P-A, KAD42B, KAMD42B,  
TAMD42B, TAMD42WJ-A  
KAD43P, KAD43P-A, KAD43P-B, KADM43P, KAMD43P-A, KAMD43P-B  
KAD44P, KAD44P-A, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-B,  
KAMD44P-C  
KAD300-A, KAMD300-A,  
740A, BB740A

Passar sjövattpumpar / fits seawater pumps OEM nr 858150, 858408,  
858469, 860629, 861198, 858701, 860827, 838314, 3581558, 3583115,  
3581559, 3583145, 842843, 3583095

Art. nr/Part no	Ersätter/Replaces	Info
15844	844580	Passar/fits pumps

### Axel sjövattpump Seawater pump shaft



MD5, MD6, MD7, MD11

MD5A, MD5B, MD5C  
MD6B  
MD7A, MD7B  
MD11C, MD11D

Till glidlagrad sjövattpump/for seawater pump with plain bearing

Art. nr/Part no	Ersätter/Replaces	Info
15001	827014	ingår i sats/incl. in kit 15584



D3-110, D3-130, D3-160, D3-190

D3-110I-A, 110I-B, 110I-C  
D3-130A-A, 130A-B, 130A-C, 130I-A, 130I-B, 130I-C  
D3-160A-A, 160A-B, 160A-C, 160I-A, 160I-B, 160I-C  
D3-190A-B, 190I-A, 190I-B, 190I-C

Art. nr/Part no	Ersätter/Replaces	Info
15439	N/A	ingår i sats/incl. in kit 22439



D3-110, D3-140, D3-150, D3-170, D3-200, D3-220

D3-110I-D, D3-110I-E, D3-110I-F, D3-110I-G, D3-110I-H  
D3-140A-D, D3-140A-E, D3-140A-F, D3-140A-G, D3-140A-H, D3-140I-D,  
D3-140I-E, D3-140I-F, D3-140I-G, D3-140I-H  
D3-150I-D, D3-150I-E, D3-150I-G, D3-150I-H  
D3-170A-D, D3-170A-E, D3-170A-F, D3-170A-G, D3-170A-H, D3-170I-D,  
D3-170I-E, D3-170I-F, D3-170I-G, D3-170I-H  
D3-200A-D, D3-200A-E, D3-200A-F, D3-200A-G, D3-200A-H, D3-200I-D,  
D3-200I-E, D3-200I-F, D3-200I-G, D3-200I-H  
D3-220A-D, D3-220A-E, D3-220A-F, D3-220A-G, D3-220A-H, D3-220I-D,  
D3-220I-E, D3-220I-F, D3-220I-G, D3-220I-H

Art. nr/Part no	Ersätter/Replaces	Info
15119	N/A	Passar sjövattpump / fits seawater pump 15102 (OEM 21379102)



## Reservdelar sjöattenpumpar Spare parts for sea water pumps



**D4-145, D4-150, D4-175, D4-180, D4-210, D4-225, D4-230, D4-260, D4-270, D4-300, D4-320**

D4-145I-G, D4-150A-G, D4-175I-G  
D4-180I-B, D4-180I-C, D4-180I-D, D4-180I-E, D4-180I-F  
D4-210A-A, D4-210A-B  
D4-225A-B, D4-225A-C, D4-225A-D, D4-225A-E, D4-225A-F, D4-225A-F  
D4-225I-B, D4-225I-C, D4-225I-D, D4-225I-E, D4-225I-F  
D4-230A-G, D4-230I-G  
D4-260A-A, D4-260A-B, D4-260A-C, D4-260A-D, D4-260A-E, D4-260A-F  
D4-260D-B, D4-260D-C, D4-260D-D, D4-260D-E, D4-260D-F, D4-260I-A,  
D4-260I-B, D4-260I-C, D4-260I-D, D4-260I-E, D4-260I-F  
D4-270A-G, D4-270I-G  
D4-300A-A, D4-300A-B, D4-300A-C, D4-300A-D, D4-300A-E, D4-300A-F  
D4-300A-G, D4-300D-A, D4-300D-C, D4-300D-D, D4-300D-E, D4-300D-F  
D4-300I-A, D4-300I-C, D4-300I-D, D4-300I-E, D4-300I-F, D4-300I-G  
D4-320A-G, D4-320I-G

Art. nr/Part no	Ersätter/Replaces	
15634	21422634	



**D4-180, D4-210, D4-225, D4-260, D4-300**

D4-180I-B, D4-180I-C, D4-180I-D, D4-180I-E  
D4-210A-A, D4-210A-B, D4-210I-A, D4-210I-B  
D4-225A-B, D4-225A-C, D4-225A-D, D4-225I-B, D4-225I-C, D4-225I-D,  
D4-225I-E  
D4-260A-A, D4-260A-B, D4-260A-C, D4-260A-D, D4-260D-B, D4-260D-C,  
D4-260D-D, D4-260I-A, D4-260I-B, D4-260I-C, D4-260I-D, D4-260I-E  
D4-300A-A, D4-300A-C, D4-300A-D, D4-300D-A, D4-300D-C, D4-300D-D,  
D4-300I-A, D4-300I-C, D4-300I-D, D4-300I-E

Art. nr/Part no	Ersätter/Replaces	
15199	3583608	



**D6-280, D6-300, D6-310, D6-330, D6-340, D6-370, D6-380, D6-400, D6-435, D6-440, D6-480**

D6-280A-E  
D6-300A-F, D6-300A-G, D6-300D-F, D6-300I-G  
D6-310A-E, D6-310D-E  
D6-330A-E, D6-330A-F, D6-330D-E, D6-330D-F  
D6-340A-G, D6-340I-G  
D6-370A-E, D6-370A-F, D6-370D-E, D6-370D-F  
D6-380A-G, D6-380I-G  
D6-400A-E, D6-400A-F, D6-400A-G  
D6-435D-E, D6-435D-F  
D6-440I-G, D6-440I-WJ-G  
D6-480I-G, D6-480I-WJ-G

Art. nr/Part no	Ersätter/Replaces	
15635	21422635	Axel/shaft 1"



## Packningsatser sjövattpumpar Gasket kits sea water pumps



### B18, B20, MD3, MD17

AQ60F, AQ90, AQ95, AQ95A, AQ110  
AQ120  
BB30, BB100  
MB18, MB20A, MB20B, MB20C  
AQ105A  
AQ115A, AQ115B, BB115, BB115B, BB115C  
AQ130A, AQ130B, AQ130C, AQ130D  
MD3B  
MD17C, MD17D

För pump med glidlager / For pump with plain bearing  
Impeller 15808

Art. nr/Part no	Ersätter/Replaces
22042	N/A



### B18, B20, D1, D2, MD3, MD17

AQ60F, AQ90, AQ95, AQ95A, AQ110  
AQ120  
BB30, BB100  
MB18, MB20A, MB20B, MB20C  
AQ105A  
AQ115A, AQ115B, BB115, BB115B, BB115C  
AQ130A, AQ130B, AQ130C, AQ130D  
D1-13A, D1-13B, D1-13F  
D1-20A, D1-20B, D1-20F  
D2-40A, D2-40B,  
MD3B  
MD17C, MD17D

För kullagrad pump/For pump with ball bearing  
Impeller 15808

Art. nr/Part no	Ersätter/Replaces
22009	N/A



### B30, MD21

AQ165A, AQ170A, AQ170B, AQ170C  
BB165A, BB170A, BB170B, BB170C  
AQD21A\*, AQD21B  
MD21A\*, MD21B

\* Från/From MO 103387 -  
Impeller 15575

Art. nr/Part no	Ersätter/Replaces
22047	N/A



### B21, B23, B25

AQ120B, AQ125A, AQ140A  
BB140A  
230A, 230B  
AQ125B  
AQ131A, AQ131B, AQ131C, AQ131D  
AQ145A, AQ145B  
BB145A  
250A, 250B, 251A  
AQ151A, AQ151B, AQ151C  
AQ171A, AQ171C

Impeller 15575

Art. nr/Part no	Ersätter/Replaces
22072	N/A



### MB10, MD1, MD2, MD6

MB10A  
MD1A, MD1B  
AQD2B, D2A, MD2, MD2A, MD2B  
MD6A

Tidigare utförande med glidlager/Ealier version with plain bearing  
Impeller 15807

Art. nr/Part no	Ersätter/Replaces
22053	N/A



## Packningsatser sjövattpumpar Gasket kits sea water pumps



### 2001, 2002, 2003, MD5, MD6, MD7, MD11

2001, 2001AG, 2001B, 2001BG  
2002, 2002AG, 2002B, 2002BG  
2003\*, 2003AG, 2003B, 2003BG  
MD5A, MD5B, MD5C  
MD6B  
MD7A, MD7B  
MD11C, MD11D

\* Ej för 2003T/Not for 2003T  
Impeller 15583

Art. nr/Part no	Ersätter/Replaces
22054	N/A




### 2003T

2003T, 2003TB

Endast för 2003T/Only for 2003T  
Impeller 15811


Art. nr/Part no	Ersätter/Replaces
22040	N/A

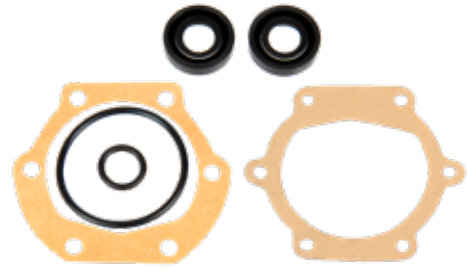

### MD2010, MD2020, DI-13, DI-20

MD2010, MD2010B, MD2010-C, MD2010-D  
MD2020, MD2020B, MD2020-C, MD2020-D  
DI-13, DI-13B, DI-13F  
DI-20, DI-20B, DI-20F

Art. nr/Part no	Info
23036	Passar sjövattpump / fits seawater pump 3593654



### MD2010, MD2020, MD2030, MD2040, DI-30, D2-40

MD2010-C, MD2010-D  
MD2020-C, MD2020-D  
MD2030, MD2030B, MD2030-C, MD2030-D  
MD2040, MD2040B, MD2040-C, MD2040-D  
DI-30, DI-30B, DI-30F  
D2-40, D2-40B, D2-40F

Art. nr/Part no	Info
22167	Passar sjövattpump / fits seawater pump 3593655



### D2-50, D2-55, D2-60, D2-75

D2-50F  
D2-55A, D2-55B, D2-55C, D2-55D, D2-55E, D2-55F  
D2-60F  
D2-75A, D2-75B, D2-75C, D2-75F

Art. nr/Part no	Ersätter/Replaces
23036	N/A




## Packningsatser sjövätenpumpar Gasket kits sea water pumps



**30, 40, 31, 41, KAD32, KAD42, KAD43, KAD44, KAD300**  
 AD30A, AQAD30A, MD30A, TAMD30A, TMD30A  
 AD31A, AD31B, AD31D, AD31XD, AQAD31A  
 MD31A, TAMD31A, TAMD31B, TAMD31D  
 TMD31A, TMD31B, TMD31D  
 KAD32P-A  
 AQD40A, MD40A, TMD40A, TMD40B, TMD40C  
 AD41A, AD41B, AD41D, AQAD41A, D41A, D41B, D41D  
 TAMD41A, TAMD41B, TAMD41D, TMD41A, TMD41B, TMD41D  
 KAD42A, KAD42B, KAD42P-A, KAMD42A, KAMD42B,  
 KAMD42P-A, TAMD42B, TAMD42WJ-A  
 KAD43P-A, KAMD43P-A  
 KAD44P-A, KAMD44P-A  
 KAD300-A, KAMD300-A

För pump med sex skruvar/For pump with six screws in cover  
 Impeller 65 mm 15593

Art. nr/Part no	Ersätter/Replaces
22016	N/A

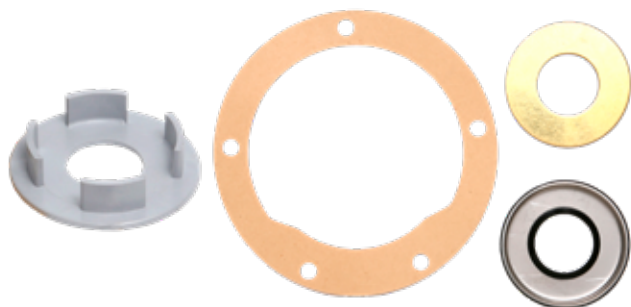

**40**  
 AD40B, AQAD40A, AQAD40B  
 TAMD40A, TAMD40B

För pump med fem skruvar/For pump with five screws in cover  
 Impeller 95 mm 15660

Art. nr/Part no	Ersätter/Replaces
22089	N/A

## Lockpackningar End cover gaskets



**B21, B23, B25**  
 AQ120B, AQ125A, AQ125B  
 AQ140A, BB140A  
 AQ145A, AQ145B, BB145A  
 AQ131A, AQ131B, AQ131C, AQ131D  
 AQ151A, AQ151B, AQ151C, AQ151D  
 230A, 230B, 250A, 250B

Art. nr/Part no	Ersätter/Replaces	Info
15901	855901	



**MD1, 2, 3, 5, 6, 7, 11, 17, 2000, MB10**  
 MD1B, MD2B, AQD2B, MD3B  
 MD5A, MD5B, MD5C  
 MD6, MD6A, MD6B  
 MD7, MD7A, MD7B  
 MD11, MD11C, MD11D  
 MD17, MD17C, MD17D  
 2001, 2001B, 2001AG, 2001BG, 2002, 2002B, 2002D, 2002AG, 2002BG,  
 2003, 2003B, 2003AG, 2003BG  
 MB10A  
 MD2010C, MD2020C, MD2030C, MD2040C  
 MD2010D, MD2020D, MD2030D, MD2040D  
 D1-13A, D1-13B  
 D1-20A, D1-20B  
 D1-30A, D1-30B  
 D2-40A, D2-40B  
 D1-13F, D1-20F, D1-30F, D2-40F

Art. nr/Part no	Ersätter/Replaces
15994	833994



**MD1, 2, 3, 11, 17, MD2010-2040, D1, D2**  
 MD1B, MD2B, AQD2B, MD3B  
 MD11, MD11C, MD11D, MD17, MD17C, MD17D  
 MD2010A, MD2020A, MD2030A, MD2040A  
 MD2010B, MD2020B, MD2030B, MD2040B  
 MD2010C, MD2020C, MD2030C, MD2040C  
 MD2010D, MD2020D, MD2030D, MD2040D  
 D1-13A, D1-13B  
 D1-20A, D1-20B  
 D1-30A, D1-30B  
 D2-40A, D2-40B  
 D1-13F, D1-20F, D1-30F, D2-40F

Art. nr/Part no	Ersätter/Replaces
15959	819959



## Lockpackningar End cover gaskets




### MB10, MD1, MD2, MD6, MD2010, MD2020

MB10A  
MD1, MD1A, MD1B  
MD2, MD2A, MD2B  
MD6A  
MD2010A, MD2020A

Passar sjövättanpumpar / fits seawater pumps OEM 807368, 833415, 833522, 3580064. Passar pumplock / fits end cap 803724.

Art. nr/Part no	Ersätter/Replaces
15417	833417, 803725, 3580065

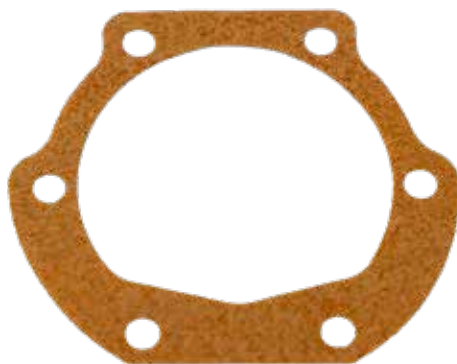


### B20, MD3, MD17, MD2010, MD2020, DI-13, DI-20

AQ115A, AQ115B, BBI15A, BBI15B, BBI15C, MB20A, MB20B, MB20C  
AQ130A, AQ130B, AQ130C, AQ130D  
MD3B  
MD17C, MD17C/HD, MD17D  
MD2010, MD2010B, MD2010-C, MD2010-D  
MD2020, MD2020B, MD2020-C, MD2020-D  
DI-13, DI-13B, DI-13F  
DI-20, DI-20B, DI-20F

Passar sjövättanpumpar / fits seawater pumps OEM 829895, 3593654.

Art. nr/Part no	Ersätter/Replaces
15385	840385

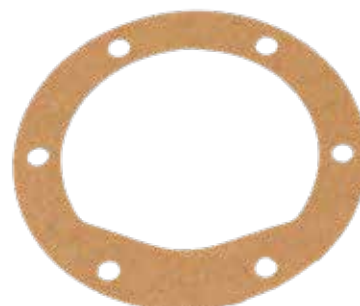


### 30, 31, 40, 41, KAD32, KAD42, 63, 70, 100, 120

MD30A, TMD30A, TAMD30A, AQAD30A  
MD40A, TMD40A, TMD40B, TMD40C, AQD40A  
MD31A, TMD31A, TAMD31A, TMD31B, TAMD31B, TMD31D, TAMD31D,  
TMD31L-A, TAMD31L-A, TAMD31M-A, TAMD31S, TAMD31P, TAMD31P-A,  
AD31, AD31B, AD31L-A, AD31P-A, AD31D-A, AD31XD  
TMD41A, TAMD41A, TMD41B, TAMD41B, TAMD41H-A, TAMD41H-B,  
TAM41P-A, TMD41D, TAM41D, TMD41L-A, AD41A, AD41B, AD41BJ,  
D41B, AD41D, D41D, AD41L-A, AD41P-A, D41L-A  
KAD32P, KAD32P-A  
KAD42A, KAD42B, KAD42P-A, KAMD42A, KAMD42B, KAMD42P-A,  
TAMD42B, TAM42WJ-A  
TAMD63L-A, TAM42P-A  
MD70B, MD70BK, TMD70B, TAM42P-A, THAMD70B, TAM42P-A,  
TAMD70D, TAM42P-A, AQD70B, AQD70BL, AQD70C, AQD70D  
MD100A, TMD100A, MD100B  
MD120A, TMD120A, TAM42P-A, TAM42P-A

Passar sjövättanpumpar / fits seawater pumps 858469, 860629, 842843, 838314, 860827, 842385, 837370, 837371. Lock / end cap 815573

Art. nr/Part no	Ersätter/Replaces
15275	808275

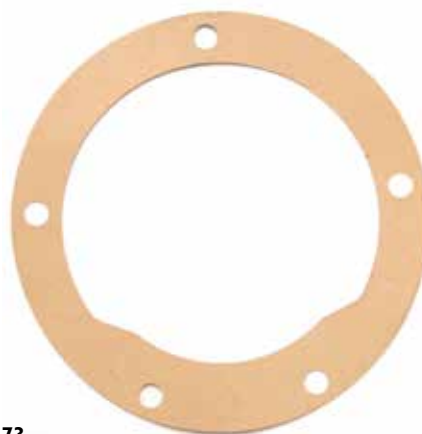

### 40, 61, 71, 73

MD40A, TMD40A, TAM42P-A, TMD40B, TAM42P-A, TMD40C, AQD40A,  
AQAD40A, AD40B, AQAD40B  
TAMD61A, TAM42P-A  
TAMD71A, TAM42P-A  
TAMD73P-A, TAM42P-A

Art. nr/Part no	Ersätter/Replaces
15111	846111



## Lockpackningar End cover gaskets



**31, 32, 41, 42, 43, 44. 300, D4, D6**

AD31L-A, AD31P-A, TAMD31L-A, TAMD31M-A, TAMD31P-A, TAMD31S-A, TMD31L-A, TAMD31L-A, TAMD31M-A, TAMD31P-A, TAMD31S-A, TMD31L-A  
AD41L-A, AD41P-A, D41L-A, TAMD41H-A, TAMD41H-B, TAMD41P-A, TAMD41L-A, TAMD41M-A, TMD41L-A, TAMD41H-A, TAMD41H-B, TAMD41P-A, TAMD41L-A, TAMD41M-A, TMD41L-A, AD41B  
KAD32P  
KAD42P-A, KAMD42P-A, TAMD42WJ-A  
KAMD43P-A,  
KAD44P, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-C,  
KAMD44P-A  
KAD300, KAMD300-A,  
D4-225A-E, D4-260A-E, D4-260D-E, D4-300A-E, D4-300D-E, D4-225A-F, D4-260A-F, D4-260D-F, D4-300A-F, D4-300D-F  
D6-300A-F, D6-300D-F, D6-330A-F, D6-330D-F, D6-370A-F, D6-370D-F, D6-400A-F, D6-435D-F, D6-280A-E, D6-310A-E, D6-310D-E, D6-330A-E, D6-330D-E, D6-370A-E, D6-370D-E, D6-400A-E, D6-435D-E

Art. nr/Part no	Ersätter/Replaces	Info
I5618	3581618	



**D6, D8, 63**

D6-300A-G, D6-300I-G  
D6-340A-G, D6-340I-G  
D6-380A-G, D6-380I-G  
D6-400A-G  
D6-440A-G, D6-440I-G, D6-440I-WJ-G  
D6-480I-G, D6-480I-WJ-G  
D8A1-A MP, D8A2-A MP, D8A3-A MP, D8A4-A MP, D8A5-A MP, D8A6-A MP  
TAMD63L-A, TAMD63P-A

Art. nr/Part no	Ersätter/Replaces	Info
I5108	3825108	1" axel / 1" shaft

## Slangklämmor Hose clamps



**Slangklämma / Hose clamp**

Rostfritt stål / Stainless steel AISI316

Art. nr/Part no	Info
I9671	16-27 mm
I9672	40-60 mm
I9673	60-80 mm
I9675	70-90 mm
I9013	120-140 mm
I9039	150-170 mm
I9067	210-230 mm
I9074	260-280 mm




**Slangklämma Heavy duty / Hose clamp Heavy duty**

Rostfritt stål / Stainless steel AISI316

Art. nr/Part no	Info
P409	60-65 mm
P410	65-70 mm
P412	75-80 mm



## Pinwing - skruvsatser impellerlock Pinwing - screw kits impeller cover

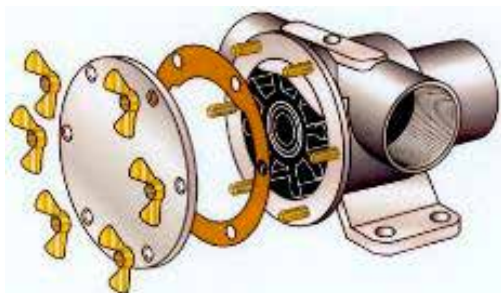

Med Pinwing går det lätt att lossa locket utan sönderdragna skruvar. Satserna innehåller pinnskruvar och vingmuttrar för enkel och snabb åtkomst till impellern.

Pinwing makes it easy to remove the cover without destroying screws. The kits include pin screws and wing nuts for easy and quick access to the impeller.



**B18\*, B20\*, B30, MB10, V-8 MD1, MD2, MD3\*, MD6, MD17\*, D21, D22**

**2010, 2020, 2030, 2040**

MB10A

AQ60, AQ90, AQ110, AQ120A

BB30, BB100

MB18, MB20A, MB20B, MB20C

AQ105A

AQ115A, AQ115B, BB115A, BB115B, BB115C

AQ130A, AQ130B, AQ130C, AQ130D

AQ165A, AQ170A, AQ170B, AQ170C, BB165A, BB170A, BB170B,

BB170C

AQ200D, AQ225D, AQ255B, AQ260A

AQ280A, AQ290A

BB225A, BB225AV, BB225B, BB260A

BB260AV, BB260B

MD1A, MD1B

MD2A, MD2B

MD3B

MD6A, MD6B

MD17C, MD17D

MD21A, MD21B

MD22A, TMD22A

MD2010A

MD2020A

MD2030A

MD2040A

Med sex skruvar i locket/With six screws in cover

\*Ej för kullagrad pump/\*\*Not for ball bearing pump

Art. nr/Part no	Ersätter/Replaces	Info
15350	N/A	8/32" x M4



**MD5, MD7, MD11, 2001, 2002, 2003**

MD5A, MD5B, MD5C

MD7A, MD7B

MD11C, MD11D

2001, 2002, 2003

Med fyra skruvar i locket/With four screws in cover

Art. nr/Part no	Ersätter/Replaces	Info
15351	N/A	M4 x M4



**B18, B20 MD3, MD17, 2003**

AQ60, AQ90, AQ100, AQ110, AQ120A

BB30, BB100

MB18

AQ105A, AQ115A, AQ115B

AQ130A, AQ130B, AQ130C, AQ130D

MB20A, MB20B, MB20C

MD3B

MD17C, MD17D

2003T

För kullagrad pump med sex skruvar i locket

For ball bearing pump with six screws in cover

Art. nr/Part no	Ersätter/Replaces	Info
15932	N/A	M4 x M4



Spare parts from Sweden

## Pinwing - skruvsatser impellerlock Pinwing - screw kits impeller cover



**MD27, MD29, MD32**  
AQD27, MD27  
AQD29, AQD29A, MD29, MD29A  
AQD32A, MD32A

Med sex skruvar i locket/With six screws in cover

Art. nr/Part no	Ersätter/Replaces	Info
I5356	N/A	I0/32 x M5



**V6, V8**  
430A, 430B, 431A, 431B  
AQ175A  
500A, 500B, 501A, 570A, 571A, 572A  
AQ200D, AQ211A, AQ225B, AQ225D, BB225A, BB225AV, BB225B,  
BB225C  
AQ225F  
AQ231A, AQ231B, BB231B  
AQ260A, BB260A, BB260AV, BB260B, BB260C  
BB261B  
AQ271A, AQ271C, AQ290A  
AQ311A, AQ311B

Med fyra skruvar i locket/With four screws in cover

Art. nr/Part no	Ersätter/Replaces	Info
I5935	N/A	M5 x M5



**30, 40, 41, KAD42, KAD43, KAD44, KAD300**  
AD30A, AQAD30A, MD30A, TAMD30A, TMD30A  
AD31A, AD31B, AD31D, AD31L-A, AD31P-A, AD31XD  
AQAD31A, MD31A, TAMD31A, TAMD31B, TAMD31D, TAMD31L-A,  
TAMD31M-A, TAMD31P-A, TMD31A, TMD31B, TMD31D, TMD31L-A  
KAD32P-A  
AQD40A, MD40A, TMD40A, TMD40B, TMD40C  
AD41A, AD41B, AD41D, AD41L-A, AD41P-A, AQAD41A  
D41A, D41B, D41D, D41L-A, TAMD41A, TAMD41B, TAMD41D  
TAMD41H-A, TAMD41L-A, TAMD41M-A, TAMD41P-A  
TMD41A, TMD41B, TMD41D, TMD41L-A  
KAD42A, KAMD 42A, KAD42B, KAD42P-A  
KAMD42B, KAMD42P-A, TAMD42B, TAMD42WJ-A  
KAD43P-A, KAMD43P-A  
KAD44P-A, KAD44P-C, KAMD44P-A, KAMDP-B, KAMD44P-C  
KAD300-A, KAMD300-A

Med sex skruvar i locket/With six screws in cover

Art. nr/Part no	Ersätter/Replaces	Info
I5934	N/A	M5 x M5



## Cirkulationspumpar Circulation pumps



**B21, B23**  
AQ125B  
AQ145B

Art. nr/Part no	Ersätter/Replaces
15566	855566



**B23, B25**  
230A, 230B  
250A, 250B  
251A  
AQ131A, AQ131B, AQ131C, AQ131D  
AQ151A, AQ151B, AQ151C  
AQ171A, AQ171C

Art. nr/Part no	Ersätter/Replaces
15975	271975



**3.0**

Art. nr/Part no	Ersätter/Replaces
15340	3858340, 3854017



**4.3, 5.0, 5.7 V6, V8**  
4.3GL, 4.3GS, 4.3Gi  
5.0GXi, 5.0OSi  
5.7GL, 5.7GLi, 5.7GSi  
430A, 430B, 431A, 431B, 432A, 434A  
500A, 500B, 501A, 501B, 570A, 571A, 572A  
AQ175A  
AQ205A  
AQ200A, AQ200C, AQ200D, AQ200F  
AQ211A  
AQ225A, AQ225B, AQ225C, AQ225D, AQ225E, AQ225F, BB225B,  
BB225C, BB225A, BB225AV  
AQ231A, AQ231B, BB231A  
AQ255A, AQ255B  
AQ260A, AQ260B, BB260A, BB260AV, BB260B, BB260C  
BB261A  
AQ271A, AQ271B, AQ271C, AQ271D  
AQ280A  
AQ290A  
AQ311A, AQ311B

Art. nr/Part no	Ersätter/Replaces
15850	3853850, 856364, 835390



**5.0, 5.8**  
5.0Fi, 5.0FL  
5.8Fi, 5.8FL

Art. nr/Part no	Ersätter/Replaces
15853	3853796



## Cirkulationspumpar Circulation pumps



**740**  
740A, 740B

Art. nr/Part no	Ersätter/Replaces
15991	3855991, 856609, 3854118



**MD21**  
MD21A, MD21B, AQD21A, AQD21B

Art. nr/Part no	Ersätter/Replaces	Info
19870	826870	Pump komplett/ Pump complete
19372		Repsats/Repair kit



**D3**  
D3-110I-A  
D3-130A-A, D3-130I-A  
D3-160A-A, D3-160I-A  
D3-190I-A

Art. nr/Part no	Ersätter/Replaces	Info
19403	8694630	Pump komplett/ Pump complete
19151	985151 x 7	Bultsats/Boltkit
19767	30677767	Packning/Gasket



**D3**  
D3-110I-B, D3-110I-C, D3-110I-D, D3-110I-E, D3-110I-F, D3-110I-G,  
D3-110I-H  
D3-130A-B, D3-130A-C, D3-130I-B, D3-130I-C  
D3-140A-D, D3-140A-E, D3-140A-F, D3-140A-G, D3-140A-H, D3-140I-D,  
D3-140I-E, D3-140I-F, D3-140I-G, D3-140I-H  
D3-150I-D, D3-150I-E, D3-150I-F, D3-150I-G, D3-150I-H  
D3-160A-B, D3-160A-C, D3-160I-B, D3-160I-C  
D3-170A-D, D3-170A-E, D3-170A-F, D3-170A-G, D3-170A-H, D3-170I-D,  
D3-170I-E, D3-170I-F, D3-170I-G, D3-170I-H  
D3-190A-B, D3-190A-C, D3-190I-B, D3-190I-C  
D3-200A-D, D3-200A-E, D3-200A-F, D3-200A-G, D3-200A-H, D3-200I-D,  
D3-200I-E, D3-200I-F, D3-200I-G, D3-200I-H  
D3-220A-D, D3-220A-E, D3-220A-F, D3-220A-G, D3-220A-H, D3-220I-D,  
D3-220I-E, D3-220I-F, D3-220I-G, D3-220I-H

Art. nr/Part no	Ersätter/Replaces	Info
19404	3801636, 3801404	Pump komplett/ Pump complete
19151	985151 x 7	Bultsats/Boltkit
19767	30677767	Packning/Gasket



**D12**  
D12D-A MH, D12D-B MH, D12D-C MH, D12D-E MH, D12D-G MH,  
D12C-A MP, D12D-A MP, D12D-B MP, D12D-C MP, D12D-D MP,  
D12D-E MP, D12D-F MP, D12D-G MP, D12D-H M  
D12D-A MG, D12D-E MG

Art. nr/Part no	Ersätter/Replaces
19135	3803909, 20431135, 8170833



## Reparationssatser cirkulationspumpar Repair kits circulation pumps



### B30

Tätningssats cirkulationspump/Sealing circulating pump

Art. nr/Part no	Ersätter/Replaces
15839	460839 + 421306



### 30, 31, KAD32

MD30A, TMD30A, TAMD30A, AD30A, AQAD30A  
TMD31A, TAMD31A, TMD31B, TAMD31B, TMD31D, TAMD31D, TMD31L-A, TAMD31L-A, TAMD31M-A, TAMD31P-A, TAMD31S, AD31, AD31B, AD31D, AD31D-A, AD31L-A, AD31P-A, AD31XD  
KAD32P, KAD32P-A


Art. nr/Part no	Ersätter/Replaces
20793	876793, 876560



### MD21

MD21A, MD21B, AQD21A, AQD21B

Art. nr/Part no	Ersätter/Replaces
19372	875372

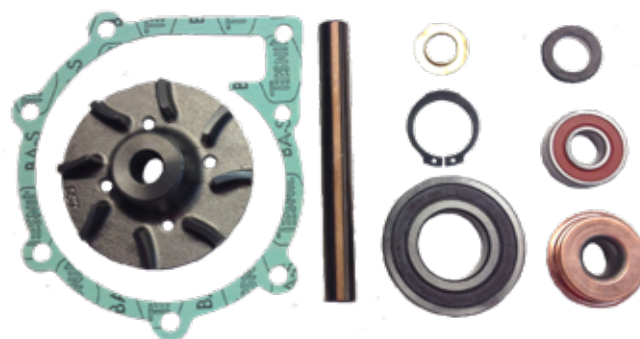

### 31, 40, 41, KAD32, KAD42, KAD43, KAD44, KAD300

TAMD31D, TAMD31L-A, TAMD31M-A, TAMD31P-A, TAMD31S, TMD31D, TMD31L-A, AD31D, AD31D-A, AD31L-A, AD31P-A, AD31XD  
MD40A, TMD40A, TAMD40A, TMD40B, TAMD40B, TMD40C, AQAD40A, AD40B, AQAD40B  
TMD41A, TAMD41A, TMD41B, TAMD41B, TMD41D, TAMD41D, TAMD41H-A, TAMD41H-B, TAMD41P, TAMD41P-A, TMD41L-A, AD41A, D41B, AD41B, AD41BJ, D41D, AD41D, D41L-A, AD41L-A, AD41P-A  
KAD32P  
KAD42A, KAD42B, KAD42P-A, KAMD42A, KAMD42B, KAMD42P-A, TAMD42B, TAMD42WJ-A  
KAD43P-A, KAD43P-B, KAMD43P, KAMD43P-A, KAMD43P-B  
KAD44P, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-B, KAMD44P-C  
KAD300-A, KAMD300-A

Art. nr/Part no	Ersätter/Replaces
19794	876794, 876544



Spare parts from Sweden

## Reparationsatts cirkulationspump Repair kits circulation pumps



**60**  
TAMD60A, TAMD60B, TAMD60C

Art. nr/Part no	Ersätter/Replaces
19686	875686



**63, 71, 72, 73, 74, 75**  
TAMD63L-A, TAMD63P-A  
TAMD71B  
TAMD72A  
TAMD73P-A, TAMD73WJ-A  
TAMD74A, TAMD74C-A, TAMD74C-B, TAMD74L-A, TAMD74L-B,  
TAMD74P-A, TAMD74P-B  
TAMD75P-A

Art. nr/Part no	Ersätter/Replaces
19840	876840

## Packningsatser cirkulationspumpar Gasket kits water circulation pumps



**B21, B23**  
AQ120B, AQ125A  
AQ140A, BB140A  
AQ145A, BB145A

Art. nr/Part no	Ersätter/Replaces
22014	N/A



**B21, B23**  
AQ125B  
AQ145B

Art. nr/Part no	Ersätter/Replaces
22038	N/A



**B23, B25**  
230A, 230B  
250A, 250B  
251A  
AQ131A, AQ131B, AQ131C, AQ131D  
AQ151A, AQ151B, AQ151C  
AQ171A, AQ171C

Art. nr/Part no	Ersätter/Replaces
22039	N/A




## Packningsseter cirkulationspumpar Gasket kits water circulation pumps



### B30

AQ165A, BB165A  
AQ170A, AQ170B, AQ170C, BB170A, BB170B, BB170C

Art. nr/Part no	Ersätter/Replaces
22013	N/A

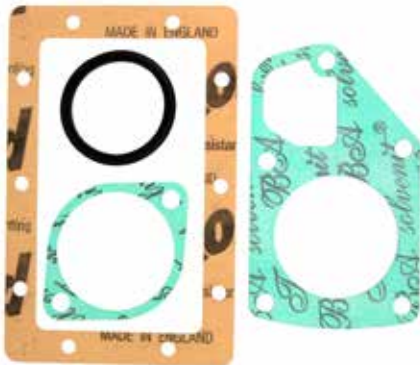

### MD21

AQD21A, AQD21B\*, MD21A, MD21B\*

\*Tidigare utförande/\*Ealier version

Art. nr/Part no	Ersätter/Replaces
22125	N/A




### MD21

AQD21B, MD21B

Senare utförande med rörkylare / Late version with pipe cooler

Art. nr/Part no	Ersätter/Replaces
22126	N/A

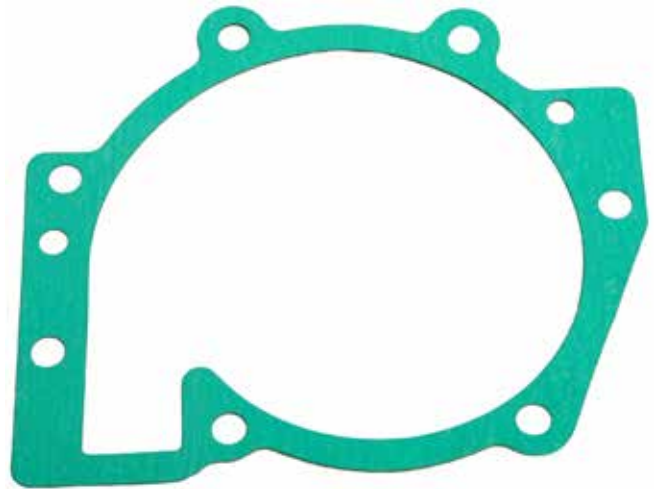

### D3

D3-110I-A, D3-110I-B, D3-110I-C, D3-110I-D, D3-110I-E, D3-110I-F,  
D3-110I-G, D3-110I-H

D3-130A-A, D3-130A-B, D3-130A-C, D3-130I-A, D3-130I-B, D3-130I-C

D3-140A-D, D3-140A-E, D3-140A-F, D3-140A-G, D3-140A-H, D3-140I-D,  
D3-140I-E, D3-140I-F, D3-140I-G, D3-140I-H

D3-150I-D, D3-150I-E, D3-150I-F, D3-150I-G, D3-150I-H

D3-160A-A, D3-160A-B, D3-160A-C, D3-160I-A, D3-160I-B, D3-160I-C

D3-170A-D, D3-170A-E, D3-170A-F, D3-170A-G, D3-170A-H, D3-170I-D,  
D3-170I-E, D3-170I-F, D3-170I-G, D3-170I-H

D3-190A-B, D3-190A-C, D3-190I-A, D3-190I-B, D3-190I-C

D3-200A-D, D3-200A-E, D3-200A-F, D3-200A-G, D3-200A-H, D3-200I-D,  
D3-200I-E, D3-200I-F, D3-200I-G, D3-200I-H

D3-220A-D, D3-220A-E, D3-220A-F, D3-220A-G, D3-220A-H, D3-220I-D,  
D3-220I-E, D3-220I-F, D3-220I-G, D3-220I-H

Art. nr/Part no	Ersätter/Replaces
19767	3067767



## Kylslangar Cooling hoses



### 31, 41, KAD32, KAD42, KAD43

AD31B, AD31D, AD31D-A, AD31L-A, AD31P-A, AD31XD  
D41B, AD41B, AD41BJ, D41D, AD41D, D41L-A, AD41L-A, AD41P-A  
KAD32P  
KAD42A, KAD42B, KAD42P-A, KAMD42P-A  
KAD43P-A, KAD43P-B, KAMD43P, KAMD43P-A

Kylslang mellan sjövattnfilter och oljekylare/  
Cooling hose between seawater filter and oil cooler

Art. nr/Part no	Ersätter/Replaces
26018	861018



### KAD42, KAD43, KAD44, KAD300

KAD42B, KAD42P-A, KAMD42B, KAMD42P-A  
KAD43P-A, KAD43P-B, KAMD43P, KAMD43P-A, KAMD43P-B  
KAD44P, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-B,  
KAMD44P-C  
KAD300-A, KAMD300-A

Kylslang mellan termostathus och värmväxlare/  
Cooling hose between thermostat housing and heat exchanger

Art. nr/Part no	Ersätter/Replaces
26109	861109



### 31, 41, KAD42, KAD43

AD31B, AD31D, AD31D-A, AD31L-A, AD31P-A, AD31XD  
AD41B, AD41BJ, AD41D, AD41L-A, AD41P-A, D41B, D41D  
TAMD42B, TAMD42WJ-A  
KAD42A, KAD42B, KAD42P-A, KAMD42A, KAMD42B, KAMD42P-A  
KAD43P-A, KAD43P-B, KAMD43P, KAMD43P-A, KAMD43P-B

Kylslang mellan värmväxlare och avgaskrök/  
Cooling hose between heat exchanger and exhaust riser

Art. nr/Part no	Ersätter/Replaces
26066	3581066



### 41, 42

TMD41D, TAMD41D, TAMD41H-A, TAMD41H-B, TAMD41P,  
TAMD41P-A, TMD41L-A, AD41D, AD41L-A, AD41P-A, D41D, D41L-A  
TAMD42B, TAMD42WJ-A

Kylslang mellan termostathus och värmväxlare/  
Cooling hose between thermostat housing and heat exchanger

Art. nr/Part no	Ersätter/Replaces
26110	861110



## Kylslangar Cooling hoses



### KAD42, KAD43

KAD42B, KAD42P-A, KAMD42B, KAMD42P-A  
KAD43P-A, KAD43P-B, KAMD43P, KAMD43P-A, KAMD43P-B

Kylslang mellan värmexväxlare och laddluftkylare/Cooling hose between heat exchanger and aftercooler

Art. nr/Part no	Ersätter/Replaces
26277	861277



### KAD44, KAD300

KAD44P, KAD44P-B, KAD44P-C  
KAD300-A, KAMD300-A

Kylslang mellan sjövattpump, sjövattnfilter och laddluftkylare  
Cooling hose between seawater pump, seawater filter and aftercooler

Art. nr/Part no	Ersätter/Replaces
26336	861336



### KAD43, KAD44, KAD300

KAD43P-A, KAD43P-B  
KAD44P, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-B,  
KAMD44P-C  
KAD300-A, KAMD300-A

Kylslangssats mellan sjövattpump/sjövattnfilter och laddluftkylare.  
Inkl. slangklämmor och skarvnippel för enklare montering.  
Coolant hose kit between seawater pump/seawater filter  
and aftercooler. Incl. hose clamps and joint nipple for easier installation.

Art. nr/Part no	Ersätter/Replaces
26335	861335



### KAMD43, KAD44, KAD300

KAMD43P-B  
KAD44P, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-B,  
KAMD44P-C  
KAD300-A, KAMD300-A

Kylslangssats mellan oljekylare och laddluftkylare.  
Inkl. slangklämmor och skarvnippel för enklare montering.  
Cooling hose kit between oil cooler and aftercooler.  
Incl. clamps and joint nipple for easier installation.

Art. nr/Part no	Ersätter/Replaces
26337	861337



## Kylslangar Cooling hoses



**KAMD43, KAD44, KAD300**  
KAMD43P-B  
KAD44P, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-B,  
KAMD44P-C  
KAD300-A, KAMD300-A

Kylslang mellan oljekylare och värmeväxlare  
Cooling hose between oil cooler and heat exchanger

Art. nr/Part no	Ersätter/Replaces
26340	861340



**41, KAD42, KAD43**  
TAMD41B, TAMD41D, TAMD41H-A, TAMD41H-B, TAMD41P, TAMD41P-A,  
AD41B, AD41BJ, AD41D, AD41L-A, AD41P-A  
KAD42A, KAD42B, KAD42P-A, KAMD42A, KAMD42B, KAMD42P-A,  
TAMD42B, TAMD42WJ-A  
KAD43P-A, KAD43P-B, KAMD43P, KAMD43P-A, KAMD43P-B

Kylslang mellan oljekylare och mellankylare  
Cooling hose between oil cooler and aftercooler

Art. nr/Part no	Ersätter/Replaces
26404	860404



**KAD44, KAD300**  
KAD44P, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-B,  
KAMD44P-C  
KAD300-A, KAMD300-A

Kylslang mellan värmeväxlare och avgaskrök  
Cooling hose between heat exchanger and exhaust bend

Art. nr/Part no	Ersätter/Replaces
26341	861341



**31, 41, 42**  
TAMD31B, TAMD31D, TAMD31L-A, TAMD31M-A, TAMD31P-A, TAMD31S,  
AD31B, AD31D, AD31D-A, AD31L-A, AD31P-A, AD31XD  
TAMD41B, TAMD41D, TAMD41H-A, TAMD41H-B, TAMD41P, TAMD41P-A,  
AD41B, AD41BJ, D41D, AD41D, D41L-A, AD41L-A, AD41P-A  
TAMD42B, TAMD42WJ-A

Kylslang mellan värmeväxlare och laddluftkylare  
Cooling hose between heat exchanger and aftercooler

Art. nr/Part no	Ersätter/Replaces
26645	860645



## Kylslangar Cooling hoses



### 31, 41, KAD42, KAD43, KAD44

MD31A, TMD31B, TAMD31B, TMD31D, TAMD31D, TMD31L-A, TAMD31L-A, TAMD31M-A, TAMD31P-A, TAMD31S, AD31L-A, AD31P-A, TMD41B, TAMD41B, TMD41D, TAMD41D, TAMD41H-A, TAMD41H-B, TAMD41P, TAMD41P-A, TMD41L-A, AD41B, AD41BJ, AD41D, D41L-A, AD41L-A, AD41P-A  
TAMD42B, TAMD42WJ-A  
KAD42P-A, KAMD42A, KAMD42B, KAMD42P-A  
KAD43P-A, KAMD43P, KAMD43P-A, KAMD43P-B  
KAMD44P-A, KAMD44P-B, KAMD44P-C

Kylslang mellan sjövattpump och oljekylare  
Cooling hose between seawater pump and oil cooler

Art. nr/Part no	Ersätter/Replaces
26997	860997



### 31, 41, 42

AD31B, AD31D, AD31D-A, AD31L-A, AD31P-A, AD31XD  
D41B, AD41B, AD41BJ, D41D, AD41D, AD41L-A, AD41P-A  
TAMD42B, TAMD42WJ-A  
KAD42A, KAD42B, KAD42P-A, KAMD42A, KAMD42B, KAMD42P-A

Kylslang mellan värmväxlare och avgaskrök  
Cooling hose between heat exchanger and exhaust bend

Art. nr/Part no	Ersätter/Replaces
26828	3581065



## Packningssatser kylvattenrör Seal kits cooling water pipes



**MB10**  
MB10A

Art. nr/Part no	Ersätter/Replaces
22036	N/A



**B18, B20**  
AQ60F, AQ90, AQ95, AQ95A, AQ110  
AQ120  
BB30, BB100  
MB18  
AQ105A  
MB20A, MB20B, MB20C

Art. nr/Part no	Ersätter/Replaces
22049	N/A



**B20**  
AQ115A, AQ115B  
AQ130A, AQ130B, AQ130C, AQ130D  
BB115A, BB115B, BB115C

Art. nr/Part no	Ersätter/Replaces
22061	N/A



**B21, B23**  
AQ120B, AQ125A, AQ140A, BB140A  
AQ125B, AQ145A, AQ145B, BB145A

Art. nr/Part no	Ersätter/Replaces
22051	N/A



**B23, B25**  
230A, 230B  
AQ131A, AQ131B, AQ131C, AQ131D  
250A, 250B, 251A  
AQ151A, AQ151B, AQ151C  
AQ171A, AQ171C

Art. nr/Part no	Ersätter/Replaces
22037	N/A



**B30**  
AQ165A  
AQ170A, AQ170B, AQ170C  
BB165A  
BB170A, BB170B, BB170C

Art. nr/Part no	Ersätter/Replaces
22012	N/A



## Packningsatser kylvattenrör Seal kits cooling water pipes

**MD1, MD2**  
MD1B  
AQD2B, D2A, MD2, MD2A, MD2B



Art. nr/Part no	Ersätter/Replaces
22035	N/A

**MD5**  
MD5A, MD5B, MD5C



Art. nr/Part no	Ersätter/Replaces
22019	N/A

**MD6, MD7**  
MD6A, MD6B  
MD7A, MD7B



Art. nr/Part no	Ersätter/Replaces
22024	N/A

**MD11**  
MD11C, MD11D



Art. nr/Part no	Ersätter/Replaces
22021	N/A

**MD11, MD17**  
MD11C, MD11D  
MD17C, MD17D



Med Volvo Penta sötvattenkyllning / With Volvo Penta fresh-water cooling

Art. nr/Part no	Ersätter/Replaces
22023	N/A

**MD17**  
MD17C, MD17D



Art. nr/Part no	Ersätter/Replaces
22025	N/A

**2001, 2002, 2003, 2003T**


2001, 2001AG, 2001B, 2001BG, 2001D, 2001R  
2002, 2002AG, 2002B, 2002BG, 2002D  
2003, 2003 SOLAS, 2003AG, 2003B, 2003B SOLAS, 2003BG, 2003D,  
2003R, 2003R SOLAS  
2003T, 2003TB, 2003TB SOLAS, 2003TR



Art. nr/Part no	Ersätter/Replaces
22011	876224 (1 x 418411, 4 x 418445, 4 x 829714)



## Packningsseter kylvattenrör Seal kits cooling water pipes

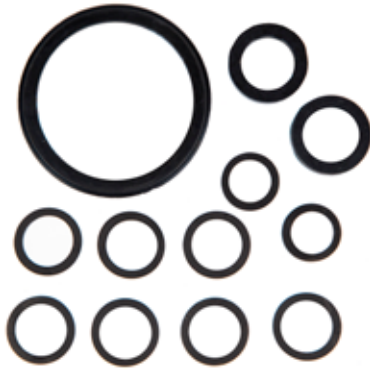

**2002, 2003**

2002, 2002AG, 2002B, 2002BG  
2003, 2003AG, 2003B, 2003BG

Med Volvo Penta sötvattenkyllning / With Volvo Penta fresh-water cooling

Art. nr/Part no	Ersätter/Replaces
22017	N/A




**2003T**

2003T  
2003TB

Med Volvo Penta sötvattenkyllning / With Volvo Penta Fresh-water cooling


Art. nr/Part no	Ersätter/Replaces
22008	N/A

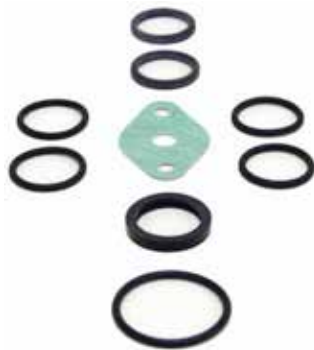

**30**

MD30A  
TMD30A

Art. nr/Part no	Ersätter/Replaces
22114	N/A

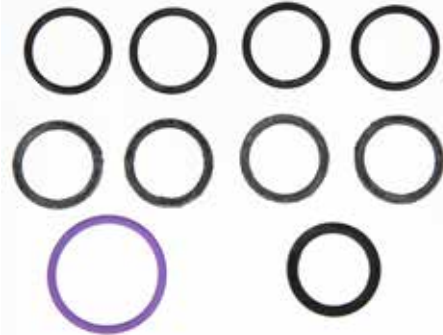

**30**

AD30A, AQAD30A, TAMD30A

Art. nr/Part no	Ersätter/Replaces
22115	N/A



**40**

AD40B  
AQAD40A, AQAD40B, AQD40A  
MD40A, TAMD40A, TAMD40B  
TMD40A, TMD40B, TMD40C

Art. nr/Part no	Ersätter/Replaces
22116	N/A




**31, 41, KAD32, KAD42, KAD43, KAD44**

AD31A, AD31B, AD31D, AD31XD, AQAD31A, MD31A, TAMD31A,  
TAMD31B, TAMD31D, TMD31A, TMD31B, TMD31D  
KAD32P-A

AD41A, AD41B, AD41D, AQAD41A, D41A, D41B, D41D, TAMD41A,  
TAMD41B, TAMD41D, TMD41A, TMD41B, TMD41D  
KAD42A, KAD42B, KAD42P-A, KAMD42A, KAMD42B, KAMD42P-A,  
TAMD42B, TAMD42WJ-A  
KAD43P-A, KAMD43P-A  
KAD44P-A, KAMD44P-A

Art. nr/Part no	Ersätter/Replaces
22113	N/A



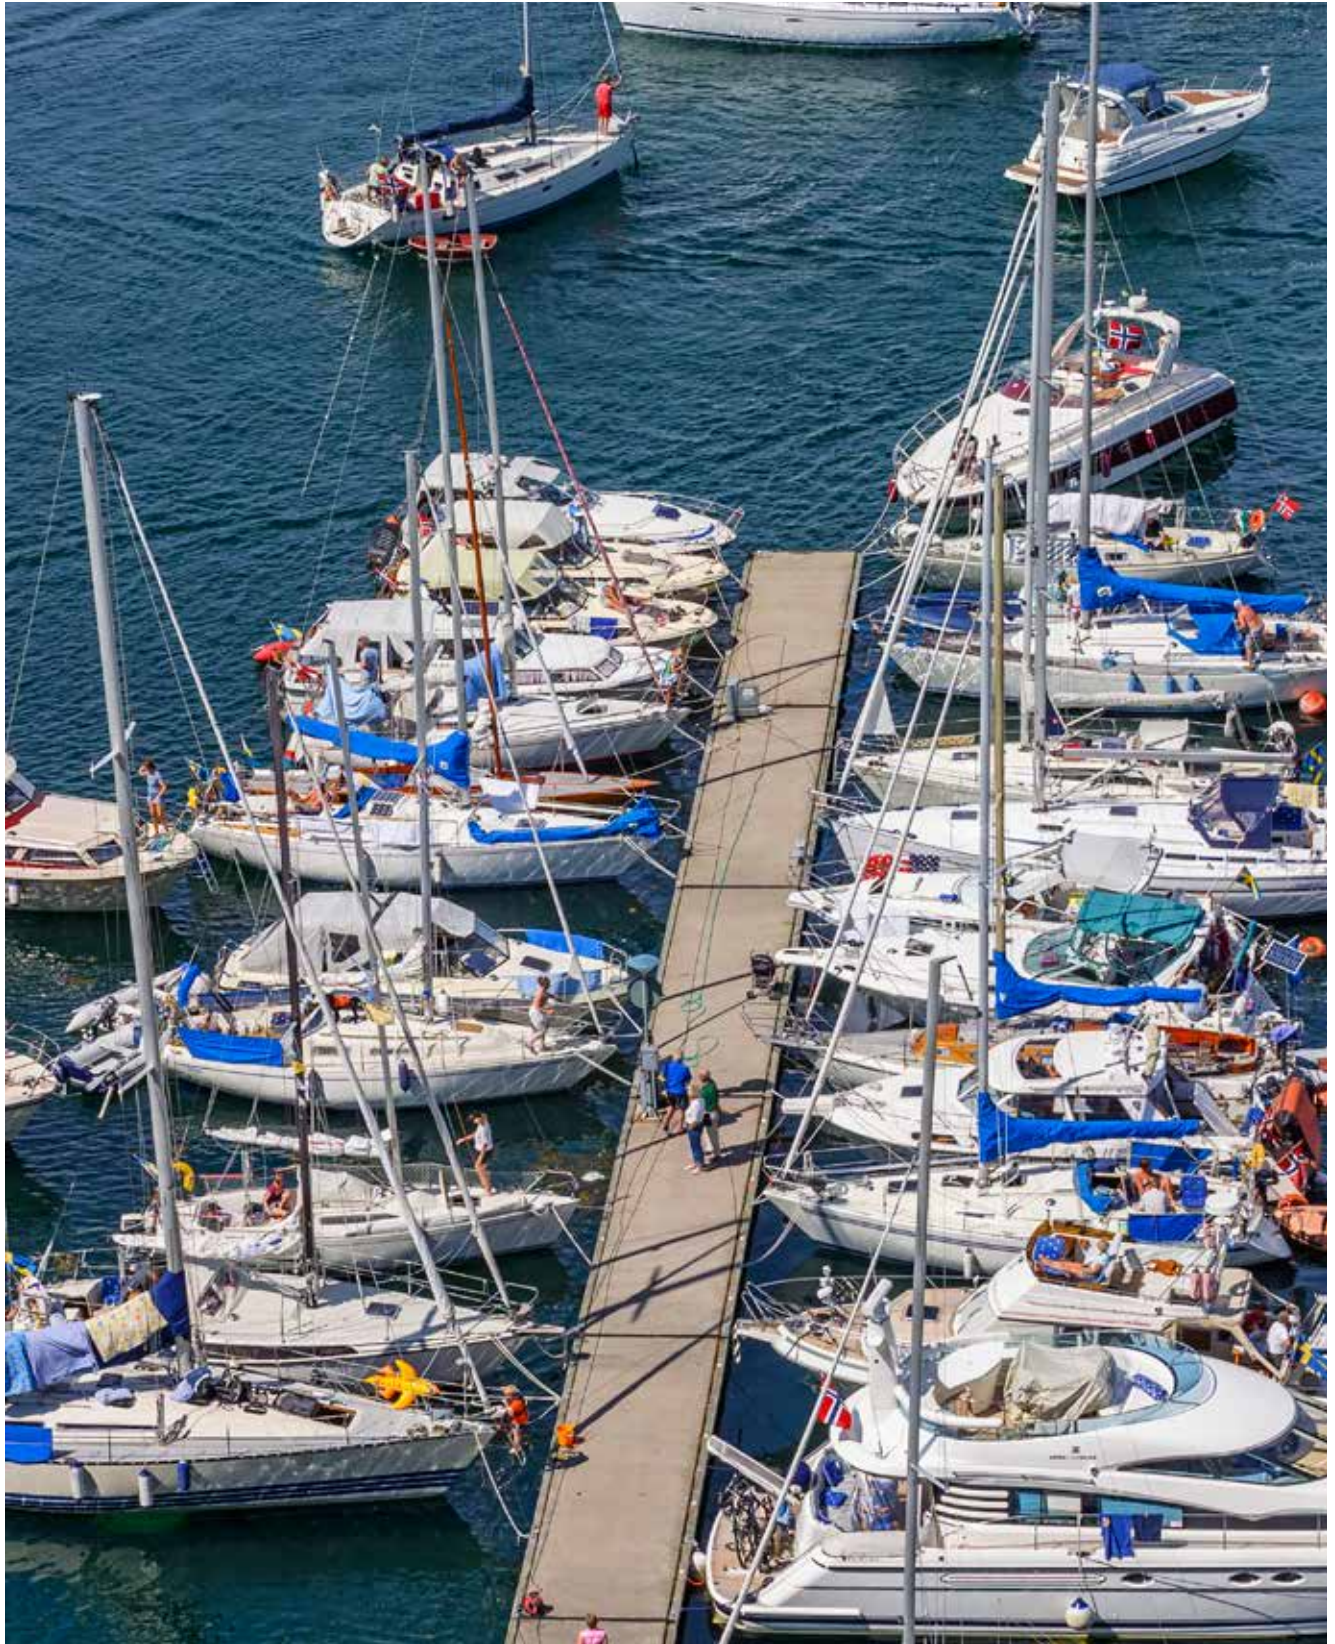

Spare parts from Sweden

## Packningskit värmeväxlare Gasket kits heat exchangers



**B21, B23**  
AQ120B, AQ125A, AQ140A  
BBI40A  
AQ125B, AQ145A, AQ145B  
BBI45A

Art. nr/Part no	Ersätter/Replaces
22103	N/A



**B23, B25**  
230A, 230B  
AQ131A, AQ131B, AQ131C, AQ131D  
250A, 250B, 251A  
AQ151A, AQ151B, AQ151C  
AQ171A, AQ171C

Art. nr/Part no	Ersätter/Replaces
22015	N/A



**MD21**  
MD21A

Art. nr/Part no	Ersätter/Replaces
22122	N/A



**MDD21**  
AQD21A \*)  
MD21B

Art. nr/Part no	Ersätter/Replaces	Info
22123	N/A	*) senare/later



**MD29, MD32**  
AQD29, AQD29A, MD29, MD29A  
AQD32A, MD32A

Art. nr/Part no	Ersätter/Replaces
22124	N/A



**MD22**  
MD22L-B  
MD22P-B

Art. nr/Part no	Ersätter/Replaces
22077	N/A



## Packningskit värmeväxlare Gasket kits heat exchangers



**TMD22**  
TMD22A


Art. nr/Part no	Ersätter/Replaces
22156	N/A



**2002, 2003**  
2002, 2002AG, 2002B, 2002BG  
2003, 2003AG, 2003B, 2003BG

Med Volvo Penta sötvattenkyllning With Volvo Penta fresh-water cooler


Art. nr/Part no	Ersätter/Replaces
22032	N/A

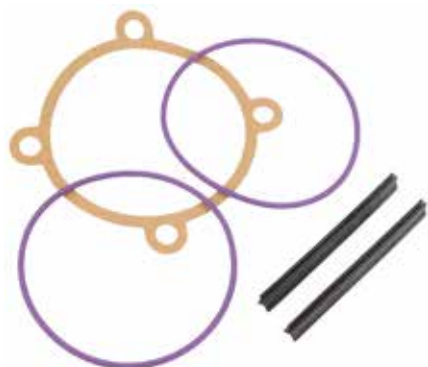

**2003T**  
2003T  
2003TB

Med Volvo Penta sötvattenkyllning With Volvo Penta fresh-water cooler

Art. nr/Part no	Ersätter/Replaces
22033	

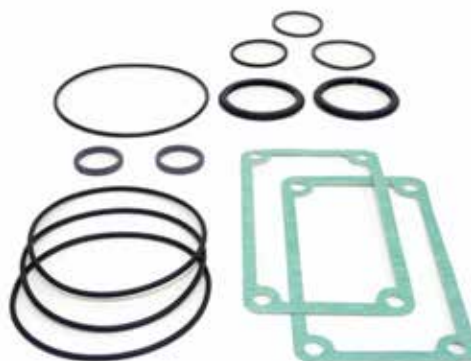


**30**  
AD30A, AQAD30A, MD30A, TAMD30A, TMD30A

Art. nr/Part no	Ersätter/Replaces
22105	N/A



**40**  
MD40A, TMD40A, AQD40A

Art. nr/Part no	Ersätter/Replaces
22106	N/A

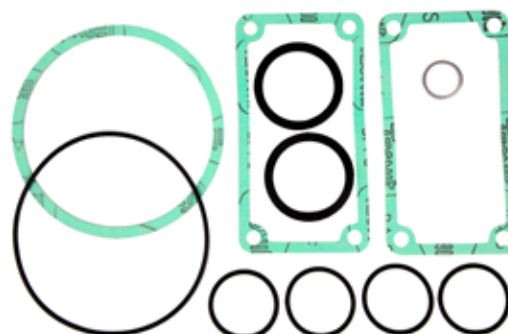


**40**  
AD40B, AQAD40A, AQAD40B, TAMD40A, TAMD40B  
TMD40B, TMD40C

Art. nr/Part no	Ersätter/Replaces
22107	N/A



## Packningsatser värmeväxlare Gasket kits heat exchangers



**31, 41**

AD31A, AD31B, AQAD31A, TAMD31A, TAMD31B, TMD31A, TMD31B  
AD41A, AD41B, AQAD41A, D41A, D41B, TAMD41A, TAMD41B  
TMD41A, TMD41B


Art. nr/Part no	Ersätter/Replaces
22108	N/A



**31, 41, KAD32, KAD42, KAD43, KAD44, KAD300**

AD31, AD31B, AD31D, AD31D-A, AD31L-A, AD31P-A, AD31XD, TMD31A,  
TAMD31A, TAMD31B, TAMD31B, TAMD31D, TMD31L-A, TAMD31L-A,  
TAMD31M-A, TAMD31P-A, TMD31D, TMD31L-A,  
KAD32P, KAD32P-A  
AD41A, D41B, AD41B, AD41BJ, AD41D, AD41L-A, AD41P-A, D41D, D41L-A,  
TMD41A, TAMD41A, TMD41B, TAMD41B, TMD41D, TAMD41D, TAMD41H-A,  
TAMD41H-B, TAMD41L-A, TAMD41M-A, TAMD41P, TAMD41P-A, TMD41D,  
TMD41L-A  
KAD42A, KAD42B, KAD42P-A, KAMD42A, KAMD42B, KAMD42P-A  
TAMD42B, TAMD42WJ-A  
KAD43P-A, KAD43P-B, KAD43P-C, KAMD43P, KAMD43P-A, KAMD43P-B,  
KAMD43P-C  
KAD44P-A, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-B, KAMD44P-C  
KAD300-A, KAMD300-A

Art. nr/Part no	Ersätter/Replaces
22109	N/A



**70**

TAMD70D, TAMD70E

Art. nr/Part no	Ersätter/Replaces
23053	925278x4




**D1-13, D1-20, D1-30, D2-40**

D1-20A, D1-20B, D1-20F  
D1-30A, D1-30B, D1-30F  
D2-40, D2-40B, D2-40F

Passar värmeväxlare / fits heat exchangers OEM 3840127, 22850978

Art. nr/Part no	Ersätter/Replaces
23015	4 x 3842016 + 1 x 3583830 + 1 x 3586514

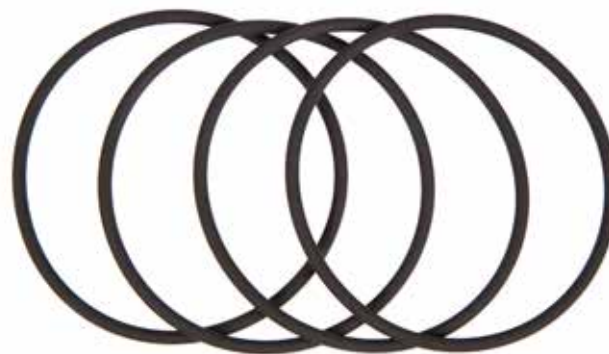


**D2-55, 22**

MD22L, MD22P, TMD22B, TMD22P-C, TAMD22P-B  
D2-55, D2-55A, D2-55B

Art. nr/Part no	Ersätter/Replaces
23011	4 x 3580818




## Packningsseter värmeväxlare Gasket kits heat exchangers

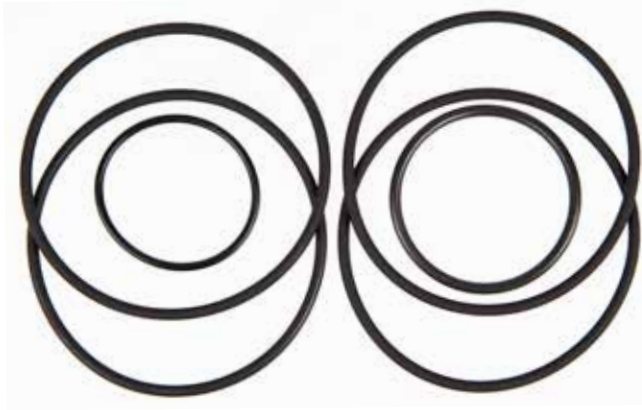

### D2-50, D2-55, D2-60, D2-75

D2-50F  
D2-55C, D2-55D, D2-55F  
D2-60F  
D2-75A, D2-75B, D2-75C, D2-75F

Art. nr/Part no	Ersätter/Replaces
23012	4x 3581070 + 1x 3583830 + 1x 3586514

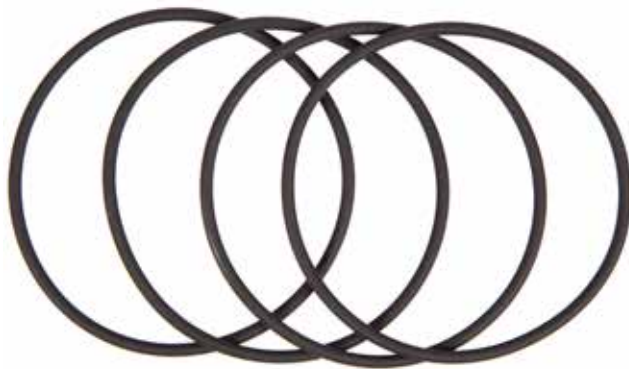

### D3

D3-110I-A, D3-110I-B, D3-110I-C  
D3-130A-A, D3-130A-B, D3-130A-C, D3-130I-A, D3-130I-B, D3-130I-C  
D3-160A-A, D3-160A-B, D3-160A-C, D3-160I-A, D3-160I-B, D3-160I-C  
D3-190A-B, D3-190A-C, D3-190I-A, D3-190I-B, D3-190I-C

Art. nr/Part no	Ersätter/Replaces
23013	3581070




### D4, D6

D4-145I-G  
D4-150A-G  
D4-175I-G  
D4-180I-B, D4-180I-C, D4-180I-D, D4-180I-E, D4-180I-F  
D4-210A-A, D4-210A-B, D4-210I-A, D4-210I-B  
D4-225A-B, D4-225A-C, D4-225A-D, D4-225A-E, D4-225A-F  
D4-225I-B, D4-225I-C, D4-225I-D, D4-225I-E, D4-225I-F  
D4-230A-G, D4-230I-G  
D4-260A-A, D4-260A-B, D4-260A-C, D4-260A-D, D4-260A-E, D4-260A-F,  
D4-260D-B, D4-260D-C, D4-260D-D, D4-260D-E, D4-260D-F,  
D4-260I-A, D4-260I-B, D4-260I-C, D4-260I-D, D4-260I-E, D4-260I-F  
D4-270A-G, D4-270I-G  
D4-300A-A, D4-300A-C, D4-300A-D, D4-300A-E, D4-300A-F,  
D4-300A-G, D4-300D-A, D4-300D-C, D4-300D-D, D4-300D-E,  
D4-300D-F, D4-300I-A, D4-300I-C, D4-300I-D, D4-300I-E, D4-300I-F,  
D4-300I-G  
D4-320A-G, D4-320I-G  
D6-280A-A, D6-280A-B, D6-280A-C, D6-280A-D, D6-280A-E, D6-280I-A,  
D6-280I-B, D6-280I-C, D6-280I-D, D6-280I-E  
D6-300A-F, D6-300A-G, D6-300D-F, D6-300D-G, D6-300I-F, D6-300I-G  
D6-310A-A, D6-310A-B, D6-310A-C, D6-310A-D, D6-310A-E,  
D6-310D-B, D6-310D-C, D6-310D-D, D6-310D-E, D6-310I-A, D6-310I-B,  
D6-310I-C, D6-310I-D, D6-310I-E  
D6-330A-B, D6-330A-C, D6-330A-D, D6-330A-E, D6-330A-F,  
D6-330D-B, D6-330D-C, D6-330D-D, D6-330D-E, D6-330D-F, D6-330I-B,  
D6-330I-C, D6-330I-D, D6-330I-E, D6-330I-F  
D6-340A-G, D6-340D-G, D6-340I-G  
D6-350A-A, D6-350A-B  
D6-370A-B, D6-370A-C, D6-370A-D, D6-370A-E, D6-370A-F,  
D6-370D-A, D6-370D-B, D6-370D-C, D6-370D-D, D6-370D-E,  
D6-370D-F, D6-370I-A, D6-370I-B, D6-370I-C, D6-370I-D, D6-370I-E,  
D6-370I-F  
D6-380A-G, D6-380D-G, D6-380I-G  
D6-400A-E, D6-400A-F, D6-400A-G  
D6-435D-A, D6-435D-C, D6-435D-D, D6-435D-E, D6-435D-F,  
D6-435I-A, D6-435I-C, D6-435I-D, D6-435I-E, D6-435I-F  
D6-440A-G, D6-440D-G, D6-440I-G, D6-440I-WJ-G  
D6-480D-G, D6-480I-G, D6-480I-WJ-G

Art. nr/Part no	Ersätter/Replaces	Info
23017	1 x 976041, 1 x 976051, 1 x 969415, 2 x 949722	Mellan värmeväxlare och block / Between heat exchanger and engine



## Packningsatser värmeväxlare Gasket kits heat exchangers

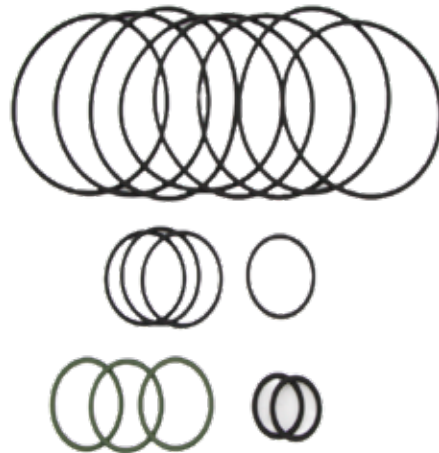

### D4, D6

D4-145I-G  
D4-150A-G  
D4-175I-G  
D4-180I-B, D4-180I-C, D4-180I-D, D4-180I-E, D4-180I-F  
D4-210A-A, D4-210A-B, D4-210I-A, D4-210I-B  
D4-225A-B, D4-225A-C, D4-225A-D, D4-225A-E, D4-225A-F  
D4-225I-B, D4-225I-C, D4-225I-D, D4-225I-E, D4-225I-F  
D4-230A-G, D4-230I-G  
D4-260A-A, D4-260A-B, D4-260A-C, D4-260A-D, D4-260A-E, D4-260A-F,  
D4-260D-B, D4-260D-C, D4-260D-D, D4-260D-E, D4-260D-F,  
D4-260I-A, D4-260I-B, D4-260I-C, D4-260I-D, D4-260I-E, D4-260I-F  
D4-270A-G, D4-270I-G  
D4-300A-A, D4-300A-C, D4-300A-D, D4-300A-E, D4-300A-F,  
D4-300A-G, D4-300D-A, D4-300D-C, D4-300D-D, D4-300D-E,  
D4-300D-F, D4-300I-A, D4-300I-C, D4-300I-D, D4-300I-E, D4-300I-F,  
D4-300I-G  
D4-320A-G, D4-320I-G  
D6-280A-A, D6-280A-B, D6-280A-C, D6-280A-D, D6-280A-E, D6-280I-A,  
D6-280I-B, D6-280I-C, D6-280I-D, D6-280I-E  
D6-300A-F, D6-300A-G, D6-300D-F, D6-300D-G, D6-300I-F, D6-300I-G  
D6-310A-A, D6-310A-B, D6-310A-C, D6-310A-D, D6-310A-E,  
D6-310D-B, D6-310D-C, D6-310D-D, D6-310D-E, D6-310I-A, D6-310I-B,  
D6-310I-C, D6-310I-D, D6-310I-E  
D6-330A-B, D6-330A-C, D6-330A-D, D6-330A-E, D6-330A-F,  
D6-330D-B, D6-330D-C, D6-330D-D, D6-330D-E, D6-330D-F, D6-330I-B,  
D6-330I-C, D6-330I-D, D6-330I-E, D6-330I-F  
D6-340A-G, D6-340D-G, D6-340I-G  
D6-350A-A, D6-350A-B  
D6-370A-B, D6-370A-C, D6-370A-D, D6-370A-E, D6-370A-F,  
D6-370D-A, D6-370D-B, D6-370D-C, D6-370D-D, D6-370D-E,  
D6-370D-F, D6-370I-A, D6-370I-B, D6-370I-C, D6-370I-D, D6-370I-E,  
D6-370I-F  
D6-380A-G, D6-380D-G, D6-380I-G  
D6-400A-E, D6-400A-F, D6-400A-G  
D6-435D-A, D6-435D-C, D6-435D-D, D6-435D-E, D6-435D-F,  
D6-435I-A, D6-435I-C, D6-435I-D, D6-435I-E, D6-435I-F  
D6-440A-G, D6-440D-G, D6-440I-G, D6-440I-VJ-G  
D6-480D-G, D6-480I-G, D6-480I-VJ-G

### D4, D6

D4-145I-G  
D4-150A-G  
D4-175I-G  
D4-180I-B, D4-180I-C, D4-180I-D, D4-180I-E, D4-180I-F  
D4-210A-A, D4-210A-B, D4-210I-A, D4-210I-B  
D4-225A-B, D4-225A-C, D4-225A-D, D4-225A-E, D4-225A-F  
D4-225I-B, D4-225I-C, D4-225I-D, D4-225I-E, D4-225I-F  
D4-230A-G, D4-230I-G  
D4-260A-A, D4-260A-B, D4-260A-C, D4-260A-D, D4-260A-E, D4-260A-F,  
D4-260D-B, D4-260D-C, D4-260D-D, D4-260D-E, D4-260D-F,  
D4-260I-A, D4-260I-B, D4-260I-C, D4-260I-D, D4-260I-E, D4-260I-F  
D4-270A-G, D4-270I-G  
D4-300A-A, D4-300A-C, D4-300A-D, D4-300A-E, D4-300A-F,  
D4-300A-G, D4-300D-A, D4-300D-C, D4-300D-D, D4-300D-E,  
D4-300D-F, D4-300I-A, D4-300I-C, D4-300I-D, D4-300I-E, D4-300I-F,  
D4-300I-G  
D4-320A-G, D4-320I-G  
D6-280A-A, D6-280A-B, D6-280A-C, D6-280A-D, D6-280A-E, D6-280I-A,  
D6-280I-B, D6-280I-C, D6-280I-D, D6-280I-E  
D6-300A-F, D6-300A-G, D6-300D-F, D6-300D-G, D6-300I-F, D6-300I-G  
D6-310A-A, D6-310A-B, D6-310A-C, D6-310A-D, D6-310A-E,  
D6-310D-B, D6-310D-C, D6-310D-D, D6-310D-E, D6-310I-A, D6-310I-B,  
D6-310I-C, D6-310I-D, D6-310I-E  
D6-330A-B, D6-330A-C, D6-330A-D, D6-330A-E, D6-330A-F,  
D6-330D-B, D6-330D-C, D6-330D-D, D6-330D-E, D6-330D-F, D6-330I-B,  
D6-330I-C, D6-330I-D, D6-330I-E, D6-330I-F  
D6-340A-G, D6-340D-G, D6-340I-G  
D6-350A-A, D6-350A-B  
D6-370A-B, D6-370A-C, D6-370A-D, D6-370A-E, D6-370A-F,  
D6-370D-A, D6-370D-B, D6-370D-C, D6-370D-D, D6-370D-E,  
D6-370D-F, D6-370I-A, D6-370I-B, D6-370I-C, D6-370I-D, D6-370I-E,  
D6-370I-F  
D6-380A-G, D6-380D-G, D6-380I-G  
D6-400A-E, D6-400A-F, D6-400A-G  
D6-435D-A, D6-435D-C, D6-435D-D, D6-435D-E, D6-435D-F,  
D6-435I-A, D6-435I-C, D6-435I-D, D6-435I-E, D6-435I-F  
D6-440A-G, D6-440D-G, D6-440I-G, D6-440I-VJ-G  
D6-480D-G, D6-480I-G, D6-480I-VJ-G

Komplett packningssats för värmeväxlare och oljefilterhus / Complete gasket kit for heat exchanger and oil filter housing


Art. nr/Part no	Ersätter/Replaces
23014	8 x 3583647

Art. nr/Part no	Ersätter/Replaces
23094	3 x 969415, 1 x 976041, 8 x 3583647, 2 x 3885174, 3 x 866690, 2 x 949722



Spare parts from Sweden

## Packningsatts oljefilterhus - värmeväxlare Gasket kit oil filter housing - heat exchanger

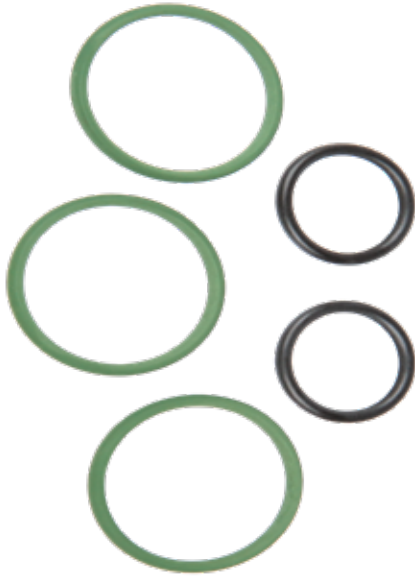

### D4, D6

D4-180I-B, D4-180I-C, D4-180I-D,  
D4-180I-E, D4-210A-A, D4-210A-B, D4-210I-A, D4-210I-B, D4-225A-C,  
D4-225A-D, D4-225A-E, D4-225I-B, D4-225I-C, D4-225I-D, D4-225I-E,  
D4-260A-A, D4-260A-B, D4-260A-C, D4-260A-D, D4-260A-E, D4-260D-B,  
D4-260D-C, D4-260D-D, D4-260D-E, D4-260I-A, D4-260I-B, D4-260I-C,  
D4-260I-D, D4-260I-E, D4-300A-A, D4-300A-C, D4-300A-D, D4-300A-E,  
D4-300D-A, D4-300D-C, D4-300D-D, D4-300D-E, D4-300I-A, D4-300I-C,  
D4-300I-D, D4-300I-E  
D4-180I-F, D4-225A-F, D4-225I-F,  
D4-260A-F, D4-260D-F, D4-260I-F, D4-300A-F, D4-300D-F, D4-300I-F  
D4-175I-G, D4-230I-G, D4-270I-G,  
D4-300I-G, D4-320I-G, D4-150A-G, D4-230A-G, D4-270A-G, D4-300A-G,  
D4-320A-G

D6-280A-A, D6-280I-A, D6-310A-A, D6-310I-A, D6-350A-A, D6-350A-B,  
D6-370I-A  
D6-280I-A, D6-280I-B, D6-280I-C,  
D6-280I-D, D6-280I-E, D6-310I-A,  
D6-310I-B, D6-310I-C, D6-310I-D,  
D6-310I-E, D6-330I-B, D6-330I-C,  
D6-330I-D, D6-330I-E, D6-370I-A,  
D6-370I-B, D6-370I-C, D6-370I-D,  
D6-370I-E, D6-435I-A, D6-435I-C,  
D6-435I-D, D6-435I-E  
D6-300A-F, D6-300D-F, D6-330A-F, D6-330D-F, D6-330I-F,  
D6-370A-F, D6-370D-F, D6-370I-F, D6-400A-F, D6-435D-F, D6-435I-F  
D6-400A-E, D6-435D-C, D6-435D-D, D6-435D-E, D6-435I-C, D6-435I-D,

Art. nr/Part no	Ersätter/Replaces
23051	3 x 866690, 2 x 3885174

## Packningsatser mellankylare Gasket kits after coolers



### TAMD22 TAMD22P-B

Art. nr/Part no	Ersätter/Replaces
22154	N/A



### 30 AQAD30A, TAMD30A

Art. nr/Part no	Ersätter/Replaces
22110	2 x 858986, 2 x 925258, 1 x 9925259




### 40 AQAD40A, AQAD40B TAMD40A, TAMD40B

Art. nr/Part no	Ersätter/Replaces
22111	N/A



## Packningsatser laddluftkylare Gasket kits charge air coolers

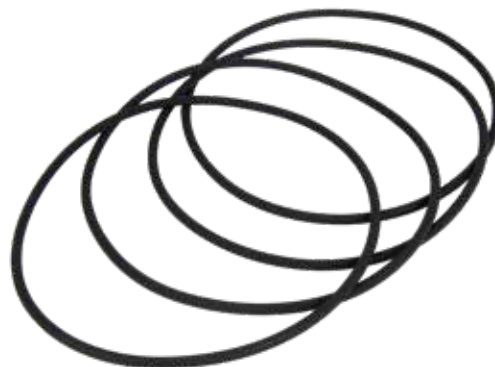

### 31, 41, KAD32, KAD42, KAD43, KAD44, KAD300

TMD31A, TAMD31A, TMD31B, TAMD31B, TMD31D, TAMD31D, TMD31L-A, TAMD31L-A, TAMD31M-A, TAMD31P-A, TAMD31S, AD31, AQAD31A, AD31B, AQAD31B, AD31D, AD31D-A, AD31L-A, AD31P-A, AD31XD  
TMD41A, TAMD41A, TMD41B, TAMD41B, TMD41D, TAMD41D, TAMD41H-A, TAMD41H-B, TAMD41P, TAMD41P-A, TMD41L-A, TAMD41L-A, AD41A, D41B, AD41B, AD41Bj, D41D, AD41D, D41L-A, AD41L-A, AD41P-A  
TAMD42B, TAMD42Wj-A  
KAD32P, KAD32P-A  
KAD42A, KAD42B, KAD42P-A, KAMD42A, KAMD42B, KAMD42P-A  
KAD43P-A, KAD43P-B, KAMD43P, KAMD43P-A, KAMD43P-B  
KAD44P, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-B, KAMD44P-C  
KAD300-A, KAMD300-A

Art. nr/Part no	Ersätter/Replaces
22182	877386, 876110

### D3, D4, D6

D3-110I-D, D3-110I-E, D3-110I-F, D3-110I-G, D3-110I-H  
D3-140A-E, D3-140A-F, D3-140A-G, D3-140A-H, D3-140I-D, D3-140I-E, D3-140I-F, D3-140I-G, D3-140I-H  
D3-150I-D, D3-150I-E, D3-150I-F, D3-150I-G, D3-150I-H  
D3-170A-D, D3-170A-E, D3-170A-F, D3-170A-G, D3-170A-H, D3-170I-D, D3-170I-E, D3-170I-F, D3-170I-G, D3-170I-H  
D3-200A-D, D3-200A-E, D3-200A-F, D3-200A-G, D3-200A-H, D3-200I-D, D3-200I-E, D3-200I-F, D3-200I-G, D3-200I-H  
D3-220A-D, D3-220A-E, D3-220A-F, D3-220A-G, D3-220A-H, D3-220I-D, D3-220I-E, D3-220I-F, D3-220I-G, D3-220I-H  
D4-145I-G, D4-150A-G, D4-175I-G  
D4-180I-B, D4-180I-C, D4-180I-D, D4-180I-E, D4-180I-F  
D4-210A-A, D4-210A-B, D4-210I-A, D4-210I-B  
D4-225A-B, D4-225A-C, D4-225A-D, D4-225A-E, D4-225A-F, D4-225I-B, D4-225I-C, D4-225I-D, D4-225I-E, D4-225I-F  
D4-230A-G, D4-230I-G  
D4-260A-A, D4-260A-B, D4-260A-C, D4-260A-D, D4-260A-E, D4-260A-F, D4-260D-B, D4-260D-C, D4-260D-D, D4-260D-E, D4-260D-F, D4-260I-A, D4-260I-B, D4-260I-C, D4-260I-D, D4-260I-E, D4-260I-F  
D4-270A-G, D4-270I-G  
D4-300A-A, D4-300A-C, D4-300A-D, D4-300A-E, D4-300A-F, D4-300A-G, D4-300D-A, D4-300D-C, D4-300D-D, D4-300D-E, D4-300D-F, D4-300I-A, D4-300I-C, D4-300I-D, D4-300I-E, D4-300I-F, D4-300I-G  
D4-320A-G, D4-320I-G  
D6-280A-A, D6-280A-B, D6-280A-C, D6-280A-D, D6-280A-E, D6-280I-A, D6-280I-B, D6-280I-C, D6-280I-D, D6-280I-E  
D6-300A-F, D6-300A-G, D6-300D-F, D6-300D-G, D6-300I-F, D6-300I-G  
D6-310A-A, D6-310A-B, D6-310A-C, D6-310A-D, D6-310A-E, D6-310D-B, D6-310D-C, D6-310D-D, D6-310D-E, D6-310I-A, D6-310I-B, D6-310I-C, D6-310I-D, D6-310I-E  
D6-330A-B, D6-330A-C, D6-330A-D, D6-330A-E, D6-330A-F, D6-330D-B, D6-330D-C, D6-330D-D, D6-330D-E, D6-330D-F, D6-330I-B, D6-330I-C, D6-330I-D, D6-330I-E, D6-330I-F  
D6-340A-G, D6-340D-G, D6-340I-G  
D6-350A-A, D6-350A-B  
D6-370A-B, D6-370A-C, D6-370A-D, D6-370A-E, D6-370A-F, D6-370D-A, D6-370D-B, D6-370D-C, D6-370D-D, D6-370D-E, D6-370D-F, D6-370I-A, D6-370I-B, D6-370I-C, D6-370I-D, D6-370I-E, D6-370I-F  
D6-380A-G, D6-380D-G, D6-380I-G  
D6-400A-E, D6-400A-F, D6-400A-G  
D6-435D-A, D6-435D-D, D6-435D-C, D6-435D-E, D6-435D-F, D6-435I-A, D6-435I-C, D6-435I-D, D6-435I-E, D6-435I-F  
D6-440A-G, D6-440I-G, D6-440I-Wj-G  
D6-480D-G, D6-480I-G, D6-480I-Wj-G

Art. nr/Part no	Ersätter/Replaces
23048	4 x 3838406



## Packningsatser oljekylare Gasket kits oil coolers



### B18

AQ60F, AQ90, AQ95, AQ95A, AQ110  
AQ120  
BB30, BB100  
MB18

Art. nr/Part no	Ersätter/Replaces
22068	N/A



### B20, B21, B23, B25, B30

AQ105A, MB20A, MB20B, MB20C  
AQ115A, AQ115B, BB115A, BB115B, BB115C  
AQ130A, AQ130B, AQ130C, AQ130D  
AQ120B, AQ125A, AQ140A, BB140A  
230A, 230B  
AQ145A, AQ145B, BB145A  
250A, 250B, 251A  
AQ151A, AQ151B, AQ151C  
AQ171A, AQ17C  
AQ165A, BB165A  
AQ170A, AQ170B, AQ170C, BB170A, BB170B, BB170C

Art. nr/Part no	Ersätter/Replaces
22070	N/A



### MD21

AQD21A, AQD21B  
MD21A, MD21B

Art. nr/Part no	Ersätter/Replaces
22127	N/A



### MD29, MD32

AQD29A, MD29, MD29A  
AQD32A, MD32A

Art. nr/Part no	Ersätter/Replaces
22128	N/A



### 2003T

2003T  
2003TB, 2003TB SOLAS  
2003TR

Med Volvo Penta original färskvattenkyllning / With Volvo Penta original freshwater cooling

Art. nr/Part no	Ersätter/Replaces
22022	N/A




## Packningsatser oljekylare Gasket kits oil coolers




**30, 31, 40, 41, KAD32, KAD42, KAD43, KAD44, KAD300**  
 AD30A, AQAD30A, MD30A, TAMD30A, TMD30A  
 AD31A, AD31B, AD31D, AD31L-A, AD31P-A, AD31XD  
 AQAD31A, MD31A, TAMD31A, TAMD31B, TAMD31D  
 TAMD31L-A, TAMD31M-A, TAMD31P-A, TMD31A, TMD31B, TMD31D  
 TMD31L-A, KAD32P-A  
 AD40B, AQAD40A, AQAD40B, AQD40A, MD40A, TAMD40A, TAMD40B  
 TMD40A, TMD40B, TMD40C  
 AD41A, AD41B, AD41D, AD41L-A, AD41P-A, AQAD41A  
 D41A, D41B, D41D, D41L-A, TAMD41A, TAMD41B, TAMD41D  
 TAMD41H-A, TAMD41L-A, TAMD41M-A, TAMD41P-A  
 TMD41A, TMD41B, TMD41D, TMD41L-A  
 KAD42A, KAD42B, KAD42P-A, KAMD42A, KAMD42B  
 KAMD42P-A, TAMD42B, TAMD42VJ-A  
 KAD43P-A, KAMD43P-A  
 KAD44P-A, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-B, KAMD44P-C  
 KAD300A, KAMD300A

Art. nr/Part no	Ersätter/Replaces	Info
22149	N/A	För oljekylarhus / For oil cooler housing

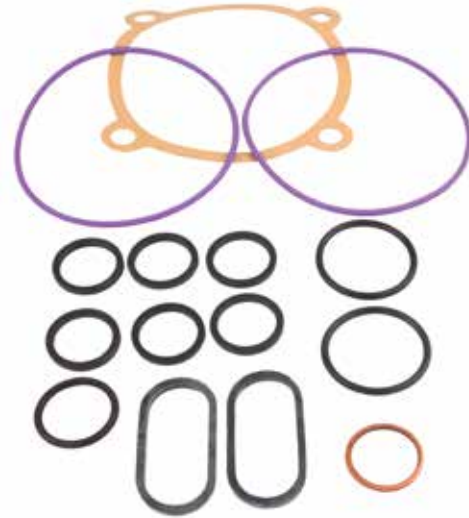

**30, 31, 40, 41, 42, KAD32, KAD42, KAD43, KAD44, KAD300**  
 Komplet sats, innehåller/Complete kit, contains 22149 + 22152  
 För oljekylare med fyra skruvar / For oil cooler with four bolts

Art. nr/Part no	Ersätter/Replaces
22104	N/A

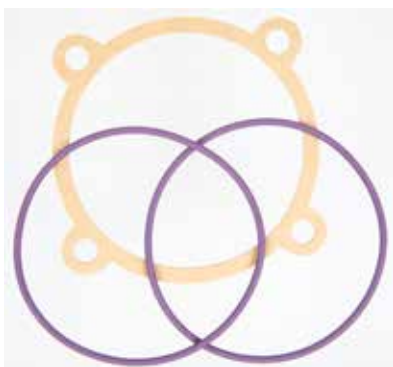

**30, 31, 40, 41, 42, KAD42**  
 MD30A, TMD30A, TAMD30A, AD30A, AQAD30A  
 MD31A, TMD31A, TAMD31A, TMD31B, TAMD31B, TMD31D, TAMD31D,  
 TMD31L-A, TAMD31L-A, TAMD31M-A, TAMD31P-A, AD31, AD31A,  
 AQAD31A, AD31B, AQAD31B, AD31D, AD31D-A, AD31L-A, AD31P-A,  
 AD31XD  
 MD40A, TMD40A, TAMD40A, TMD40B, TAMD40B, TMD40C, AD40B,  
 AQD40A, AQAD40A, AQAD40B  
 TAMD41A, TMD41B, TAMD41B, TMD41D, TAMD41D, TAMD41H-A, TAMD41P,  
 TAMD41P-A, TMD41L-A, AD41A, AQAD41A, D41B, AD41B, AQAD41B,  
 AD41B, D41D, AD41D, D41L-A, AD41L-A, AD41P-A  
 KAD42A, KAD42B, KAD42P-A, KAMD42A, KAMD42B, KAMD42P-A  
 TAMD42B, TAMD42VJ-A

Art. nr/Part no	Ersätter/Replaces	Info
22152	1 x 842597 2 x 948981	För oljekylare med fyra skruvar For oil cooler cover with four bolts




**31, 41, KAD32, KAD42, KAD43, KAD44, KAD300, 71, 73, 74, 75**  
**TMD31L-A, TAMD31L-A, TAMD31M-A, TAMD31P-A, TAMD31S,**  
 AD31L-A, AD31P-A  
 TAMD41H-A, TAMD41H-B, TMD41L-A, AD41L-A, AD41P-A, D41L-A  
 KAD32P-A  
 KAD42P-A, KAMD42P-A  
 TAMD42VJ-A  
 KAD43P-A, KAD43P-B, KAMD43P, KAMD43P-A, KAMD43P-B  
 KAD44P, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-B, KAMD44P-C  
 KAD300-A, KAMD300-A  
 TAMD71B  
 TAMD73P-A, TAMD73VJ-A  
 TAMD74A, TAMD74C-A, TAMD74C-B, TAMD74L-A, TAMD74L-B, TAMD74P-  
 A, TAMD74P-B  
 TAMD75P-A

För oljekylare med tre skruvar i locket / For oil cooler with three bolts in end cover. OEM 861757, 861600, 861601, 3827201, 3830503

Art. nr/Part no	Ersätter/Replaces
22143	4 x 3581070



## Packningsatser oljekylare Gasket kits oil cooler

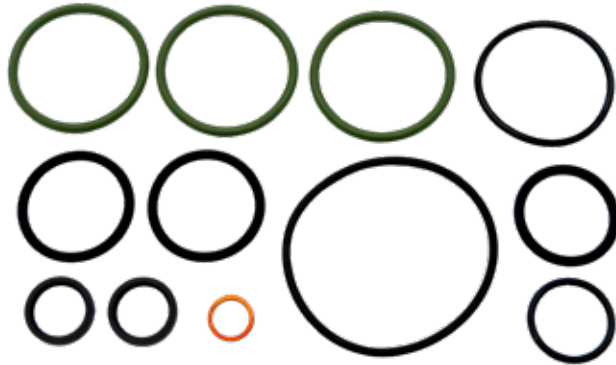

### D4, D6

D4-145I-G, D4-150A-G, D4-175I-G

D4-180I-B, D4-180I-C, D4-180I-D, D4-180I-E, D4-180I-F

D4-210I-A, D4-210I-B

D4-225I-B, D4-225I-C, D4-225I-D, D4-225I-E, D4-225I-F

D4-230A-G, D4-230I-G

D4-260I-A, D4-260I-B, D4-260I-C, D4-260I-D, D4-260I-E, D4-260I-F

D4-270A-G, D4-270I-G

D4-300A-G, D4-300I-A, D4-300I-C, D4-300I-D, D4-300I-E, D4-300I-F,

D4-320I-G, D4-320A-G, D4-320I-G

D6-280I-A, D6-280I-B, D6-280I-C, D6-280I-D, D6-280I-E

D6-300A-G, D6-300D-G, D6-300I-F, D6-300I-G

D6-310I-A, D6-310I-B, D6-310I-C, D6-310I-D, D6-310I-E

D6-330I-B, D6-330I-C, D6-330I-D, D6-330I-E, D6-330I-F

D6-340A-G, D6-340D-G, D6-340I-G

D6-370I-A, D6-370I-B, D6-370I-C, D6-370I-D, D6-370I-E, D6-370I-F

D6-380A-G, D6-380D-G, D6-380I-G

D6-400A-G


D6-435I-A, D6-435I-C, D6-435I-D, D6-435I-E, D6-435I-F

D6-440A-G, D6-440D-G, D6-440I-G, D6-440I-WJ-G

D6-480D-G, D6-480I-G, D6-480I-WJ-G

Packningssats till anslutning oljekylare / gasket kit for oil cooler connection.  
Passar oljekylare / Fits oil coolers OEM nr 22799788, 22212940

Art. nr/Part no	Ersätter/Replaces
	1 x 3583830, 1 x 3583831, 1 x 3583832, 2 x 982193, 3 x 866690, 1 x 3885174, 2 x 469846, 1 x 947282

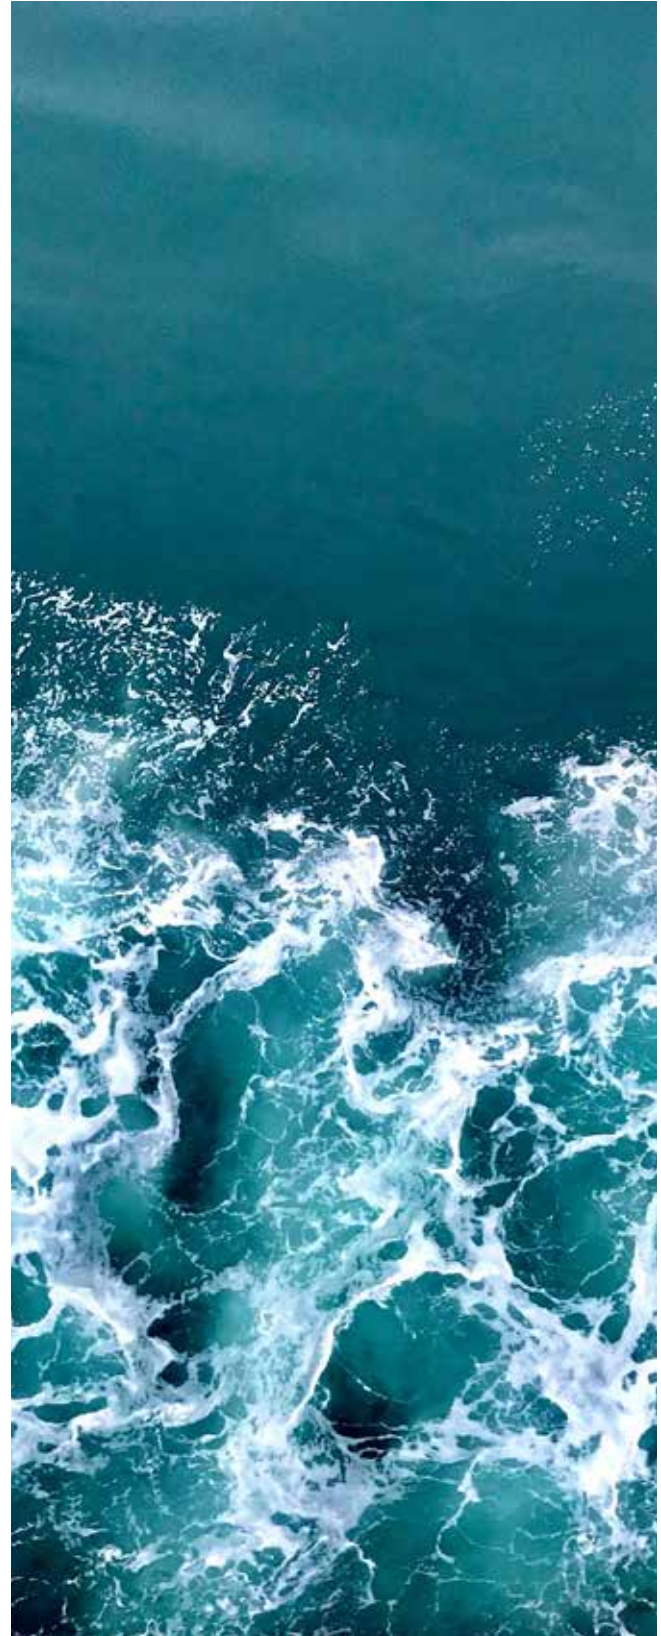

Spare parts from Sweden

## Anoder internt kylsystem Anodes internal cooling system



2001, 2002, 2003, MD19, MD21, MD27, MD29, MD32, 30, 31, 40, 41, KAD42, 60, 61, 62, 63, 70, 71, 72, 73, 74, 75, 100, 102, 103, 120, 121, 122, 162, 163, 165, D4, D5, D6, D9, D11, D12, MS3B, MS3C

Hållare till anod 19929 / plug for anode 19929

Art. nr/Part no	Ersätter/Replaces	Gänga/Thread
15928	838928, 800475	1/2" konisk/conical + M8



2001, 2002, 2003, MD19, MD21, MD27, MD29, MD32, 30, 31, 40, 41, KAD42, 60, 61, 62, 63, 70, 71, 72, 73, 74, 75, 100, 102, 103, 120, 121, 122, 162, 163, 165, D4, D5, D6, D9, D11, D12, MS3B, MS3C

Passar i hållare 15928 / plug 15928 fits

Inv. gänga/internal thread M8, Utv. gänga/external thread 7/16" UNC

Art. nr/Part no	Ersätter/Replaces	Förp/Packaging	Material
19929	838929, 804107, 800476, 858501	1 st/pcs Blister	Zink/zinc
19929-01	838929, 804107, 800476, 858501	10 st/pcs Bulk	Aluminium
19929-10	838929, 804107, 800476, 858501	10 st/pcs Bulk	Zink/zinc
19929-50	838929, 804107, 800476, 858501	50 st/pcs Bulk	Zink/zinc



60, 70, 100, 102, 103, 120, 121, 122, 162, 163, 165, D12, D13, D16

Hållare till anod 15661 / plug for anode 15561

Art. nr/Part no	Ersätter/Replaces	Gänga/Thread
17662	823662	1" + 3/8"-UNC



60, 70, 100, 102, 103, 120, 121, 122, 162, 163, 165, D12, D13, D16

Passar i hållare 15928/plug 15928 fits. Gänga 3/8"-UNC/Thread 3/8"-UNC

Art. nr/Part no	Ersätter/Replaces	Info
15661	823661	Zink/zinc
15169	836169	Packning/Gasket



**D4, D6 med/with DPH/DPR**

Till avgasrör mellan sköld och motor. Packningar ingår / for exhaust pipe between engine and transom. Gaskets included.

Art. nr/Part no	Ersätter/Replaces	Info
19042	21868042	Aluminium



## Anoder internt kylsystem Anodes internal cooling system



**MD2, MD3, MD5, MD6, MD7, MD11, MD17, 2001, 2002, 2003**  
MD2A, MD2B, MD3B  
MD5A, MD5B, MD5C  
MD6A, MD6B, MD7A, MD7B  
MD11C, MD11D, MD17C, MD17D  
2001, 2002, 2003

Med Martec och Sendure sötvattenkyllning / With Martec and Sendure fresh-water cooling. Material Zink/zinc

Art. nr/Part no	Ersätter/Replaces	Info
15300	43957300	1/4" NPT x 19 mm, Ø 9,5 mm



**B18, B20, B30**  
AQ60F, AQ90, AQ95, AQ95A, AQ110  
AQ120  
BB30, BB100  
MB18  
AQ105A  
AQ115A, AQ115B, BB115, BB115B, BB115C  
AQ130A, AQ130B, AQ130C, AQ130D  
MB20A, MB20B, MB20C  
AQ165A, BB165A  
AQ170A, AQ170B, AQ170C, BB170A, BB170B, BB170C

Med Martec och Sendure sötvattenkyllning / With Martec and Sendure fresh-water cooling. Material Zink/zinc

Art. nr/Part no	Ersätter/Replaces	Info
15301	43957301	1/4" NPT x 27 mm, Ø 9,5 mm



**V6, V8**

Med Martec sötvattenkyllning/With Martec fresh-water cooling. Material Zink/zinc

Art. nr/Part no	Ersätter/Replaces	Info
15302	43957302	1/4" NPT x 44 mm, Ø 9,5 mm



**V6, V8**

Med Martec sötvattenkyllning/With Martec fresh-water cooling  
Zink/zinc

Art. nr/Part no	Ersätter/Replaces	Info
15303	43957303	3/8" NPT x 25 mm, Ø12,7 mm



**V6, V8**

Med Martec sötvattenkyllning/With Martec fresh-water cooling  
Zink/zinc

Art. nr/Part no	Ersätter/Replaces	Info
15304	N/A	3/8" NPT x 38 mm, Ø12,7 mm



**Universal**  
Zink/zinc

Art. nr/Part no	Ersätter/Replaces	Info
15306	841063	1/2" NPT x 51 mm, Ø15,9 mm



## Vakuumentiler Siphon breakers



Vakuumentil 12 mm / Siphon breaker 12 mm

Art. nr/Part no	Ersätter/Replaces	Info
23700	N/A	12 mm



Vakuumentil 22 mm / Siphon breaker 22 mm

Art. nr/Part no	Ersätter/Replaces	Info
23703	21662703	22 mm



Vakuumentil 16 mm / Siphon breaker 16 mm

Art. nr/Part no	Ersätter/Replaces	Info
23701	21662701	16 mm



Vakuumentil 25 mm / Siphon breaker 25 mm

Art. nr/Part no	Ersätter/Replaces	Info
23704	21662704	25 mm



Vakuumentil 19 mm / Siphon breaker 19 mm

Art. nr/Part no	Ersätter/Replaces	Info
23702	21662702	19 mm



Reparationssett till Orbitrade Vakuumentiler / repair kit for Orbitrade Siphon breakers

Art. nr/Part no	Ersätter/Replaces	Info
23705	21662704	



## Packningsatts vakuumentil Gasket kit vacuum valve



För alla motorer med Volvo Penta vakuumentil/  
For all engines with Volvo Penta vacuum valve

Art. nr/Part no	Ersätter/Replaces
15738	3818424, 875738

## Expansionspluggar, rostfria Expansion plugs, stainless steel



B18, B20, V-8, MD5, MD6, MD7, 2001, 2002, 2003, D30, D31, D32, D40, D41, D42, D43, D44, D300, D60, D63, D70, D71, D73, D74, D75

Art. nr/Part no	Ersätter/Replaces	Diameter
11031	477026, 192426	26 mm

B18, B20, V-8, MD1, MD2, MD3, MD6, MD7, MD11, MD17, 2001, 2002, 2003, D60, D63, D70, D71, D73, D72,

Art. nr/Part no	Ersätter/Replaces	Diameter
11032	477024, 192211, 463903	35 mm

B23, B25, V-8, D30, D31, D32, D40, D41, D42, D43, D44, D300, D9, D11, D13, D16, D63, D71, D72, D73, D74,

Art. nr/Part no	Ersätter/Replaces	Diameter
11955	968955, 1542263	40 mm

B18, B20,  
Kamaxelbricka/Camshaft washer

Art. nr/Part no	Ersätter/Replaces	Diameter
11902	463902, 955103	42 mm

B18, B20, B30, D21

Art. nr/Part no	Ersätter/Replaces	Diameter
11033	192212, 463904	45 mm

B21, B23, B25, B30, D30, D31, D32, D40, D41, D42, D43, D44, D300

Art. nr/Part no	Ersätter/Replaces	Diameter
11905	463905	52 mm

## Sjövattenintagsatts S-drev Seawater intake kit Saildrive



Sjövattenintagsatts 110S, Seawater intake kit, 110S  
110S

Art. nr/Part no	Ersätter/Replaces
19230	852230



Sjövattenintagsatts 120S, Seawater intake kit, 120S  
120S, 120SB, 120S-C, 120S-E

Art. nr/Part no	Ersätter/Replaces
19777	851777



## Avtappningskrantar kylvatten Drain cocks cooling water



**B 18, B20, B21, B23, B25, B30, MB10, 2003T, MD19, MD21, 60, 70, 100, 102, 120, 122**

Art. nr/Part no	Ersätter/Replaces	Info
15744	82744	1/8"



**B 18, B20, B21, B23, B25, B30, 40**

Art. nr/Part no	Ersätter/Replaces	Info
15745	82745	1/4"



**MD 1B, MD2B, MD3B, MD5, MD6, 70, 100, 120**

MD 1B, MD2B, AQD2B, MD3B  
MD5A, MD5B  
MD6A, MD6B\*  
MD70B, TMD70B, TAMD70B, AQD70B, AQD70BL, THAMD70B, THAMD70C  
MD 100A, MD 100B, TMD 100A  
MD 120A, TMD 120A, TAMD 120A, TMD 120B, TAMD 120B

\*Tidigare version/\*Earlier version

Art. nr/Part no	Ersätter/Replaces	Info
15036	807036	M10 x 1



**D2-50, D2-55, D2-60, D2-75, 30, 31, 40, 41, 42, 61, 62, 63, 71, 72, 73, 74, 75, KAD32, KAD42, KAD43, KAD44, KAD300, D3, D4, D6, D9, D11, D12, D13, D16, 100, 102, 103, 120, 121, 122, 162, 163, 165**

Art. nr/Part no	Ersätter/Replaces	Info
15918	997641, 949918	1/4"



**V6, V8, 2002, MD2010, MD2020, MD2030, MD2040, 30, 31, 40, 41, KAD32, KAD42, KAD43, KAD44, KAD300, 60, 61, 62, 70, 71, 72, 74, 75, D4, D6, D12, 100, 102, 103, 120, 121, 122, 162, 163, 165**

Art. nr/Part no	Ersätter/Replaces	Info
15134	861551, 192134	1/4"



**V6, V8, 2002, 2003, 2003T, 40, 60, 61, 62, 63, 70, 71, 72, 73, 74, 75, D4, D6, D11, D12, 100, 102, 103, 120, 162, 163, 165**

AQ175A, AQ205A, 430, 430A, 430B, 431A, 431B, 432A, 434A  
AQ200D, AQ200F, AQ211A  
AQ225D, AQ225E, AQ225F, BB225A, BB225C  
AQ231A, AQ231B, BB231A  
AQ260A, BB260AV, BB260B, BB260C, BB261A  
AQ271A, AQ271B, AQ271C, AQ271D  
AQ290A, AQ311A, AQ311B  
500A, 500B, 501A, 501B, 570, 570A, 571A, 572A, 740B, 740B,  
2002, 2002AG, 2002B, 2002BG, 2002D, 2003, 2003 SOLAS, 2003D, 2003R,  
2003R SOLAS, 2003T, 2003TB, 2003TB SOLAS, 2003TR, AQD21A  
MD40A, AQD40A, TMD40A, AQD40A  
TAMD60A, TAMD60B, TAMD61A, TAMD62A, TAMD63L-A, TAMD63P-A  
MD70B, MD70C, TAMD70B, TAMD70C, TAMD70D, AQD70B, AQD70C,  
AQD70BL, AQD70CL, TAMD71A, TAMD71B, TAMD72A, TAMD72P-A,  
TAMD72VJ-A, TAMD73P-A, TAMD73VJ-A, TAMD74A, TAMD74C-A,  
TAMD74C-B, TAMD74L-A, TAMD74L-B, TAMD74P-A, TAMD74P-B, TAMD75P  
D4-180I-B, D4-180I-C, D4-180I-D, D4-180I-E, D4-180I-F  
D4-210A-A, D4-210A-B, D4-210I-A, D4-210I-B  
D4-225A-B, D4-225A-C, D4-225A-D, D4-225A-E, D4-225A-F, D4-225I-B,  
D4-225I-C, D4-225I-D, D4-225I-E, D4-225I-F  
D4-260A-A, D4-260A-B, D4-260A-C, D4-260A-D, D4-260A-E, D4-260A-F,  
D4-260D-B, D4-260D-C, D4-260D-D, D4-260D-E, D4-260D-F,  
D4-260I-A, D4-260I-B, D4-260I-C, D4-260I-D, D4-260I-E, D4-260I-F  
D4-300A-A, D4-300A-C, D4-300A-D, D4-300A-E, D4-300A-F, D4-300D-A,  
D4-300D-C, D4-300D-D, D4-300D-E, D4-300D-F, D4-300I-A, D4-300I-C,  
D4-300I-D, D4-300I-E, D4-300I-F  
D6-280A-A, D6-280A-B, D6-280A-C, D6-280A-D, D6-280A-E, D6-280I-A,  
D6-280I-B, D6-280I-C, D6-280I-D, D6-280I-E  
D6-300A-F, D6-300D-F, D6-300I-F  
D6-310A-A, D6-310A-B, D6-310A-C, D6-310A-D, D6-310A-E, D6-310D-B,  
D6-310D-C, D6-310D-D, D6-310D-E, D6-310I-A, D6-310I-B, D6-310I-C,  
D6-310I-D, D6-310I-E, D6-330A-B, D6-330A-C, D6-330A-D, D6-330A-E,  
D6-330A-F, D6-330D-B, D6-330D-C, D6-330D-D, D6-330D-E, D6-330D-F,  
D6-330I-B, D6-330I-C, D6-330I-D, D6-330I-E, D6-330I-F  
D6-350A-A, D6-350A-B, D6-370A-B, D6-370A-C, D6-370A-D, D6-370A-E,  
D6-370A-F, D6-370D-A, D6-370D-B, D6-370D-C, D6-370D-D, D6-370D-E,  
D6-370D-F, D6-370I-A, D6-370I-B, D6-370I-C, D6-370I-D, D6-370I-E,  
D6-370I-F, D6-400A-E, D6-400A-F  
D6-435D-A, D6-435D-C, D6-435D-D, D6-435D-E, D6-435D-F, D6-435I-A,  
D6-435I-C, D6-435I-D, D6-435I-E, D6-435I-F  
D11A-A, D11A-B, D11A-C, D11A-C (IPS), D11A-C MP, D11A-D MP, D11A-E,  
D11A-E MP, D11B1-A MP, D11B2-A MP, D11B3-A MP, D11B4-A MP, D11C1-A  
MP, D11C2-A MP, D11C3-A MP, D11C4-A MP  
D12D-A MH, D12D-B MH, D12D-C MH, D12D-E MH, D12D-G MH  
TMD 100A, TAMD 102A, TAMD 102D, TAMD 103A  
TAMD 120A, TAMD 120B  
TAMD 162A, TAMD 162B, TAMD 162C, TAMD 163A-A, TAMD 163P-A,  
TAMD 165A, TAMD 165C, TAMD 165P

Art. nr/Part no	Ersätter/Replaces	Info
15956	479956, 192154, 818923, 980532, 981293	1/2" NPTF-19



## Sjövattenfilterlock Cap kit sea water strainer



**30, 31, 40, 41, 32, 42, 43, 44, 300, D3**  
 AQAD30A, MD30A, TAMD30A, TMD30A  
 TMD31D, TAMD31D, AD31D-A, AD31XD, AD31L-A, AD31P-A  
 TAMD31L-A, TAMD31M-A, TAMD31P-A, TAMD31S-A, TMD31L-A  
 MD31A, TMD31A, TAMD31A, AD31A, AQAD31A, TMD31B  
 TAMD31B, AD31B, KAD32P-A  
 MD40A, TMD40A, AQD40A, TAMD40A, TAMD40B, AQAD40A  
 AQAD40B  
 AD41B, AD41L-A, AD41P-A, D41A, D41L-A, AQAD41A, AD41A  
 TAMD41A, TAMD41H-A, TAMD41H-B, TAMD41P-A, TAMD41L-A  
 TAMD41M-A, TMD41A, TMD41L-A, TMD41B, TMD41D, TAMD41B  
 TAMD41D, AD41D, D41B, D41D  
 TAMD42WJ-A, KAMD42A, KAD42A, TAMD42B, KAMD42B, KAD42B  
 KAMD42P-A, KAD42P-A  
 KAMD43P-A, KAD43P-A  
 KAMD44P-A, KAMD44P-C, KAD44P-A, KAD44P-B, KAD44P-C  
 KAD300-A, KAMD300-A  
 D3-110I-A, D3-110I-B, D3-110I-C, D3-110I-D, D3-110I-E, D3-110I-F  
 D3-110I-G  
 D3-130A-A, D3-130I-A, D3-130A-B, D3-130I-B, D3-130A-C, D3-130I-C  
 D3-140A-G, D3-140I-G, D3-140I-E, D3-140I-F, D3-140A-D, D3-140A-E  
 D3-140A-F  
 D3-150I-G, D3-150I-D, D3-150I-E, D3-150I-F  
 D3-160A-A, D3-160I-A, D3-160A-B, D3-160I-B, D3-160A-C, D3-160I-C  
 D3-170A-G, D3-170I-G, D3-170I-D, D3-170I-E, D3-170I-F, D3-170A-D  
 D3-170A-E, D3-170A-F  
 D3-190A-B, D3-190I-B, D3-190A-C, D3-190I-C  
 D3-200A-G, D3-200I-G, D3-200I-D, D3-200I-E, D3-200I-F, D3-200A-D  
 D3-200A-E, D3-200A-F  
 D3-220A-G, D3-220I-G, D3-220I-D, D3-220I-E, D3-220I-F, D3-220A-D  
 D3-220A-E, D3-220A-F

Art. nr/Part no	Ersätter/Replaces	Info
15984	21863984, 842722	Ø127mm



Plexi-lock till locksats 15984 / plastic cap for cap kit 15984

Art. nr/Part no	Ersätter/Replaces	Info
15987	N/A	Ø 100 mm, H=10 mm

## Expansionstank Expansion tank



**D1, D2**  
 D1-13, D1-13B, D1-13F  
 D1-20, D1-20B, D1-20F  
 D1-30, D1-30B, D1-30F  
 D2-40, D2-40B, D2-40F

Art. nr/Part no	Ersätter/Replaces	Info
15810	3840810, 1674083	inkl. lock / incl. cap

## Trycklock Pressure caps



**2002, 2003, 2003T, KAD42, 102, 103, 122, 162**  
 2002, 2002AG, 2002B, 2002BG, 2002D  
 2003, 2003 SOLAS, 2003B, 2003B SOLAS, 2003D, 2003R, 2003R SOLAS  
 2003T, 2003TB, 2003TB SOLAS, 2003TR  
 KAD42A, KAMD42A  
 TAMD102A, TAMD102D, TAMD103A  
 TAMD122P-A, TAMD122P-B, TAMD122P-C  
 TAMD162A, TAMD162B, TAMD162C, TAMD162C-B

Art. nr/Part no	Ersätter/Replaces
15591	1542591



**4.3, 5.0, 5.7, 5.8, 7.4, 8.1, 8.2, V8**  
 MD2010, MD2020, MD2030, MD2040, D1, D2, D3, D11, D12, D13,  
 D16, 22, 31, 41, KAD42, KAD43, KAD44, KAD300, 63, 74, 102, 103,  
 120, 121, 162, 163, 165

Art. nr/Part no	Ersätter/Replaces
15083	1674083



## Avgaslimpor Exhaust manifolds




**V6**  
430A, 430B, 431A, 431B, 432A, 434A  
AQ175A, AQ205A

Art. nr/Part no	Ersätter/Replaces
16894	856894, 841676, 856137




**4.3**  
4.3Gi-200-R  
4.3GIJBYA, 4.3GIJWTR  
4.3GIPBYCCE, 4.3GiPEFS, 4.3GIPLKDC, 4.3GIPLKECE, 4.3GIPNCACE,  
4.3GIPNCBCE, 4.3GIPNCMCE, 4.3GIPNCSCE, 4.3GIPWTRCE  
4.3GL-A, 4.3GL-B, 4.3GL-C, 4.3GL-D, 4.3GL-E, 4.3GL-EF, 4.3GL-G, 4.3GL-  
GF, 4.3GL-J, 4.3GL-J, 4.3GL-JF, 4.3GL-JF, 4.3GL-P, 4.3GL-P  
4.3GLMMDA, 4.3GLPBYC, 4.3GLPEFS, 4.3GLPLKD, 4.3GLPLKE,  
4.3GLPMDA, 4.3GLPNCA, 4.3GLPNCB, 4.3GLPNCS, 4.3GLPWTR,  
4.3GSJBYA, 4.3GSJLKD, 4.3GSJNCC, 4.3GSJNCS, 4.3GSJWTR,  
4.3GSPBYC, 4.3GSPLKD, 4.3GSPLKE, 4.3GSPMDA, 4.3GSPNCA,  
4.3GSPNCB, 4.3GSPNCM, 4.3GSPNCS, 4.3GSPWTR  
4.3GXi-225-R, 4.3GXi-A, 4.3GXi-B, 4.3GXi-BF, 4.3GXi-C, 4.3GXi-CF,  
4.3GXi-D, 4.3GXi-DF, 4.3GXi-E, 4.3GXi-EF, 4.3GXi-F, 4.3GXi-FF, 4.3GXi-  
G, 4.3GXi-GF, 4.3GXi-J, 4.3GXi-J, 4.3GXi-JF, 4.3GXi-P, 4.3GXi-P,  
4.3GXi-Q, 4.3GXi-Q, 4.3GXiE-225-R, 4.3GXiE-M, 4.3GXiE-M, 4.3GXiE-  
P, 4.3GXiE-P, 4.3GXiE-Q, 4.3GXiE-Q, 4.3OSi-B, 4.3OSi-BF, 4.3OSi-C,  
4.3OSi-CF, 4.3OSi-D, 4.3OSi-DF, 4.3OSi-E, 4.3OSi-EF, 4.3OSi-F, 4.3OSi-FF,  
4.3OSi-G, 4.3OSi-GF, 4.3OSi-J, 4.3OSi-J, 4.3OSi-JF, 4.3OSi-JF  
V6-200-A, V6-225-A, V6-225-E-A

Art. nr/Part no	Ersätter/Replaces
16656	3847499, 3857656

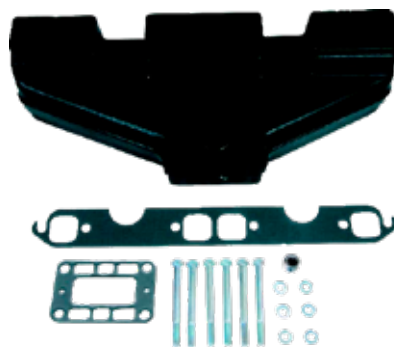

**V8**  
500A, 500B, 501A, 501B, 570, 570A, 571A, 572A  
AQ200D, AQ200F, AQ211A  
AQ225D, AQ225E, AQ225F, BB225A, BB225AV, BB225B, BB225C  
AQ231A, AQ231B, BB231A  
AQ255B, AQ260A, AQ260B, BB260A, BB260AV, BB260B, BB260C, BB261A  
AQ271A, AQ271B, AQ271C, AQ271D  
AQ280A, AQ290A  
AQ311A, AQ311B

Art. nr/Part no	Ersätter/Replaces
16804	856883, 855926, 835804



**5.0, 5.7, V8**  
5.0GiPBYCCE, 5.0GiPEFS, 5.0GiPWTR, 5.0GL-A, 5.0GL-B, 5.0GL-C,  
5.0GL-D, 5.0GL-E, 5.0GL-F, 5.0GL-FF, 5.0GL-H, 5.0GL-HF, 5.0GL-J, 5.0GL-  
JF, 5.0GLPBYC, 5.0GLPEFS, 5.0GLPWTR, 5.0GXi-270-R, 5.0GXi-A, 5.0GXi-  
B, 5.0GXi-BF, 5.0GXi-C, 5.0GXi-CF, 5.0GXi-D, 5.0GXi-DF, 5.0GXi-E,  
5.0GXi-EF, 5.0GXi-F, 5.0GXi-FF, 5.0GXi-G, 5.0GXi-GF, 5.0GXi-J, 5.0GXi-JF,  
5.0GXi-N, 5.0GXi-P, 5.0GXiE-270-R, 5.0GXiE-J, 5.0GXiE-JF, 5.0GXiE-K,  
5.0GXiE-KF, 5.0GXiE-M, 5.0GXiE-MF, 5.0GXiE-N, 5.0GXiE-P, 5.0OSi-B,  
5.0OSi-BF, 5.0OSi-C, 5.0OSi-CF, 5.0OSi-D, 5.0OSi-DF, 5.0OSi-E, 5.0OSi-EF,  
5.0OSi-F, 5.0OSi-FF, 5.0OSi-G, 5.0OSi-GF, 5.0OSi-J, 5.0OSi-JF, 5.0OSiE-J,  
5.0OSiE-JF  
5.7Gi-300-J, 5.7Gi-300-JF, 5.7Gi-300-N, 5.7Gi-300-P, 5.7Gi-300-R, 5.7Gi-A,  
5.7Gi-B, 5.7Gi-BF, 5.7Gi-C, 5.7Gi-CF, 5.7Gi-D, 5.7Gi-DF, 5.7Gi-E, 5.7Gi-EF,  
5.7Gi-F, 5.7Gi-FF, 5.7Gi-G, 5.7Gi-GF, 5.7GiE-300-J, 5.7GiE-300-JF, 5.7GiE-  
300-K, 5.7GiE-300-KF, 5.7GiE-300-M, 5.7GiE-300-MF, 5.7GiE-300-N,  
5.7GiE-300-P, 5.7GiE-300-R, 5.7GiL-A, 5.7GiL-B, 5.7GiL-C, 5.7GiL-D, 5.7GiL-  
E, 5.7GiL-F, 5.7GiL-G, 5.7GiL-H, 5.7OSi-300-J, 5.7OSi-300-JF, 5.7OSi-A,  
5.7OSi-AF, 5.7OSi-B, 5.7OSi-BF, 5.7OSi-C, 5.7OSi-CF, 5.7OSi-D, 5.7OSi-DF,  
5.7OSi-E, 5.7OSi-EF, 5.7OSi-G, 5.7OSi-GF, 5.7OSiE-300-J, 5.7OSiE-300-JF,  
5.7OSXi-A, 5.7OSXi-AF, 5.7OSXi-B, 5.7OSXi-BF, 5.7OSXi-C, 5.7OSXi-CF,  
5.7OSXi-D, 5.7OSXi-DF, 5.7OSXi-E, 5.7OSXi-EF, 5.7OSXi-G, 5.7OSXi-GF,  
5.7OSXi-J, 5.7OSXi-JF, 5.7OSXiE-J, 5.7OSXiE-JF  
V8-270-A, V8-270-B, V8-270-E-A, V8-270-E-B, V8-300-A, V8-300-B,  
V8-300-E-A, V8-300-E-B, V8-320-A, V8-320-B, V8-320-E-A, V8-320-E-B

Art. nr/Part no	Ersätter/Replaces
16501	3847501, 3857723



## Packningsatser avgaslimpor Gasket kits exhaust manifold



**B18, B20**  
AQ60F, AQ90, AQ95, AQ95A, AQ110  
AQ120  
BB30, BB100  
MB18  
AQ105  
MB20A, MB20B, MB20C

För avgasrör OEM 806333 / For exhaust manifold OEM 806333

Art. nr/Part no	Ersätter/Replaces
22003	



**B20**  
AQ115A, AQ115B  
AQ130A, AQ130B, AQ130C, AQ130D  
BB115A, BB115B, BB115C

För avgasrör OEM 824532 / For exhaust manifold OEM 824532

Art. nr/Part no	Ersätter/Replaces
22002	1 x 824633, 2 x 856028, 4 x 829714, 2 x 418445, 1 x 418411



**B30**  
AQ165A  
AQ170A, AQ170B, AQ170C, BB170C

Art. nr/Part no	Ersätter/Replaces
16913	1378913, 461092



**B30**  
AQ165A  
AQ170A, AQ170B, AQ170C  
BB165A  
BB170A, BB170B, BB170C

Art. nr/Part no	Ersätter/Replaces
22041	1x1378913, 1x856042



**B21, B23**  
AQ120B, AQ125A, AQ125B  
AQ140A, BB140A  
230A, 230B, 250A, 250B  
AQ131A, AQ131B, AQ131C, AQ131D  
AQ145A, AQ145B, BB145A  
AQ151A, AQ151B, AQ151C

För avgasrör OEM 855387 / For exhaust manifold OEM 855387

Art. nr/Part no	Ersätter/Replaces
22004	4 x 855967, 1 x 831622, 1 x 418412



**B25**  
251A  
AQ171A, AQ171C

Art. nr/Part no	Ersätter/Replaces
16513	855513



**V6**  
430A, 430B, 431A, 431B, 432A, 434A  
AQ175A  
AQ205A

P-sats för 1 sida 2 st åtgär/Gasket kit for one side 2 pcs required

Art. nr/Part no	Ersätter/Replaces
22147	1 x 856116, 1 x 856039



## Packningsatser avgaslimpor Gasket kits exhaust manifold



### V8

500A, 500B, 501A, 501B  
570A, 571A, 572A  
AQ200D, AQ200F, AQ211A  
AQ225D, AQ225E, AQ225F, BB225A, BB225AV, BB225B, BB225C  
AQ231A, AQ231B, BB231A  
AQ255B  
AQ260A, AQ260B, BB260A, BB260AV, BB260B, BB260C  
BB261A  
AQ271A, AQ271B, AQ271C, AQ271D  
AQ280A  
AQ290A  
AQ311A, AQ311B

P-sats för 1 sida 2 st åtgär/Gasket kit for one side 2 kits required for both sides

Art. nr/Part no	Ersätter/Replaces
22001	1 x 856034, 1 x 857618



### MD21

AQD21A, AQD21B  
MD21A, MD21B

Art. nr/Part no	Ersätter/Replaces
22129	3 x 859140, 3 x 859114, 2 x 859144



### MD29, MD32

AQD29, AQD29A, MD29, MD29A  
AQD32A, MD32A

Art. nr/Part no	Ersätter/Replaces
22130	2 x 859140, 3 x 859114, 4 x 859144, 1 x 859085



### 4.3

4.3Gi-200-R, 4.3GIJBYA, 4.3GIJWTR, 4.3GIPBYCCE, 4.3GIPEFS,  
4.3GIPLKDC, 4.3GIPLKECE, 4.3GIPNCACE, 4.3GIPNCBCE, 4.3GIPNC-  
MCE, 4.3GIPNCSC, 4.3GIPWTRCE  
4.3GL-A, 4.3GL-B, 4.3GL-C, 4.3GL-D, 4.3GL-E, 4.3GL-EF, 4.3GL-G, 4.3GL-  
GF, 4.3GL-J, 4.3GL-JF, 4.3GL-P  
4.3GLMMDA, 4.3GLPBYC, 4.3GLPEFS, 4.3GLPLKD, 4.3GLPLKE,  
4.3GLPMDA, 4.3GLPNCA, 4.3GLPNCB, 4.3GLPNCS, 4.3GLPWTR  
4.3GSJBYA, 4.3GSJLKD, 4.3GSJPLKE, 4.3GSJPMDA, 4.3GSJPNCA, 4.3GSJP-  
NCB, 4.3GSJPNCM, 4.3GSJPNCS, 4.3GSPWTR  
4.3GXi-225-R, 4.3GXi-A, 4.3GXi-B, 4.3GXi-BF, 4.3GXi-C, 4.3GXi-CF,  
4.3GXi-D, 4.3GXi-DF, 4.3GXi-E, 4.3GXi-EF, 4.3GXi-F, 4.3GXi-FF, 4.3GXi-  
G, 4.3GXi-GF, 4.3GXi-J, 4.3GXi-JF, 4.3GXi-P, 4.3GXi-Q, 4.3GXiE-225-R,  
4.3GXiE-M, 4.3GXiE-P, 4.3GXiE-Q, 4.3OSi-B, 4.3OSi-BF, 4.3OSi-C,  
4.3OSi-CF, 4.3OSi-D, 4.3OSi-DF, 4.3OSi-E, 4.3OSi-EF, 4.3OSi-F, 4.3OSi-FF,  
4.3OSi-G, 4.3OSi-GF, 4.3OSi-J, 4.3OSi-JF

V6-200-A

V6-225-A, V6-225-E-A

Art. nr/Part no	Ersätter/Replaces
16412	3853412, 856116



### 7.4, 8.1, 8.2


7.4GIINCCCE, 7.4GIINCSCE, 7.4GIPBYCCE, 7.4GIPEFS, 7.4GIPLK-  
DCE, 7.4GIPLKECE, 7.4GIPNCACE, 7.4GIPNCBCE, 7.4GIPNCMCE,  
7.4GIPNCSC, 7.4GIPWTR, 7.4GLIMDM, 7.4GLINCC, 7.4GLINCS,  
7.4GLPLKD, 7.4GLPLKE, 7.4GLPMDA, 7.4GLPMDM, 7.4GLPNCA,  
7.4GLPNCB, 7.4GLPNCM, 7.4GLPNCS, 7.4GSIINCC, 7.4GSIINCS,  
7.4GSPBYCCE, 7.4GSIPEFS, 7.4GSIWTR, 7.4GSIXNCB, 7.4GSIXNCM  
8.1Gi-A, 8.1Gi-B, 8.1Gi-BF, 8.1Gi-C, 8.1Gi-CF, 8.1Gi-D, 8.1Gi-DF, 8.1Gi-E,  
8.1Gi-EF, 8.1Gi-G, 8.1Gi-GF, 8.1Gi-H, 8.1Gi-HF, 8.1Gi-J, 8.1Gi-JF, 8.1Gi-  
J, 8.1GiC-JF, 8.1GiC-Q, 8.1GiCE-J, 8.1GiCE-JF, 8.1GiCE-M, 8.1GiCE-P,  
8.1GiCE-Q, 8.1GiE-J, 8.1GiE-JF, 8.1GiE-K, 8.1GiE-KF, 8.1GiE-M, 8.1GiE-  
MF, 8.1GiE-P, 8.1GiL-A, 8.1GiL-B, 8.1GiL-C, 8.1GiL-D, 8.1GiL-E, 8.1GiL-F,  
8.1GiL-G, 8.1GiL-H, 8.1Gsi-A, 8.1GsiL-A, 8.1GXi-A, 8.1GXi-AF, 8.1GXi-  
B, 8.1GXi-BF, 8.1GXi-C, 8.1GXi-CF, 8.1GXi-D, 8.1GXi-DF, 8.1GXi-E,  
8.1GXi-EF, 8.1GXi-F, 8.1GXi-FF, 8.1GXi-G, 8.1GXi-GF, 8.1GXi-J, 8.1GXi-JF,  
8.1GXiE-J, 8.1GXiE-JF, 8.1GXiE-K, 8.1GXiE-KF, 8.1GXiE-M, 8.1GXiE-P,  
8.1GXiL-A, 8.1GXiL-B, 8.1GXiL-C, 8.1GXiL-D, 8.1GXiL-E, 8.1GXiL-F,  
8.1GXiL-G, 8.1IPSC-JF, 8.1IPSC-MF, 8.1IPSC-P, 8.1IPSC-Q, 8.1IPSE-JF,  
8.1OSi-A, 8.1OSi-AF, 8.1OSi-B, 8.1OSi-BF, 8.1OSi-C, 8.1OSi-CF, 8.1OSi-D,  
8.1OSi-DF, 8.1OSi-J, 8.1OSi-JF, 8.1OSiE-J, 8.1OSiE-JF  
8.2GLIMDM, 8.2GLPMDA, 8.2GLPMDM, 8.2GSIWTR, 8.2GSIPEFS,  
8.2GSIWTR, 8.2GSIINCB  
DPX375-A, DPX375-B, DPX375-BF, DPX375-CF, DPX385XBYDCE,  
DPX385XEF, DPX385XLKE, DPX415XBYDCE, DPX415XEF, DPX415XLKE,  
DPX420-A, DPX420-B, DPX420-BF, DPX420-CF

Art. nr/Part no	Ersätter/Replaces
16472	3852472



Spare parts from Sweden

## Packningar avgaslimpor Gaskets exhaust manifolds

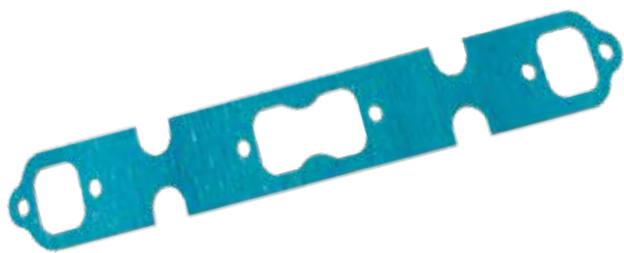

### 5.0, 5.7, V8

5.0GiC-225-S, 5.0GiC-J, 5.0GiCE-225-S, 5.0GIPBYCCE, 5.0GIPEFS, 5.0GIPWTR, 5.0GL-A, 5.0GL-B, 5.0GL-C, 5.0GL-D, 5.0GL-E, 5.0GL-F, 5.0GL-FF, 5.0GL-H, 5.0GL-HF, 5.0GL-J, 5.0GL-JF, 5.0GLPBYC, 5.0GLPEFS, 5.0GLPWTR, 5.0GXl-270-R, 5.0GXl-A, 5.0GXl-B, 5.0GXl-BF, 5.0GXl-C, 5.0GXl-CF, 5.0GXl-D, 5.0GXl-DF, 5.0GXl-E, 5.0GXl-EF, 5.0GXl-F, 5.0GXl-FF, 5.0GXl-G, 5.0GXl-GF, 5.0GXl-J, 5.0GXl-JF, 5.0GXl-N, 5.0GXl-P, 5.0GXl-C-270-R, 5.0GXl-C-J, 5.0GXl-C-JF, 5.0GXl-C-P, 5.0GXlCE-270-R, 5.0GXlCE-J, 5.0GXlCE-JF, 5.0GXlCE-M, 5.0GXlCE-MF, 5.0GXlCE-P, 5.0GXlE-270-R, 5.0GXlE-J, 5.0GXlE-JF, 5.0GXlE-K, 5.0GXlE-KF, 5.0GXlE-M, 5.0GXlE-MF, 5.0GXlE-N, 5.0GXlE-P, 5.0OSl-B, 5.0OSl-BF, 5.0OSl-C, 5.0OSl-CF, 5.0OSl-D, 5.0OSl-DF, 5.0OSl-E, 5.0OSl-EF, 5.0OSl-F, 5.0OSl-FF, 5.0OSl-G, 5.0OSl-GF, 5.0OSl-J, 5.0OSl-JF, 5.0OSlE-J, 5.0OSlE-JF, 5.7Gi-300-J, 5.7Gi-300-JF, 5.7Gi-300-N, 5.7Gi-300-P, 5.7Gi-300-R, 5.7Gi-A, 5.7Gi-B, 5.7Gi-BF, 5.7Gi-C, 5.7Gi-CF, 5.7Gi-D, 5.7Gi-DF, 5.7Gi-E, 5.7Gi-EF, 5.7Gi-F, 5.7Gi-FF, 5.7Gi-G, 5.7Gi-GF, 5.7GiC-300-JF, 5.7GiC-300-P, 5.7GiC-300-R, 5.7GiCE-300-JF, 5.7GiCE-300-M, 5.7GiCE-300-MF, 5.7GiCE-300-P, 5.7GiCE-300-R, 5.7GiE-300-J, 5.7GiE-300-JF, 5.7GiE-300-K, 5.7GiE-300-KF, 5.7GiE-300-M, 5.7GiE-300-N, 5.7GiE-300-P, 5.7GiE-300-R, 5.7GiL-A, 5.7GiL-B, 5.7GiL-C, 5.7GiL-D, 5.7GiL-E, 5.7GiL-F, 5.7GiL-G, 5.7GiLMDA, 5.7GiLNCCE, 5.7GiPHUS, 5.7GiPLKDCE, 5.7GiPLKECE, 5.7GiPMDA, 5.7GiPNCACE, 5.7GiPNCBCE, 5.7GiPNCMCE, 5.7GiPNCSCCE, 5.7GL-A, 5.7GL-B, 5.7GL-C, 5.7GL-D, 5.7GL-E, 5.7GLIMDA, 5.7GLIPLKDCE, 5.7GLPLKA, 5.7GLPLKD, 5.7GLPLKE, 5.7GLPLKR, 5.7GLPMDA, 5.7GLPNCS, 5.7GSICPLKD, 5.7GSiL-A, 5.7GSIPBYCCE, 5.7GSiPEFS, 5.7GSiPLKE, 5.7GSiPWTR, 5.7GSPBYC, 5.7GSPEFS, 5.7GSPLKD, 5.7GSPLKE, 5.7GSPWTR, 5.7GXl-320-R, 5.7GXl-A, 5.7GXl-B, 5.7GXl-C, 5.7GXl-CF, 5.7GXl-D, 5.7GXl-DF, 5.7GXl-E, 5.7GXl-EF, 5.7GXl-F, 5.7GXl-FF, 5.7GXl-G, 5.7GXl-GF, 5.7GXl-H, 5.7GXl-HF, 5.7GXl-J, 5.7GXl-JF, 5.7GXl-N, 5.7GXl-P, 5.7GXlC-320-R, 5.7GXlC-J, 5.7GXlC-JF, 5.7GXlC-P, 5.7GXlCE-320-R, 5.7GXlCE-J, 5.7GXlCE-JF, 5.7GXlCE-M, 5.7GXlCE-P, 5.7GXlE-320-R, 5.7GXlE-J, 5.7GXlE-JF, 5.7GXlE-K, 5.7GXlE-KF, 5.7GXlE-M, 5.7GXlE-MF, 5.7GXlE-N, 5.7GXlE-P, 5.7GXlL-A, 5.7GXlL-B, 5.7GXlL-C, 5.7GXlL-D, 5.7GXlL-E, 5.7GXlL-F, 5.7GXlL-G, 5.7GXlL-H, 5.7OSl-300-J, 5.7OSl-300-JF, 5.7OSl-A, 5.7OSl-AF, 5.7OSl-B, 5.7OSl-BF, 5.7OSl-C, 5.7OSl-CF, 5.7OSl-D, 5.7OSl-DF, 5.7OSl-E, 5.7OSl-EF, 5.7OSl-G, 5.7OSl-GF, 5.7OSlE-300-J, 5.7OSlE-300-JF, 5.7OSXl-A, 5.7OSXl-AF, 5.7OSXl-B, 5.7OSXl-BF, 5.7OSXl-C, 5.7OSXl-CF, 5.7OSXl-D, 5.7OSXl-DF, 5.7OSXl-E, 5.7OSXl-EF, 5.7OSXl-G, 5.7OSXl-GF, 5.7OSXl-J, 5.7OSXl-JF, 5.7OSXlE-J, 5.7OSXlE-JF

V8-225-C-A, V8-225-C-B, V8-225-CE-A, V8-225-CE-B  
V8-270-A, V8-270-B, V8-270-C-A, V8-270-C-B, V8-270-CE-A, V8-270-CE-B, V8-270-E-A, V8-270-E-B  
V8-300-A, V8-300-B, V8-300-C-A, V8-300-C-B, V8-300-CE-A, V8-300-CE-B, V8-300-E-A, V8-300-E-B  
V8-320-A, V8-320-B, V8-320-C-A, V8-320-C-B, V8-320-CE-A, V8-320-CE-B, V8-320-E-A, V8-320-E-B

Art. nr/Part no	Ersätter/Replaces
16468	3852468



### MD1, MD1A, MD1B, AQD2B, MD2, MD2A, MD2B, MD3B, MD11C, MD11D, MD17C, MD17D

MD1, MD1A, MD1B  
AQD2B, D2A, MD2A, MD2B  
MD3B  
MD11C, MD11D  
MD17C, MD17D

1-cyl = 1 st åtgär/1 pcs required  
2-cyl = 2 st åtgär/2 pcs required  
3-cyl = 3 st åtgär/3 pcs required

Art. nr/Part no	Ersätter/Replaces
16098	859145, 833598, 897322



### MB10, MD1, MD2, MD3, MD5, MD6, MD7, MD11, MD17

MD1A, MD1B  
AQD2B, D2, MD2, MD2A, MD2B  
MD3B  
MD5A, MD5B, MD5C  
MD6A, MD6B  
MD7A, MD7B  
MD11C, MD11D  
MD17C, MD17D

Art. nr/Part no	Ersätter/Replaces
16374	859015, 803374



### MD6, MD7

MD6A, MD6B  
MD7A, MD7B

Art. nr/Part no	Ersätter/Replaces
16194	859194, 3875382



## Packningar avgaslimpor Gaskets exhaust manifolds



**30, 40**

MD30A, TMD30A, TAMD30A, AD30A, AQAD30A  
TMD40A, TAMD40A, TMD40B, TAMD40B, TMD40C, AD40A, AQD40A,  
AQAD40A, AD40B, AQAD40B

30 = 4 st åtgär/4 pcs required

40 = 6 st åtgär/6 pcs required

Art. nr/Part no	Ersätter/Replaces
16123	1542123



**31, 41**

AD31A, AD31B, AD31D, AD31L-A, AD31P-A, AD31XD, AQAD31A,  
MD31A  
TAMD31A, TAMD31B, TAMD31D, TAMD31L-A, TAMD31M-A, TAMD31P-A  
TMD31A, TMD31B, TMD31D, TMD31L-A  
KAD32P-A  
AD41A, AD41B, AD41D, AD41L-A, AD41P-A, AQAD41A, D41A,  
D41B, D41D, D41L-A, TAMD41A, TAMD41B, TAMD41D, TAMD41H-A,  
TAMD41L-A  
TAMD41M-A, TAMD41P-A, TMD41A, TMD41B, TMD41D, TMD41L-A  
KAD42A, KAD42B, KAD42P-A, KAMD42A, KAMD42B, KAMD42P-A  
TAMD42B, TAMD42VJ-A  
KAD43P-A, KAMD43P-A  
KAD44P-A, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-B,  
KAMD44P-C  
KAD300A, KAMD300A

31 = 4 st åtgär/4 pcs required

41 = 6 st åtgär/6 pcs required

Art. nr/Part no	Ersätter/Replaces
16673	876144, 838673, 876144

## Bultsatser avgaslimpor Bolt kits exhaust manifolds



**B18, B20**

AQ60F, AQ90, AQ95, AQ95A, AQ110

AQ120

BB30, BB100

MB18

AQ105A

AQ115A, AQ115B

AQ130A, AQ130B, AQ130C, AQ130D

BB115A, BB115B, BB115C

MB20A, MB20B, MB20C

För avgasrör 806333, 824532/For exhaust manifold 806333, 824532

Art. nr/Part no	Ersätter/Replaces
22005	N/A



**B21, B23, B25**

AQ120B, AQ125A

AQ140A, BB140A

230A, 230B

AQ125B

AQ131A, AQ131B, AQ131C, AQ131D

AQ145A, AQ145B, BB145A

250A, 250B

AQ151A, AQ151B, AQ151C

Art. nr/Part no	Ersätter/Replaces
22007	N/A



## Bultsatser avgaslimpor Bolt kits exhaust manifolds



### B30

AQ165A, BB165A  
AQ170A, AQ170B, AQ170C, BB170A, BB170B, BB170C

Art. nr/Part no	Ersätter/Replaces
22045	N/A



### V6

430A, 430B, 431A, 431B, 432A, 434A  
AQ175A  
AQ205A

2 satser åtgår för komplett motor/2 sets required for compl. engine

Art. nr/Part no	Ersätter/Replaces
22145	N/A



### V8

500A, 500B, 501A, 501B  
570A, 571A, 572A  
AQ200D, AQ200F, AQ211A  
AQ225D, AQ225E, AQ225F, BB225A, BB225AV, BB225B, BB225C  
AQ231A, AQ231B  
AQ255B  
AQ260A, AQ260B, BB260A, BB260AV, BB260B, BB260C  
AQ271A, AQ271B, AQ271C, AQ271D  
AQ280A  
AQ290A  
AQ311A, AQ311B  
BB231A  
BB261A

2 satser åtgår för komplett motor/2 sets required for compl. engine

Art. nr/Part no	Ersätter/Replaces
22006	N/A




### 5.0, 5.7, V8

5.0GL-A, 5.0GL-B, 5.0GL-E, 5.0GXi-B, 5.0GXi-BF, 5.0GXiE-P, 5.0GXi-P,  
5.0GXi-C, 5.0GXi-CF, 5.0GXi-D, 5.0GXi-DF, 5.0OSi-CF, 5.0OSi-D,  
5.0OSi-DF, 5.0OSi-B, 5.0OSi-BF, 5.0GXi-270-R  
5.7Gi-B, 5.7Gi-BF, 5.7GL-A, 5.7GL-B, 5.7GL-E, 5.7GXi-C, 5.7GXi-CF,  
5.7GiE-300-P, 5.7Gi-300-P, 5.7Gi-300-R, 5.7GXiE-320-R, 5.7GXiE-  
P, 5.7GXi-P, 5.7OSi-A, 5.7OSi-AF, 5.7OSXi-A, 5.7OSXi-AF, 5.7GiI-B,  
5.7GXii-C  
V8-270-E-A, V8-270-E-B, V8-300-B, V8-300-E-B, V8-320-B, V8-320-E-B

Art. nr/Part no	Ersätter/Replaces
22183	N/A



## Avgaskrökar Exhaust bends

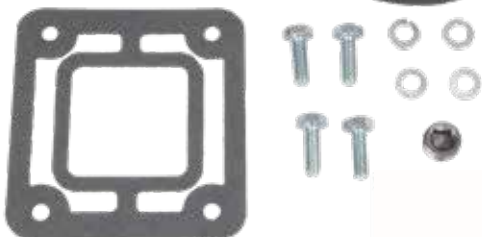

**3.0**

3.0GLM-A, 3.0GLM-B, 3.0GLM-C, 3.0GLP-A, 3.0GLP-B, 3.0GLP-C, 3.0GSM-A, 3.0GSM-B, 3.0GSM-C, 3.0GSMBYMCE, 3.0GSMLKD, 3.0GSMNCS, 3.0GSMWTR, 3.0GSP-A, 3.0GPS-B, 3.0GSP-C, 3.0GSPBYMCE, 3.0GSPEFS, 3.0GSPDKD, 3.0GSPNCS, 3.0GSPWTR

Art. nr/Part no	Ersätter/Replaces
16071	3863071, 3857798



**V6**

430A, 430B, 431A, 431B, 432A, 434A  
AQ175A  
AQ205A

Art. nr/Part no	Ersätter/Replaces
16037	857037, 841847, 855380, 856895



**V6**

4.3Gi-200-R, 4.3GL-J, 4.3GL-JF, 4.3GL-P, 4.3GXi-225-R, 4.3GXi-J, 4.3GXi-JF, 4.3GXi-P, 4.3GXi-Q, 4.3GXiE-225-R, 4.3GXiE-M, 4.3GXiE-P, 4.3GXiE-Q, 4.3OSi-J, 4.3OSi-JF, V6-200-A, V6-225-A, V6-225-E-A

Art. nr/Part no	Ersätter/Replaces
16964	3889964



**4.3, V6, 5.0, 5.7, V8**

4.3GXiE-M, 4.3GXi-P, 4.3GXi-Q, 4.3GXi-225-R, 4.3Gi-200-R, 4.3GXi-B, 4.3GXi-BF, 4.3GXi-A, 4.3GXi-C, 4.3GXi-CF, 4.3GXi-D, 4.3GXi-DF, 4.3GXi-E, 4.3GXi-EF, 4.3GXi-F, 4.3GXi-FF  
4.3GL-P, 4.3GL-A, 4.3GL-B, 4.3GL-C, 4.3GL-D, 4.3GL-E, 4.3GL-EF, 4.3GL-G, 4.3GL-EF, 4.3GL-  
4.3OSi-E, 4.3OSi-EF, 4.3OSi-J, 4.3OSi-JF  
V6-200-A  
V6-225-A, V6-225-E-A

5.0GL-A, 5.0GL-B, 5.0GL-E, 5.0GXi-B, 5.0GXi-BF, 5.0GXiE-P, 5.0GXi-P, 5.0GXi-C, 5.0GXi-CF, 5.0GXi-D, 5.0GXi-DF, 5.0OSi-CF, 5.0OSi-D, 5.0OSi-DF, 5.0OSi-B, 5.0OSi-BF, 5.0GXi-270-R

5.7Gi-B, 5.7Gi-BF, 5.7GL-A, 5.7GL-B, 5.7GL-E, 5.7GXi-C, 5.7GXi-CF, 5.7GiE-300-P, 5.7Gi-300-P, 5.7Gi-300-R, 5.7GXiE-320-R, 5.7GXiE-P, 5.7GXi-P, 5.7OSi-A, 5.7OSi-AF, 5.7OSXi-A, 5.7OSXi-AF, 5.7GiI-B, 5.7GXiI-C

V8-270-E-A, V8-270-E-B, V8-300-B, V8-300-E-B, V8-320-B, V8-320-E-B

Art. nr/Part no	Ersätter/Replaces
16061	3863061



## Avgaskrökar Exhaust bends



### 4.3, V6, 5.0, 5.7, V8

4.3GXIE-M, 4.3GXi-P, 4.3GXi-Q, 4.3GXi-225-R, 4.3Gi-200-R, 4.3GXi-B, 4.3GXi-BF, 4.3GXi-A, 4.3GXi-C, 4.3GXi-CF, 4.3GXi-D, 4.3GXi-DF, 4.3GXi-E, 4.3GXi-EF, 4.3GXi-F, 4.3GXi-FF  
4.3GL-P, 4.3GL-A, 4.3GL-B, 4.3GL-C, 4.3GL-D, 4.3GL-E, 4.3GL-EF, 4.3GL-G, 4.3GL-EF, 4.3GL-  
4.3OSi-E, 4.3OSi-EF, 4.3OSi-J, 4.3OSi-JF  
V6-200-A  
V6-225-A, V6-225-E-A

5.0GL-A, 5.0GL-B, 5.0GL-E, 5.0GXi-B, 5.0GXi-BF, 5.0GXi-P, 5.0GXi-P, 5.0GXi-C, 5.0GXi-CF, 5.0GXi-D, 5.0GXi-DF, 5.0OSi-CF, 5.0OSi-D, 5.0OSi-DF, 5.0OSi-B, 5.0OSi-BF, 5.0GXi-270-R

5.7Gi-B, 5.7Gi-BF, 5.7GL-A, 5.7GL-B, 5.7GL-E, 5.7GXi-C, 5.7GXi-CF, 5.7GiE-300-P, 5.7Gi-300-P, 5.7Gi-300-R, 5.7GXiE-320-R, 5.7GXiE-P, 5.7GXi-P, 5.7OSi-A, 5.7OSi-AF, 5.7OSXi-A, 5.7OSXi-AF, 5.7GiL-B, 5.7GXil-C

V8-270-E-A, V8-270-E-B, V8-300-B, V8-300-E-B, V8-320-B, V8-320-E-B

Art. nr/Part no	Ersätter/Replaces	Info
16061-1	3862627	High rise 3"



MD1B, MD2B, MD3B, MD6, MD7, MD11, MD17  
MD2B, MD11C, MD11D

Connection: Flange  
Exhaust Hose: 44,5mm, 1 3/4"  
Water Hose: 16mm, 5/8", Uni  
Material: Stainless EN 1.4404/316L

Art. nr/Part no	Ersätter/Replaces	Info
16200	833583	Rostfri/Stainless
16374	859015	Packning/Gasket



MD1B, MD2B, MD3B, MD6, MD7, MD11, MD17

Connection: Flange  
Exhaust Hose: 44,5mm, 1 3/4"  
Water Hose: 16mm, 5/8", Uni  
Material: Stainless EN 1.4404/316L

Art. nr/Part no	Ersätter/Replaces	Info
16102	833583	Rostfri/Stainless
16374/16015	803374/859015	Packning/Gasket



MD1B, MD2B, MD3B, MD6, MD7, MD11, MD17

MD6B  
MD7A, MD7B  
MD11C, MD11D  
MD17C, MD17D

Vattenanslutning/Water connection: 16 mm / 5/8"  
Gänga/Thread: 1 3/4"

Art. nr/Part no	Ersätter/Replaces	Info
16100	833998	Rostfri/Stainless



## Avgaskrökar Exhaust bends



**MD1B, MD2B, MD3B, MD6, MD7, MD11, MD17**

**Connection:** Thread  
**Exhaust Hose:** 44,5mm, I 3/4"  
**Water Hose:** 16mm, 5/8", Uni  
**Material:** Stainless EN 1.4404/316L

Art. nr/Part no	Ersätter/Replaces	Info
16101	833998	Rostfri/Stainless



**MD5**  
 MD5A, MD5B, MD5C

**Connection:** Flange  
**Exhaust Hose:** 44,5mm, I 3/4"  
**Water Hose:** 16mm, 5/8", Angled against Exhaust connection  
**Material:** Stainless EN 1.4404/316L

Art. nr/Part no	Ersätter/Replaces	Info
16300	838224	Rostfri/Stainless
16374	859015	Packning/Gasket



**MD5**  
 MD5A, MD5B, MD5C

**Connection:** Flange  
**Exhaust Hose:** 44,5mm, I 3/4"  
**Water Hose:** 16mm, 5/8", Angled from Exhaust connection  
**Material:** Stainless EN 1.4404/316L

Art. nr/Part no	Ersätter/Replaces	Info
16302	838224	Rostfri/Stainless
16374	803374/859015	Packning/Gasket



**MD5**  
 MD5A, MD5B, MD5C

**Connection:** Flange  
**Exhaust Hose:** 44,5mm, I 3/4"  
**Water Hose:** 16mm, 5/8", Uni direction  
**Material:** Stainless EN 1.4404/316L

Art. nr/Part no	Ersätter/Replaces	Info
16304	838224	Rostfri/Stainless
16374	803374/859015	Packning/Gasket



**MD21**  
 MD21A, MD21B

**Slanganslutning/Hose connector:** 60 mm  
**Totallängd/Length:** 260mm  
**Gänga/Thread:** 3/4"

Art. nr/Part no	Ersätter/Replaces	Info
16400	818359	Rostfri/Stainless



**2001, 2002, 2003**  
**Connection:** Flange  
**Exhaust Hose:** 44,5 mm, I 3/4"  
**Water Hose:** 16 mm uni direction  
**Material:** Stainless EN 1.4404/316L

Art. nr/Part no	Ersätter/Replaces	Info
16790	840690	Rostfri/Stainless
16902	840902	Packning/Gasket



## Avgaskrökar Exhaust bends



### D1, D2, 2010, 2020, 2030, 2040

D1-13A, D1-13B, D1-13F  
D1-20A, D1-20B, D1-20F  
D1-30A, D1-30B, D1-30F  
D2-40A, D2-40B, D2-40F  
MD2010A, MD2010B, MD2010C, MD2010D  
MD2020A, MD2020B, MD2020C, MD2020D  
MD2030A, MD2030B, MD2030C, MD2030D  
MD2040A, MD2040B, MD2040C, MD2040D

Art. nr/Part no	Ersätter/Replaces	Info
16750	861906	Rostfri/Stainless
16190	861907	Packning/Gasket



### D2-50, D2-55, MD22

D2-50F, D2-55A, D2-55B, D2-55C, D2-55D, D2-55E, D2-55F,  
MD22, MD22A, MD22L-A, MD22L-B, MD22P-B

**Connection:** Flange

**Exhaust Hose:** 57mm, 2 1/4"

**Water Hose:** 30mm

**Material:** Stainless EN 1.4404/316L

Art. nr/Part no	Ersätter/Replaces	Info
16222	21424345	Rostfri/Stainless
16596	888596	Packning/Gasket



### D2-55, MD22

D2-50F, D2-55A, D2-55B, D2-55C, D2-55D, D2-55E, D2-55F, D2-60F,  
MD22A, MD22L-A, MD22L-B, MD22P-B

**Connection:** Flange

**Exhaust Hose:** 57mm, 2 1/4"

**Water Hose:** 30mm Uni direction

**Material:** Stainless EN 1.4404/316L

Art. nr/Part no	Ersätter/Replaces	Info
16223	21424345	Rostfri/Stainless
16596	888596	Packning/Gasket



### D2-60, D2-75

D2-60F  
D2-75, D2-75B, D2-75C, D2-75F

**Connection:** 5 x bolt

**Exhaust Hose:** 89mm, 3 1/2"

**Water Hose:** 25mm, 1"

**Material:** Stainless EN 1.4404/316L

Art. nr/Part no	Ersätter/Replaces	Info
16240	3584413	Rostfri/Stainless
16480	21194801	Packning/Gasket



## Avgaskrökar Exhaust bends



**30, 40**

TMD30A, TAMD30A, AD30A, AQAD30A  
TMD40A, TAMD40A, TMD40B, TAMD40B, TMD40C, AQD40A,  
AQAD40A, AD40B, AQAD40B

Art. nr/Part no	Ersätter/Replaces	Info
I626I	84526I	Gjutjärn/Iron cast



**31, 41**

AD31B  
TAMD31B, TAMD31D, TAMD31L-A, TAMD31M-A, TAMD31P-A  
TMD31B, TMD31D, TMD31L-A  
AD41B, AD41D, D41B  
TAMD41B, TAMD41D, TAMD41H-A, TAMD41L-A  
TAMD41M-A, TAMD41P-A, TMD41B, TMD41D, TMD41L-A

Art. nr/Part no	Ersätter/Replaces	Info
I6963	859963, 85848I	Gjutjärn/Iron cast



**31, 41**

TMD31A, TAMD31A, TMD31B, TAMD31B, TMD31D, TAMD31D, TMD31L-A,  
TAMD31L-A, TAMD31M-A, TAMD31P-A, AD31, AD31B  
TMD41A, TAMD41A, TMD41B, TAMD41B, TMD41D, TMD41L-A,  
TAMD41D, TAMD41H-A, TAMD41H-B, TAMD41P, TAMD41P-A, **AD41A**,  
D41B, AD41B, AD41BJ, AD41D

Ersätter avgaskrök med spjäll / replaces exhaust bends with throttle

Art. nr/Part no	Ersätter/Replaces	Info
I6415	855963, 877415, 858841	Gjutjärn/Iron cast



**D4**

D4-145I-G, D4-150A-G, D4-175I-G  
D4-180I-B, D4-180I-C, D4-180I-D, D4-180I-E, D4-180I-F  
D4-210A-A, D4-210A-B, D4-210I-A, D4-210I-B  
D4-225A-B, D4-225A-C, D4-225A-D, D4-225A-E, D4-225A-F, D4-225I-B,  
D4-225I-C, D4-225I-D, D4-225I-E, D4-225I-F  
D4-230A-G, D4-230I-G  
D4-260A-A, D4-260A-B, D4-260A-C, D4-260A-D, D4-260A-E,  
D4-260A-F, D4-260I-A, D4-260I-B, D4-260I-C, D4-260I-D, D4-260I-E,  
D4-260I-F, D4-260D-B, D4-260D-C, D4-260D-D, D4-260D-E  
D4-270A-G, D4-270I-G  
D4-300A-A, D4-300A-C, D4-300A-D, D4-300A-E, D4-300A-F,  
D4-300A-G, D4-300D-A, D4-300D-C, D4-300D-D, D4-300D-E,  
D4-300D-F, D4-300I-A, D4-300I-C, D4-300I-D, D4-300I-E, D4-300I-F,  
D4-300I-G  
D4-320A-G, D4-320I-G

Art. nr/Part no	Ersätter/Replaces	Info
I6832	22948832, 21684826, 388470I	Gjutjärn/Iron cast



## Monteringskit avgaskrökar Installation kits exhaust bends



### B18, B20

AQ60F, AQ90, AQ95, AQ95A, AQ110  
AQ120  
BB30, BB100  
MB18  
AQ105A, AQ115A, AQ115B, BB115A, BB115B, BB115C  
AQ130A, AQ130B, AQ130C, AQ130D  
MB20A, MB20B, MB20C

Art. nr/Part no	Ersätter/Replaces
16001	N/A



### B18, B20

AQ60F, AQ90, AQ95, AQ95A, AQ110  
AQ120  
BB30, BB100  
MB18  
AQ105A, AQ115A, AQ115B, BB115A, BB115B, BB115C  
AQ130A, AQ130B, AQ130C, AQ130D  
MB20A, MB20B, MB20C

Art. nr/Part no	Ersätter/Replaces	Info
16341	806341	Täcklock / end cover



### B30

AQ165A  
AQ170A, AQ170B, AQ170C  
BB165A  
BB170A, BB170B, BB170C

Art. nr/Part no	Ersätter/Replaces
22102	N/A




### V6

430A, 430B, 431A, 431B, 432A, 434A  
AQ175A  
AQ205A

2 satser åtgår för komplett motor / 2 kits required for complete engine

Till avgaskrök 16037 / For exhaust bend 16037

Art. nr/Part no	Ersätter/Replaces
22146	N/A

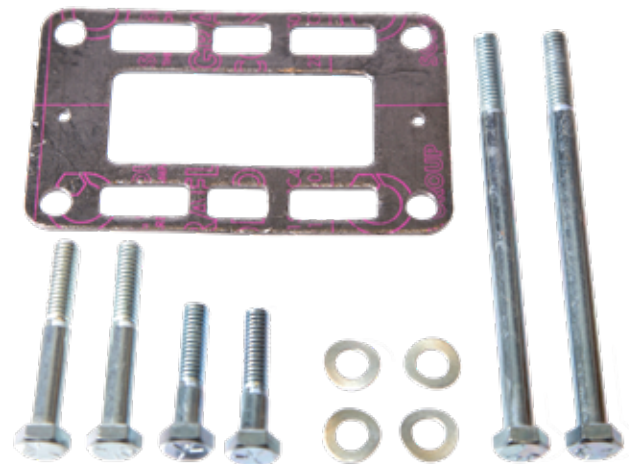

### V8

500A, 500B, 501A, 501B  
570A, 571A, 572A  
AQ200D, AQ200F  
AQ211A  
AQ225D, AQ225E, AQ225F, BB225A, BB225AV, BB225B, BB225C  
AQ231A, AQ231B, BB231A  
AQ255B  
AQ260A, AQ260B, BB260A, BB260AV, BB260B, BB260C  
AQ271A, AQ271B, AQ271C, AQ271D  
AQ280A  
AQ290A  
AQ311A, AQ311B  
BB261A

Till avgaskrök 16384 / For exhaust bend 16384

Art. nr/Part no	Ersätter/Replaces
16008	N/A



## Packningar avgaskrökar Gaskets exhaust bends



### 4.3, V6. 5.0, 5.7, V8

4.3GXIE-M, 4.3GXi-P, 4.3GXi-Q, 4.3GXi-225-R, 4.3Gi-200-R, 4.3GXi-B, 4.3GXi-BF, 4.3GXi-A, 4.3GXi-C, 4.3GXi-CF, 4.3GXi-D, 4.3GXi-DF, 4.3GXi-E, 4.3GXi-EF, 4.3GXi-F, 4.3GXi-FF  
4.3GL-P, 4.3GL-A, 4.3GL-B, 4.3GL-C, 4.3GL-D, 4.3GL-E, 4.3GL-EF, 4.3GL-G, 4.3GL-EF, 4.3GL-  
4.3OSi-E, 4.3OSi-EF, 4.3OSi-J, 4.3OSi-JF  
V6-200-A  
V6-225-A, V6-225-E-A

5.0GL-A, 5.0GL-B, 5.0GL-E, 5.0GXi-B, 5.0GXi-BF, 5.0GXiE-P, 5.0GXi-P, 5.0GXi-C, 5.0GXi-CF, 5.0GXi-D, 5.0GXi-DF, 5.0OSi-CF, 5.0OSi-D, 5.0OSi-DF, 5.0OSi-B, 5.0OSi-BF, 5.0GXi-270-R

5.7Gi-B, 5.7Gi-BF, 5.7GL-A, 5.7GL-B, 5.7GL-E, 5.7GXi-C, 5.7GXi-CF, 5.7GiE-300-P, 5.7Gi-300-P, 5.7Gi-300-R, 5.7GXiE-320-R, 5.7GXiE-P, 5.7GXi-P, 5.7OSi-A, 5.7OSi-AF, 5.7OSXi-A, 5.7OSXi-AF, 5.7GiI-B, 5.7GXiI-C

V8-270-E-A, V8-270-E-B, V8-300-B, V8-300-E-B, V8-320-B, V8-320-E-B

Art. nr/Part no	Ersätter/Replaces	Info
16191	3863191	



### MB10, MD1, MD2, MD3, MD5, MD6, MD7, MD11, MD17

MB10A  
MD1A, MD1B  
AQD2B, D2, MD2, MD2A, MD2B  
MD3B  
MD5A, MD5B, MD5C  
MD6A, MD6B  
MD7A, MD7B  
MD11C, MD11D  
MD17C, MD17D


Art. nr/Part no	Ersätter/Replaces	Info
16374	859015, 803374	Passar krökar 16200, 16101, 16304 / fits elbows 16200, 16101, 16304



### MD19, MD21, MD27, MD29, MD32

AQD19, MD19  
AQD21A, AQD21B  
MD21A, MD21B  
AQD27, MD27  
AQD29, AQD29A, MD29, MD29A  
AQD32A, MD32A

Art. nr/Part no	Ersätter/Replaces	Info
16140	859140, 819720	Passar krök 16400 / fits exhaust elbow 16400

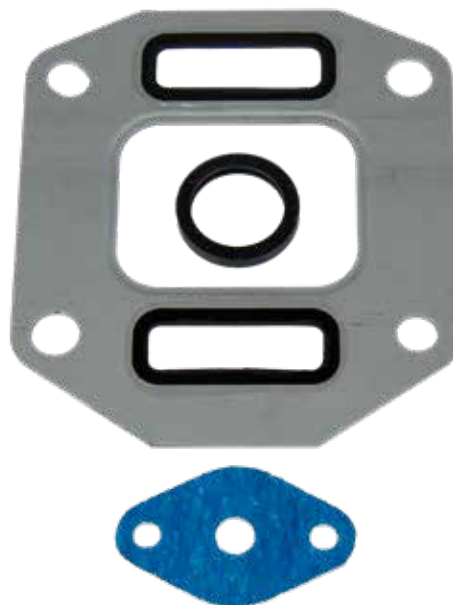


### 30, 31, 40, 41

MD30A  
MD31A  
MD40A

Art. nr/Part no	OEM nr
22134	3582676, 842913, 859002



## Packningar avgaskrökar Gaskets exhaust bends

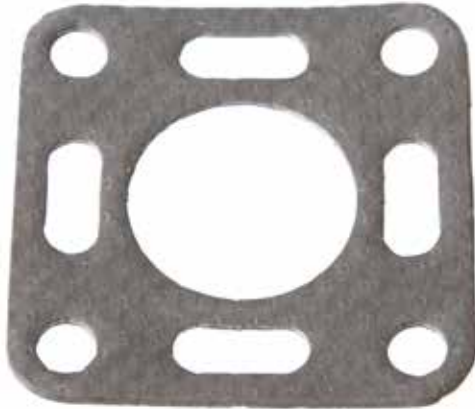

### 2001, 2002, 2003, MD6, MD7

2001, 2002, 2003, 2003T, MD6, MD7  
2001, 2001AG, 2001B, 2001BG, 2001D, 2001R  
2002, 2002AG, 2002B, 2002BG, 2002D  
2003, 2003 SOLAS, 2003AG, 2003B, 2003B SOLAS, 2003BG, 2003D,  
2003R, 2003R SOLAS  
2003T, 2003TB, 2003TB SOLAS, 2003TR  
MD6A, MD6B  
MD7A, MD7B

Art. nr/Part no	Ersätter/Replaces
16902	840902, 3875050



### D1, D2, MD2010, MD2020, MD2030, MD2040

D1-13, D1-13B, D1-13F  
D1-20, D1-20B, D1-20F  
D1-30, D1-30B, D1-30F  
D2-40, D2-40B, D2-40F  
MD2010, MD2010B, MD2010C, MD2010D  
MD2020, MD2020B, MD2020C, MD2020D  
MD2030, MD2030B, MD2030C, MD2030D  
MD2040, MD2040B, MD2040C, MD2040D

Art. nr/Part no	Ersätter/Replaces
16190	861907



### D2-50, D2-55, D2-60, D2-75

D2-50F  
D2-55, D2-55B, D2-55C, D2-55D, D2-55E, D2-55F  
D2-60F  
D2-75, D2-75B, D2-75C, D2-75F

Art. nr/Part no	Ersätter/Replaces	Info
16596	888596	Passar krök 16222, 16223 / fits exhaust elbow 16222, 16223



### D2-60, D2-75

D2-60F  
D2-75, D2-75B, D2-75C, D2-75F

Art. nr/Part no	Ersätter/Replaces	Info
16480	21194801	Passar krök 16240 / fits exhaust elbow 16240



### D2-50, D2-55, 22, 31

D2-50F  
D2-55, D2-55B, D2-55C, D2-55D, D2-55E, D2-55F  
MD22, MD22A, MD22L, MD22P, TMD22A, TMD22B, TMD22-B, TMD22P-  
C, MD22P-B, MD22L-B, TAMD22-B, TAMD22P-B  
TAMD31S, TAMD31S-A

Art. nr/Part no	Ersätter/Replaces	Info
16834	859834	Passar krök OEM 3589544 / fits exhaust elbow OEM 3589544



## Packningar avgaskrökar Gaskets exhaust bends



### D3

D3-110I-A, D3-110I-B, D3-110I-C, D3-110I-D, D3-110I-E, D3-110I-F, D3-110I-G  
 D3-130A-A, D3-130I-A, D3-130A-B, D3-130I-B, D3-130A-C, D3-130I-C  
 D3-140I-E, D3-140I-F, D3-140A-D, D3-140A-E, D3-140A-F, D3-140A-G, D3-140I-G  
 D3-150I-D, D3-150I-E, D3-150I-F, D3-150I-G  
 D3-160A-A, D3-160I-A, D3-160A-B, D3-160I-B, D3-160A-C, D3-160I-C  
 D3-170I-D, D3-170I-E, D3-170I-F, D3-170A-D, D3-170A-E, D3-170A-F, D3-170A-G, D3-170I-G  
 D3-190A-B, D3-190I-B, D3-190A-C, D3-190I-C  
 D3-200I-D, D3-200I-E, D3-200I-F, D3-200A-D, D3-200A-E, D3-200A-F, D3-200A-G, D3-200I-G  
 D3-220I-D, D3-220I-E, D3-220I-F, D3-220A-D, D3-220A-E, D3-220A-F, D3-220A-G, D3-220I-G

Art. nr/Part no	Ersätter/Replaces
900612	1275549
900613	8631549

## Turboaggregat Turbo chargers



### D2-60, D2-75

D2-60F, D2-75, D2-75B, D2-75-C, D2-75F

Art. nr/Part no	OEM nr	Info
17341	3801341	IHI, Japan



### 31A, 31B, 31P, KAD32, 41B, 41D

AQAD31A, AQAD31B, AD31A, AD31B, AD31L-A, AD31P-A, TMD31A, TMD31B, TAMD31A, TAMD31B, TAMD31L-A, TAMD31M-A, TAMD31P-A

KAD32P

AD41D, D41D, TAMD41B, TAMD41D

Tillverkningsår motorer / engine model year: 1996-2008

Art. nr/Part no	OEM nr	Info
17282	3802082, 3581528, 860916, 838695	Borg Warner



Spare parts from Sweden

## Turboaggregat Turbo chargers



**41A, 41B, 41D, 41L, 41M, KAD42, KAD43**  
TAMD41A, TMD41A  
AD41B, AD41BJ, D41B, TAMD41B, TMD41B  
TMD41L-A, TAMD41M-A, AD41D, D41D  
KAD42A, KAMD42A, KAD42P-A, KAMD42P-A, KAD42B, TAMD42WJ-A  
KAD43P-A, KAD43P-B

Tillverkningsår motorer / engine model year: 1993-2003

Art. nr/Part no	OEM nr	Info
17070	3802070, 861260, 838697, 860916	Borg Warner



**KAD44**  
KAD44P, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-C

Tillverkningsår motorer / engine model year: 1995-2010

Art. nr/Part no	OEM nr	Info
17112	3802112, 3581012, 3802105	Borg Warner




**KAD43, KAD44, KAD300**  
KAD43P, KAMD43P, KAD43P-A, KAMD43P-A, KAMD43P-B  
KAD44P, KAD44P-A, KAMD44P-A, KAD44P, KAD44P-B, KAMD44P-B,  
KAD44P-C, KAMD44P-C,  
KAD300-A, KAMD300-A

Tillverkningsår motorer / engine model year: 2001-2004

Art. nr/Part no	OEM nr	Info
17125	3583006, 3802125	Borg Warner

## Packningsatser avgaskrök - turbo Gasket kits turbo connection

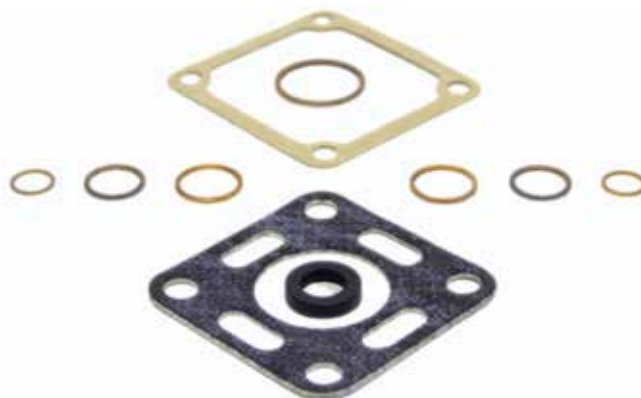


**2003T**  
2003T, 2003TB

Art. nr/Part no	Ersätter/Replaces
22034	N/A



## Packningsatser avgaskrök - turbo Gasket kits turbo connection

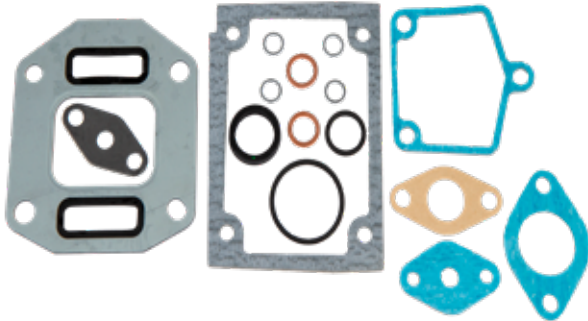

**30, 40**

AD30A, AQAD30A  
TAMD30A, TMD30A

AQAD40A, AQAD40B, AQD40A

TAMD40A, TAMD40B, TMD40A, TMD40B, TMD40C

Art. nr/Part no	Ersätter/Replaces
22139	3582595, 876398, 875646



**31, 41, KAD32, KAD42, KAD43, KAD44, KAD300**

AD31A, AD31B, AD31D, AD31L-A, AD31P-A, AD31XD, AQAD31A  
TAMD31A, TAMD31B, TAMD31D, TAMD31L-A, TAMD31M-A,  
TAMD31P-A, TMD31A, TMD31B, TMD31D, TMD31L-A,  
KAD32P-A

AD41A, AD41B, AD41D, AD41L-A, AD41P-A, AQAD41A

D41A, D41B, D41D, D41L-A

TAMD41A, TAMD41B, TAMD41D, TAMD41H-A, TAMD41L-A

TAMD41M-A, TAMD41P-A, TMD41A, TMD41B, TMD41D, TMD41L-A

KAD42A, KAD42B, KAD42P-A, KAMD42A, KAMD42B, KAMD42P-A

TAMD42B, TAMD42WJ-A

KAD43P-A, KAMD43P-A

KAD44P-A, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-B,

KAMD44P-C

KAD300A, KAMD300A

Art. nr/Part no	Ersätter/Replaces
22138	3582563, 876312, 876108



**30, 40, 31, 32, 41, 42, 43, 44, 300, D4, D6**

AD30A, AQAD30A

TAMD30A, TMD30A

AQAD40A, AQAD40B, AQD40A

TAMD40A, TAMD40B, TMD40A, TMD40B, TMD40C AD31A, AD31B,

AD31D, AD31L-A, AD31P-A, AD31XD, AQAD31A, TAMD31A, TAMD31B,

TAMD31D, TAMD31L-A, TAMD31M-A, TAMD31P-A, TMD31A, TMD31B,

TMD31D, TMD31L-A

KAD32P-A

AD41A, AD41B, AD41D, AD41L-A, AD41P-A, AQAD41A, D41A,

D41B, D41D, D41L-A, TAMD41A, TAMD41B, TAMD41D, TAMD41H-A,

TAMD41L-A, TAMD41M-A, TAMD41P-A, TMD41A, TMD41B, TMD41D,

TMD41L-A

KAD42A, KAD42B, KAD42P-A, KAMD42A, KAMD42B, KAMD42P-A,

TAMD42B, TAMD42WJ-A

KAD43P-A, KAMD43P-A, KAD44P-A, KAD44P-B, KAD44P-C,

KAMD44P-A, KAMD44P-B, KAMD44P-C

KAD300A, KAMD300A.

D4-180I-F, D4-180I-B, D4-180I-C, D4-180I-D, D4-180I-E

D4-210A-A, D4-210I-A, D4-210I-B

D4-225A-F, D4-225I-F, D4-225A-B, D4-225I-B, D4-225A-C, D4-225A-D,

D4-225I-C, D4-225I-D, D4-225A-E, D4-225I-E

D4-260A-F, D4-260D-F, D4-260I-F, D4-260A-A, D4-260A-B, D4-260A-C,

D4-260A-D, D4-260D-B, D4-260D-C, D4-260D-D, D4-260I-A, D4-260I-B,

D4-260I-C, D4-260I-D, D4-260D-E, D4-260I-E, D4-260A-E

D4-300A-F, D4-300D-F, D4-300I-F, D4-300A-A, D4-300A-C, D4-300A-D,

D4-300D-A, D4-300D-C, D4-300I-A, D4-300I-C, D4-300I-D, D4-300A-E,

D4-300D-E, D4-300D-D, D4-300I-E

D6-280A-A, D6-280A-B, D6-280A-C, D6-280A-D, D6-280A-E, D6-280I-A,

D6-280I-B, D6-280I-C, D6-280I-D, D6-280I-E

D6-310I-A, D6-310A-A, D6-310A-B, D6-310A-C, D6-310A-D, D6-310D-B,

D6-310D-C, D6-310D-D, D6-310I-B, D6-310I-C, D6-310I-D, D6-310A-E,

D6-310D-E, D6-310I-E

D6-330A-B, D6-330A-C, D6-330A-D, D6-330D-B, D6-330D-C,

D6-330D-D, D6-330I-B, D6-330I-C, D6-330I-D, D6-330A-E, D6-330D-E,

D6-330I-E

D6-350A-A, D6-350A-B

D6-370A-B, D6-370A-C, D6-370A-D, D6-370D-B, D6-370D-C,

D6-370D-D, D6-370I-A, D6-370I-B, D6-370I-C, D6-370I-D, D6-370A-E,

D6-370D-E, D6-370I-E

D6-400A-E

D6-435D-A, D6-435D-D, D6-435D-C, D6-435D-E, D6-435I-A, D6-435I-C,


D6-435I-D, D6-435I-E

Art. nr/Part no	Ersätter/Replaces	Info
16676	23557470, 23557475, 3582676, 8591111, 3581570	ingår även i / also included in 22138, 22139, 23041



Spare parts from Sweden

## Packningsatser avgaskrök - turbo Gasket kits turbo connection

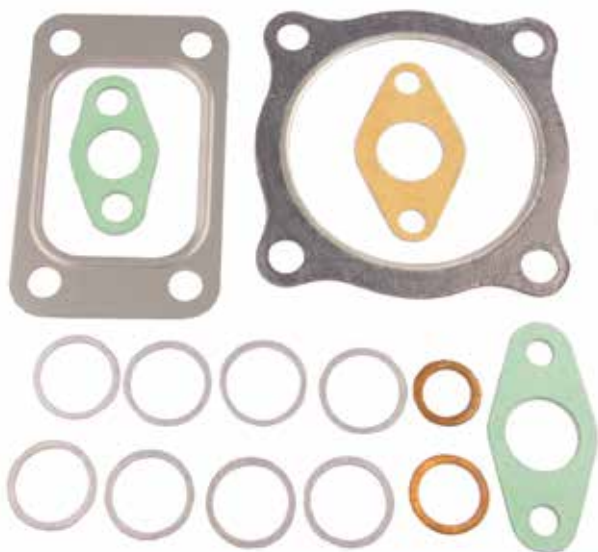

**60**  
TAMD60A, TAMD60B, TAMD60C

Art. nr/Part no	Ersätter/Replaces
23055	87643



**70**  
TAMD70D, TAMD70E

Art. nr/Part no	Ersätter/Replaces
23054	3883844



**D3**  
D3-110I-A, D3-110I-B, D3-110I-C  
D3-130A-A, D3-130I-A, D3-130A-B, D3-130I-B, D3-130A-C, D3-130I-C  
D3-160A-A, D3-160I-A, D3-160A-B, D3-160I-B, D3-160A-C, D3-160I-C  
D3-190A-B, D3-190I-B, D3-190A-C, D3-190I-C

Art. nr/Part no	Ersätter/Replaces
90061	3883844





**D4, D6**  
D4-180I-F, D4-180I-B, D4-180I-C, D4-180I-D, D4-180I-E  
D4-210A-A, D4-210I-A, D4-210I-B  
D4-225A-F, D4-225I-F, D4-225A-B, D4-225I-B, D4-225A-C, D4-225I-C, D4-225I-D, D4-225A-E, D4-225I-E  
D4-260A-F, D4-260D-F, D4-260I-F, D4-260A-A, D4-260A-B, D4-260A-C, D4-260A-D, D4-260D-B, D4-260D-C, D4-260D-D, D4-260I-A, D4-260I-B, D4-260I-C, D4-260I-D, D4-260D-E, D4-260I-E, D4-260A-E  
D4-300A-F, D4-300D-F, D4-300I-F, D4-300A-A, D4-300A-C, D4-300A-D, D4-300D-A, D4-300D-C, D4-300I-A, D4-300I-C, D4-300I-D, D4-300A-E, D4-300D-E, D4-300D-D, D4-300I-E  
D6-280A-A, D6-280A-B, D6-280A-C, D6-280A-D, D6-280A-E, D6-280I-A, D6-280I-B, D6-280I-C, D6-280I-D, D6-280I-E  
D6-310I-A, D6-310A-A, D6-310A-B, D6-310A-C, D6-310A-D, D6-310D-B, D6-310D-C, D6-310D-D, D6-310I-B, D6-310I-C, D6-310I-D, D6-310A-E, D6-310D-E, D6-310I-E  
D6-330A-B, D6-330A-C, D6-330A-D, D6-330D-B, D6-330D-C, D6-330D-D, D6-330I-B, D6-330I-C, D6-330I-D, D6-330A-E, D6-330D-E, D6-330I-E  
D6-350A-A, D6-350A-B  
D6-370A-B, D6-370A-C, D6-370A-D, D6-370D-B, D6-370D-C, D6-370D-D, D6-370I-A, D6-370I-B, D6-370I-C, D6-370I-D, D6-370A-E, D6-370D-E, D6-370I-E  
D6-400A-E  
D6-435D-A, D6-435D-D, D6-435D-C, D6-435D-E, D6-435I-A, D6-435I-C, D6-435I-D, D6-435I-E

Art. nr/Part no	Ersätter/Replaces
23041	3588435



## Ljuddämpare Silencer

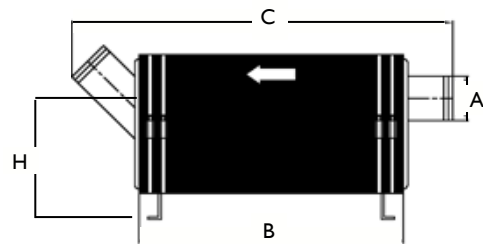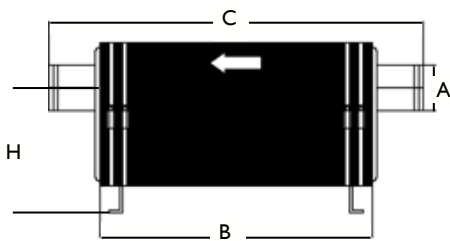

### Typ A

Rak ingång - rak utgång / straight inlet - straight outlet

Gavlar tillverkade av rostfritt stål / end caps made of stainless steel

### Typ B

Rak ingång - vinklad utgång / straight inlet - angled outlet

Gavlar tillverkade av rostfritt stål / end caps made of stainless steel

Art. nr/ Part no	Ersätter/ Replaces	ØA mm	B mm	C mm	H mm	Liter
16703		40	200	310	155	4
16704		45	200	310	155	4
167041		45	300	410	150	6
16705		51	200	320	150	4
167051		51	300	410	150	6
16706		51	400	510	150	8
16707		57	300	420	150	6
16708		60	300	430	155	6
16711		76	400	560	160	8

Art. nr/ Part no	Ersätter/ Replaces	ØA mm	B mm	C mm	H mm	Liter
16725	828064	45	200	320	150	4
16726		51	200	340	150	4
16727		51	300	430	150	6
16730	842768	89	450	660	190	16



Spare parts from Sweden

## Skarvrör 60° rostfritt Joint pipes 60° stainless



Skarvrör 90° rostfritt / Stainless joint pipe 90°  
Diameter: 45 mm

Art. nr/Part no	Ersätter/Replaces
16970	N/A



Skarvrör 60° rostfritt / Stainless joint pipe 60°  
Diameter: 51 mm

Art. nr/Part no	Ersätter/Replaces
16991	N/A



Skarvrör 90° rostfritt / Stainless joint pipe 90°  
Diameter: 51 mm

Art. nr/Part no	Ersätter/Replaces
16971	N/A



Skarvrör 60° rostfritt / Stainless joint pipe 90°  
Diameter: 89 mm

Art. nr/Part no	Ersätter/Replaces
16993	N/A



Skarvrör 60° rostfritt / Stainless joint pipe 60°  
Diameter: 45 mm

Art. nr/Part no	Ersätter/Replaces
16990	N/A



Skarvrör rak rostfritt / Stainless joint pipe straight  
Diameter: 45 mm

Art. nr/Part no	Ersätter/Replaces
PI171	N/A



## Avgasslangar avgaskrökar Exhaust hoses exhaust bends



**B16, B18, B20, V8, MD19, MD21, MD29, MD32**  
AQ80, AQ80S  
AQ60F, AQ90, AQ95, AQ95A, AQ100  
AQ110, AQ120, AQ120A  
AQ105A, AQ115A, AQ115B  
AQ130A, AQ130B, AQ130C, AQ130D  
AQD19, AQD21A, AQD21B  
AQD27, AQD29, AQD29A, AQD32A

Art. nr/Part no	Ersätter/Replaces	Info
16007	952980	Ø 57 mm, length 200 mm



**B30, V8 Ford**  
AQ165A, AQ170A, AQ170B, AQ170C  
AQ190A, AQ240A

Art. nr/Part no	Ersätter/Replaces	Info
16010	952986	Ø 75 mm, length 130 mm



**V6, V8**  
430A, 430B, 431A, 431B, 432A, 434A  
AQ175A, AQ205A  
500A, 500B, 501A, 501B  
570A, 571A, 572A  
AQ200D, AQ200F, AQ211A  
AQ225D, AQ225E, AQ225F  
AQ231A, AQ231B  
AQ255B, AQ260A, AQ260B,  
AQ271A, AQ271B, AQ271C, AQ271D  
AQ280A, AQ290A  
AQ311A, AQ311B  
BB225A, BB225AV, BB225B, BB225C, BB231A  
BB260A, BB260AV, BB260B, BB260C, BB261A

För avgaskrök 16384, 4 slangklammer 19012 åtgär (ingår ej) / For exhaust bend 16384, 4 hose clamps 19012 required (not incl)

Art. nr/Part no	Ersätter/Replaces	Info
16751	24069348, 834751	Ø 95 mm, length 160 mm



**31, 41, KAD32, KAD42, KAD43, KAD44**

MD31A, AD31B, AD31D, AD31D-A, AD31XD, AD31L-A, AD31P-A, TMD31B,  
TAMD31B, TMD31D, TAMD31D, TAMD31M  
KAD32P, KAD32P-A  
D41B, D41D, AD41D, AD41B, AD41BJ, AD41L-A, AD41P-A, TAMD41P  
KAD42A, KAD42B, KAD42P-A, KAMD42B, KAMD42P-A, TAMD42B,  
TAMD42WJ-A  
KAD43P-A, KAD43P-B, KAMD43P, KAMD43P-A, KAMD43P-B  
KAD44P, KAD44P-A, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-B,  
KAMD44P-C, KAD300, KAD300-A  
Med drev/with drive DP-D, DP-D1, DP-E, DP-G, DP-S, SP-C1, DPX-R, DPX-C,  
DPX-S, DPX-S1

Art. nr/Part no	Ersätter/Replaces	Info
19596	860396	Ø 102 mm, length 110 mm



**31, 41**

AD31, AD31A, AQAD31A, AD31B, TAMD31A  
D41A, D41B, AQAD41A, AD41A, AD41B, AD41BJ, TAMD41A  
med drev 290A, DP-A, DP-B, DP-A1, DP-B1, SP-A, SP-A1, SP-A2

Art. nr/Part no	Ersätter/Replaces	Info
19955	858729, 858955	Ø 88,9 mm, length 75 mm





## Avgasslangar avgaskrökar Exhaust hoses exhaust bends



### 4.3,V6. 5.0, 5.7,V8

4.3GIJBYA, 4.3GIJWTR, 4.3GIPBYCCE, 4.3GiPEFS, 4.3GIPLKDCE, 4.3GIPLKECE, 4.3GIPNCACE, 4.3GIPNCBCE, 4.3GIPNCMCE, 4.3GIPNCSCCE, 4.3GIPWTRCE, 4.3GL-A, 4.3GL-B, 4.3GL-C, 4.3GL-D, 4.3GL-E, 4.3GL-EF, 4.3GL-G, 4.3GL-GF, 4.3GL-J, 4.3GL-JF, 4.3GL-P, 4.3GLMMDA, 4.3GLPBYC, 4.3GLPEFS, 4.3GLPLKD, 4.3GLPLKE, 4.3GLPMDA, 4.3GLPNCA, 4.3GLPNCB, 4.3GLPNCS, 4.3GLPWTR, 4.3GSJBYA, 4.3GSJLKD, 4.3GSJNCC, 4.3GSJNCS, 4.3GSJWTR, 4.3GSPBYC, 4.3GSPLKD, 4.3GSPLKE, 4.3GSPMDA, 4.3GSPNCA, 4.3GSPNCB, 4.3GSPNCM, 4.3GSPNCS, 4.3GSPWTR, 4.3GXi-225-R, 4.3GXi-A, 4.3GXi-B, 4.3GXi-BF, 4.3GXi-C, 4.3GXi-CF, 4.3GXi-D, 4.3GXi-DF, 4.3GXi-E, 4.3GXi-EF, 4.3GXi-F, 4.3GXi-FF, 4.3GXi-G, 4.3GXi-GF, 4.3GXi-J, 4.3GXi-JF, 4.3GXi-P, 4.3GXi-Q, 4.3GXie-225-R, 4.3GXie-M, 4.3GXie-P, 4.3GXie-Q, 4.3OSi-B, 4.3OSi-BF, 4.3OSi-C, 4.3OSi-CF, 4.3OSi-D, 4.3OSi-E, 4.3OSi-EF, 4.3OSi-F, 4.3OSi-FF, 4.3OSi-G, 4.3OSi-GF, 4.3OSi-J, 4.3OSi-JF

V6-200-A, V6-225-A, V6-225-E-A

5.0FIPHURCE, 5.0FIPMDA, 5.0FIPNCBCE, 5.0FLPHUE, 5.0FLPHUR, 5.0FLPMDA, 5.0FLPNCB, 5.0FLPNCS, 5.0GiPBYCCE, 5.0GiPEFS, 5.0GiPWTR, 5.0GL-A, 5.0GL-B, 5.0GL-C, 5.0GL-D, 5.0GL-E, 5.0GL-F, 5.0GL-FF, 5.0GL-H, 5.0GL-HF, 5.0GL-J, 5.0GL-JF, 5.0GLPBYC, 5.0GLPEFS, 5.0GLPWTR, 5.0GXi-270-R, 5.0GXi-A, 5.0GXi-B, 5.0GXi-C, 5.0GXi-CF, 5.0GXi-D, 5.0GXi-DF, 5.0GXi-E, 5.0GXi-EF, 5.0GXi-F, 5.0GXi-FF, 5.0GXi-G, 5.0GXi-GF, 5.0GXi-J, 5.0GXi-JF, 5.0GXi-N, 5.0GXi-P, 5.0GXie-270-R, 5.0GXie-J, 5.0GXie-JF, 5.0GXie-K, 5.0GXie-M, 5.0GXie-MF, 5.0GXie-N, 5.0GXie-P, 5.0OSi-B, 5.0OSi-BF, 5.0OSi-C, 5.0OSi-CF, 5.0OSi-D, 5.0OSi-DF, 5.0OSi-E, 5.0OSi-EF, 5.0OSi-F, 5.0OSi-FF, 5.0OSi-G, 5.0OSi-GF, 5.0OSi-J, 5.0OSi-JF, 5.0OSIE-J, 5.0OSIE-JF

5.7Gi-300-J, 5.7Gi-300-JF, 5.7Gi-300-N, 5.7Gi-300-P, 5.7Gi-300-R, 5.7Gi-A, 5.7Gi-B, 5.7Gi-BF, 5.7Gi-C, 5.7Gi-CF, 5.7Gi-D, 5.7Gi-DF, 5.7Gi-E, 5.7Gi-EF, 5.7Gi-F, 5.7Gi-FF, 5.7Gi-G, 5.7Gi-GF, 5.7GiE-300-J, 5.7GiE-300-JF, 5.7GiE-300-K, 5.7GiE-300-KF, 5.7GiE-300-M, 5.7GiE-300-N, 5.7GiE-300-P, 5.7GiE-300-R, 5.7GiL-A, 5.7GiL-B, 5.7GiL-C, 5.7GiL-D, 5.7GiL-E, 5.7GiLMDA, 5.7GiLNCCE, 5.7GiPHUS, 5.7GiPLKECE, 5.7GiPMDA, 5.7GiPMDACE, 5.7GiPNCACE, 5.7GiPNCBCE, 5.7GiPNCMCE, 5.7GiPNCSCCE,

5.7GL-A, 5.7GL-B, 5.7GL-C, 5.7GL-D, 5.7GL-E, 5.7GLIMDA, 5.7GLIPLKDCE, 5.7GLPLKA, 5.7GLPLKD, 5.7GLPLKR, 5.7GLPMDA, 5.7GLPNCS, 5.7GSIC-PLKD, 5.7GSiL-A, 5.7GSIPBYCCE, 5.7GSiPEFS, 5.7GSiPLKE, 5.7GSiPWTR, 5.7GSPBYC, 5.7GSPPEFS, 5.7GSPLKD, 5.7GSPLKE, 5.7GSPWTR

5.7GXi-320-R, 5.7GXi-A, 5.7GXi-B, 5.7GXi-C, 5.7GXi-CF, 5.7GXi-D, 5.7GXi-DF, 5.7GXi-E, 5.7GXi-EF, 5.7GXi-F, 5.7GXi-FF, 5.7GXi-G, 5.7GXi-GF, 5.7GXi-H, 5.7GXi-HF, 5.7GXi-J, 5.7GXi-JF, 5.7GXi-N, 5.7GXi-P, 5.7GXie-320-R, 5.7GXie-J, 5.7GXie-JF, 5.7GXie-K, 5.7GXie-KF, 5.7GXie-M, 5.7GXie-MF, 5.7GXie-N, 5.7GXie-P, 5.7GXie-B, 5.7GXie-BF, 5.7GXie-C, 5.7GXie-D, 5.7GXie-E, 5.7GXie-F

5.7OSi-300-J, 5.7OSi-300-JF, 5.7OSi-A, 5.7OSi-AF, 5.7OSi-B, 5.7OSi-BF, 5.7OSi-C, 5.7OSi-D, 5.7OSi-DF, 5.7OSi-E, 5.7OSi-EF, 5.7OSi-G, 5.7OSi-GF, 5.7OSXi-A, 5.7OSXi-AF, 5.7OSXi-B, 5.7OSXi-C, 5.7OSXi-CF, 5.7OSXi-D, 5.7OSXi-DF, 5.7OSXi-E, 5.7OSXi-EF, 5.7OSXi-G, 5.7OSXi-GF, 5.7OSXi-J, 5.7OSXi-JF, 5.7OSXiE-J, 5.7OSXiE-JF

5.8FIPHURCE, 5.8FIPNCBCE, 5.8FIPNCMCE, 5.8FLIHUB, 5.8FLIHUE, 5.8FLPHUR, 5.8FLPMDA, 5.8FLPNCA, 5.8FLPNCB, 5.8FLPNCM, 5.8FLPNCS, 5.8FSIPHURCE

7.4GIINCCE, 7.4GIINCSCCE, 7.4GIPBYCCE, 7.4GiPEFS, 7.4GIPLKDCE, 7.4GIPLKECE, 7.4GIPNCACE, 7.4GIPNCBCE, 7.4GIPNCMCE, 7.4GIPNCSCCE, 7.4GIPWTR, 7.4GLIMDM, 7.4GLINCC, 7.4GLINCS, 7.4GLPLKD, 7.4GLPLKE, 7.4GLPMDA, 7.4GLPMDM, 7.4GLPNCA, 7.4GLPNCB, 7.4GLPNCM, 7.4GLPNCS, 7.4GLPNCC, 7.4GSiNCC, 7.4GSiNCS, 7.4GSiPBYCCE, 7.4GSiPEFS, 7.4GSiPWTR, 7.4GSiXNCB, 7.4GSiXNCM

8.1Gi-A, 8.1Gi-B, 8.1Gi-BF, 8.1Gi-C, 8.1Gi-CF, 8.1Gi-D, 8.1Gi-DF, 8.1Gi-E, 8.1Gi-EF, 8.1Gi-F, 8.1Gi-FF, 8.1Gi-G, 8.1Gi-GF, 8.1Gi-H, 8.1Gi-HF, 8.1Gi-J, 8.1Gi-JF, 8.1GiE-J, 8.1GiE-JF, 8.1GiE-K, 8.1GiE-KF, 8.1GiE-M, 8.1GiE-MF, 8.1GiE-P, 8.1GiL-A, 8.1GiL-B, 8.1GiL-C, 8.1GiL-D, 8.1GiSi-A, 8.1GiSi-A

8.1GXi-A, 8.1GXi-AF, 8.1GXi-B, 8.1GXi-C, 8.1GXi-CF, 8.1GXi-D, 8.1GXi-DF, 8.1GXi-E, 8.1GXi-EF, 8.1GXi-F, 8.1GXi-FF, 8.1GXi-G, 8.1GXi-GF, 8.1GXi-J, 8.1GXi-JF, 8.1GXie-J, 8.1GXie-JF, 8.1GXie-K, 8.1GXie-KF, 8.1GXie-M, 8.1GXie-P, 8.1GXie-A, 8.1GXie-B, 8.1GXie-C, 8.1OSi-A, 8.1OSi-AF, 8.1OSi-B, 8.1OSi-BF, 8.1OSi-C, 8.1OSi-CF, 8.1OSi-D, 8.1OSi-DF, 8.1OSi-J, 8.1OSi-JF, 8.1OSiE-J, 8.1OSiE-JF

8.2GLIMDM, 8.2GLPMDA, 8.2GLPMDM, 8.2GSIPBYCCE, 8.2GSiPEFS, 8.2GSiPWTR, 8.2GSiXNCB

DPX375-A, DPX375-B, DPX375-BF, DPX375-CF

DPX385XBYDCE, DPX385XEFS, DPX385XLKE

DPX415XBYDCE, DPX415XEFS, DPX415XLKE

DPX420-A, DPX420-B, DPX420-BF, DPX420-CF

V8-270-A, V8-270-B, V8-270-E-A, V8-270-E-B

V8-300-A, V8-300-B, V8-300-E-A, V8-300-E-B

V8-320-A, V8-320-B, V8-320-E-A, V8-320-E-B

V8-350-C-D, V8-350-CE-D

V8-380-C-A, V8-380-C-B, V8-380-C-D, V8-380-CE-A, V8-380-CE-B, V8-380-CE-D

V8-430-CE-D

med/with SX-A

Art. nr/Part no	Ersätter/Replaces	Info
19496	3852696	Ø 102 mm, length 120mm



Spare parts from Sweden



## Startmotorer Starters



### B21, B23, B25, 2001, 2002, 2003, 2003T

2001, 2001AG, 2001B, 2001BG, 2001D, 2001R  
2002, 2002AG, 2002B, 2002BG, 2002D  
2003, 2003 SOLAS, 2003B, 2003B SOLAS, 2003D, 2003R, 2003R SOLAS  
2003T, 2003TB, 2003TB SOLAS, 2003TR  
AQ120B, AQ140A, BB140A  
230A, 230B  
AQ125A, AQ125B  
AQ131A, AQ131B, AQ131C, AQ131D  
AQ145A, AQ145B, BB145A  
250A, 250B, 251A  
AQ151A, AQ151B, AQ151C  
AQ171A, AQ171C

**Spänning / Voltage:** 12V

**Effekt / Power:** 1,1 kW

**Polaritet / Polarity:** I-polig negativ / I-pole negative

**Rotation:** medurs / clockwise

Art. nr/Part no	Ersätter/Replaces
30808	859553, 873549, 834339, 840808



### 3.0, V6, V8

3.0GLMMDA, 3.0GSMBYMCE, 3.0GSMLKD, 3.0GSMNCS, 3.0GSPBYMCE,  
3.0GSPLKD, 3.0GSPMDA, 3.0GSPNCS  
430, 430A, 431A, 431B, 432A  
AQ175A, AQ205A, AQ205LB  
500A, 500B, 501A, 501B  
570, 570A, 571A, 572A  
AQ200B, AQ200C, AQ200D, AQ200F  
AQ211A  
AQ225B, AQ225C, AQ225D, AQ225E, AQ225F, BB225A, BB225AV, BB225B,  
BB225C  
AQ231A, AQ231B  
AQ255A, AQ255B  
AQ260A, AQ260B, BB260AV, BB260B, BB260C  
AQ271A, AQ271B, AQ271C, AQ271D  
AQ290A  
AQ311A, AQ311B  
740B, BB740A

**Spänning / voltage:** 12V

**Effekt / power:** 1,6 kW

**Polaritet / polaritet:** I-pole negative

**Rotation:** clockwise

Art. nr/Part no	Ersätter/Replaces	Info
30308	3862308, 3803635, 3856003	Straight Bolt Pattern



Spare parts from Sweden



## Startmotorer Starters



### MD1B, MD2B, MD3B, MD11C, MD17D

MD1B  
MD2B, AQD2B  
MD3B  
MD11C, MD11D  
MD17C, MD17D

**Spänning / Voltage:** 12V

**Effekt / Power:** 2,0 kW

**Polaritet / Polarity:** 1-polig negativ / 1-pole negative

**Rotation:** moturs / counter clockwise

Art. nr/Part no	Ersätter/Replaces
30031	833031, 833669, 3803073



### D1-30, D2-40, MD2030, MD2040

D1-30, D1-30B, D1-30F  
D2-40, D2-40B, D2-40F  
MD2030, MD2030B, MD2030-C, MD2030-D  
MD2040

**Spänning / Voltage:** 12V

**Effekt / Power:** 1,1 kW

**Polaritet / Polarity:** 1-polig negativ / 1-pole negative

**Rotation:** medurs / clockwise

Art. nr/Part no	Ersätter/Replaces
30514	21302969, 3582514



### D1-13, D1-20, MD2010, MD2020, MD2040

D1-13, D1-13B, D1-13F  
D1-20, D1-20B, D1-20F  
MD2010, MD2010B, MD2010-C, MD2010-D  
MD2020, MD2020B, MD2020-C, MD2020-D  
MD2040

**Spänning / Voltage:** 12V

**Effekt / Power:** 0,8 kW

**Polaritet / Polarity:** 1-polig negativ / 1-pole negative

**Rotation:** medurs / clockwise

Art. nr/Part no	Ersätter/Replaces
30597	24539580, 3803904, 3840888, 861845



### D2-50, D2-55, D2-60, D2-75

D2-50, D2-50F  
D2-55, D2-55B, D2-55C, D2-55D, D2-55E, D2-55F  
D2-60F  
D2-75, D2-75B, D2-75C, D2-75F

**Spänning / Voltage:** 12V

**Effekt / Power:** 2,0 kW

**Polaritet / Polarity:** 1-polig negativ / 1-pole negative

**Rotation:** medurs / clockwise

Art. nr/Part no	Ersätter/Replaces
30043	21323043



## Startmotorer Starters



**2003, 2003T, 30, 31, 40, 41, KAD32, KAD42, KAD43, KAD44, KAD300**  
2003, 2003 SOLAS, 2003B, 2003B SOLAS, 2003D, 2003R, 2003R SOLAS  
2003T, 2003TB, 2003TB SOLAS, 2003TR, 2003TR

AD30A, AQAD30A, MD30A, TAMD30A, TMD30A

MD31A, AD31, AD31B, AD31D, AD31D-A, AD31L-A, AD31P-A, AD31XD,  
TMD31A, TMD31B, TMD31D, TMD31L-A, TAMD31A, TAMD31B,  
TAMD31D, TAMD31L, TAMD31L-A, TAMD31M, TAMD31M-A, TAMD31P,  
TAMD31P-A, TAMD31P-B, TAMD31S  
TAMD31L-A, TAMD31M-A, TAMD31P-A, TAMD31S-A  
KAD32P, KAD32P-A

MD40A, AD40B, AQD40A, AQAD40A, AQD40B, AQAD40B, TMD40A,  
TMD40B, TMD40C, TAMD40A, TAMD40B, TD40A

AD41A, AD41B, AD41BJ, AD41D, AD41L-A, AD41P-A, D41B, D41D,  
D41L-A, TMD41D, TMD41L-A, TMD41A, TMD41B, TAMD41A, TAMD41D,  
TAMD41D, TAMD41H-A, TAMD41H-B, TMD41L-A, TAMD41L-A,  
TAMD41M-A, TAMD41P, TAMD41P-A, TAMD41P-B

KAD42A, KAD42B, KAD42P-A, KAMD42A, KAMD42B, KAMD42P-A,  
TAMD42WJ-A

KAD43P, KAD43P-A, KAD43P-B, KAD43P-C, KAMD43P-A, KAMD43P-B

KAD44P, KAD44P-A, KAD44P-B, KAD44P-C, KAMD44P-A, KAMD44P-B,  
KAMD44P-C

KAD300-A, KAMD300-A

**Spänning / Voltage:** 12V  
**Effekt / Power:** 3,2 kW  
**Polaritet / Polarity:** 2-polig / 2-poles  
**Rotation:** medurs / clockwise

Art. nr/Part no	Ersätter/Replaces	Info
30774	3581774, 3803386, 859252	2-polig/2-poles



### D3

D3-110I-A, D3-110I-B, D3-110I-C, D3-110I-D, D3-110I-E, D3-110I-F,  
D3-110I-G, D3-110I-H  
D3-130A-A, D3-130A-B, D3-130A-C, D3-130I-A, D3-130I-B, D3-130I-C  
D3-140A-D, D3-140A-E, D3-140A-F, D3-140A-G, D3-140A-H, D3-140I-D,  
D3-140I-E, D3-140I-F, D3-140I-G, D3-140I-H  
D3-150I-D, D3-150I-E, D3-150I-F, D3-150I-G, D3-150I-H  
D3-160A-A, D3-160A-B, D3-160A-C, D3-160I-A, D3-160I-B, D3-160I-C  
D3-170A-D, D3-170A-E, D3-170A-F, D3-170A-G, D3-170A-H  
D3-170I-D, D3-170I-E, D3-170I-F, D3-170I-G, D3-170I-H  
D3-190A-B, D3-190A-C, D3-190I-A, D3-190I-B, D3-190I-C  
D3-200A-D, D3-200A-E, D3-200A-F, D3-200A-G, D3-200A-H, D3-200I-D,  
D3-200I-E, D3-200I-F, D3-200I-G, D3-200I-H

**Spänning / Voltage:** 12V

**Effekt / Power:** 2,2 kW

**Polaritet / Polarity:** 1-polig negativ / 1-pole negative

**Rotation:** medurs / clockwise

Art. nr/Part no	Ersätter/Replaces
30965	30782228, 3848965



## Startmotorer Starters



### D4, D6

D4-180I-B, D4-180I-C, D4-180I-D, D4-180I-E, D4-180I-F  
 D4-210A-A, D4-210A-B, D4-210A-C, D4-210A-D, D4-210A-E, D4-210A-F,  
 D4-210I-A, D4-210I-B  
 D4-225A-B, D4-225A-C, D4-225A-D, D4-225A-E, D4-225A-F, D4-225I-B,  
 D4-225I-C, D4-225I-D, D4-225I-E, D4-225I-F  
 D4-260A-A, D4-260A-B, D4-260A-C, D4-260A-D, D4-260A-E, D4-260A-F,  
 D4-260D-B, D4-260D-C, D4-260D-D, D4-260D-E, D4-260D-F, D4-260I-A,  
 D4-260I-B, D4-260I-C, D4-260I-D, D4-260I-E, D4-260I-F  
 D4-300A-A, D4-300A-C, D4-300A-D, D4-300A-E, D4-300A-F, D4-300D-A,  
 D4-300D-C, D4-300D-D, D4-300D-E, D4-300D-F, D4-300I-A, D4-300I-C,  
 D4-300I-D, D4-300I-E, D4-300I-F

D6-280A-A, D6-280A-B, D6-280A-C, D6-280A-D, D6-280A-E, D6-280I-A,  
 D6-280I-B, D6-280I-C, D6-280I-D, D6-280I-E  
 D6-300A-F, D6-300D-F, D6-300I-F  
 D6-310A-A, D6-310A-B, D6-310A-C, D6-310A-D, D6-310A-E,  
 D6-310D-B, D6-310D-C, D6-310D-D, D6-310D-E, D6-310I-A, D6-310I-B,  
 D6-310I-C, D6-310I-D, D6-310I-E  
 D6-330A-B, D6-330A-C, D6-330A-D, D6-330A-E, D6-330A-F, D6-330D-B,  
 D6-330D-C, D6-330D-D, D6-330D-E, D6-330D-F, D6-330I-B, D6-330I-C,  
 D6-330I-D, D6-330I-E, D6-330I-F  
 D6-350A-A, D6-350A-B  
 D6-370A-B, D6-370A-C, D6-370A-D, D6-370A-E, D6-370A-F, D6-370D-A,  
 D6-370D-B, D6-370D-C, D6-370D-D, D6-370D-E, D6-370D-F, D6-370I-A,  
 D6-370I-B, D6-370I-C, D6-370I-D, D6-370I-E, D6-370I-F  
 D6-400A-E, D6-400A-F  
 D6-435D-A, D6-435D-C, D6-435D-D, D6-435D-E, D6-435D-F, D6-435I-A,  
 D6-435I-C, D6-435I-D, D6-435I-E, D6-435I-F


**Spänning / Voltage:** 12V

**Effekt / Power:** 3,6 kW

**Polaritet / Polarity:** 2-polig / 2-poles

**Rotation:** medurs / clockwise

Art. nr/Part no	Ersätter/Replaces
30488	21423488

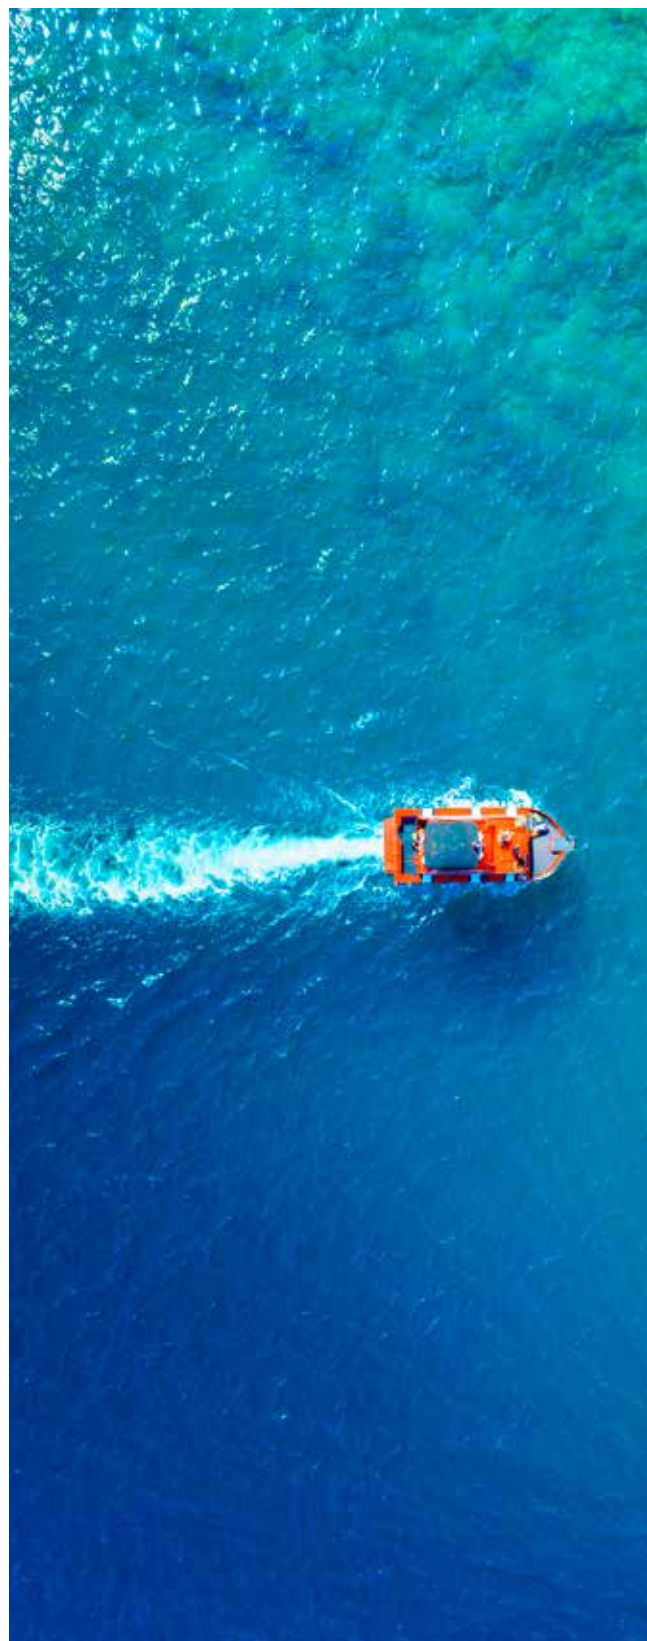

Spare parts from Sweden

## Generatorer Alternators



**B21, B23, B25, V6, V8, D1-20, D1-30, D2-40, 2001, 2002, 2003, MD2010, MD2020, MD2030, MD2040, MD7, MD11, MD17, 21, 31, 32, 41, 42, 43, 44, 300, 63, 71, 72, 73, 74, 75**  
 230A, 230B, 231LB, B230, B230E, B230F, B230FB, B230FX  
 250A, 250B, 251A, 271LB  
 430, 430A, 430B, 431A, 431B, 432A, 434A  
 500A, 500B, 501A, 501B  
 570, 570A, 571A, 572A  
 740B

AQ120B, AQ140A, BB140A  
 AQ125A, AQ125B, AQ145A, AQ145B, BB145A  
 AQ131A, AQ131B, AQ131C, AQ131D  
 AQ151A, AQ151B, AQ151C  
 AQ171A, AQ171C  
 AQ175A, AQ205A, AQ205LB  
 AQ190A, AQ240A

AQ200B, AQ200C, AQ200D, AQ200F  
 AQ225B, AQ225C, AQ225D, AQ225E, AQ225F, BB225A, BB225AV, BB225B, BB225C  
 AQ231A, AQ231B, BB231A  
 AQ255A, AQ255B, AQ260A, AQ260B, BB260AV, BB260B, BB260C  
 BB261A  
 AQ271A, AQ271B, AQ271C, AQ271D  
 AQ290A  
 AQ311A, AQ311B  
 BB740A

D1-20A, D1-20B, D1-20F  
 D1-30A, D1-30B, D1-30F  
 D2-40A, D2-40B, D2-40F  
 D2-55, D2-55B, D2-55C, D2-55D, D2-55E  
 D2-75, D2-75B, D2-75C

2001, 2001AG, 2001D, 2001R  
 2002, 2002AG, 2002B, 2002BG, 2002D  
 2003, 2003B, 2003BSOLAS, 2003AG, 2003SOLAS, 2003D, 2003R, 2003RSOLAS  
 2003T, 2003TB, 2003TBSOLAS, 2003TR

MD2010, MD2010B, MD2010C, MD2010D  
 MD2020, MD2020B, MD2020C, MD2020D  
 MD2030, MD2030B, MD2030C, MD2030D  
 MD2040, MD2040B, MD2040C, MD2040D

MD5A, MD5B, MD5C  
 MD6A, MD6B  
 MD7A, MD7B  
 MD11C, MD11D  
 MD17C, MD17D  
 MD21B, AQD21B

MD22, MD22A, MD22L, MD22P, TMD22A, TMD22B, TMD22P-C, TAMD22P-B

MD30A, AD30A, AQAD30A, TMD30A, TAMD30A  
 MD31A, AD31, AD31B, AD31D, AD31D-A, AD31L-A, AD31P-A, AD31XD, TMD31A, TMD31B, TMD31D, TMD31D, TMD31L-A, TAMD31A, TAMD31B, TAMD31D, TAMD31L-A, TAMD31M, TAMD31M-A, TAMD31P-A, TAMD31S, TAMD31S-A, TMD31L-A  
 KAD32P, KAD32P-A

MD40A, TMD40A, AQD40A, AD40B, TMD40B, TMD40C, TMD40AAQD40B, AQAD40B, TAMD40A, TAMD40B  
 AD41A, AD41B, AD41BJ, AD41D, AD41L-A, AD41P-A, D41B, D41D, D41L-A, TMD41A, TMD41L-A, TMD41B, TAMD41H-A, TAMD41H-B, TAMD41PA, TAMD41A, TAMD41B, TAMD41D, TAMD41H-A, TAMD41H-B, TAMD41P, TAMD41P-A, TAMD41L-A, TAMD41M-A, TMD41L-A

KAD42A, KAD42B, KAD42P-A, TAMD42B, TAMD42WJ-A, KAMD42A, KAMD42B, KAMD42P-A  
 KAD43P, KAD43P-A, KAMD43P, KAMD43P-A, KAMD43P-B  
 KAD44, KAD44P, KAD44P-A, KAD44P-B, KAD44P-C, KAMD44P, KAMD44P-A, KAMD44P-B, KAMD44P-C  
 KAD300-A, KAMD300-A

TAMD60C  
 TAMD61A, TAMD62A  
 TAMD63L-A, TAMD63P-A  
 TAMD70D, AQD70D, TAMD70E  
 TAMD71A, TAMD71B  
 TAMD72A, TAMD72P-A, TAMD72WJ-A  
 TAMD73P-A, TAMD73WJ-A  
 TAMD74A, TAMD74A-A, TAMD74A-B, TAMD74C-A, TAMD74C-B, TAMD74LA  
 TAMD74L-B, TAMD74P-A, TAMD74P-B  
 TAMD75P-A

Art. nr/Part no	Ersätter/Replaces	Info
30770	873770, 3803444, 872019, 872235, 873633	12V / 60A



## Generatorer Alternators



### D1-13, D1-20, D1-30, D2-40, D2-55, D2-75, D4, D6

D1-13, D1-13B, D1-13F  
 D1-20, D1-20B, D1-20F  
 D1-30, D1-30B, D1-30F  
 D2-40, D2-40B, D2-40F  
 D2-55C, D2-55D, D2-55E, D2-55F  
 D2-75, D2-75B, D2-75C, D2-75F  
 D4-180I-B, D4-180I-C, D4-180I-D, D4-180I-E, D4-180I-F  
 D4-210A-A, D4-210A-B, D4-210I-A, D4-210I-B  
 D4-225A-B, D4-225A-C, D4-225A-D, D4-225A-E, D4-225A-F, D4-225I-B,  
 D4-225I-C, D4-225I-D, D4-225I-E, D4-225I-F  
 D4-260A-A, D4-260A-B, D4-260A-C, D4-260A-D, D4-260A-E, D4-260A-F,  
 D4-260D-B, D4-260D-C, D4-260D-D, D4-260D-E, D4-260D-F, D4-260I-A,  
 D4-260I-B, D4-260I-C, D4-260I-D, D4-260I-E, D4-260I-F  
 D4-300A-A, D4-300A-C, D4-300A-D, D4-300A-E, D4-300A-F, D4-300D-A,  
 D4-300D-C, D4-300D-D, D4-300D-E, D4-300D-F, D4-300I-A, D4-300I-C,  
 D4-300I-D, D4-300I-E, D4-300I-F  
 D6-280A-A, D6-280A-B, D6-280A-C, D6-280A-D, D6-280A-E, D6-280I-A,  
 D6-280I-B, D6-280I-C, D6-280I-D, D6-280I-E  
 D6-300A-F, D6-300D-F, D6-300I-F  
 D6-310A-A, D6-310A-B, D6-310A-C, D6-310A-D, D6-310A-E,  
 D6-310D-B, D6-310D-C, D6-310D-D, D6-310D-E, D6-310I-A, D6-310I-B,  
 D6-310I-C, D6-310I-D, D6-310I-E  
 D6-330A-B, D6-330A-C, D6-330A-D, D6-330A-E, D6-330A-F, D6-330D-B,  
 D6-330D-C, D6-330D-D, D6-330D-E, D6-330D-F, D6-330I-B, D6-330I-C,  
 D6-330I-D, D6-330I-E, D6-330I-F  
 D6-350A-A, D6-350A-B  
 D6-370A-B, D6-370A-C, D6-370A-D, D6-370A-E, D6-370A-F, D6-370D-A,  
 D6-370D-B, D6-370D-C, D6-370D-D, D6-370D-E, D6-370D-F, D6-370I-A,  
 D6-370I-B, D6-370I-C, D6-370I-D, D6-370I-E, D6-370I-F  
 D6-400A-E, D6-400A-F  
 D6-435D-A, D6-435D-C, D6-435D-D, D6-435D-E, D6-435D-F, D6-435I-A,  
 D6-435I-C, D6-435I-D, D6-435I-E, D6-435I-F

### D1-13, D1-20, D1-30, D2-40, D2-55, D2-75, D4, D6

Original Mitsubishi generator med temperatursensor / Original Mitsubishi alternator with temperature sensor

D1-13, D1-13B, D1-13F  
 D1-20, D1-20B, D1-20F  
 D1-30, D1-30B, D1-30F  
 D2-40, D2-40B, D2-40F  
 D2-55C, D2-55D, D2-55E, D2-55F  
 D2-75, D2-75B, D2-75C, D2-75F  
 D4-180I-B, D4-180I-C, D4-180I-D, D4-180I-E, D4-180I-F  
 D4-210A-A, D4-210A-B, D4-210I-A, D4-210I-B  
 D4-225A-B, D4-225A-C, D4-225A-D, D4-225A-E, D4-225A-F, D4-225I-B,  
 D4-225I-C, D4-225I-D, D4-225I-E, D4-225I-F  
 D4-260A-A, D4-260A-B, D4-260A-C, D4-260A-D, D4-260A-E, D4-260A-F,  
 D4-260D-B, D4-260D-C, D4-260D-D, D4-260D-E, D4-260D-F, D4-260I-A,  
 D4-260I-B, D4-260I-C, D4-260I-D, D4-260I-E, D4-260I-F  
 D4-300A-A, D4-300A-C, D4-300A-D, D4-300A-E, D4-300A-F, D4-300D-A,  
 D4-300D-C, D4-300D-D, D4-300D-E, D4-300D-F, D4-300I-A, D4-300I-C,  
 D4-300I-D, D4-300I-E, D4-300I-F  
 D6-280A-A, D6-280A-B, D6-280A-C, D6-280A-D, D6-280A-E, D6-280I-A,  
 D6-280I-B, D6-280I-C, D6-280I-D, D6-280I-E  
 D6-300A-F, D6-300D-F, D6-300I-F  
 D6-310A-A, D6-310A-B, D6-310A-C, D6-310A-D, D6-310A-E,  
 D6-310D-B, D6-310D-C, D6-310D-D, D6-310D-E, D6-310I-A, D6-310I-B,  
 D6-310I-C, D6-310I-D, D6-310I-E  
 D6-330A-B, D6-330A-C, D6-330A-D, D6-330A-E, D6-330A-F, D6-330D-B,  
 D6-330D-C, D6-330D-D, D6-330D-E, D6-330D-F, D6-330I-B, D6-330I-C,  
 D6-330I-D, D6-330I-E, D6-330I-F  
 D6-350A-A, D6-350A-B  
 D6-370A-B, D6-370A-C, D6-370A-D, D6-370A-E, D6-370A-F, D6-370D-A,  
 D6-370D-B, D6-370D-C, D6-370D-D, D6-370D-E, D6-370D-F, D6-370I-A,  
 D6-370I-B, D6-370I-C, D6-370I-D, D6-370I-E, D6-370I-F  
 D6-400A-E, D6-400A-F  
 D6-435D-A, D6-435D-C, D6-435D-D, D6-435D-E, D6-435D-F, D6-435I-A,  
 D6-435I-C, D6-435I-D, D6-435I-E, D6-435I-F

Art. nr/Part no	Ersätter/Replaces	Info
30181	24110417, 3840181, 874502	12V / 115A

Art. nr/Part no	Ersätter/Replaces	Info
30417	24110417, 3840181, 874502	12V / 115A



Spare parts from Sweden

## Generatorer Alternators



### D3

D3-1101-A, D3-1101-B, D3-1101-C  
 D3-130A-A, D3-130A-B, D3-130A-C, D3-1301-A, D3-1301-B, D3-1301-C  
 D3-160A-A, D3-160A-B, D3-160A-C, D3-1601-A, D3-1601-B, D3-1601-C  
 D3-190A-B, D3-190A-C, D3-1901-A, D3-1901-B, D3-1901-C

Art. nr/Part no	Ersätter/Replaces	Info
30645	8676498, 3803645	12V / 140A



### D3

D3-1101-D, D3-1101-E, D3-1101-F, D3-1101-G, D3-1101-H  
 D3-140A-D, D3-140A-E, D3-140A-F, D3-140A-G, D3-140A-H, D3-1401-D,  
 D3-1401-E, D3-1401-F, D3-1401-G, D3-1401-H  
 D3-1501-D, D3-1501-E, D3-1501-F, D3-1501-G, D3-1501-H  
 D3-170A-D, D3-170A-E, D3-170A-F, D3-170A-G, D3-170A-H, D3-1701-D,  
 D3-1701-E, D3-1701-F, D3-1701-G, D3-1701-H  
 D3-200A-D, D3-200A-E, D3-200A-F, D3-200A-G, D3-200A-H, D3-2001-D,  
 D3-2001-E, D3-2001-F, D3-2001-G, D3-2001-H  
 D3-220A-E, D3-220A-F, D3-220A-G, D3-220A-H, D3-2201-D, D3-2201-E,  
 D3-2201-F, D3-2201-G, D3-2201-H

Art. nr/Part no	Ersätter/Replaces	Info
30731	31419556, 30659131, 30667118	12V / 180A

## Motorreläer Engine relays



### Startrelä 12V/30A

2003 SOLAS, 2003B SOLAS, 2003TB SOLAS  
 MD22A, MD22A-A, MD22L-A, TMD22A, TMD22-A, MD22L, MD22L-B,  
 MD22P-B, TMD22-B, TMD22P-C, TAMD22P-B  
 KAD43P-A, KAMD43P-A  
 AQ120B, AQ125A, AQ125B, AQ140A, BB140A  
 AQ145A, BB145A, AQ145B  
 AQ131A, AQ131B, AQ131C, AQ131D  
 AQ151A, AQ151B, AQ151C  
 AQ171A, AQ171C  
 230A, 230B, 250A, 250B, 251A  
 430A, 430B, 431A, 431B, 432A, 434A, AQ205A, AQ175A  
 500, 500A, 501A, 500B, 501B, 570A, 571A, 572A, 740B, 740A, BB740A,  
 AQ200D, AQ200F, AQ225D, AQ225E, AQ225F, BB225A, BB225AV, BB225B,  
 BB225C  
 AQ211A, AQ231A, AQ231B  
 AQ260A, AQ260B, BB260A, BB260AV, BB260B, BB260C  
 AQ271A, AQ271B, AQ271C, AQ271D  
 AQ311A, AQ311B, BB231A, BB261A, AQ290A

Art. nr/Part no	Ersätter/Replaces	Info
19177	841177	12V / 30A



### Relä 24V/20A. 21, 31, 41, 63, 70, 73, 74, 100, 102, 120, 121, 122, B20, B30

MD21A, MD21B, AQD21A, AQD21B  
 TMD31A, TMD31B, TMD31D, TAMD31A, TAMD31B, TAMD31D, TMD31L-A,  
 TAMD31L-A, TAMD31M-A, TAMD31P-A, TAMD31S, MD31A, AD31, AD31B,  
 AD31D, AD31D-A, AD31L-A, AD31P-A, AD31XD  
 TMD41A, TMD41B, TAMD41A, TAMD41B, TMD41D, TAMD41D, TAMD41H-A,  
 TAMD41H-B, TAMD41P, TAMD41P-A, D41B, AD41B, AD41BJ, D41D, AD41D,  
 TMD41L-A  
 TAMD63L-A, TAMD63P-A, MD70B, TMD70B, MD70C, TMD70C, AQD70B,  
 AQD70BL, AQD70C, AQD70CL, AQD70D, TAMD70B, TAMD70C, TAMD70D,  
 TAMD70E, THAMD70B, THAMD70C  
 TAMD73P-A, TAMD74A, TAMD74C-A, TAMD74L-A, TAMD74P-A  
 MD100A, MD100B, TMD100A, TMD100C, TAMD102A, TMD102A  
 MD120A, TMD120A, TAMD120A, TMD120B, TAMD120B, TMD121C,  
 TAMD121D, TMD122A, TAMD122A, TAMD122D, TAMD122P-B, TAMD122P-C  
 AQ115A, AQ115B, AQ130A, AQ130B, AQ130C, AQ130D, AQ165A, AQ170A,  
 AQ170B, AQ170C

Art. nr/Part no	Ersätter/Replaces	Info
19611	873611, 837878	24V / 20A



### Fördelarlock Distributor caps

**B18, B20**

AQ60F, AQ90, AQ95, AQ95A, AQ110  
AQ120  
BB30, BB100, MB18  
AQ105A  
AQ115A, AQ115B  
AQ130A, AQ130B, AQ130C, AQ130D  
BB115A, BB115B, BB115C  
MB20A, MB20B, MB20C

Art. nr/Part no	Ersätter/Replaces	Passar Bosch fördelare nr / fits Bosch distributor no
18690	870690, 870422, 239598, 233260, 243632	0231 153 010, 0231 153 012, 0231 110 043

**B30**

AQ165A  
AQ170A, AQ170B, AQ170C  
BB165A  
BB170A, BB170B, BB170C

Ø 73 mm

Art. nr/Part no	Ersätter/Replaces	Passar Bosch fördelare nr / fits Bosch distributor no
18669	241669	0231 116 054, 0231 116 060, 0231 121 008

**B20, B21**

AQ115A, AQ115B  
AQ130A, AQ130B, AQ130C, AQ130D  
BB115A, BB115B, BB115C  
MB20A, MB20B, MB20C  
AQ120B\*, AQ125A\*, AQ140A\*  
BB140A\*

\*Lock med clippsfästning/\*Cap to be fitted with spring clips

Art. nr/Part no	Ersätter/Replaces	Passar Bosch fördelare nr / fits Bosch distributor no
18797	243797	0231 178 011

**B30**

AQ170A, AQ170B, AQ170C, BB170A, BB170B, BB170C

Ø 90 mm

Art. nr/Part no	Ersätter/Replaces	Passar Bosch fördelare nr / fits Bosch distributor no
18658	243658, 243803	0231 311 002



Fördelarlock  
Distributor caps



**B21, B23, B25**  
AQ120B, AQ125A,  
AQ140A, BB140A  
230A, 230B  
AQ125B, AQ145A, AQ145B  
AQ131A, AQ131B, AQ131C, AQ131D  
250A, 250B  
AQ151A, AQ151B, AQ151C

Lock med skruvfastsättning/Cap to be fitted with bolts

Art. nr/Part no	Ersätter/Replaces	Passar Bosch fördelare nr / fits Bosch distributor no
18263	841263	0231 178 017



**3.0**  
3.0GLM-A, 3.0GLM-B, 3.0GLM-C, 3.0GLMMDA, 3.0GLP-A, 3.0GLP-B,  
3.0GLP-C, 3.0GLP-D, 3.0GLP-E, 3.0GLP-J, 3.0GLP-N  
3.0GSM-A, 3.0GSM-B, 3.0GSM-C, 3.0GSMBYMCE, 3.0GSMLKD,  
3.0GSMNCS, 3.0GSMWTR, 3.0GSP-A, 3.0GSP-B, 3.0GSP-C,  
3.0GSPBYMCE, 3.0GSPEFS, 3.0GSPLKD, 3.0GSPMDA, 3.0GSPMCS,  
3.0GSPWTR

Art. nr/Part no	Ersätter/Replaces
18260	3854260



**4.3, V6, V8**  
4.3GIJBYA, 4.3GIJWTR, 4.3GIPBYCCE, 4.3GiPEFS, 4.3GIPLKECE,  
4.3GIPNCACE, 4.3GIPNCBCE, 4.3GIPNCMCE, 4.3GIPNCSCE,  
4.3GIPWTRCE  
4.3GL-A, 4.3GL-B, 4.3GL-C, 4.3GL-D, 4.3GL-E, 4.3GL-EF, 4.3GL-G, 4.3GL-  
GF, 4.3GL-J, 4.3GL-JF, 4.3GL-P  
4.3GLMMDA, 4.3GLPBYC, 4.3GLPEFS, 4.3GLPLKD, 4.3GLPLKE,  
4.3GLPMDA, 4.3GLPNCA, 4.3GLPNCB, 4.3GLPNCS, 4.3GLPWTR,  
4.3GSJBYA, 4.3GSJLKD, 4.3GSJNCC, 4.3GSJNCS, 4.3GSJWTR, 4.3GSPBYC,  
4.3GSPLKD, 4.3GSPLKE, 4.3GSPMDA, 4.3GSPNCA, 4.3GSPNCB,  
4.3GSPNCM, 4.3GSPNCS, 4.3GSPWTR, 4.3GXi-A  
430, 430A, 430B, 431A, 431B, 432A, 434A  
500B, 501B, 570, 570A, 572A, 740B.

Art. nr/Part no	Ersätter/Replaces
18331	3854331



**V6, V8**  
430, 430A, 430B  
431A, 431B  
432A, 434A  
AQ175A, AQ205A, AQ205LB  
500B, 501B  
570, 570A, 572A  
740B

Art. nr/Part no	Ersätter/Replaces
18926	841926



## Fördelarlock Distributor caps

**V8**

AQ200B, AQ200C  
AQ225B, AQ225C  
AQ255A, AQ255B

Platt lock/Flat cap

Art. nr/Part no	Ersätter/Replaces
18244	841244, 835310

**4.3, 5.0, 5.7, 5.8, 7.4, 8.2, V8**

AQ200B, AQ200C, AQ200D, AQ200F, AQ211A  
AQ225B, AQ225C, AQ225D, AQ225E, AQ225F, BB225A, BB225AV, BB225B,  
BB225C, AQ231A, AQ231B, BB231A  
AQ255A, AQ255B, AQ260A, AQ260B, BB260AV, BB260B, BB260C,  
BB261A, AQ271A, AQ271B, AQ271C, AQ271D, AQ311A, AQ311B  
430, 430A, 430B, 431A, 431B, 432A, 434A  
500A, 500B, 501A, 501B, 570, 570A, 571A, 572A, 740B, BB740A  
5.0FLPHUE, 5.0FLPHUR, 5.0FLPMDA, 5.0FLPNCB, 5.0FLPNCS,  
5.0GLPBYC, 5.0GLPEFS, 5.0GLPWTR, 5.0GL-A  
5.7GL-A, 5.7GLPLKA, 5.7GLPLKD, 5.7GLPLKE, 5.7GLPLKR, 5.7GLPMDA,  
5.7GLPNCS, 5.7GSPBYC, 5.7GSPEFS, 5.7GSPLKD, 5.7GSPLKE,  
5.7GSPWTR  
5.8FLIHUB, 5.8FLIHUE, 5.8FLINCC, 5.8FLINCS, 5.8FLPHUE, 5.8FLPHUR,  
5.8FLPMDA, 5.8FLPNCA, 5.8FLPNCB, 5.8FLPNCM, 5.8FLPNCS  
7.4GLIMDM, 7.4GLINCC, 7.4GLINCS, 7.4GLPLKD, 7.4GLPLKE,  
7.4GLPMDA, 7.4GLPMDM, 7.4GLPNCA, 7.4GLPNCB, 7.4GLPNCM,  
7.4GLPNCS  
8.2GLIMDM, 8.2GLPMDA, 8.2GLPMDM

Lock med skruvfastsättning/Cap to be fitted with bolts

Art. nr/Part no	Ersätter/Replaces
18070	841070

**V8**

AQ190A  
AQ200C, AQ200D, AQ200F  
AQ225C  
AQ240A  
AQ255A, AQ255B  
AQ260A, BB260AV, BB260B, BB260C  
AQ290A

Lock med clippfastsättning/Cap to be fitted with spring clips

Art. nr/Part no	Ersätter/Replaces
18702	835702

**5.0, 5.7, 7.4, 8.2, V8**

5.0GiPBYCCE, 5.0GiPEFS, 5.0GiPWTR, 5.0GL-B, 5.0GL-C, 5.0GL-D,  
5.0GL-E, 5.0GL-F, 5.0GL-FF, 5.0GL-H, 5.0GL-HF, 5.0GL-J, 5.0GL-JF,  
5.0GXi-A  
5.7Gi-A, 5.7Gi-A, 5.7GIIMDA, 5.7GIINCCCE, 5.7GiPHUS, 5.7GIPLKDCE,  
5.7GIPLKECE, 5.7GIPMDA, 5.7GIPMDACE, 5.7GIPNCACE, 5.7GIPNCBCE,  
5.7GIPNCMCE, 5.7GIPNCSCCE, 5.7GL-B, 5.7GL-C, 5.7GL-D, 5.7GL-E,  
5.7GLIPLKDCE, 5.7GSICPLKD, 5.7GSi-A, 5.7GSIPBYCCE, 5.7GSiPEFS,  
5.7GSiPLKE, 5.7GSIPWTR, 5.7GSPWTR, 5.7GXi-A, 5.7GXi-B, 5.7GXi-A,  
5.7GXi-B  
7.4GIINCCCE, 7.4GIINCSCE, 7.4GIPBYCCE, 7.4GiPEFS, 7.4GIPLK-  
DCE, 7.4GIPLKECE, 7.4GIPNCACE, 7.4GIPNCBCE, 7.4GIPNCMCE,  
7.4GIPNCSCCE, 7.4GIPWTR, 7.4GSiINCC, 7.4GSiINCS, 7.4GSIPBYCCE,  
7.4GSiPEFS, 7.4GSIPWTR, 7.4GSIXNCB, 7.4GSIXNCM  
8.2GSIPBYCCE, 8.2GSiPEFS, 8.2GSIPWTR, 8.2GSIXNCB  
DPX385XBYDCE, DPX385XEFS, DPX385XLKE, DPX415XBYDCE,  
DPX415XEFS, DPX415XLKE

Art. nr/Part no	Ersätter/Replaces
18454	3854548



## Tändkabelsatser Ignition cable kits



### B18, B20

AQ60F, AQ90, AQ95, AQ95A, AQ110  
AQ120  
BB30, BB100  
MB18  
AQ105A  
AQ115A, AQ115B  
AQ130A, AQ130B, AQ130C, AQ130D  
BB115A, BB115B, BB115C  
MB20A, MB20B, MB20C

Art. nr/Part no	Ersätter/Replaces
18363	875363



### B21, B23, B25

AQ120B  
AQ125A, AQ125B  
AQ140A, BB140A  
230A, 230B  
AQ125B  
AQ131A, AQ131B, AQ131C, AQ131D  
AQ145A, AQ145B  
AQ151A, AQ151B, AQ151C  
250A, 250B

Art. nr/Part no	Ersätter/Replaces
18571	875571



### B30

AQ165A  
AQ170A, AQ170B, AQ170C  
BB165A  
BB170A, BB170B, BB170C

Art. nr/Part no	Ersätter/Replaces
18404	875404



### 3.0

3.0GLM-A, 3.0GLM-B, 3.0GLM-C, 3.0GLMMDA, 3.0GLP-A, 3.0GLP-C,  
3.0GLP-D, 3.0GLP-E, 3.0GLP-J, 3.0GLP-N  
3.0GSM-A, 3.0GSM-B, 3.0GSM-C, 3.0GSMBYMCE, 3.0GSMLKD,  
3.0GSMNCS, 3.0GSMWTR  
3.0GSP-A, 3.0GSP-B, 3.0GSP-C, 3.0GSPBYMCE, 3.0GSPEFS, 3.0GSPDKD,  
3.0GSPMDA, 3.0GSPNCS, 3.0GSPWTR  
3.0GXi-J, 3.0GXi-C

Art. nr/Part no	Ersätter/Replaces
18324	3888324



## Tändkabelsatser Ignition cable kits



**4.3**  
432A, 434A  
4.3GIJBYA, 4.3GIJWTR, 4.3GIPBYCCE, 4.3GIPLKDCE, 4.3GIPLKECE,  
4.3GIPNCACE, 4.3GIPNCBCE, 4.3GIPNCMCE, 4.3GIPNCSCCE,  
4.3GIPVTRCE  
4.3GL-A, 4.3GL-B, 4.3GL-C, 4.3GL-D, 4.3GL-E, 4.3GL-EF, 4.3GL-G, 4.3GL-  
GF, 4.3GL-J, 4.3GL-JF, 4.3GL-P, 4.3GLMMDA, 4.3GLPBYC, 4.3GLPEFS,  
4.3GLPLKD, 4.3GLPLKE, 4.3GLPMDA, 4.3GLPNCA, 4.3GLPNCB,  
4.3GLPNCS, 4.3GLPWTR  
4.3GSJBYA, 4.3GSJLKD, 4.3GSJNCC, 4.3GSJNCS, 4.3GSJWTR, 4.3GSPBYC,  
4.3GSPDKD, 4.3GSPDKLKE, 4.3GSPMDA, 4.3GSPNCA, 4.3GSPNCB,  
4.3GSPNCM, 4.3GSPNCS, 4.3GSPWTR  
4.3GXl-A


Art. nr/Part no	Ersätter/Replaces
18325	3888325



**V6, V8**  
AQ175A, AQ205A  
430, 430A, 430B, 431A, 431B, 434A  
AQ190A, AQ240A  
AQ200B, AQ200C, AQ200D, AQ200F, AQ211A  
AQ225B, AQ225C, AQ225D, AQ225E, AQ225F, BB225A, BB225AV,  
BB225B, BB225C, AQ231A, AQ231B, BB231A  
AQ255A, AQ255B, AQ260A, AQ260B, BB260AV, BB260B, BB260C,  
BB261A, AQ271A, AQ271B, AQ271C, AQ271D  
AQ290A, AQ311A, AQ311B  
500A, 500B, 501A, 501B, 570, 570A, 571A, 572A, 740B, BB740A  
7.4GLIMDM, 7.4GLINCC, 7.4GLINCS, 7.4GLPLKD, 7.4GLPLKE,  
7.4GLPMDA, 7.4GLPMDM, 7.4GLPNCA, 7.4GLPNCB, 7.4GLPNCM,  
7.4GLPNCS  
8.2GLIMDM, 8.2GLPMDA, 8.2GLPMDM

Värmetåliga silikonkablar. Satsen passar både V6 och V8 / Heat resistant  
silicone cables. The kit fits both V6 and V8.

Art. nr/Part no	Ersätter/Replaces
18532	3857166, 3851819, 876532

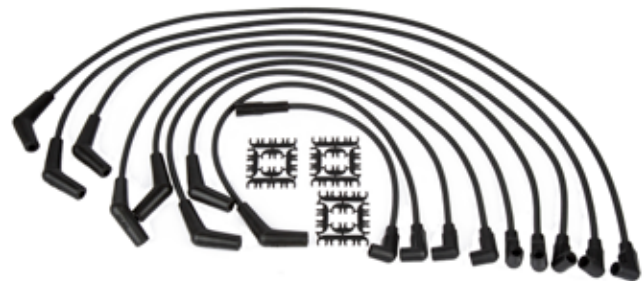

**V8**  
5.0GL-B, 5.0GL-C, 5.0GL-D, 5.0GL-E, 5.0GL-F, 5.0GL-FF, 5.0GL-H, 5.0GL-  
HF, 5.0GL-J, 5.0GL-JF, 5.0GXl-A, 5.0GIPBYCCE, 5.0GiPEFS, 5.0GiPWTR

5.7GL-B, 5.7GL-C, 5.7GL-D, 5.7GL-E, 5.7GLIPLKDCE, 5.7Gi-A, 5.7GiI-A,  
5.7GIIMDA, 5.7GIINCCCE, 5.7GiPHUS, 5.7GIPLKDCE, 5.7GIPLKECE,  
5.7GIPMDA, 5.7GIPMDACE, 5.7GIPNCACE, 5.7GIPNCSCCE, 5.7GSIC-  
PLKD, 5.7GSil-A, 5.7GSIPBYCCE, 5.7GSiPEFS, 5.7GSiPLKE, 5.7GSIPWTR,  
5.7GSPWTR, 5.7GXl-A, 5.7GXl-B, 5.7GXil-A, 5.7GXil-B

7.4GIINCCCE, 7.4GIINCSCE, 7.4GIPBYCCE, 7.4GiPEFS, 7.4GIPNCACE,  
7.4GIPNCBCE, 7.4GIPNCMCE, 7.4GIPNCSCCE, 7.4GIPWTR, 7.4GSIINCC,  
7.4GSIINCS, 7.4GSIXNCB, 7.4GSIXNCM

8.2GSIXNCB

Art. nr/Part no	Ersätter/Replaces
18326	3888326



## Tändstift NGK Spark plugs NGK



Art. nr/Part no	Info
52000	NGK AB6
52001	NGK AR6FS
52003	NGK B6HS
52004	NGK B6S
52005	NGK B7HS
52006	NGK B7HS-10
52007	NGK B8HS
52008	NGK B8HS-10
52009	NGK B9ES
52010	NGK B9HS-10
52011	NGK BKR6E
52012	NGK BKR6EKU
52013	NGK BKR7EKU
52014	NGK BMR4A
52015	NGK BM6A
52016	NGK BP5HS
52018	NGK BP6HS
52020	NGK BPR7ES
52021	NGK BP7HS
52022	NGK BP8ES
52023	NGK BP8HN-10
52024	NGK BP8HS-10
52025	NGK BP8HS15
52026	NGK BPR5FS
52027	NGK BPR6EFS
52028	NGK BPR6ES
52029	NGK BPR6FS
52030	NGK BPR6HS
52031	NGK BPR6HS-10
52032	NGK BPR7HS-10
52033	NGK BPZ8HN-10

Art. nr/Part no	Info
52034	NGK BPZ8HS-10
52035	NGK BR7HS-10
52036	NGK BR10ES
52037	NGK BR5HS
52038	NGK BR6FS
52039	NGK BR6HS
52040	NGK BR6HS-10
52041	NGK BR7ES
52042	NGK BR7HS
52043	NGK BR8ES
52044	NGK BR8HS
52045	NGK BR8HS-10
52046	NGK BR9ES
52047	NGK BR9EYA
52048	NGK BR9HS-10
52049	NGK BU8H
52053	NGK BZ7HS-10
52054	NGK CR5EH-9
52055	NGK CR5HSB
52056	NGK CR6HS
52057	NGK CR6HSA
52058	NGK CR7E
52060	NGK D6HS
52061	NGK D8EA
52062	NGK DCPR6E
52063	NGK DCPR7E
52064	NGK DPR5EA-9
52065	NGK DPR6EA9
52066	NGK DPR6EB-9
52067	NGK DR5HS
52068	NGK DR6HS
52069	NGK DR7EA
52070	NGK IZFR5G Iridium
52071	NGK IZFR5J Iridium
52072	NGK IZFR6K-11 Iridium
52073	NGK IZFR7M Iridium
52074	NGK LFR5A-11
52075	NGK LFR6A-11
52076	NGK LKR7E
52077	NGK LMAR6C-9
52078	NGK PZFR6H
52079	NGK TR4
52080	NGK TR5
52081	NGK TR55
52082	NGK TR55IX Iridium
52083	NGK UR4
52084	NGK UR5
52085	NGK UR6



Spare parts from Sweden

### Tändstift NGK Spark plugs NGK



Art. nr/Part no	Info
52086	NGK XR5
52087	NGK YR5
52088	NGK ZFR6F-11
52089	NGK ZFR7F
52090	NGK BR8HCS-1
52091	NGK BP7HS-10
52092	NGK LFR4A-E
52093	NGK CR6E
52094	NGK BKR5EK
52095	NGK BPR7HS
52096	NGK CR6HSB
52097	NGK GR5
52098	NGK ILFR6GE Iridium
52099	NGK BP6HS-10
52100	NGK ITR4A-15 Iridium
52101	NGK CR9EB
52102	NGK ZFR6K-11
52103	NGK ZFR6K-9E
52104	NGK IZFR6K-11E Iridium
52105	NGK IZFR6F11 Iridium
52106	NGK ZFR5F
52107	NGK LKR6E
52108	NGK DCPR8E
52109	NGK KR9E-G
52110	NGK CPR6EA-9
52111	NGK ILTR5E-11
52112	NGK IZTR5B-11

### Tändstift Champion Spark plugs Champion



Art. nr/Part no	Info	Ersätter/Replaces
53001	Champion QC10WEP	
53002	Champion QC8WEP	
53003	Champion QC12PEP	
53004	Champion QL78YC	
53005	Champion XC12PEPB	
53006	Champion QL77JC4	
53007	Champion L77JC4	
53008	Champion QC12PEPB	
53009	Champion RA8HC	
53010	Champion QL86C	
53011	Champion QL82C	
53012	Champion RV15YC4	3851859, 3851861, 3851868
53013	Champion RS12YC	3851857, 3856759



## Rotorer Rotors



### B18, B20, B30

AQ60F, AQ90, AQ95, AQ95A, AQ110, MB18  
AQ120  
BB30, BB100  
AQ105A, AQ115A, AQ115B  
AQ130A, AQ130B, AQ130C, AQ130D  
BB115A, BB115B, BB115C  
MB20A, MB20B, MB20C  
AQ165A, AQ170A, AQ170B, AQ170C, BB165A, BB170A, BB170B,  
BB170C

Art. nr/Part no	Ersätter/Replaces	Passar Bosch fördelare nr / fits Bosch distributor no
18258	238258, 233678, 870619, 76977	0231 110 043



### B18, B20, B21, B23, B25, B30, MB10

MB10A  
AQ60F, AQ90, AQ95, AQ95A, AQ110  
AQ120  
BB30, BB100, MB18  
AQ105A  
AQ115A, AQ115B, BB115A, BB115B, BB115C  
AQ130A, AQ130B, AQ130C, AQ130D  
MB20A, MB20B, MB20C  
AQ120B, AQ125A, AQ125B  
AQ140A, BB140A  
230A, 230B  
AQ125B  
AQ131A, AQ131B, AQ131C, AQ131D  
AQ145A, AQ145B, BB145A  
250A, 250B  
AQ151A, AQ151B, AQ151C  
AQ165A\*, BB165A\*, AQ170A\*, AQ170B\*, AQ170C\*, BB170A\*, BB170B\*,  
BB170C\*

\*Tidigare utförande/Earlier version

Art. nr/Part no	Ersätter/Replaces	Passar Bosch fördelare nr / fits Bosch distributor no
18903	243903, 240305, 243796	0231 178 005, 0231 116 054, 0231 116 060, 0231 311 002



### B20, B30

AQ115A, AQ115B, BB115A, BB115B, BB115C  
AQ130A, AQ130B, AQ130C, AQ130D  
AQ165A, BB165A  
AQ170A, AQ170B, AQ170C, BB170A, BB170B, BB170C

Senare utförande/Later version

Art. nr/Part no	Ersätter/Replaces	Passar Bosch fördelare nr / fits Bosch distributor no
18657	243657	0231 311 002



### 3.0

3.0GLM-A, 3.0GLM-B, 3.0GLM-C  
3.0GLMMDA  
3.0GLP-A, 3.0GLP-B, 3.0GLP-C, 3.0GLP-D, 3.0GLP-E, 3.0GLP-J, 3.0GLP-N  
3.0GSM-A, 3.0GSM-B, 3.0GSM-C  
3.0GSMBYMCE, 3.0GSMLKD, 3.0GSMNCS, 3.0GSMWTR  
3.0GSP-A, 3.0GSP-B, 3.0GSP-C  
3.0GSMBYMCE, 3.0GSPEFS, 3.0GSPLKD, 3.0GSPMDA, 3.0GSPNCS,  
3.0GSPWTR  
3.0GX-i-J, 3.0GX-i-C-J

Art. nr/Part no	Ersätter/Replaces
18426	3854261



### V6, V8

430, 430A, 430B, 431A, 431B, 432A, 434A  
4.3GIJBYA, 4.3GIJWTR, 4.3GIPBYCCE, 4.3GiPEFS, 4.3GIPLKDC, 4.3GIPLKECE,  
4.3GIPNCACE, 4.3GIPNCBCE, 4.3GIPNCMCE,  
4.3GIPNCSC, 4.3GIPWTRCE  
4.3GL-A, 4.3GL-B, 4.3GL-C, 4.3GL-D, 4.3GL-E, 4.3GL-EF, 4.3GL-G, 4.3GL-  
GF, 4.3GL-J, 4.3GL-JF, 4.3GL-P  
4.3GLMMDA, 4.3GLPBYC, 4.3GLPEFS, 4.3GLPLKD, 4.3GLPLKE,  
4.3GLPMDA, 4.3GLPNCA, 4.3GLPNCB, 4.3GLPNCS, 4.3GLPWTR  
4.3GSJBYA, 4.3GSJLKD, 4.3GSJNCC, 4.3GSJNCS, 4.3GSJWTR, 4.3GSPBYC,  
4.3GSPLKD, 4.3GSPLKE, 4.3GSPMDA, 4.3GSPNCA, 4.3GSPNCB,  
4.3GSPNCM, 4.3GSPNCS, 4.3GSPWTR  
4.3GX-i-A  
500B, 501B, 570, 570A, 572A, 740B

Art. nr/Part no	Ersätter/Replaces
18431	3854311, 857593



## Rotorer Rotors



**V8**  
AQ200B  
AQ225B

Art. nr/Part no	Ersätter/Replaces
18243	841243, 835158, 835305



**5.0, 5.7, 5.8, 7.4, 8.2, V6, V8**  
430A, 430B, 431A, 431B, 432A  
AQ175A, AQ205A, AQ205LB  
500A, 500B, 501A, 501B, 570A, 571A, 572A  
740A, 740B, BB740A  
AQ200B, AQ200C, AQ200D, AQ200F  
AQ211A  
AQ225B, AQ225C, AQ225D, AQ225E, AQ225F  
BB225A, BB225AV, BB225B, BB225C  
AQ231A, AQ231B, BB231A, 231LB  
AQ255A, AQ255B, AQ260A, AQ260B, BB261A, BB260A, BB260AV,  
BB260B, BB260C  
AQ271A, AQ271B, AQ271C, AQ271D, 271LB  
AQ290A, AQ311A, AQ311B  
5.0GL-A, 5.0FLPHUE, 5.0FLPHUR, 5.0FLPMDA, 5.0FLPNCB, 5.0FLPNCS,  
5.0GLPBYC, 5.0GLPEFS, 5.0GLPWTR  
5.7GL-A, 5.7GLPLKA, 5.7GLPLKD, 5.7GLPLKE, 5.7GLPLKR, 5.7GLPMDA,  
5.7GLPNCS, 5.7GSPBYC, 5.7GSPEFS, 5.7GSPLKD, 5.7GSPKE,  
5.7GSPWTR  
5.8FLIHUB, 5.8FLIHUE, 5.8FLINCC, 5.8FLINCS, 5.8FLPHUE, 5.8FLPHUR,  
5.8FLPMDA, 5.8FLPNCA, 5.8FLPNCB, 5.8FLPNCM, 5.8FLPNCS  
7.4GLIMDM, 7.4GLINCC, 7.4GLINCS, 7.4GLPLKD, 7.4GLPLKE,  
7.4GLPMDA, 7.4GLPMDM, 7.4GLPNCA, 7.4GLPNCB, 7.4GLPNCM,  
7.4GLPNCS  
8.2GLIMDM, 8.2GLPMDA, 8.2GLPMDM

Art. nr/Part no	Ersätter/Replaces
18845	3853801, 855845, 841907



**V8**  
AQ190A (Ford)  
AQ200C, AQ200D, AQ200F  
AQ225C  
AQ240A (Ford)  
AQ255A, AQ255B  
AQ260A, AQ260B  
BB260AV, BB260B, BB260C

Art. nr/Part no	Ersätter/Replaces
18975	834975



**V8**  
5.0GIPBYCCE, 5.0GIPEFS, 5.0GIPWTR  
5.0GL-B, 5.0GL-C, 5.0GL-D, 5.0GL-E, 5.0GL-F, 5.0GL-FF, 5.0GL-H, 5.0GL-  
HF, 5.0GL-J, 5.0GL-JF, 5.0GX1-A

5.7GI-A, 5.7GI-A, 5.7GIIMDA, 5.7GIINCCCE, 5.7GIPHUS, 5.7GIPLK-  
DCE, 5.7GIPLKECE, 5.7GIPMDA, 5.7GIPMDACE, 5.7GIPNCACE,  
5.7GIPNCBCE, 5.7GIPNCMCE, 5.7GIPNCSCCE, 5.7GL-B, 5.7GL-C, 5.7GL-  
D, 5.7GL-E, 5.7GLIPLKDCE, 5.7GSICPLKD, 5.7GSiL-A, 5.7GSIPBYCCE,  
5.7GSIPPEFS, 5.7GSIPWTR, 5.7GSPWTR, 5.7GX1-A, 5.7GX1-B,  
5.7GX1L-A, 5.7GX1L-B

7.4GIINCCCE, 7.4GIINCSCE, 7.4GIPBYCCE, 7.4GIPEFS, 7.4GIPLK-  
DCE, 7.4GIPLKECE, 7.4GIPNCACE, 7.4GIPNCBCE, 7.4GIPNCMCE,  
7.4GIPNCSCCE, 7.4GIPWTR, 7.4GSIINCC, 7.4GSIINCS, 7.4GSIPBYCCE,  
7.4GSIPPEFS, 7.4GSIPWTR, 7.4GSIXNCB, 7.4GSIXNCM

8.2GSIPBYCCE, 8.2GSIPPEFS, 8.2GSIPWTR, 8.2GSIXNCB  
DPX385XBYDCE, DPX385XEFS, DPX385XLKE  
DPX415XBYDCE, DPX415XEFS, DPX415XLKE

Art. nr/Part no	Ersätter/Replaces
18549	3854549



## Brytarspetsar Breaker points



### B18, B20

AQ60F, AQ90, AQ95, AQ95A, AQ110  
AQ120  
BB30, BB100  
MB18  
AQ105A  
AQ115A, AQ115B  
AQ130A, AQ130B, AQ130C, AQ130D  
BB115A, BB115B, BB115C  
MB20A, MB20B, MB20C

Art. nr/Part no	Ersätter/Replaces	Passar Bosch fördelare nr / fits Bosch distributor no
18149	240149, 870421, 72384, 28250, 239596	0231 110 043, 0231 178 005



### B18, B20, B21, MB10

MB10A  
AQ60F, AQ90, AQ95, AQ95A, AQ110  
AQ120  
BB30, BB100, MB18  
AQ105A, AQ115A, AQ115B, BB115A, BB115B, BB115C  
AQ130A, AQ130B, AQ130C, AQ130D  
MB20A, MB20B, MB20C  
AQ120B, AQ125A, AQ140A  
BB140A  
230A, 230B  
AQ125B  
AQ131A, AQ131B, AQ131C, AQ131D  
AQ145A, AQ145B, BB145A  
250A, 250B  
AQ151A, AQ151B, AQ151C  
AQ165A, BB165A  
AQ170A, AQ170B, AQ170C, BB170A, BB170B, BB170C

Art. nr/Part no	Ersätter/Replaces	Passar Bosch fördelare nr / fits Bosch distributor no
18799	243799	0231 109 017 0231 178 011, 0231 178 005



### B18, B20

AQ60F, AQ90, AQ95, AQ95A, AQ110  
AQ120  
BB30, BB100  
MB18  
AQ105A  
AQ115A, AQ115B  
AQ130A, AQ130B, AQ130C, AQ130D  
BB115A, BB115B, BB115C  
MB20A, MB20B, MB20C

Art. nr/Part no	Ersätter/Replaces	Passar Bosch fördelare nr / fits Bosch distributor no
18169	1306169, 241664	0231 121 008, 0231 153 012



### B30

AQ165A  
AQ170A, AQ170B, AQ170C  
BB165A  
BB170A, BB170B, BB170C

Senare utförande/Late version

Art. nr/Part no	Ersätter/Replaces	Passar Bosch fördelare nr / fits Bosch distributor no
18801	243801	0231 311 002



### Brytarspetsar Breaker points

**V8**

AQ200B, AQ200C  
AQ210A  
AQ225A, AQ225B, AQ225C  
AQ255A, AQ255B

För fördelare med platt lock (18244) / For distributor with flat cap (18244)

Art. nr/Part no	Ersätter/Replaces
18304	835304

**V6, V8**

AQ175A  
AQ190A  
AQ200B, AQ200C, AQ200D, AQ200F  
AQ211A  
AQ225B, AQ225C, AQ225D, AQ225E, AQ225F, BB225A, BB225AV, BB225B, BB225C  
AQ231A, AQ231B, BB231A, 231LB  
AQ240A  
AQ255A, AQ255B  
AQ260A, AQ260B, BB260AV, BB260B, BB260C, BB261A  
AQ280A, AQ290A

För fördelare med originallock/For distributor with ordinary cap

Art. nr/Part no	Ersätter/Replaces
18705	835705, 855846, 841287

### Kondensatorer Capacitors

**B18, B20, B30**

AQ60F, AQ90, AQ95, AQ95A, AQ110  
AQ120  
BB30, BB100, MB18  
AQ105A, AQ115A, AQ115B, BB115A, BB115B, BB115C  
AQ130A, AQ130B, AQ130C, AQ130D  
MB20A, MB20B, MB20C  
AQ165A, AQ170A, AQ170B, AQ170C, BB165A, BB170A, BB170B, BB170C

Art. nr/Part no	Ersätter/Replaces
18842	233842, 233852

**B21, B23, B25**

AQ120B, AQ125A, AQ125B  
AQ140A, BB140A  
230A, 230B  
AQ125B  
AQ131A, AQ131B, AQ131C, AQ131D  
AQ145A, AQ145B, BB145A  
BB145A  
250A, 250B  
AQ151A, AQ151B, AQ151C

Rund genomföring/Round hole

Art. nr/Part no	Ersätter/Replaces
18262	841262, 834560

**B21, B23**

AQ120B, AQ125A, AQ140A, BB140A

Fyrkantig genomföring - lock med clippsfastsättning / Square hole - cap to be fitted with spring clips

Art. nr/Part no	Ersätter/Replaces	Passar Bosch fördelare nr / fits Bosch distributor no
18560	841262, 834560	0231 178 017



## Kondensatorer Capacitors



### V6, V8

430, 430A, 430B  
431A, 431B, 432A, 434A  
500A, 500B, 501A, 501B  
570, 570A, 572A, 740B  
AQ175A  
AQ190A  
AQ200B, AQ200C, AQ200D, AQ200F  
AQ211A  
AQ225B, AQ225C, AQ225D, AQ225E, AQ225F, BB225A, BB225AV, BB225B, BB225C  
AQ231A, AQ231B, 231LB, BB231A  
AQ240A  
AQ255A, AQ255B  
AQ260A, AQ260B, BB260AV, BB260B, BB260C, BB261A  
AQ290A

Art. nr/Part no	Ersätter/Replaces
18704	835704



### V8

AQ200B, AQ200C  
AQ225B, AQ225C  
AQ255A, AQ255B

Art. nr/Part no	Ersätter/Replaces
18308	835308

## Tändspolar Ignition coils



### B18, B20, B23, B25, MB10A

MB10A  
AQ60F, AQ90, AQ95, AQ95A, AQ110  
AQ120  
BB30, BB100  
MB18  
AQ105A, AQ115A, AQ115B  
AQ130A, AQ130B, AQ130C, AQ130D  
BB115A, BB115B, BB115C  
MB20A, MB20B, MB20C  
AQ120B, AQ125A, AQ140A, BB140A  
230A, 230B  
AQ125B, AQ145A, AQ145B, BB145B  
AQ131A, AQ131B, AQ131C, AQ131D  
250A, 250B  
AQ151A, AQ151B, AQ151C

Art. nr/Part no	Ersätter/Replaces
18254	35254, 834462



### 5.0, 5.7, 5.8, 7.4, 8.2, V8

5.0FLPHUE, 5.0FLPHUR, 5.0FLPMDA, 5.0FLPNCB, 5.0FLPNCS  
5.7GL-A, 5.7GLPLKA, 5.7GLPLKD, 5.7GLPLKE, 5.7GLPLKR, 5.7GLPMDA,  
5.7GLPNCS, 5.7GSPBYC, 5.7GSPEFS, 5.7GSPLKD, 5.7GSPLKE,  
5.7GSPWTR  
5.8FLIHUB, 5.8FLIHUE, 5.8FLINCC, 5.8FLINCS, 5.8FLPHUE, 5.8FLPHUR,  
5.8FLPMDA, 5.8FLPNCA, 5.8FLPNCB, 5.8FLPNCM, 5.8FLPNCS  
7.4GLIMDM, 7.4GLINCC, 7.4GLINCS, 7.4GLPLKD, 7.4GLPLKE,  
7.4GLPMDA, 7.4GLPMDM, 7.4GLPNCA, 7.4GLPNCM, 7.4GLPNCS  
8.2GLIMDM, 8.2GLPMDA, 8.2GLPMDM

Art. nr/Part no	Ersätter/Replaces
18217	3852217, 3853548



## Tändspolar Ignition coils



### V6, V8

AQ175A  
AQ200C, AQ200D, AQ200F  
AQ211A  
AQ225C, AQ225D, AQ225E, AQ225F  
BB225A, BB225AV, BB225B, BB225C  
AQ231A, AQ231B, BB231A  
AQ255A, AQ255B  
AQ260A, AQ260B, BB260AV, BB260B, BB260C, BB261A

Art. nr/Part no	Ersätter/Replaces
18998	835998



### 5.0, 5.8, V8

5.0FIPHUECE, 5.0FIPHURCE  
5.0FiPMDA, 5.0FiPMDM, 5.0FIPNCBCE, 5.0FIPNCSC

5.8FIIHUECE, 5.8FIPHUECE, 5.8FIPHURCE, 5.8FiPMDA, 5.8FiPMDM,  
5.8FIPNCACE, 5.8FIPNCBCE, 5.8FIPNCMCE, 5.8FIPNCSC, 5.8FSIINCC,  
5.8FSIINCS, 5.8FSIPHUBCE, 5.8FSIPHURCE, 5.8FSIPNCACE, 5.8FSIPNCD,  
5.8FSIPNCS

Art. nr/Part no	Ersätter/Replaces
18161	3854161

## Tändmoduler Ignition modules



### 3.0, 5.0, 5.7, 7.4, 8.2, V6, V8

3.0GLM-A, 3.0GLM-B, 3.0GLM-C 3.0GLMMDA, 3.0GLP-A, 3.0GLP-B, 3.0GLP-C, 3.0GLP-D, 3.0GLP-E, 3.0GLP-J, 3.0GLP-N, 3.0GSM-A, 3.0GSM-B, 3.0GSM-C, 3.0GSMBYMCE, 3.0GSMLKD, 3.0GSMNCS, 3.0GSMWTR, 3.0GSP-A, 3.0GSP-B, 3.0GSP-C, 3.0GSPBYMCE, 3.0GSPEFS, 3.0GSPLKD, 3.0GSPMDA, 3.0GSPNCS, 3.0GSPWTR

4.3GIJBYA, 4.3GIJWTR, 4.3GIPBYCCE, 4.3GIPEFS, 4.3GIPLKDCE,  
4.3GIPLKECE, 4.3GIPNCACE, 4.3GIPNCBCE, 4.3GIPNCMCE, 4.3GIPNCSC, 4.3GIPNCSC, 4.3GIPWTRCE, 4.3GL-A, 4.3GL-B, 4.3GL-C, 4.3GL-D, 4.3GL-E, 4.3GL-EF, 4.3GL-G, 4.3GL-GF, 4.3GL-J, 4.3GL-JF, 4.3GL-P, 4.3GLMMDA,  
4.3GLPBYC, 4.3GLPEFS, 4.3GLPLKD, 4.3GLPKE, 4.3GLPMDA, 4.3GLPNCA,  
4.3GLPNCB, 4.3GLPNCS, 4.3GLPWTR, 4.3GSJBYA, 4.3GSJLKD, 4.3GSJNCC,  
4.3GSJNCS, 4.3GSJWTR, 4.3GSPBYC, 4.3GSPLKD, 4.3GSPLKE, 4.3GSPMDA,  
4.3GSPNCA, 4.3GSPNCB, 4.3GSPNCM, 4.3GSPNCS, 4.3GSPWTR, 4.3GXI-A

5.0GIPBYCCE, 5.0GIPEFS, 5.0GIPWTR, 5.0GL-B, 5.0GL-C, 5.0GL-D, 5.0GL-E, 5.0GL-F, 5.0GL-FF, 5.0GL-H, 5.0GL-HF, 5.0GL-J, 5.0GL-JF, 5.0GXI-A

5.7GI-A, 5.7GIL-A, 5.7GIIMDA, 5.7GIINCCCE, 5.7GIPHUS, 5.7GIPLKDCE,  
5.7GIPLKECE, 5.7GIPMDA, 5.7GIPMDACE, 5.7GIPNCACE, 5.7GIPNCBCE,  
5.7GIPNCMCE, 5.7GIPNCSC, 5.7GL-B, 5.7GL-C, 5.7GL-D, 5.7GL-E,  
5.7GLIPLKDCE, 5.7GLICPLKD, 5.7GSIL-A, 5.7GSIPBYCCE, 5.7GSIPPEFS,  
5.7GSIPLKE, 5.7GSIPWTR, 5.7GXI-A, 5.7GXI-B, 5.7GXIL-A, 5.7GXIL-B

7.4GIINCCCE, 7.4GIINCSCE, 7.4GIPBYCCE, 7.4GIPEFS, 7.4GIPLKDCE,  
7.4GIPLKECE, 7.4GIPNCACE, 7.4GIPNCBCE, 7.4GIPNCMCE, 7.4GIPNCSC,  
7.4GIPWTR, 7.4GSIINCC, 7.4GSIINCC, 7.4GSIINCS, 7.4GSIPBYCCE, 7.4GSIPPEFS, 7.4GSIPWTR, 7.4GSIXNCM

8.2GSIPBYCCE, 8.2GSIPPEFS, 8.2GSIPWTR, 8.2GSIXNCB

DPX385XBYDCE, DPX385XEFS, DPX385XLKE  
DPX415XBYDCE, DPX415XEFS, DPX415XLKE

Art. nr/Part no	Ersätter/Replaces
18403	3854003



## Tändmoduler Ignition modules



### 3.0, 4.3, 5.0, 5.7, V6, V8

3.0GLM-A, 3.0GLM-B, 3.0GLM-C, 3.0GLMMDA, 3.0GLP-A, 3.0GLP-B, 3.0GLP-C, 3.0GLP-D, 3.0GLP-E, 3.0GLP-J, 3.0GLP-N  
3.0GSM-A, 3.0GSM-B, 3.0GSM-C, 3.0GSMLKD, 3.0GSMNCS, 3.0GSMWTR, 3.0GSP-A, 3.0GSP-B, 3.0GSP-C, 3.0GSPBYMCE, 3.0GSPEFS, 3.0GSPLKD, 3.0GSPMDA, 3.0GSPNCS, 3.0GSPWTR

4.3GIJBYA, 4.3GIJWTR, 4.3GIPBYCCE, 4.3GiPEFS, 4.3GIPLKDCE, 4.3GIPLKECE, 4.3GIPNCACE, 4.3GIPNCBCE, 4.3GIPNCMCE, 4.3GIPNCSCE, 4.3GIPWTRCE, 4.3GL-A, 4.3GL-B, 4.3GL-C, 4.3GL-D, 4.3GL-E, 4.3GL-EF, 4.3GL-G, 4.3GL-GF, 4.3GL-J, 4.3GL-JF, 4.3GL-P, 4.3GLMMDA, 4.3GLPBYC, 4.3GLPEFS, 4.3GLPLKD, 4.3GLPLKE, 4.3GLPMDA, 4.3GLPNCA, 4.3GLPNCS, 4.3GLPWTR, 4.3GSJBYA, 4.3GSJLKD, 4.3GSJNCC, 4.3GSJNCS, 4.3GSPBYC, 4.3GSPLKD, 4.3GSPLKE, 4.3GSPMDA, 4.3GSPNCA, 4.3GSPNCB, 4.3GSPNCM, 4.3GSPNCS, 4.3GSPWTR, 4.3GXI-A

5.0GIPBYCCE, 5.0GiPEFS, 5.0GIPWTR, 5.0GL-B, 5.0GL-C, 5.0GL-D, 5.0GL-E, 5.0GL-F, 5.0GL-FF, 5.0GL-H, 5.0GL-HF, 5.0GL-J, 5.0GL-JF, 5.0GXI-A

5.7GI-A, 5.7GIL-A, 5.7GIIMDA, 5.7GIINCCCE, 5.7GIPHUS, 5.7GIPLKDCE, 5.7GIPLKECE, 5.7GIPMDA, 5.7GIPMDACE, 5.7GIPNCACE, 5.7GIPNCBCE, 5.7GIPNCMCE, 5.7GIPNCSCE, 5.7GL-B, 5.7GL-C, 5.7GL-D, 5.7GL-E, 5.7GLIPLKDCE, 5.7GSICPLKD, 5.7GSIL-A, 5.7GSIPBYCCE, 5.7GSIPPEFS, 5.7GSIPLKE, 5.7GSIPWTR, 5.7GXI-A, 5.7GXI-B, 5.7GXIL-A, 5.7GXIL-B

7.4GIINCCCE, 7.4GIINCSCE, 7.4GIPBYCCE, 7.4GiPEFS, 7.4GIPLKDCE, 7.4GIPLKECE, 7.4GIPNCACE, 7.4GIPNCBCE, 7.4GIPNCMCE, 7.4GIPNCSCE, 7.4GIPWTR, 7.4GSIINCC, 7.4GSIINCS, 7.4GSIPBYCCE, 7.4GSIPPEFS, 7.4GSIPWTR, 7.4GSIXNCB, 7.4GSIXNCM

8.2GSIPBYCCE, 8.2GSIPPEFS, 8.2GSIPWTR, 8.2GSIXNCB

DPX385XBYDCE, DPX385XEFS, DPX385XLKE  
DPX415XBYDCE, DPX415XEFS, DPX415XLKE

Art. nr/Part no	Ersätter/Replaces
18984	3858984

## Spole Pick-up coil



### 3.0, 4.3, 5.0, 5.7, 7.4, 8.2, V6, V8

4.3GIJBYA, 4.3GIJWTR, 4.3GIPBYCCE, 4.3GiPEFS, 4.3GIPLKDCE, 4.3GIPLKECE, 4.3GIPNCACE, 4.3GIPNCBCE, 4.3GIPNCMCE, 4.3GIPNCSCE, 4.3GIPWTRCE, 4.3GL-A, 4.3GL-B, 4.3GL-C, 4.3GL-D, 4.3GL-E, 4.3GL-EF, 4.3GL-G, 4.3GL-GF, 4.3GL-J, 4.3GL-JF, 4.3GL-P, 4.3GLMMDA, 4.3GLPBYC, 4.3GLPEFS, 4.3GLPLKD, 4.3GLPLKE, 4.3GLPMDA, 4.3GLPNCA, 4.3GLPNCS, 4.3GLPWTR, 4.3GSJBYA, 4.3GSJLKD, 4.3GSJNCC, 4.3GSJNCS, 4.3GSJWTR, 4.3GSPBYC, 4.3GSPLKD, 4.3GSPLKE, 4.3GSPMDA, 4.3GSPNCA, 4.3GSPNCB, 4.3GSPNCM, 4.3GSPNCS, 4.3GSPWTR, 4.3GXI-A  
5.0GIPBYCCE, 5.0GiPEFS, 5.0GIPWTR, 5.0GL-B, 5.0GL-C, 5.0GL-D, 5.0GL-E, 5.0GL-F, 5.0GL-FF, 5.0GL-H, 5.0GL-HF, 5.0GL-J, 5.0GL-JF, 5.0GXI-A  
5.7GI-A, 5.7GIL-A, 5.7GIIMDA, 5.7GIINCCCE, 5.7GIPHUS, 5.7GIPLKDCE, 5.7GIPLKECE, 5.7GIPMDA, 5.7GIPMDACE, 5.7GIPNCACE, 5.7GIPNCBCE, 5.7GIPNCMCE, 5.7GIPNCSCE, 5.7GL-B, 5.7GL-C, 5.7GL-D, 5.7GL-E, 5.7GLIPLKDCE, 5.7GSICPLKD, 5.7GSIL-A, 5.7GSIPBYCCE, 5.7GSIPPEFS, 5.7GSIPLKE, 5.7GSIPWTR, 5.7GXI-A, 5.7GXI-B, 5.7GXIL-A, 5.7GXIL-B  
7.4GIINCCCE, 7.4GIINCSCE, 7.4GIPBYCCE, 7.4GiPEFS, 7.4GIPLKDCE, 7.4GIPLKECE, 7.4GIPNCACE, 7.4GIPNCBCE, 7.4GIPNCMCE, 7.4GIPNCSCE, 7.4GIPWTR, 7.4GSIINCC, 7.4GSIINCS, 7.4GSIPBYCCE, 7.4GSIPPEFS, 7.4GSIPWTR, 7.4GSIXNCB, 7.4GSIXNCM  
8.2GSIPBYCCE, 8.2GSIPPEFS, 8.2GSIPWTR, 8.2GSIXNCB  
DPX385XBYDCE, DPX385XEFS, DPX385XLKE  
DPX415XBYDCE, DPX415XEFS, DPX415XLKE

Art. nr/Part no	Ersätter/Replaces
18400	3854001



### V6, V8, 5.0, 5.7, 7.4, 8.2

AQ205A, AQ205LB  
AQ271A, AQ271B, AQ271C, AQ271D, 271LB  
AQ311A, AQ311B  
430, 430A, 430B, 431A, 431B, 432A, 434A  
500A, 500B, 501A, 501B  
570, 570A, 571A, 572A  
740B, BB740A  
5.0FLPHUE, 5.0FLPHUR, 5.0FLPMDA, 5.0FLPNCB, 5.0FLPNCS, 5.0GL-A, 5.0GLPBYC, 5.0GLPEFS, 5.0GLPWTR  
5.7GL-A, 5.7GLPLKA, 5.7GLPLKD, 5.7GLPLKE, 5.7GLPLKR, 5.7GLPMDA, 5.7GLPNCS, 5.7GSPBYC, 5.7GSPEFS, 5.7GSPLKD, 5.7GSPLKE, 5.7GSPWTR  
5.8FLIHUB, 5.8FLIHUE, 5.8FLINCC, 5.8FLINCS, 5.8FLPHUE, 5.8FLPHUR, 5.8FLPMDA, 5.8FLPNCA, 5.8FLPNCB, 5.8FLPNCS, 5.8FLPNCS  
7.4GLIMDM, 7.4GLINCC, 7.4GLINCS, 7.4GLPLKE, 7.4GLPMDA, 7.4GLPMDM, 8.2GLIMDM, 8.2GLPMDA, 8.2GLPMDM

Art. nr/Part no	Ersätter/Replaces
18077	3854077, 855910



## Glödstift Glow plugs



### MD21, MD32

MD21A, AQD21A, MD32A, AQD32A

T.o.m / up to SN -3124096

Art. nr/Part no	Ersätter/Replaces	Info
21846	870846	Bosch nr 0 250 200 021



### MD21A, MD21B

MD21A/110S, MD21B/110S

Fr.o.m / from SN 3124096-

Art. nr/Part no	Ersätter/Replaces	Info
21857	829857	Bosch nr 0 250 201 039



### 30, 40

AD30A, AQAD30A, MD30A, TAMD30A, TMD30A

MD40A, AD40B, AQD40A, TAMD40A, TAMD40B, AQAD40A, AQAD40B, TD40A, TMD40A, TMD40B, TMD40C

11V, M12 x 1,25

Art. nr/Part no	Ersätter/Replaces	Info
21109	3092109, 1542319, 1542411	Bosch nr 0 250 200 053, 0 250 201 012, 0 250 201 034



### MD2010, MD2020, MD2030, MD2040, D2-50, D2-55, D2-75

MD2010, MD2010B, MD2010-C, MD2010-D, MD2020, MD2020B, MD2020-C, MD2020-D, MD2030, MD2030B, MD2030-C, MD2030-D, MD2040, MD2040B, MD2040-C, MD2040-D

D2-50F

D2-60F

D2-55, D2-55B, D2-55C, D2-55D, D2-55E, D2-55F,

D2-75, D2-75B, D2-75C, D2-75F

Art. nr/Part no	Ersätter/Replaces	Info
21025	3583025	Bosch nr 0 250 202 089

## Huvudströmbrytare Main switch



### Huvudströmbrytare/Main switch 1000A/5s, 12/24V

Kraftig modell, vattenskyddad IP68. Maximal kontinuerlig belastning 150A, intermittent 1000A i 5 sek.

Heavy duty, water protection IP68. Maximum load 150A, intermittent load 1000A for 5 sec.

Art. nr/Part no	Ersätter/Replaces	Info
23319	1140319	M10



## Laddningsregulatorer Voltage regulators



### Laddningsregulator Voltage regulator

För alla Volvo Penta marinmotorer med SEW-Marchal 35 amp generator  
Komplett med långa kablar.

For all Volvo Penta marine engines with SEV-Marchal 35 amps alternator.  
Complete kit including long cables.

Art. nr/Part no	Ersätter/Replaces	
18605	847605, 843547	

## Laddningsfördelare Charge distributor



### Laddningsfördelare / Charge distributor

Laddningsfördelare 70A, 12/24V. För två batterikretsar.  
Charge distributor 70A, 12/24V for two battery circuits

Mått / measurements: 85 x 115 x 95 mm

Art. nr/Part no	Ersätter/Replaces	Info
23120	873120	max 70A

## Reservdelar instrumentpaneler Spare parts for instrument panels



### LCD Display

LCD-displayen monteras i varvräknare och visar antal gångtimmar. Displayen ansluts till varvräknarens minne och visar gångtimmar från start. Passar 85 mm instrument: VDO Volvo Penta, instrument Vision, Cockpit International, Ocean Line, Yanmar Siemens

The LCD display is mounted inside the tachometer and shows engine hours. The new display is connected to the memory of the tachometer and shows engine hours from start. Fits 85 mm instrument: VDO Volvo Penta, instrument Vision, Cockpit International, Ocean Line, Yanmar Siemens

Art. nr/Part no	Passar varvräknare / Fits tachometers
23047	873992, 873830



### Summer / Buzzer 12V, 32 mm.

Passar/fits 2001, 2001B, 2001AG, 2001BG, 2002, 2002D, 2002AG, 2002BG, 2002BT, 2003, 2003B, 2003D, 2003AG, 2003BG, 2003T, 2003TB, Motorserier/ engine series 22, 30, 31, 32, 40, 41, 42, 43, 44, TAMD70D & TAMD70E. Tidiga/ early D1-13 - D1-30, D2-40 - D2-75, tidiga/early D12

Passar/fits instrumentpaneler/instrument panels art.nr: 858238, 859059, 864038, 840922, 858870, 858127, 858017, 858871, 858362, 858872, 859057, 859058, 872797

Art. nr/Part no	Ersätter/Replaces
23587	828587



## Reläer Relays



### 2003, MD22, KAD43, B21, B23, V6, V8

2003 SOLAS, 2003B SOLAS, 2003TB SOLAS  
MD22A, MD22A-A, MD22L-A, TMD22A, TMD22-A, MD22L, MD22L-B,  
MD22P-B, TMD22-B, TMD22P-C, TAMD22P-B  
KAD43P-A, KAMD43P-A  
D5A-T, D5A-TA, D5A-B TA, D7A-T, D7A-TA, D7A-B TA, D7C-TA, D7C-B TA  
AQ120B, AQ125A, AQ125B, AQ140A, BB140A  
AQ145A, BB145A, AQ145B  
AQ131A, AQ131B, AQ131C, AQ131D, AQ151A, AQ151B, AQ151C, AQ171A,  
AQ171C, 230A, 230B, 250A, 250B, 251A  
430A, 430B, 431A, 431B, 432A, 434A, AQ205A, AQ175A  
500, 500A, 501A, 500B, 501B, 570A, 571A, 572A, 740B, 740A, BB740A,  
AQ200D, AQ200F, AQ225D, AQ225E, AQ225F, BB225A, BB225AV, BB225B,  
BB225C  
AQ211A, AQ231A, AQ231B  
AQ260A, AQ260B, BB260A, BB260AV, BB260B, BB260C  
AQ271A, AQ271B, AQ271C, AQ271D  
AQ311A, AQ311B, BB231A, BB261A, AQ290A

Art. nr/Part no	Ersätter/Replaces	Info
19177	841177	12V/30A



### Relä powertrimpump, tidig model/relay powertrim pump early type

230B, 231LB, 250A, 250B, 251A, 271LB  
430, 430A, 430B, 431A, 431B, 432A, 434A,  
500A, 500B, 501A, 501B, 570, 570A, 571A, 572A, 740B,  
AQ131A, AQ131B, AQ131C, AQ131D, AQ145B, AQ151A, AQ151B, AQ151C  
AQ171A, AQ171C, AQ175A, AQ205A  
AQ200D, AQ200F, AQ211A, AQ225D, AQ225F, AQ231A, AQ231B, AQ260A,  
AQ271A, AQ271B, AQ271C, AQ271D, AQ290A, AQ311A, AQ311B  
AQAD30A, AD30A, MD40A, AQD40A, AQAD40A, AQAD40B, TMD40A,  
TAMD40A, TMD40B, TAMD40B, AD40B, TMD40C  
MD31A, AD31, TMD31B, AD31B, TAMD31B, TMD31D, TMD31L-A, TAMD31D,  
TAMD31L, TAMD31L-A, TAMD31M, TAMD31M-A, TAMD31P, TAMD31P-A,  
TAMD31P-B, TAMD31S, AD31D, AD31D-A, AD31L-A, AD31P-A, AD31XD,  
D41B, D41L-A, AD41A, AD41B, AD41BJ, TMD41B, TAMD41B, TMD41L-A,  
TAMD41H-A, TAMD41H-B, TAMD41P, TAMD41P-A, TAMD41P-B, AD41L-A,  
AD41P-A  
KAD42A, TAMD42B  
Drev 275A, 285A, DP-A, DP-A2, DP-C, DP-C1, DP-D, DP-D1, DP-E, DPX-C,  
DPX-R, MS4B, SP-A2, SP-C, SP-C1, SP-E, DP-E, DP-S,

Art. nr/Part no	Ersätter/Replaces	Info
19492	1324492	12V/20-30A



### MD21, 31, 41, 63, 70, 73, 74, 100, 102, 120, 121, 122 B20, B30

MD21A, MD21B, AQD21A, AQD21B  
TMD31A, TMD31B, TMD31D, TAMD31A, TAMD31B, TAMD31D, TMD31L-A,  
TAMD31L-A, TAMD31M-A, TAMD31P-A, TAMD31S, MD31A, AD31, AD31B,  
AD31D, AD31D-A, AD31L-A, AD31P-A, AD31XD  
TMD41A, TMD41B, TAMD41A, TAMD41B, TMD41D, TAMD41D, TAMD41H-A,  
TAMD41H-B, TAMD41P, TAMD41P-A, D41B, AD41B, AD41BJ, D41D, AD41D,  
TMD41L-A  
TAMD63L-A, TAMD63P-A  
MD70B, TMD70B, MD70C, TMD70C, AQD70B, AQD70BL, AQD70C,  
AQD70CL, AQD70D, TAMD70B, TAMD70C, TAMD70D, TAMD70E,  
THAMD70B, THAMD70C  
TAMD73P-A, TAMD74A, TAMD74C-A, TAMD74L-A, TAMD74P-A  
MD100A, MD100B, TMD100A, TMD100C  
TAMD102A, TMD102A  
MD120A, TMD120A, TAMD120A, TMD120B, TAMD120B  
TMD121C, TAMD121D  
TMD122A, TAMD122A, TAMD122D, TAMD122P-B, TAMD122P-C  
AQ115A, AQ115B  
AQ130A, AQ130B, AQ130C, AQ130D, AQ165A, AQ170A, AQ170B, AQ170C

Art. nr/Part no	Ersätter/Replaces	Info
19611	873611, 837878	24V/20A



### Relä powertrimpump sen model/relay powertrim pump late type

AQAD31A, AQAD31B, AD31D, AD31L-A, AD31P-A, AD31XD, KAD32P-A,  
AD41D, AD41L-A, AD41P-A, D41D, D41L-A, KAD42A, KAD42B, KAD42P-A,  
KAMD42P-A, KAD43P-A, KAD44P-A, KAD44P-B, KAD44P-C, KAD300A,  
AQ151, 230, 250, V6, V8, 500, 501, 740, AQ271  
SP-E, 290DP, DP-C1, DP-D1, DP-C, DP-E, DPX-A, DPX-R, DPX-C, DP-S

Art. nr/Part no	Ersätter/Replaces	Info
19357	854357	12V/30-40A



## Oljetryckskontakter Oil pressure monitors



### **B18, B20, B21, B23, B30, MB10, V8, 2001, 2002, 2003, 2003T, MD21, MD29, MD32**

AQ60F, AQ90, AQ95, AQ95A, AQ110  
AQ120  
BB30, BB100, MB18, MB20A, MB20B, MB20C  
AQ105A  
AQ115A, AQ115B, BB115A, BB115B, BB115C  
AQ130A, AQ130B, AQ130C, AQ130D  
AQ120B\*, AQ125A\*, AQ140A\*  
AQ145A, BB145A  
AQ165A, BB165A  
AQ170A, AQ170B, AQ170C, BB170A, BB170B, BB170C  
AQ200A  
AQ225A, AQ225B  
MB10A  
2001, 2001AG, 2001B, 2001BG, 2001D, 2001R  
2002, 2002AG, 2002B, 2002BG, 2002D  
2003, 2003 SOLAS, 2003B, 2003B SOLAS, 2003D, 2003R, 2003R SOLAS  
2003T, 2003TB  
AQD21A, AQD21B, MD21A  
AQD29, AQD29A, MD29, MD29A  
AQD32A, MD32A

Art. nr/Part no	Ersätter/Replaces	Info
18750	1324750, 653874, 672910, 1266085, 1606877	1/8"-27 NPTF



### **MD1, MD2, MD3, MD5, MD6**

MD1, MD1A, MD1B  
MD2, MD2A, MD2B, AQD2B  
MD3B  
MD5A, MD5B, MD5C  
MD6A, MD6B

Art. nr/Part no	Ersätter/Replaces	Info
18078	807078	1/8" NPT 0,4 Bar



### **MD5, MD7, MD11, MD17**

MD5C  
MD7A, MD7B  
MD11C, MD11D  
MD17C, MD17D

Art. nr/Part no	Ersätter/Replaces	Info
18587	829587, 875813	M10 x 1, 0.3 Bar



### **40, B21, B23, 3.0, V6, V8**

MD40A, TMD40A, TMD40B, TMD40C, AQD40A, TAMD40A, TAMD40B,  
AD40B, AQAD40A, AQAD40B  
AQ120B, AQ125A, AQ125B, AQ140A, BB140A, AQ145A, BB145A,  
AQ145B  
AQ131A, AQ131B, AQ131C, AQ131D  
AQ151A, AQ151B, AQ151C  
AQ171A, AQ171C  
230A, 230B, 250A, 250B  
430, 430A, 430B, 431A, 431B, 432A, 434A  
500B, 501B, 570A, 572A, 740B  
AQ175A, AQ205A,  
AQ190A, AQ240A  
AQ200C, AQ200D, AQ200F  
AQ225C, AQ225D, AQ225F, BB225A, BB225AV, BB225B, BB225C  
AQ255A, AQ255B, AQ260A, AQ260B, BB260A, BB260AV, BB260B, BB260C  
AQ290A  
AQ211A, AQ231A, AQ231B  
AQ271A, AQ271B, AQ271C, AQ271D  
AQ311A, AQ311B  
3.0GLM-C, 3.0GLP-C, 3.0GLP-A, 3.0GLP-B, 3.0GLM-A, 3.0GLM-B, 3.0GSP-A, 3.0GSP-B, 3.0GSP-C, 3.0GSM-A, 3.0GSM-B, 3.0GSM-C  
4.3GL-P, 4.3GL-A, 4.3GL-B, 4.3GL-C, 4.3GL-D, 4.3GXi-E, 4.3GXi-EF, 4.3OSi-E, 4.3OSi-EF, 4.3GXi-A, 4.3GXi-B, 4.3GXi-BF, 4.3OSi-B, 4.3OSi-BF, 4.3GXi-C, 4.3GXi-CF, 4.3GXi-D, 4.3GXi-DF, 4.3OSi-C, 4.3OSi-CF, 4.3OSi-D, 4.3OSi-DF  
5.0GXi-C, 5.0GXi-CF, 5.0GXi-D, 5.0GXi-DF, 5.0OSi-C, 5.0OSi-CF, 5.0OSi-D, 5.0OSi-DF, 5.0GXi-B, 5.0GXi-BF, 5.0OSi-B, 5.0OSi-BF, 5.7GL-A, 5.7GL-B, 5.7GL-C, 5.7GL-D, 5.7GL-E, 5.0GL-A, 5.0GL-B, 5.0GL-C, 5.0GL-D, 5.0GL-E, 5.0GXi-A, 5.0GXi-E, 5.0GXi-EF, 5.0OSi-E, 5.0OSi-EF  
5.7Gi-E, 5.7Gi-EF, 5.7Gi-L, 5.7GXi-F, 5.7GXi-FF, 5.7GXil-F, 5.7OSi-D, 5.7OSi-DF, 5.7OSXi-D, 5.7OSXi-DF, 5.7Gi-A, 5.7GXi-A, 5.7GXi-B, 5.7GXil-A, 5.7GSil-A, 5.7GXil-A, 5.7GXil-B, 5.7GXil-BF, 5.7GXi-C, 5.7GXi-CF, 5.7GXil-B, 5.7GXil-C, 5.7OSi-A, 5.7OSi-AF, 5.7OSXi-A, 5.7OSXi-AF, 5.7Gi-C, 5.7Gi-CF, 5.7Gi-D, 5.7Gi-DF, 5.7GXil-C, 5.7GXil-D, 5.7GXi-D, 5.7GXi-DF, 5.7GXi-E, 5.7GXi-EF, 5.7GXil-D, 5.7GXil-E, 5.7OSi-B, 5.7OSi-BF, 5.7OSi-C, 5.7OSi-CF, 5.7OSXi-B, 5.7OSXi-BF, 5.7OSXi-C, 5.7OSXi-CF  
8.1Gi-E, 8.1Gi-EF, 8.1GXi-D, 8.1GXi-DF, 8.1OSi-A, 8.1OSi-AF, 8.1GXil-E, 8.1GXil-D, 8.1Gi-A, 8.1Gi-B, 8.1Gi-BF, 8.1Gi-C, 8.1Gi-CF, 8.1Gi-D, 8.1Gi-DF, 8.1GSi-A, 8.1GXi-A, 8.1GXi-AF, 8.1GXi-B, 8.1GXi-BF, 8.1GXi-C, 8.1GXi-CF, 8.1GXil-A, 8.1GXil-B, 8.1GXil-C, 8.1GXil-D, 8.1GSil-A, 8.1GXil-A, 8.1GXil-B, 8.1GXil-C, 8.1Gi-FF, 8.1GXi-E, 8.1GXi-EF, 8.1GXil-E, 8.1Gi-F, 8.1OSi-B, 8.1OSi-BF  
DPX375-A, DPX375-B, DPX375-BF, DPX375-CF  
DPX420-A, DPX420-B, DPX420-BF, DPX420-CF

Art. nr/Part no	Ersätter/Replaces	Info
19532	3857532	1/8"-27NPT, 0-5 Bar



### Oljetryckskontakter Oil pressure monitors



**2000, 31, 40, 41, 42, 43, 44, 60, 63, 70, 72, 74, 75**  
 2001, 2001B, 2001AG, 2001BG, 2002, 2002B, 2002D, 2002AG, 2002BG,  
 2003, 2003B, 2003D, 2003AG, 2003BG, 2003T, 2003TB, 2003 SOLAS,  
 2003B SOLAS, 2003TB SOLAS,  
 MD31A, TMD31A, TMD31B, TAMD31A, TAMD31B, AD31, AQAD31A,  
 AD31B  
 KAD32P  
 MD40A, TMD40A, TMD40B, TMD40C, AQD40A, TAMD40A, TAMD40B,  
 AD40B, AQAD40A, AQAD40B,  
 TMD41A, TMD41B, D41A, D41B, TAMD41A, TAMD41B, AQAD41A,  
 AD41A, AD41B,  
 KAD42A, KAMD42A, KAD42B, KAMD42B, TAMD42B, TAMD42WJ-A,  
 KAD43P-A, KAMD43P, KAMD43P-A, KAMD43P-B, KAD44P, KAD44P-B,  
 KAD44P-C, KAMD44P-A, KAMD44P-C,  
 TAMD60A, TAMD60B, TAMD60C  
 TAMD63L-A, TAMD63P-A  
 MD70A, MD70B  
 TAMD72WJ-A, TAMD72P-A, TAMD74C-A, TAMD74C-B, TAMD74L-A,  
 TAMD74L-B, TAMD74P-A, TAMD74P-B, TAMD75P-A  
 D12D-A MH, D12C-A MP, D12D-A MP, D12D-C MP, D12D-D MP


Art. nr/Part no	Ersätter/Replaces	Info
18369	863169	M10 x 1, 0.3 Bar

### Oljetrycksgivare Oil pressure sensors



**2001, 2002, 2003, 2003T, MD2010, MD2020, MD2030, MD2040, D2-55**  
 2001, 2001AG, 2001B, 2001BG, 2001D, 2001R  
 2002, 2002AG, 2002B, 2002BG, 2002D  
 2003, 2003 SOLAS, 2003B, 2003B SOLAS, 2003D, 2003R, 2003R SOLAS  
 2003T, 2003TB, 2003TB SOLAS, 2003TR  
 MD2010B, MD2010-C, MD2010-D  
 MD2020B, MD2020-C, MD2020-D  
 MD2030B, MD2030-C, MD2030-D  
 MD2040B, MD2040-C, MD2040-D  
 D2-55, D2-55B  
**Tryck/Pressure:** 10 bar  
**Gänga/Threads:** 1/8"-27NPTF  
**Signal:** 10-184 Ohm  
**Varningstryck/Alarm pressure:** 0,8 bar

Art. nr/Part no	Ersätter/Replaces	Info
19906	366906	VDO 360 081 030 052

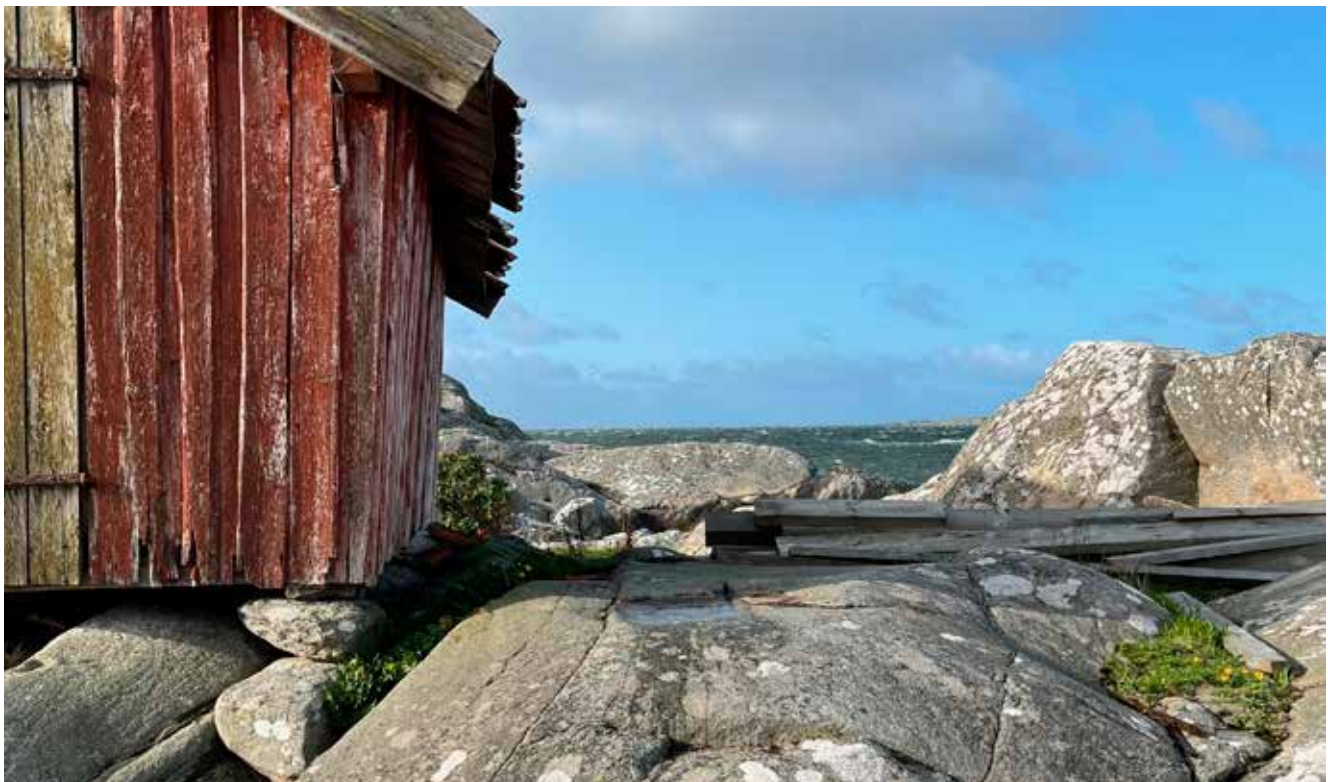

Temperaturgivare  
Temperature sensors



**B20, B21, B30**

AQ115A, AQ115B, BB115A, BB115B, BB115C  
AQ120B  
AQ125A  
AQ130A, AQ130B, AQ130C, AQ130D  
AQ140A  
AQ145A  
AQ165A, BB165A  
AQ170A, AQ170B, AQ170C, BB170A, BB170B, BB170C  
AQ200B  
AQ225B  
MB20A, MB20B, MB20C

Art. nr/Part no	Ersätter/Replaces	Info
18552	824552, 827153	5/8"-18 UNF



**3.0, 4.3, 5.0, 5.7, 5.8, 7.4, 8.1, 8.2, V6, V8**

AQ175A, AQ205A  
430, 430A, 430B, 431A, 431B, 432A, 434A  
AQ200C, AQ200D, AQ200F, AQ211A  
AQ225C, AQ225D, AQ225E, AQ225F, BB225A, BB225AV, BB225B, BB225C  
AQ231A, AQ231B, BB231A, AQ240A  
AQ255A, AQ255B, AQ260A, AQ260B, BB260AV, BB260B, BB260C  
AQ271A, AQ271B, AQ271C, AQ271D  
AQ290A  
AQ311A, AQ311B  
500A, 500B, 501A, 501B, 570, 570A, 571A, 572A, 740B, BB740A

3.0GLM-A, 3.0GLM-B, 3.0GLM-C, 3.0GLMMDA, 3.0GLP-A, 3.0GLP-B, 3.0GLP-C, 3.0GLP-D, 3.0GLP-E, 3.0GLP-J, 3.0GLP-N, 3.0GSM-A, 3.0GSM-B, 3.0GSM-C, 3.0GSMBYMCE, 3.0GSMLKD, 3.0GSMNCS, 3.0GSMWTR, 3.0GSP-A, 3.0GSP-B, 3.0GSP-C, 3.0GSPBYMCE, 3.0GSPEFS, 3.0GSPLKD, 3.0GSPMDA, 3.0GSPNCS, 3.0GSPWTR

4.3GIJBYA, 4.3GIJWTR, 4.3GIPBYCCE, 4.3GiPEFS, 4.3GIPLKDCE, 4.3GIPLKECE, 4.3GIPNCACE, 4.3GIPNCBCE, 4.3GIPNCMCE, 4.3GIPNCSCE, 4.3GIPWTRCE, 4.3GL-A, 4.3GL-B, 4.3GL-C, 4.3GL-D, 4.3GL-E, 4.3GL-EF, 4.3GL-G, 4.3GL-GF, 4.3GL-J, 4.3GL-JF, 4.3GL-P, 4.3GLMMDA, 4.3GLPBYC, 4.3GLPEFS, 4.3GLPLKD, 4.3GLPLKE, 4.3GLPMDA, 4.3GLPNCA, 4.3GLPNCB, 4.3GLPNCS, 4.3GLPWTR, 4.3GSJBYA, 4.3GSJLKD, 4.3GSJNCS, 4.3GSJWTR, 4.3GSPBYC, 4.3GSPLKD, 4.3GSPLKE, 4.3GSPMDA, 4.3GSPNCA, 4.3GSPNCB, 4.3GSPNCM, 4.3GSPNCS, 4.3GSPWTR, 4.3GXi-A, 4.3GXi-B, 4.3GXi-BF, 4.3GXi-C, 4.3GXi-CF, 4.3GXi-D, 4.3GXi-DF, 4.3GXi-E, 4.3GXi-EF, 4.3OSi-B, 4.3OSi-BF, 4.3OSi-C, 4.3OSi-CF, 4.3OSi-D, 4.3OSi-DF, 4.3OSi-E, 4.3OSi-EF

5.0FiPMDA, 5.0FiPMDM, 5.0GiPBYCCE, 5.0GiPEFS, 5.0GiPWTR, 5.0GL-A, 5.0GL-B, 5.0GL-C, 5.0GL-D, 5.0GL-E, 5.0GL-F, 5.0GL-FE, 5.0GL-H, 5.0GL-HF, 5.0GL-J, 5.0GL-JF, 5.0GLPBYC, 5.0GLPEFS, 5.0GLPWTR, 5.0GXi-A, 5.0GXi-B, 5.0GXi-BF, 5.0GXi-C, 5.0GXi-CF, 5.0GXi-D, 5.0GXi-DF, 5.0GXi-E, 5.0GXi-EF, 5.0OSi-B, 5.0OSi-BF, 5.0OSi-C, 5.0OSi-CF, 5.0OSi-D, 5.0OSi-DF, 5.0OSi-E, 5.0OSi-EF

5.7Gi-A, 5.7Gi-B, 5.7Gi-BF, 5.7Gi-C, 5.7Gi-CF, 5.7Gi-D, 5.7Gi-DF, 5.7Gi-E, 5.7Gi-EF, 5.7GiL-A, 5.7GiL-B, 5.7GiL-E, 5.7GiLMDA, 5.7GiLNCCE, 5.7GiPHUS, 5.7GIPLKDCE, 5.7GIPLKECE, 5.7GIPMDA, 5.7GIPMDACE, 5.7GIPNCACE, 5.7GIPNCBCE, 5.7GIPNCMCE, 5.7GIPNCSCE, 5.7GL-A, 5.7GL-B, 5.7GL-C, 5.7GL-D, 5.7GL-E, 5.7GLIPLKDCE, 5.7GLPLKA, 5.7GLPLKD, 5.7GLPLKE, 5.7GLPLKR, 5.7GLPMDA, 5.7GLPNCS, 5.7GSIC-PLKD, 5.7GSiL-A, 5.7GSIPBYCCE, 5.7GSiPEFS, 5.7GSiPLKE, 5.7GSIPWTR, 5.7GSPBYC, 5.7GSPPEFS, 5.7GSPLKD, 5.7GSPLKE, 5.7GSPWTR, 5.7GXi-A, 5.7GXi-B, 5.7GXi-C, 5.7GXi-CF, 5.7GXi-D, 5.7GXi-DF, 5.7GXi-E, 5.7GXi-EF, 5.7GXi-F, 5.7GXi-FF, 5.7GXil-A, 5.7GXil-B, 5.7GXil-C, 5.7GXil-D, 5.7GXil-E, 5.7GXil-F, 5.7OSXi-A, 5.7OSXi-AF, 5.7OSXi-B, 5.7OSXi-BF, 5.7OSXi-C, 5.7OSXi-CF, 5.7OSXi-D, 5.7OSXi-DF, 5.7OSi-A, 5.7OSi-AF, 5.7OSi-B, 5.7OSi-BF, 5.7OSi-C, 5.7OSi-CF, 5.7OSi-D, 5.7OSi-DF

5.8FiPMDA, 5.8FiPMDM, 5.8FLPMDA

7.4GIINCCE, 7.4GIINCSC, 7.4GIPBYCCE, 7.4GIPLKDCE, 7.4GIPLKECE, 7.4GIPNCACE, 7.4GIPNCBCE, 7.4GIPNCMCE, 7.4GIPNCSCE, 7.4GIPWTR, 7.4GLIMDM, 7.4GLPMDA, 7.4GLPMDM, 7.4GSIINCC, 7.4GSIINCS, 7.4GSIPBYCCE, 7.4GSIPWTR, 7.4GSIXNCB, 7.4GSIXNCM

8.1Gi-A, 8.1Gi-B, 8.1Gi-BF, 8.1Gi-C, 8.1Gi-CF, 8.1Gi-D, 8.1Gi-DF, 8.1Gi-E, 8.1Gi-EF, 8.1Gi-F, 8.1Gi-FF, 8.1GiL-A, 8.1GiL-B, 8.1GiL-C, 8.1GiL-D, 8.1GiL-E, 8.1GiL-F, 8.1GSi-A, 8.1GSiL-A, 8.1GXi-A, 8.1GXi-AF, 8.1GXi-B, 8.1GXi-BF, 8.1GXi-C, 8.1GXi-CF, 8.1GXi-D, 8.1GXi-DF, 8.1GXi-E, 8.1GXi-EF, 8.1GXil-A, 8.1GXil-B, 8.1GXil-C, 8.1GXil-D, 8.1GXil-E, 8.1OSi-A, 8.1OSi-AF, 8.1OSi-B, 8.1OSi-BF  
8.2GLIMDM, 8.2GLPMDA, 8.2GLPMDM, 8.2GSIPBYCCE, 8.2GSiPEFS, 8.2GSIPWTR, 8.2GSIXNCB

DPX375-A, DPX375-B, DPX375-BF, DPX375-CF  
DPX385XBYDCE, DPX385XEFS, DPX385XLKE  
DPX415XBYDCE, DPX415XEFS, DPX415XLKE  
DPX420-A, DPX420-B, DPX420-BF, DPX420-CF

Art. nr/Part no	Ersätter/Replaces	Info
18029	3852029, 872067, 835630	1/2"-14 NPTF



## Temperaturgivare Temperature sensors



### 30, 40, 31, 41, KAD42, KAD43, MD2010-MD2040, D1, D2, MD21, MD11, MD17

MD11\*), MD11C\*), MD11D\*), MD17\*), MD17C\*), MD17D\*)  
 MD21A, AQD21A, MD21B, AQD21B  
 MD30A, TMD30A, TAMD30A, AD30A, AQAD30A  
 MD31A, TMD31A, TAMD31A, TMD31B, TAMD31B, TMD31D, TAMD31D,  
 TMD31L-A, TAMD31L-A, TAMD31M-A, TAMD31P-A, AD31A, AD31B,  
 AD31D, AD31D-A, AD31L-A, AD31P-A, AD31XD  
 KAD32P, KAD32P-A  
 MD40A, TMD40A, TAMD40A, TMD40B, TAMD40B, TMD40C, AQD40A,  
 AQAD40A, AQAD40B, AD40B  
 TMD41A, TAMD41A, TMD41B, TAMD41B, TAMD41D, TAMD41H-A,  
 TAMD41H-B, TAMD41P, TAMD41P-A, AD41A, D41B, AD41B, AD41BJ,  
 D41D, AD41D, D41L-A, AD41L-A, AD41P-A  
 KAD42A, KAD42B, KAD42P-A, KAMD42B, KAMD42A, KAMD42P-A  
 KAD43P-A, KAMD43P, KAMD43P-A, KAMD43P-B  
 MD2010B, MD2010-C, MD2010-D  
 MD2020B, MD2020-C, MD2020-D  
 MD2030B, MD2030-C, MD2030-D  
 MD2040B, MD2040-C, MD2040-D  
 D1-13, D1-13B, D1-13F  
 D1-20, D1-20B, D1-20F  
 D1-30, D1-30B, D1-30F  
 D2-40, D2-40B, D2-40F  
 D2-50F  
 D2-55, D2-55B, D2-55C, D2-55D, D2-55E, D2-55F  
 D2-60F  
 D2-75, D2-75B, D2-75C, D2-75F

Mätområde / Measurement range 0-120° C

\*) givaren ger rätt värden för dessa motorer endast om det är Volvo Penta original färskvattenkylning monterad. / the sensor will only send right information if Volvo Penta original freshwater cooling is mounted.

Art. nr/Part no	Ersätter/Replaces	Info
18151	827151	M18 x 1,5



### 2001, 2002, 2003, 30, 31, 40, 41, KAD42, MD5, MD6, MD7

MD5A, MD5B, MD5C  
 MD6B  
 MD7A, MD7B  
 2001, 2001B, 2001D, 2001R  
 2002, 2002B, 2002D  
 2003, 2003B, 2003D, 2003R, 2003 SOLAS  
 2003T, 2003TB, 2003TR  
 MD30A, TMD30A, TAMD30A, AD30A, AQAD30A  
 MD31A, TMD31A, TAMD31A, TMD31B, TAMD31B, AD31, AD31B  
 MD40A, TMD40A, TAMD40A, TMD40B, TAMD40B, TMD40C, AQAD40A,  
 AQAD40B, AD40B  
 TMD41A, TAMD41A, TMD41B, TAMD41B, AD41A, AD41B, AD41BJ, D41B  
 KAD42A, KAMD42A

Växlingspunkt: 95C° +/- 3C°  
 Max temperatur: 120C°

Art. nr/Part no	Ersätter/Replaces	Info
18927	833927	M18 x 1,5



### 2001, 2002, 2003, 2003T, 30, 40

2001, 2001B, 2001AG, 2001BG, 2001D, 2001R  
 2002, 2002B, 2002D, 2002AG, 2002BG  
 2003, 2003 SOLAS, 2003B, 2003B SOLAS, 2003D, 2003AG, 2003BG, 2003R,  
 2003R SOLAS  
 2003T, 2003TB, 2003TB SOLAS, 2003TR  
 MD30A, TMD30A, TAMD30A, AD30A, AQAD30A  
 TMD40A, TAMD40A, TMD40B, TAMD40B, TMD40C, AQD40A, AQAD40A,  
 AD40B, AQAD40B

Kombinerad givare och kontakt / combined sensor and switch

Art. nr/Part no	Ersätter/Replaces	Info
18345	840345	M18 x 1,5



Spare parts from Sweden

**Temperaturgivare  
Temperature sensors**



**60, 70, 100, 102, 103, 120, 121, 122**  
 TAMD60A, TAMD60B, TAMD60C  
 MD70B, TMD70B, TAMD70B, THAMD70B, MD70C, TMD70C, TAMD70C,  
 THAMD70C, TAMD70D, TAMD70E, AQD70B, AQD70C, AQD70CL,  
 AQD70D  
 MD100A, MD100B, MD100B-CC, TMD100A, TMD100C  
 TMD102A, TAMD102A, TAMD102D  
 TAMD103A  
 MD120A, TMD120A, TAMD120A, TMD120B, TAMD120B  
 TMD121C, TAMD121D  
 TMD122A, TAMD122A, TAMD122A/C, TAMD122D, TAMD122P-A,  
 TAMD122P-B, TAMD122P-C

Mätområde / Temperature range: 20-120 °C  
 Resistance tom/empty - full: 287-22 Ohm

Art. nr/Part no	Ersätter/Replaces	Info
19150	827150	5/8"-18 UNF

**Givare laddlufttryck  
Sensor charge air pressure**



**D9, D12**  
 D9A2A, D9A2C, D9A2J  
 D12C-A MP  
 D12D-A MH, D12D-A MP  
 D12D-B MH, D12D-B MP  
 D12D-C MH, D12D-C MP  
 D12D-D MP  
 D12D-E MH, D12D-E MP  
 D12D-F MP  
 D12D-G MH, D12D-G MP  
 D12D-H MP

Art. nr/Part no	Ersätter/Replaces
18613	20909613, 20552760

**Tryckgivare vevhus  
Pressure sensor crankcase**



**D9, D11, D12, D13, D16**  
 D9A2A, D9A2A D9-425, D9A2A D9-500, D9A2A D9-500 (R4), D9A2A  
 D9-575, D9A2B D9-425, D9A2B D9-500 (R5), D9A2B D9-575, D9A2C  
 D9-425, D9A2D D9-500 (R5), D9A2E D9-425, D9A2A D9A-MH, D9A2F  
 D9-575, D9A2K D9-575, D9A2A MH, D9A2B MH, D9A2C D9A-MH, D9A2A  
 MP, D9A2B MP, D9A2C, D9A2D, D9A2E, D9A2F, D9A2G, D9A2H, D9A2J  
 D9A-J, D9A-K, D9A2K, D9A2B  
 D11B1-A MP, D11B2-A MP, D11A-A, D11A-B, D11A-C, D11A-D MP, D11A-D  
 (IPS), D11A-E, D11A-E MP, D11A-C MP, D11A-C (IPS), D11A-A, D11A-B  
 D11A-C, D11A-D MP, D11A-D (IPS), D11A-E, D11A-E MP, D11A-C MP  
 D11A-C (IPS)  
 D12D-A MH, D12D-B MH, D12D-C MH, D12D-E MH, D12D-G MH, D12C-A  
 MP, D12D-A MP, D12D-B MP, D12D-C MP, D12D-D MP, D12D-E MP, D12D-F  
 MP, D12D-G MP, D12D-H MP  
 D13B-E MH, D13C1-A MP, D13C3-A MP, D13C4-A MP, D13B-A MP, D13B-B  
 MP, D13B-C MP, D13B-D MP, D13B-G MP, D13B-H MP, D13B-J MP, D13B-K MP  
 D13B-L MP, D13B-M MP, D13B-C MH  
 D16C-D MH, D16C-A MH, D16C-B MH, D16C-C MH

Art. nr/Part no	Ersätter/Replaces
18017	21634017



### Varvtalsgivare Crankshaft pulse sensor



#### D1-13, D1-30, D2-40, D2-50, D2-55, D2-60, D2-75, D4, D6, D9, D11, D12, D13

D1-13, D1-13B, D1-13F  
D1-20, D1-20B, D1-20F  
D1-30, D1-30B, D1-30F  
D2-40, D2-40B, D2-40F  
D2-50F  
D2-55, D2-55B, D2-55C, D2-55D, D2-55E, D2-55F  
D2-60F  
D2-75B, D2-75C, D2-75F  
D4-150A-G, D4-175I-G,  
D4-180I-B, D4-180I-C, D4-180I-D, D4-180I-E, D4-180I-F  
D4-210A-A, D4-225A-B, D4-210I-A, D4-210I-B  
D4-225I-B, D4-225A-C, D4-225A-D, D4-225I-C, D4-225I-D, D4-225A-E,  
D4-225I-E, D4-225A-F, D4-225I-F  
D4-230A-G, D4-230I-G, D4-260A-A, D4-260A-B, D4-260A-C, D4-260A-D,  
D4-260D-B, D4-260D-C, D4-260D-D, D4-260I-A, D4-260I-B, D4-260I-C,  
D4-260I-D, D4-260A-E, D4-260D-E, D4-260I-E, D4-260A-F, D4-260D-F,  
D4-260I-F, D4-270A-G, D4-270I-G  
D4-300A-A, D4-300A-C, D4-300A-D, D4-300A-E, D4-300A-F, D4-300A-G,  
D4-300D-A, D4-300D-C, D4-300D-D, D4-300D-E, D4-300D-F, D4-300I-A,  
D4-300I-C, D4-300I-D, D4-300I-E, D4-320I-G  
D6-280A-A, D6-280A-B, D6-280A-C, D6-280A-D, D6-280A-E, D6-280I-A,  
D6-280I-B, D6-280I-C, D6-280I-D, D6-280I-E  
D6-300A-F, D6-300A-G, D6-300D-F, D6-300D-G, D6-300I-F, D6-300I-G  
D6-310I-A, D6-310A-A, D6-310A-B, D6-310A-C, D6-310A-D, D6-310D-B,  
D6-310D-C, D6-310D-D, D6-310I-B, D6-310I-C, D6-310I-D, D6-310A-E,  
D6-310D-E, D6-310I-E  
D6-330A-B, D6-330A-C, D6-330A-D, D6-330A-E, D6-330A-F, D6-330D-B,  
D6-330D-C, D6-330D-D, D6-330D-E, D6-330D-F, D6-330I-B, D6-330I-C,  
D6-330I-D, D6-330I-E, D6-330I-F  
D6-340A-G, D6-340D-G, D6-340I-G, D6-350A-A, D6-350A-B  
D6-370A-B, D6-370A-C, D6-370A-D, D6-370A-E, D6-370A-F, D6-370D-A,  
D6-370D-B, D6-370D-C, D6-370D-D, D6-370D-E, D6-370D-F, D6-370I-A,  
D6-370I-B, D6-370I-C, D6-370I-D, D6-370I-E, D6-370I-F  
D6-380A-G, D6-380D-G, D6-380I-G  
D6-400A-E, D6-400A-F, D6-400A-G  
D6-435D-A, D6-435D-D, D6-435D-C, D6-435D-E, D6-435D-F, D6-435I-A,  
D6-435I-C, D6-435I-D, D6-435I-E, D6-435D-F, D6-435I-SC-F, D6-435I-TC-F,  
D6-435I-VJ-F, D6-440A-G, D6-440D-G, D6-440I-G, D6-440I-VJ-G  
D6-480D-G, D6-480I-G, D6-440I-VJ-G  
D9A2A D9-425, D9A2B D9-425, D9A2C D9-425, D9A2E D9-425, D9A2A  
D9-500, D9A2A D9-500 (R4), D9A2D D9-500 (R5), D9A2B D9-500 (R5),  
D9A2B D9-575, D9A2A D9-575, D9A2F D9-575, D9A2K D9-575  
D11A-A, D11A-B, D11A-C, D11A-D, D11A-C (IPS), D11A-D (IPS)  
D11A-E, D11A-E (IPS)  
D12D-A MH, D12D-B MH, D12D-C MH, D12D-E MH, D12D-G MH  
D12C-A MP, D12D-A MP, D12D-B MP, D12D-C MP, D12D-D MP  
D12D-E MP, D12D-F MP, D12D-G MP, D12D-H MP  
D13B-A MP, D13B-B MP, D13B-C MP, D13B-D MP, D13B-G MP  
D13B-H MP, D13B-J MP, D13B-K MP, D13B-K MP (IPS), D13B-L MP  
D13B-M MP

Art. nr/Part no	Ersätter/Replaces	
18987	21426987, 20513343	Bosch 0 251 210 151

### Givare laddlufttryck och temperatur Sensor charge air pressure/temperature




#### D3, D4, D6, D9, D11, D13

D3-110I-G, D3-140A-G, D3-140I-G, D3-150I-G, D3-170A-G, D3-170I-G,  
D3-200A-G, D3-200I-G, D3-220A-G, D3-220I-G, D3-110I-H, D3-140A-H,  
D3-140I-H, D3-150I-H, D3-170A-H, D3-170I-H, D3-200A-H, D3-200I-H,  
D3-220A-H, D3-220I-H, D3-110I-D, D3-110I-E, D3-110I-F, D3-140I-E,  
D3-140I-F, D3-140A-D, D3-140A-E, D3-140A-F, D3-150I-D, D3-150I-E,  
D3-150I-F, D3-170I-D, D3-170I-E, D3-170I-F, D3-170A-D, D3-170A-E,  
D3-170A-F, D3-200I-D, D3-200I-E, D3-200I-F, D3-200A-D, D3-200A-E,  
D3-200A-F, D3-220I-D, D3-220I-E, D3-220I-F, D3-220A-D, D3-220A-E,  
D3-220A-F  
D4-180I-F, D4-225A-F, D4-225I-F, D4-260A-F, D4-260D-F, D4-260I-F,  
D4-300A-F, D4-300D-F, D4-300I-F, D4-210A-A, D4-210A-B, D4-225A-C,  
D4-225A-D, D4-225A-E, D4-225I-B, D4-260A-A, D4-260A-B, D4-260A-C,  
D4-260A-D, D4-260A-E, D4-260D-B, D4-260D-C, D4-260D-D,  
D4-260D-E, D4-300A-A, D4-300A-C, D4-300A-D, D4-300A-E,  
D4-300D-A, D4-300D-C, D4-300D-D, D4-300D-E, D4-180I-B, D4-180I-C,  
D4-180I-D, D4-180I-E, D4-210I-A, D4-210I-B, D4-225I-B, D4-225I-C,  
D4-225I-D, D4-225I-E, D4-260I-A, D4-260I-B, D4-260I-C, D4-260I-D,  
D4-260I-E, D4-300I-A, D4-300I-C, D4-300I-D, D4-300I-E  
D6-300A-F, D6-330A-F, D6-370A-F, D6-370D-F, D6-400A-F, D6-435D-F,  
D6-300I-F, D6-330I-F, D6-370I-F, D6-435I-F, D6-435I-F, D6-280A-A,  
D6-280A-B, D6-280A-C, D6-280A-D, D6-280A-E, D6-310A-A, D6-310A-B,  
D6-310A-C, D6-310A-D, D6-310A-E, D6-310D-B, D6-310D-C,  
D6-310D-D, D6-310D-E, D6-330A-B, D6-330A-C, D6-330A-D,  
D6-330A-E, D6-330D-B, D6-330D-C, D6-330D-D, D6-330D-E,  
D6-350A-A, D6-350A-B, D6-370A-B, D6-370A-C, D6-370A-D, D6-370A-E,  
D6-370D-A, D6-370D-B, D6-370D-C, D6-370D-D, D6-370D-E,  
D6-400A-E, D6-435D-A, D6-435D-C, D6-435D-D, D6-435D-E, D6-280I-A,  
D6-280I-B, D6-280I-C, D6-280I-D, D6-280I-E, D6-310I-A, D6-310I-B,  
D6-310I-C, D6-310I-D, D6-310I-E, D6-330I-B, D6-330I-C, D6-330I-D,  
D6-330I-E, D6-370I-A, D6-370I-B, D6-370I-C, D6-370I-D, D6-370I-E,  
D6-435I-A, D6-435I-C, D6-435I-D, D6-435I-E  
D9A2L MH, D9A2M MP, D9A2A, D9A2A D9-425, D9A2A D9-500,  
D9A2A D9-500 (R4), D9A2A D9-575, D9A2B D9-425, D9A2B D9-500  
(R5), D9A2B D9-575, D9A2C D9-425, D9A2D D9-500 (R5), D9A2E  
D9-425, D9A2A D9A-MH, D9A2F D9-575, D9A2K D9-575, D9A2A MH,  
D9A2C MH, D9A2C D9A-MH, D9A2A MP, D9A2B MP, D9A2C, D9A2D,  
D9A2E, D9A2F, D9A2G, D9A2H, D9A2J, D9A-J, D9A-K, D9A2K, D9A2B  
D11B1-A MP, D11A-A, D11A-B, D11A-C, D11A-D MP, D11A-D (IPS),  
D11A-E, D11A-C MP, D11A-C (IPS), D11B2-A MP  
D13B-F MG  
D16C-D MH, D16C-A MH, D16C-B MH, D16C-C MH


Art. nr/Part no	Ersätter/Replaces	Info
18936	22320906, 21385453	Bosch 0 281 006 102



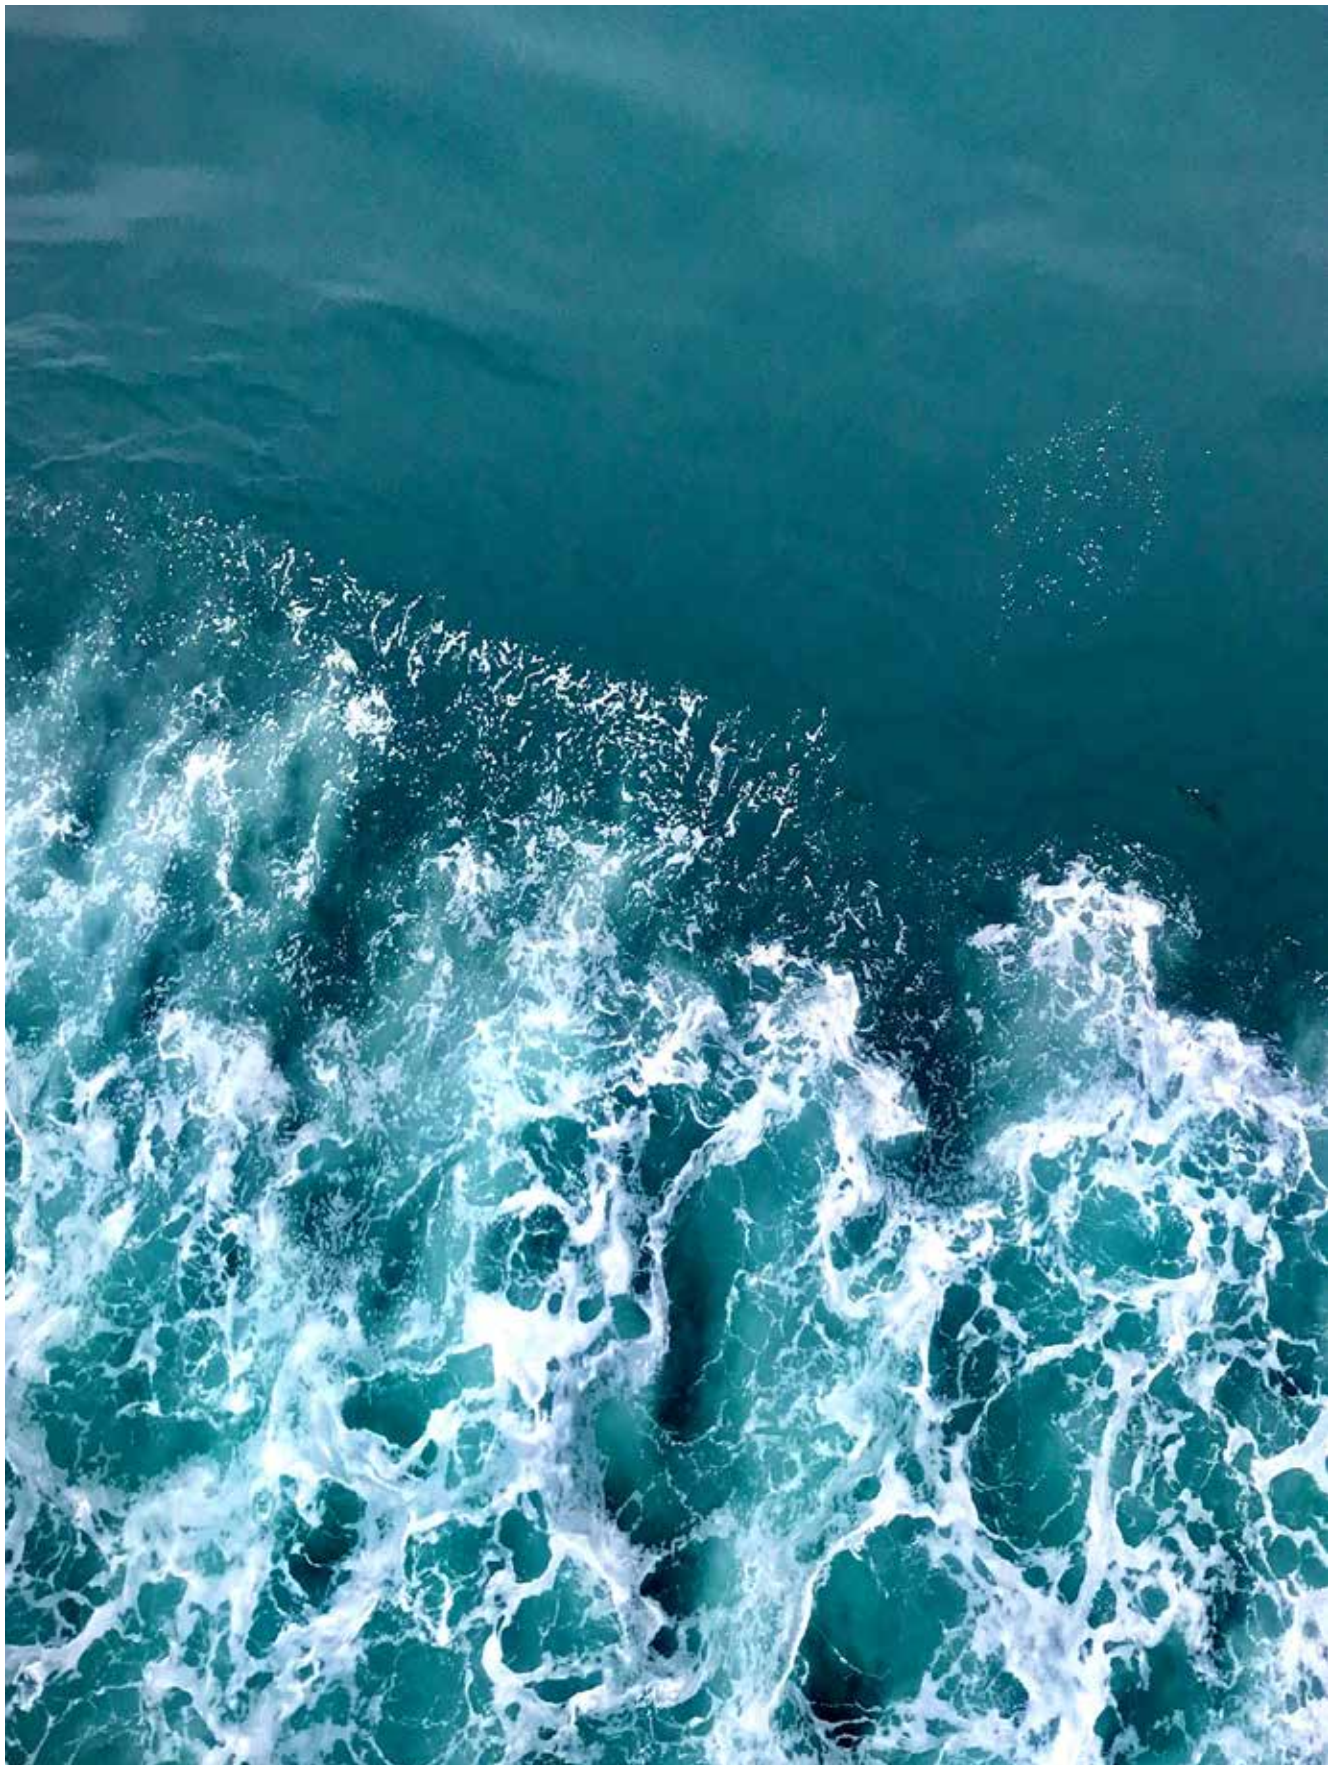

Spare parts from Sweden

Övre växel / Upper unit  
200, 250, 270, 280, 285, 290, 290DP, SP-A, C, DP-A, DP-B, DP-C, DP-D

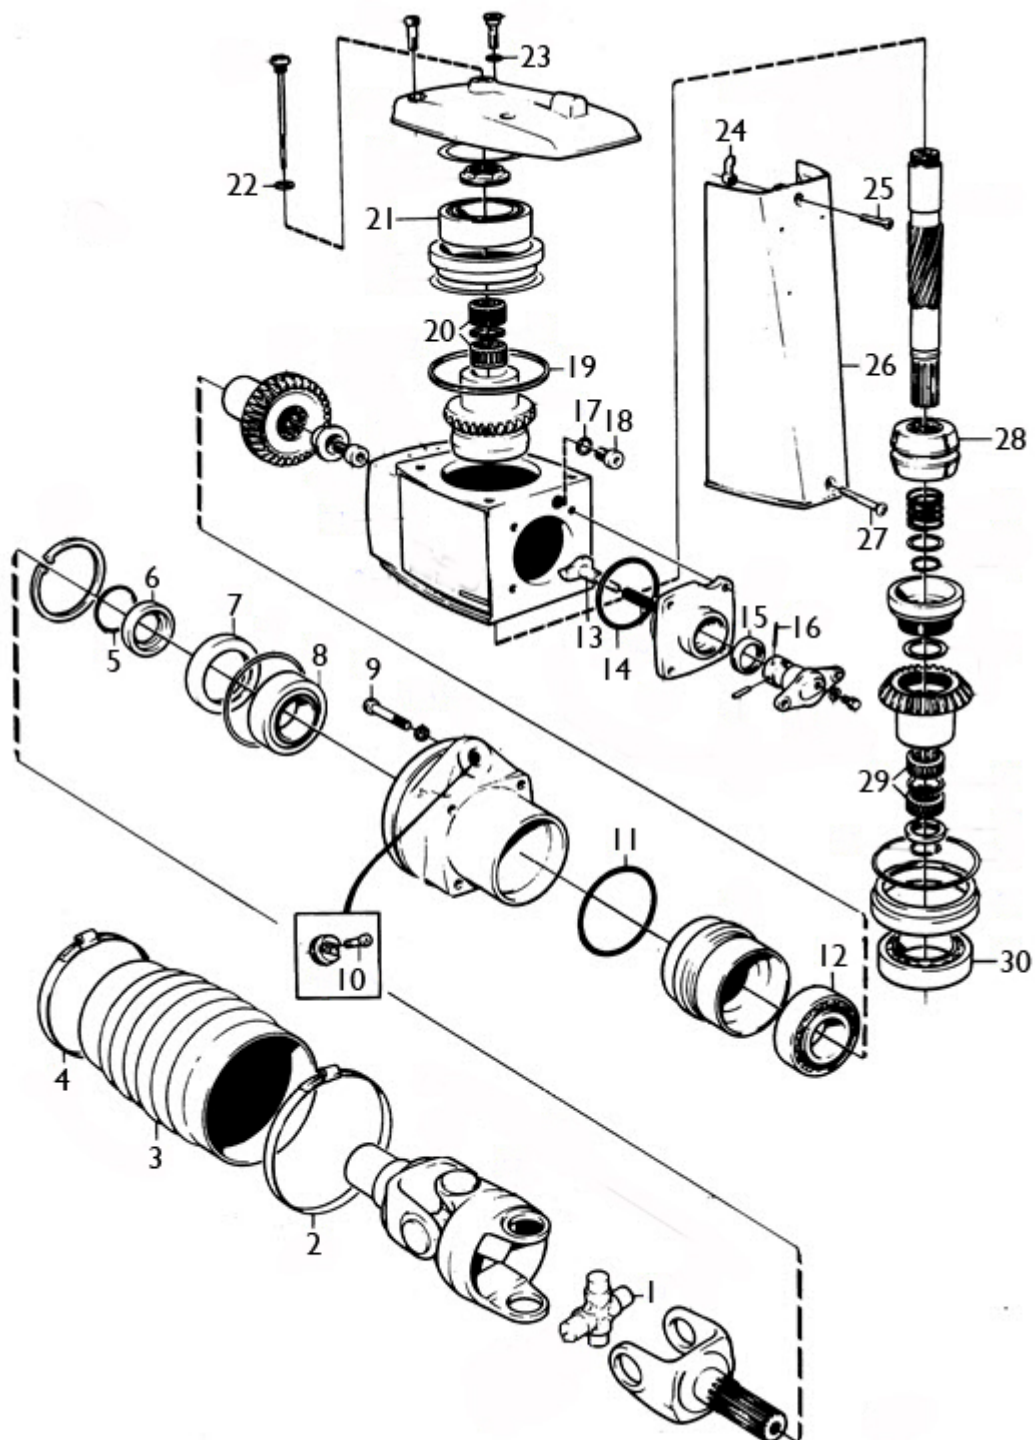

## Övre växel / Upper unit 200, 250, 270, 280, 285, 290, 290DP, SP-A, C, DP-A, DP-B, DP-C, DP-D

Bild/ Picture	Art. nr/ Part no	Ersätter/Replaces	Benämning/ Description
1	19255	853255	Knutkors/U-joint
2	19013	853013	Slangklamma/Jubilee clip
3	19294	876294, 875826	Knutbälg inkl klämmor/ Drive bellow inc clips
4	19012	853012	Slangklamma/Jubilee clip
5	19000	956000	O-ring
6	19075	832675	Slitbricka/Washer
7	19253	839253	Packbox/Oil seal
8	19949	3850852, 853949, 183247, 183668	Rulllager/Ball bearing
9	22100	956591x4, 942598x4	Bultsats dubbellagerbox/ Bolt kit double bearing
10	18706	852705	Plunsch/Pivot pin
11	19095	967344, 925095	O-ring
12	19247	183247, 3850853	Rulllager/Ball bearing
13	19646	3856502, 839646	Sko/Dog
14	19093	925093	O-ring
15	19868	958868	Packbox/Oil seal
16	19924	951924	Spännstift/Spring pin
17	19682	897682	Fiberbricka/Gasket
18	18179	981965, 814179	Oljepåfyllningsplugg/ Oil fill plug
19	19669	832669	Packning/Gasket
20	19819	3852390, 181359	Nållager/Needle bearing
21	19542	853542	Rulllager/Ball bearing
22	19974	955974	O-ring
23	19989	955989	O-ring
24	19873	897873	Låshake/Latch
25	19218	943218	Skruv/Screw
26	19570	832570	Täckkåpa/ Protecting cover
27	19816	941816	Skruv/Screw
28	19613	3807613, 3855783, 814601, 854297	Skjuthylsa/Sliding sleeve
29	19819	3852390, 853819, 181359	Nållager/Needle bearing
30	19542	853542	Rulllager/Ball bearing



**Drivknutsbälg / Drive bellow** - Inklusive ABA rostfria slangklämmor / incl. ABA stainless hose clamps

Art. nr/Part no	Ersätter/Replaces
19294	876294, 875826




**Packningssats övre växel/Seal kit upper unit**

Art. nr / Part no	Ersätter / Replaces
19029	876266



Övre växel / Upper unit  
 SP-CI, SP-E, DP-CI, DP-DI, DP-E, DP-SI, DPX, DPX-R, DPX-S, DPX-SI

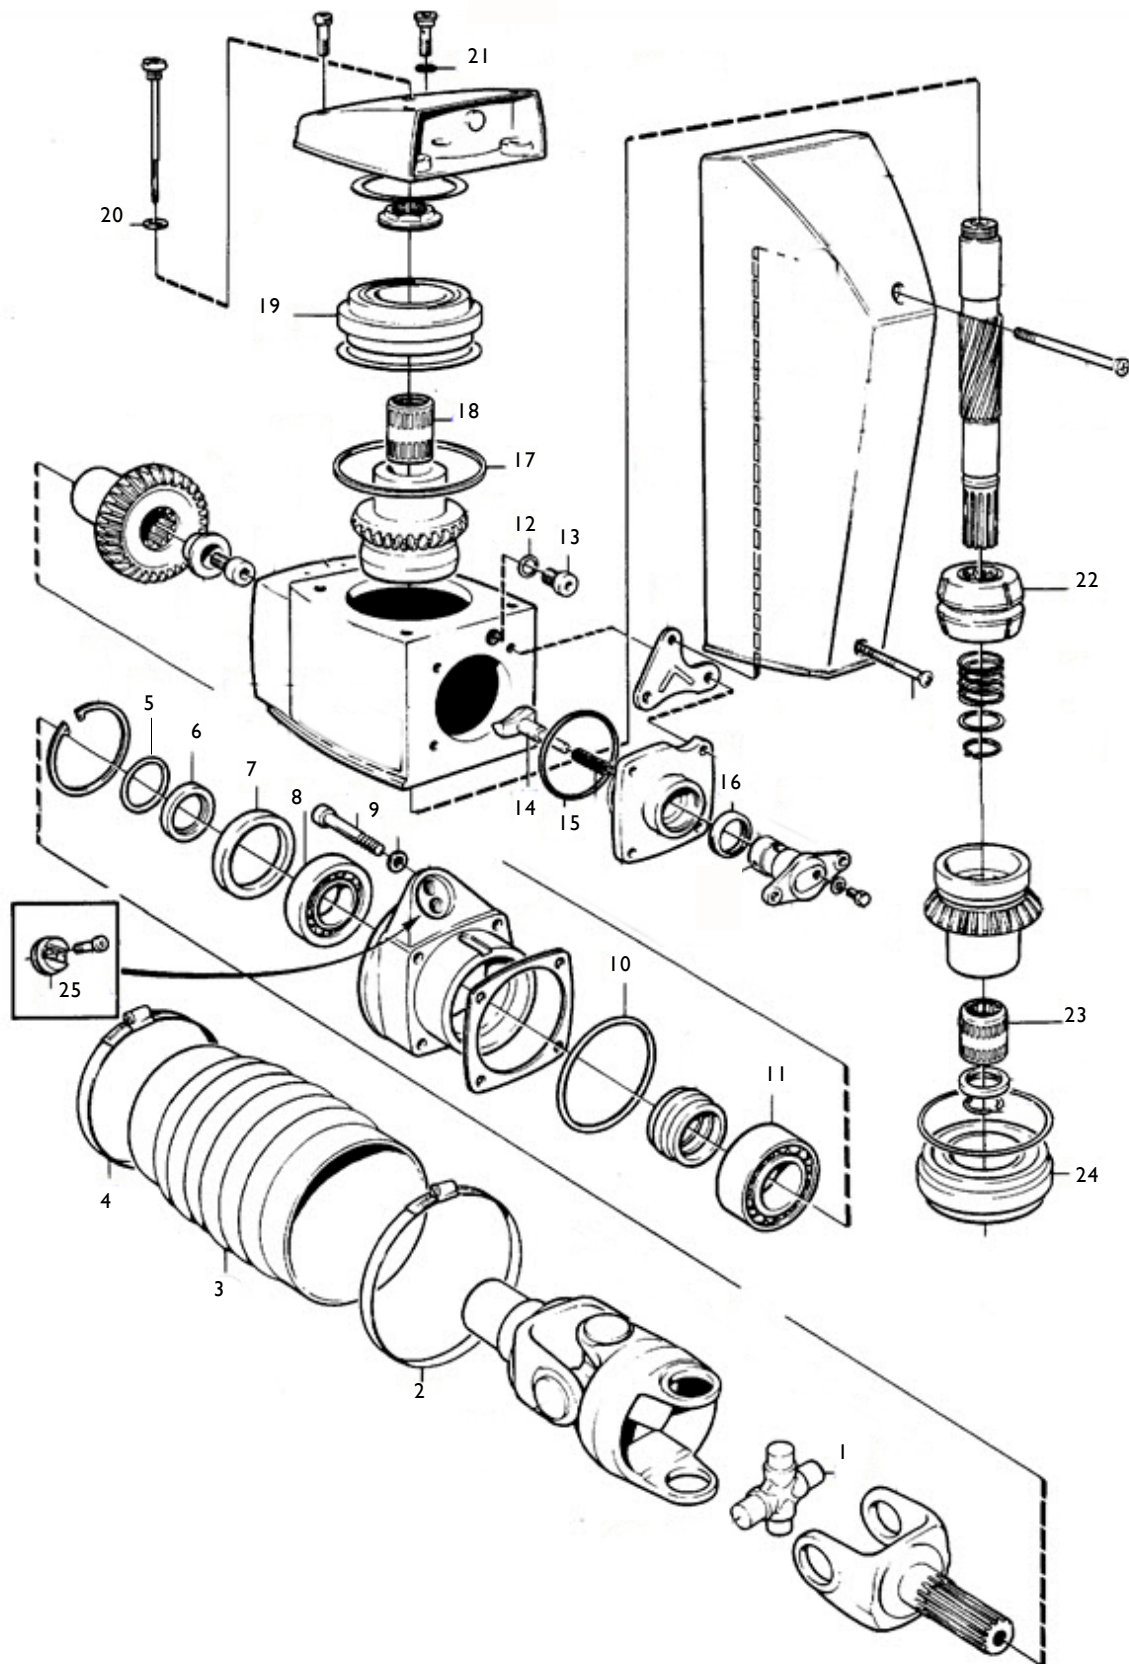

## Övre växel / Upper unit

SP-CI, SP-E, DP-CI, DP-DI, DP-E, DP-SI, DPX, DPX-R, DPX-S, DPX-SI

Bild/ Picture	Art. nr/ Part no	Ersätter/Replaces	Benämning/ Description
1	19619	3860232	Knutkors/U-joint
2	19013	853013	Slangklamma/Jubilee clip
3	19294	876294	Knutbälj inkl klämmor/ Drive bellow incl. clips
4	19012	853012	Slangklamma/Jubilee clip
5	19000	956000	O-ring
6	19075	832675	Slitbricka/Washer
7	19253	839253	Packbox/Oil seal
8	19247	183247, 3850853	Rulllager/Ball bearing
9	22100	956591x4, 942598x4	Bultsats dubbellagerbox/ Bolt kit double bearing
10	19095	967344, 925095	O-ring
11	19949	3850852	Rulllager/Ball bearing
12	19682	897682	Fiberbricka/Gasket
13	18179	981965, 814179	Oljepåfyllningsplugg/ Oil fill plug
14	19646	3856502, 839646	Sko/Dog
15	19093	925093	O-ring
16	19868	853868	Packbox/Oil seal
17	19669	832669	Packning/Gasket
18	19819	3852390, 853819	Nållager/Needle bearing
19	19019	3857176, 3852389	Rulllager/Ball bearing
20	19974	955974	O-ring
21	19989	955989	O-ring
22	19613	3807613, 3855783	Skjuthylsa/Clutch cone
23	19819	3852390	Nållager/Needle bearing
24	19019	3857176, 3852389	Rulllager/Ball bearing
25	18706	852705	Plunsch/Pivot pin



Packningssats övre växel/Seal kit upper unit

Art. nr/Part no	Ersätter/Replaces
19029	876266



Drivknutbälj / Drive bellow - Inklusive ABA rostfria slangklämmor / incl. ABA stainless hose clamps

Art. nr/Part no	Ersätter/Replaces
19294	876294, 875826




250  
270, 270T, 275, 275A  
280, 280T, 285A  
290  
SP-A, SP-A1, SP-A2, SP-C, SP-C1, SP-E  
DP-A, DP-A1, DP-A2  
DP-B, DP-B1  
DP-C, DP-C1  
DP-D, DP-D1  
DP-E  
DP-G  
DP-S, DP-S1, DP-SM, DP-SMTD, DP-SMTD1, DP-SMTD3  
DPS-A, DPS-A OXi, DPS-B, DPS-B OX, DPS-B1, DPS-B1 OX  
DPX-A, DPX-R, DPX-S1  
FWD-B1, FWD-B2  
SX-A, SX-C, SX-C1, SX-C2, SX-CT, SX-CT1, SX-CT2, SX-M, SX-M1, SX-MTD,  
SX-MTD3  
XDP-B, XDP-D3  
DP-G  
MS3B, MS3C, MS4A, MS4B, MS5A, MS5B

Alla versioner/All versions

Art. nr/Part no	Ersätter/Replaces	Benämning/ Description
19613	3807613, 3855783	Skjuthylsa/ Sliding sleeve
19646	3856502, 3852293, 3852396, 814601, 814603, 852949, 854370	Glidsko/ Shoe "dog"




Spare parts from Sweden

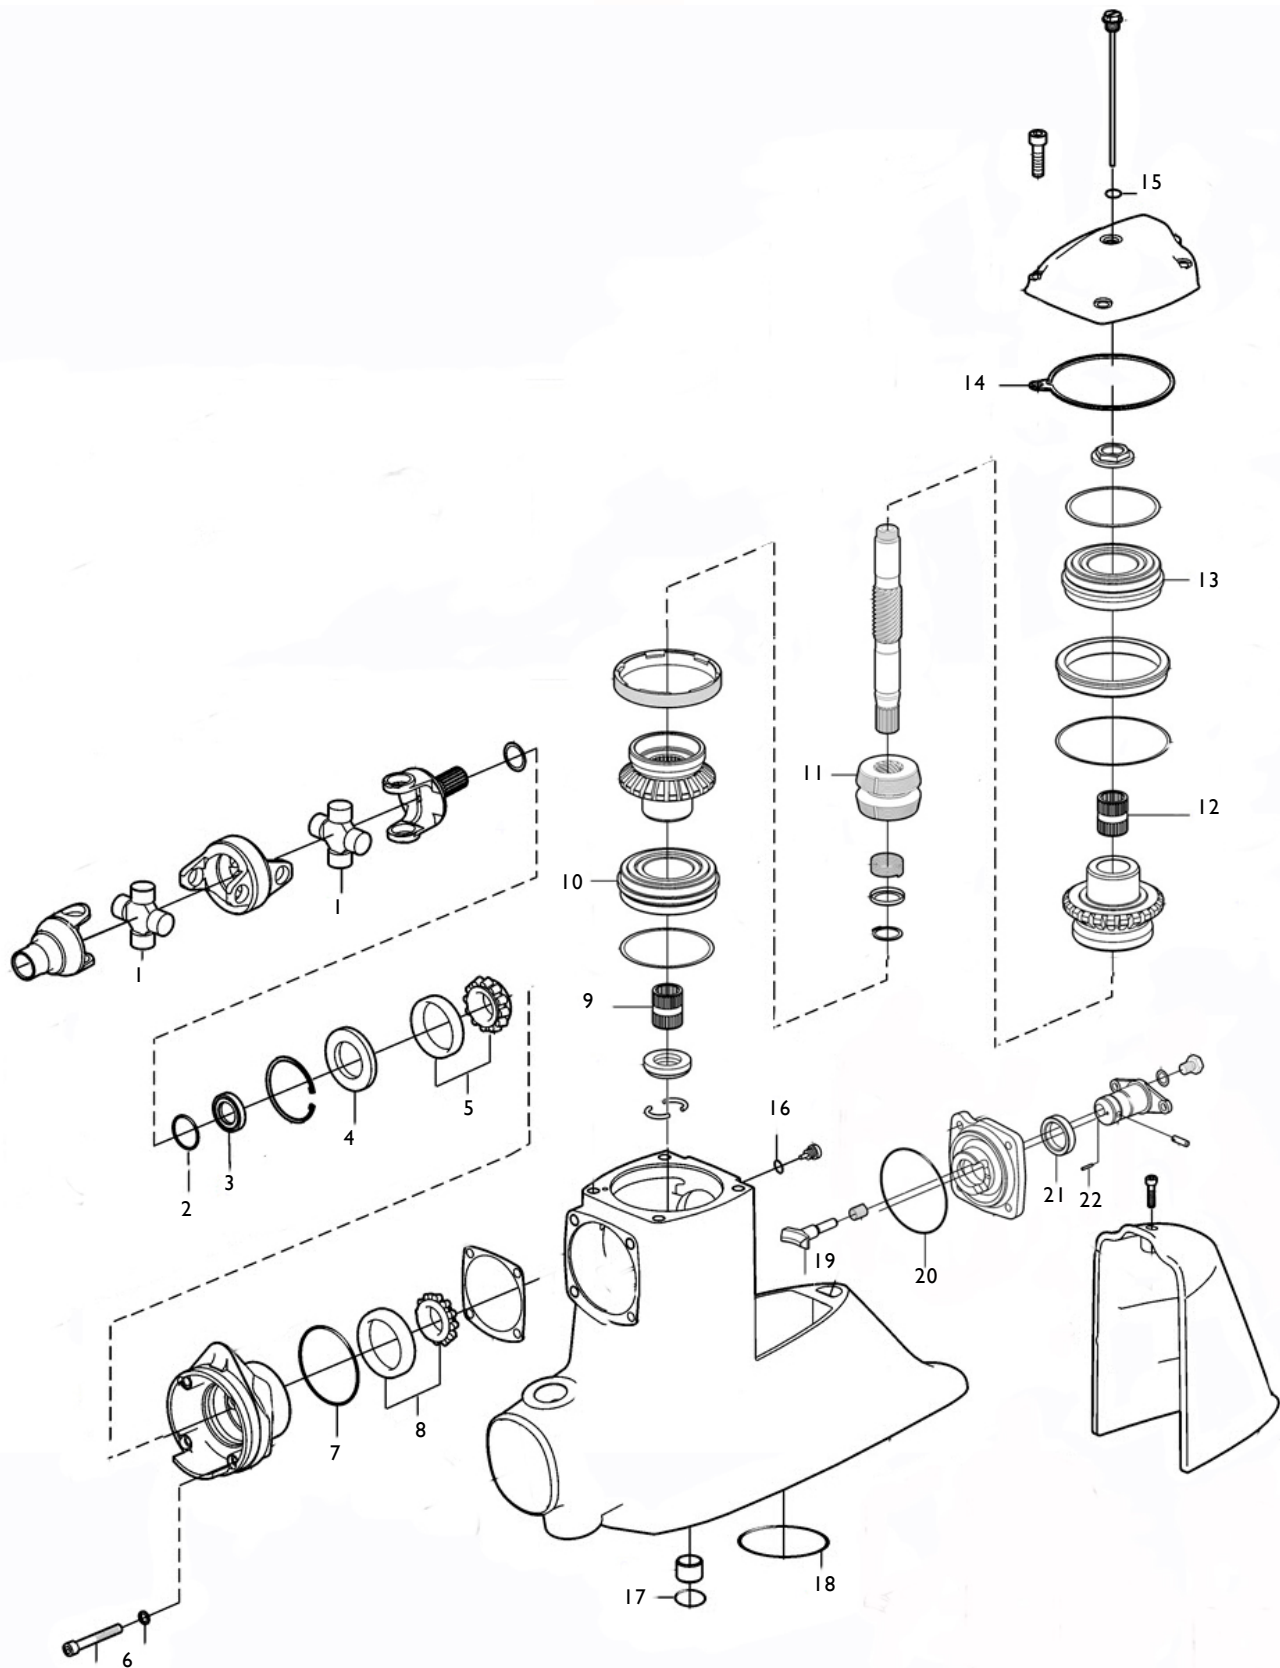Övre växel / Upper unit  
DP-G, DPX-A

## Övre växel / Upper unit DP-G, DPX-A

Bild/ Picture	Art. nr/ Part no	Ersätter/Replaces	Benämning/ Description
1	19619	3860232	Knutkors/U-joint
2	19000	956000	O-ring
3	19075	832675	Slitbricka/Washer
4	19253	839253	Packbox/Oil seal
5	19247	183247, 3850853	Rulllager/Ball bearing
6	22100	956591x4, 942598x4	Bultsats dubbellagerbox/ Bolt kit double bearing
7	19095	967344, 925095	O-ring
8	19949	3850852	Rulllager/Ball bearing
9	19819	3852390	Nållager/Needle bearing
10	19019	3857176, 3852389	Rulllager/Ball bearing
11	19613	3807613, 3855783	Skjuthylsa/Clutch cone
12	19819	3852390	Nållager/Needle bearing
13	19019	3857176, 3852389	Rulllager/Ball bearing
14	19183	3860183	Packning/Gasket
15	19905	3852045	O-ring
16	19081	3855081	O-ring
17	19017	125017	O-ring
18	19256	925256	O-ring
19	19646	3856502, 839646	Sko/Dog
20	19093	925093	O-ring
21	19868	853868	Packbox/Oil Seal
22	19593	973593	Spännstift/Spring pin

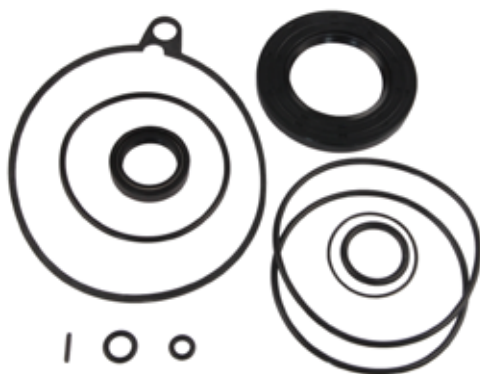

Packningssats övre växel/Seal kit upper unit

Art. nr/Part no	Ersätter/Replaces
23034	N/A



Drivknutsbäl / Drive bellow - Inklusive ABA rostfria slangklammor / incl. ABA stainless hose clamps

Art. nr/Part no	Ersätter/Replaces
19294	876294, 875826




250  
270, 270T, 275, 275A  
280, 280T, 285A  
290  
SP-A, SP-A1, SP-A2, SP-C, SP-C1, SP-E  
DP-A, DP-A1, DP-A2  
DP-B, DP-B1  
DP-C, DP-C1  
DP-D, DP-D1  
DP-E  
DP-G  
DP-S, DP-S1, DP-SM, DP-SMTD, DP-SMTD1, DP-SMTD3  
DPS-A, DPS-A OXi, DPS-B, DPS-B OX, DPS-B1, DPS-B1 OX  
DPX-A, DPX-R, DPX-S1  
FWD-B1, FWD-B2  
SX-A, SX-C, SX-C1, SX-C2, SX-CT, SX-CT1, SX-CT2, SX-M, SX-M1, SX-MTD,  
SX-MTD3  
XDP-B, XDP-D3  
DP-G  
MS3B, MS3C, MS4A, MS4B, MS5A, MS5B

Alla versioner/All versions

Art. nr/Part no	Ersätter/Replaces	Benämning/ Description
19613	3807613, 3855783	Skjuthylsa/ Sliding sleeve
19646	3856502, 3852293, 3852396, 814601, 814603, 852949, 854370	Glidsko/ Shoe "dog"



Övre växel / Upper unit  
DPH, DPR

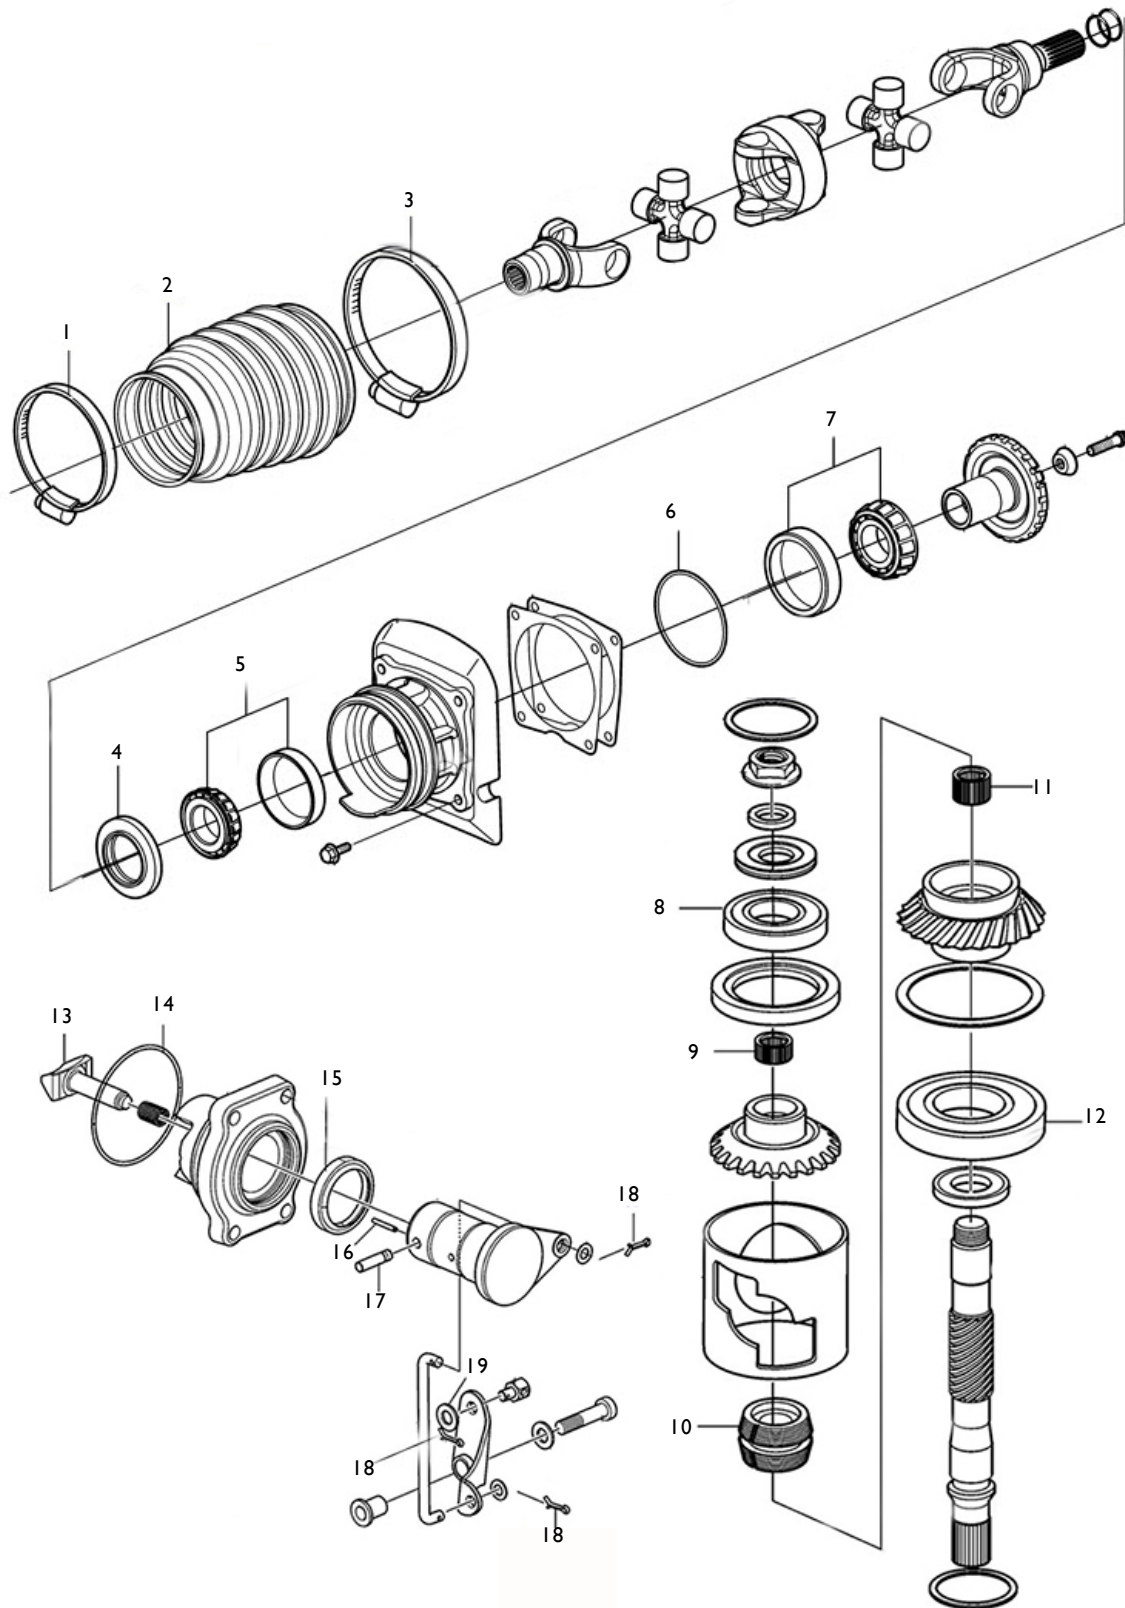

## Övre växel / Upper unit DPH, DPR

Bild/ Picture	Art. nr/ Part no	Ersätter/Replaces	Benämning/ Description
1	19012	853012	Slangklamma/Jubilee clip
2	19509	3594509	Knut bälg/Drive bellow
3	19013	22274888	Slangklamma/Jubilee clip
4	19084	3863084	Packbox/Oil seal
5	15043	11043	Kullager/Ball bearing
6	19259	925259	O-ring
7	12096	11096	Kullager/Ball bearing
8	19804	181804	Kullager/Ball bearing
9	19778	184778	Nållager/Needle bearing
10	19003	3849006	Skjuthylsa/Clutch cone
11	19654	184654	Nållager/Needle bearing
12	19430	993430	Kullager/Ball bearing
13	19387	3862387	Sko/Dog
14	18624	945624	O-ring
15	19085	3863085	Packbox/Oil seal
16	19936	951936	Fjäderstift/Spring pin
17	19867	3862867	Stift/Pin
18	19276	17276	Saxpinne/Split pin
19	19091	940191	Bricka/Washer



Packningssats övre växel/Seal kit upper unit

Art. nr/Part no	Ersätter/Replaces
23010	N/A



Packningssats till växelmekanism DPH, DPR

Art. nr/Part no	Ersätter/Replaces
22112	1 x 3863085, 1 x 945624, 3 x 17276, 1 x 951936



Drivknutsbälg / Drive bellow - Inklusive ABA rostfria slangklammor / incl. ABA stainless hose clamps

Art. nr/Part no	Ersätter/Replaces
19509	3594509



DPH-A, DPH-B, DPH-C, DPH-D  
DPR-A, DPR-B, DPR-C, DPR-D

Alla versioner/All versions

Art. nr/Part no	Ersätter/Replaces	Benämning/ Description
19003	3849006, 3862369	Skjuthylsa/ Sliding sleeve
19387	3862387	Glidsko/ Shoe "dog"




Slanganslutning / Hose connector DPH, DPR

Art. nr/Part no	Ersätter/Replaces
19192	40005192



Övre växel / Upper unit  
 SX-A, DPS-A, DPS-B, FWD

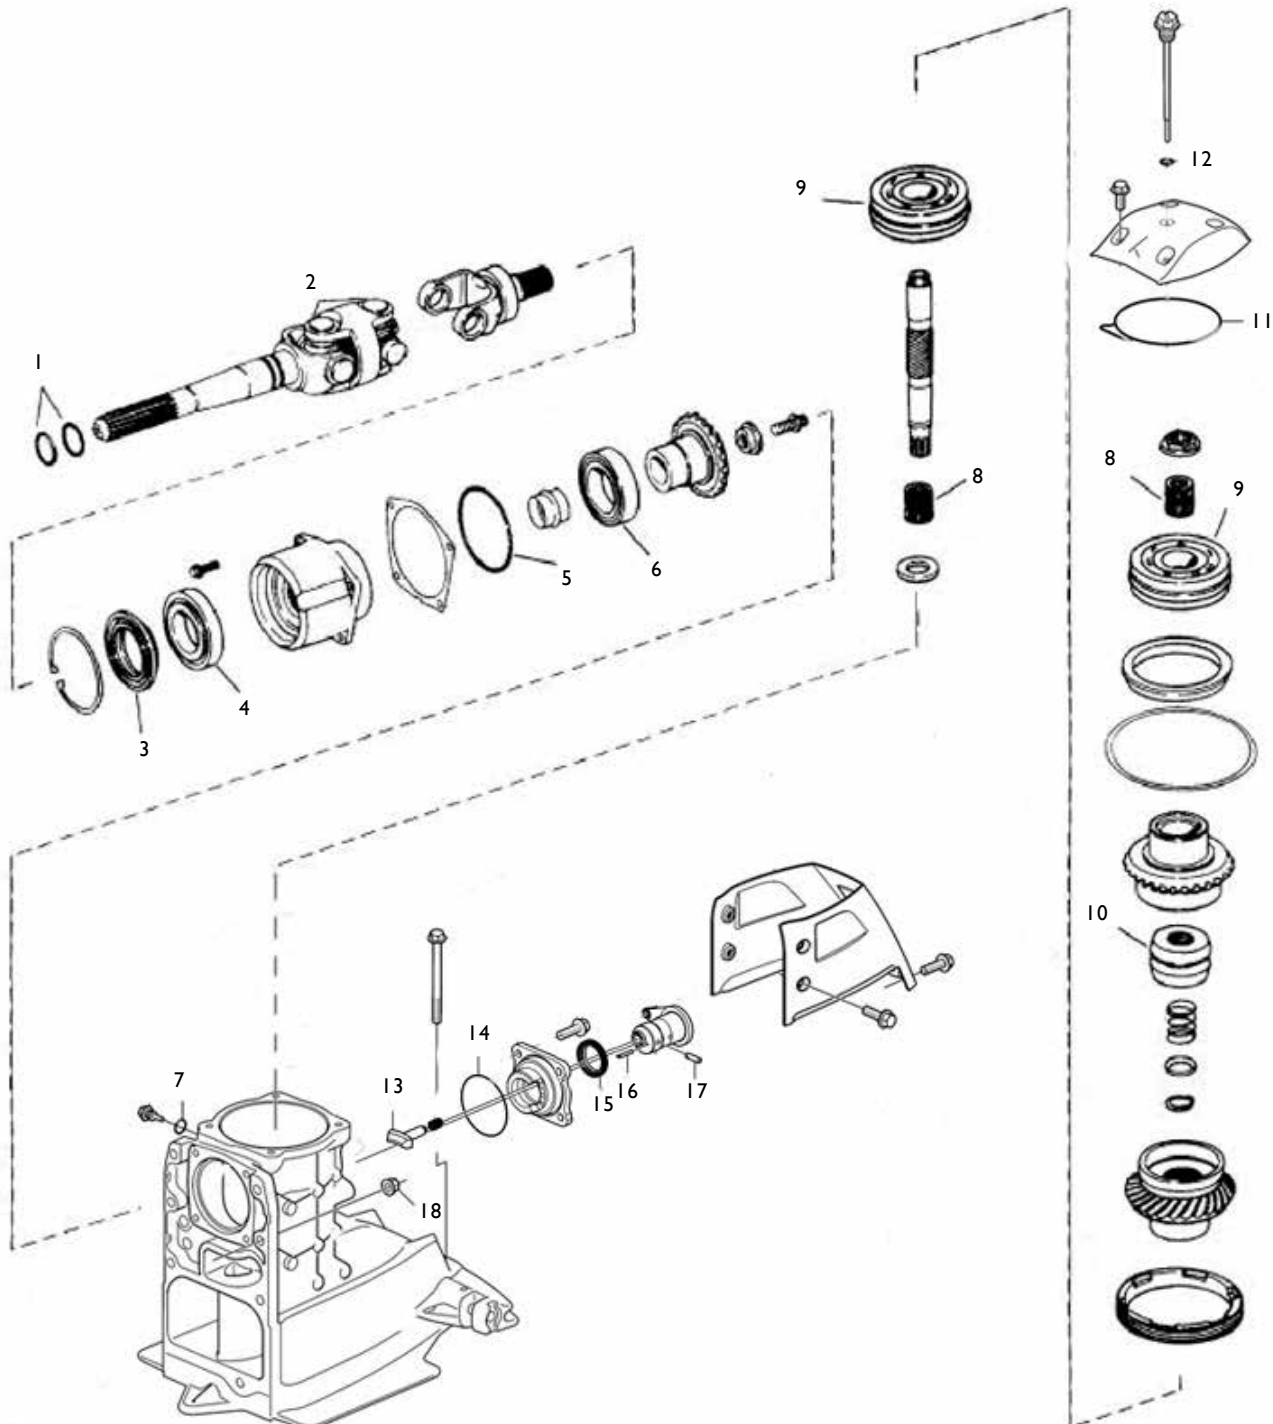

## Övre växel / Upper unit SX-A, DPS-A, DPS-B, FWD

Bild/ Picture	Art. nr/ Part no	Ersätter/Replaces	Benämning/ Description
1	19565	3852565, 997368	O-ring
3	18272	3852272	Tätning/Seal
4	19247	183247, 3850853	Lager/Bearing
5	19095	967344, 925095	O-ring
6	19949	3850852	Lager/Bearing
7	19081	3855081	O-ring DPS-B & SX-A
7	14114	949187, 955972	O-ring DPS-A & FWD
8	19819	3852390	Nållager/Needle bearing
9	11028	11028	Kullager/Ball bearing
10	19613	3807613, 3855783	Skjuthylsa/Clutch cone
11		3889782, 3841964	Packning topp kåpa/ Gasket top cover
12	19905	3852045	O-ring
13		3843517	Sko/Dog
14	19093	925093	O-ring
15	19085	3863085	Packbox/Oil seal
16	19936	951936	Rörpinne/Spring pin
17	19867	3862867	Pinne/Pin
18	19329	3853329	Mutter/Nut



Packningssett övre växel/Seal kit upper unit

Art. nr/Part no	Ersätter/Replaces
23021	3888917



### Tätning/Seal SX, DPS, FWD

SX-A, SX-D, DPS-A, DPS-B, DPS-B1, DPS-D1  
DPS-A OXi, DPS-B OX, DPS-B OXi, DPS-D1 OX  
FWD-B1, FWD-B2, FWD-D1 OX, FWD-D2 OX

Art. nr/Part no	Ersätter/Replaces
11788	3889788



Drivknutsbälg / Drive bellow - Inklusive ABA rostfria slangklammor / incl. ABA stainless hose clamps

Art. nr/Part no	Ersätter/Replaces
19127	22197130, 3841481, 3854127




250  
270, 270T, 275, 275A  
280, 280T, 285A  
290  
SP-A, SP-A1, SP-A2, SP-C, SP-C1, SP-E  
DP-A, DP-A1, DP-A2  
DP-B, DP-B1  
DP-C, DP-C1  
DP-D, DP-D1  
DP-E  
DP-G  
DP-S, DP-S1, DP-SM, DP-SMTD, DP-SMTD1, DP-SMTD3  
DPS-A, DPS-A OXi, DPS-B, DPS-B OX, DPS-B1, DPS-B1 OX  
DPX-A, DPX-R, DPX-S1  
FWD-B1, FWD-B2  
SX-A, SX-C, SX-C1, SX-C2, SX-CT, SX-CT1, SX-CT2, SX-M, SX-M1, SX-MTD,  
SX-MTD3  
XDP-B, XDP-D3  
DP-G  
MS3B, MS3C, MS4A, MS4B, MS5A, MS5B

Alla versioner/All versions

Art. nr/Part no	Ersätter/Replaces	Benämning/ Description
19613	3807613, 3855783	Skjuthylsa/ Sliding sleeve



Nedre växel / Lower unit  
200, 250, 270, 270T, 280, 280T, 285A, 290, 290A, SP-A, SP-A/MT

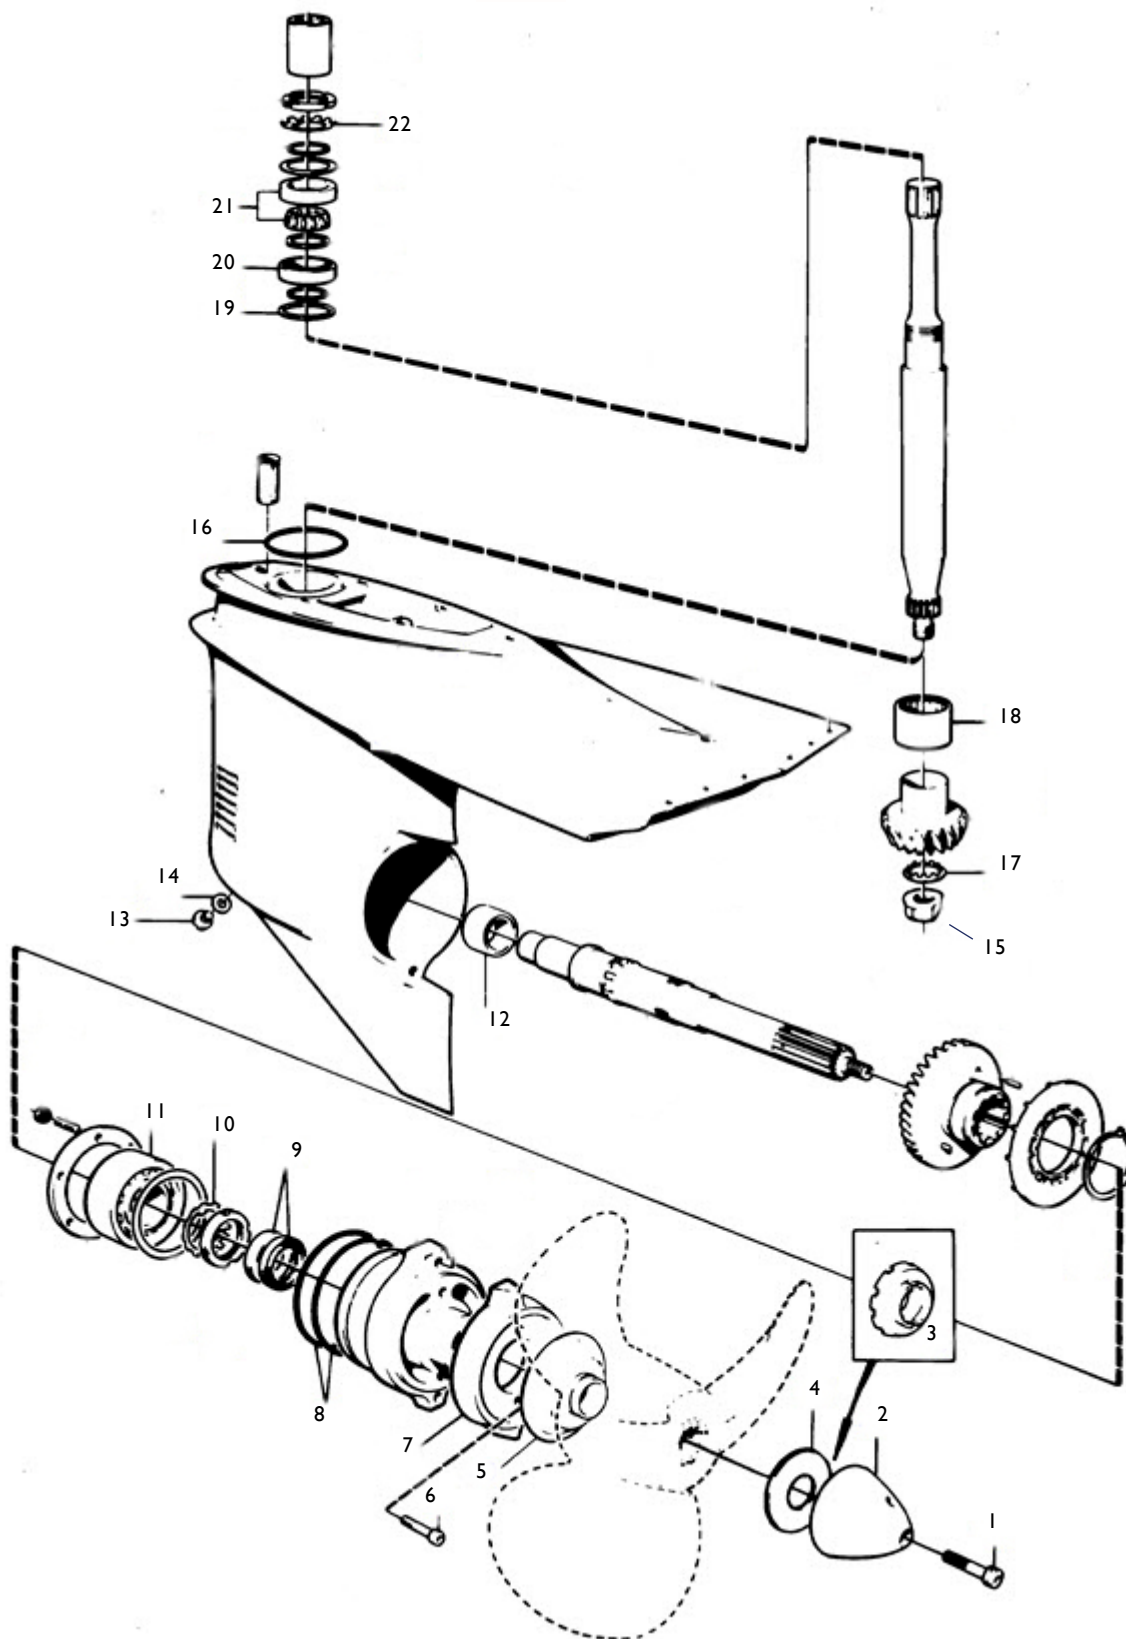

## Nedre växel / Lower unit 200, 250, 270, 270T, 280, 280T, 285A, 290, 290A, SP-A, SP-A/MT

Bild/ Picture	Art. nr/ Part no	Ersätter/ Replaces	Benämning/ Description
1	19889	850889	Skruv/Screw
2	19785	850785, 854045	Propellerkona/ Propeller cone
3	19261	851261	Distansbricka/ Spacer washer
4	19888	850888	Distansbricka plast/ Spacer washer plastic
5	19965	832965	Fisklinebricka AQ200/ Thrust washer AQ200
5	19534	839534	Fisklinebricka AQ250, 270, 275/ Thrust washer AQ250, 270, 275
5	19423	839423	Fisklinebricka AQ280, 285, 290/ Thrust washer AQ280, 285, 290
6	19009	941809	Skruv/Screw
7	19815	875815	Zinkanod sats/Zink anode kit
8	19201	925261	O-ring
9	19426	897426	Packbox/Oil seal
10	19025	907025	Låsbricka/Lock washer
11	19541	854541	Rulllager/Ball bearing
12	19390	183390	Nållager/ Needle roller bearing
13	18354	839354	Oljeplugg /Oil drain plug
14	19974	955974	O-ring
15	19300	854300	Mutter/Nut
16	19256	925256	O-ring
17	19165	814165	Låsbricka/Lock washer
18		183497	Nållager/Needle bearing
19	19191	832191	Packning/Gasket
20	19374	183374	Kullager/Bearing
21	19072	11072	Rulllager/Ball bearing
22	19023	907023	Låsbricka/Lock washer



Packningssats nedre växel/Seal kit lower unit  
Mutter 814164 ingår ej/Flange nut 814164 is not included

Art. nr/Part no	Ersätter/Replaces
19010	



Passar/Fits: 280  
Anodsats aluminium/Anode kit aluminum

Art. nr/Part no	Ersätter/Replaces	Info
I-10274	875815 + 832598	Aluminium/aluminum



Passar/Fits: 290  
Anodsats aluminium/Anode kit aluminum

Art. nr/Part no	Ersätter/Replaces	Info
I-10276	875815 + 852835	Aluminium/aluminum




Passar/Fits: 200, 250, 270, 275, 280, 285, 290, SP-A, SP-A/MT, SP-A1, SP-A2, SP-C, SP-C1, 270T, 280T, 285A, 290A.  
För långnavig propeller / for propeller with long hub

Art. nr/Part no	Ersätter/Replaces
19785	854045, 850785



Nedre växel / Lower unit  
280DP, 290DP, DP-A, DP-A1, DP-A2, DP-B, DP-C, DP-D

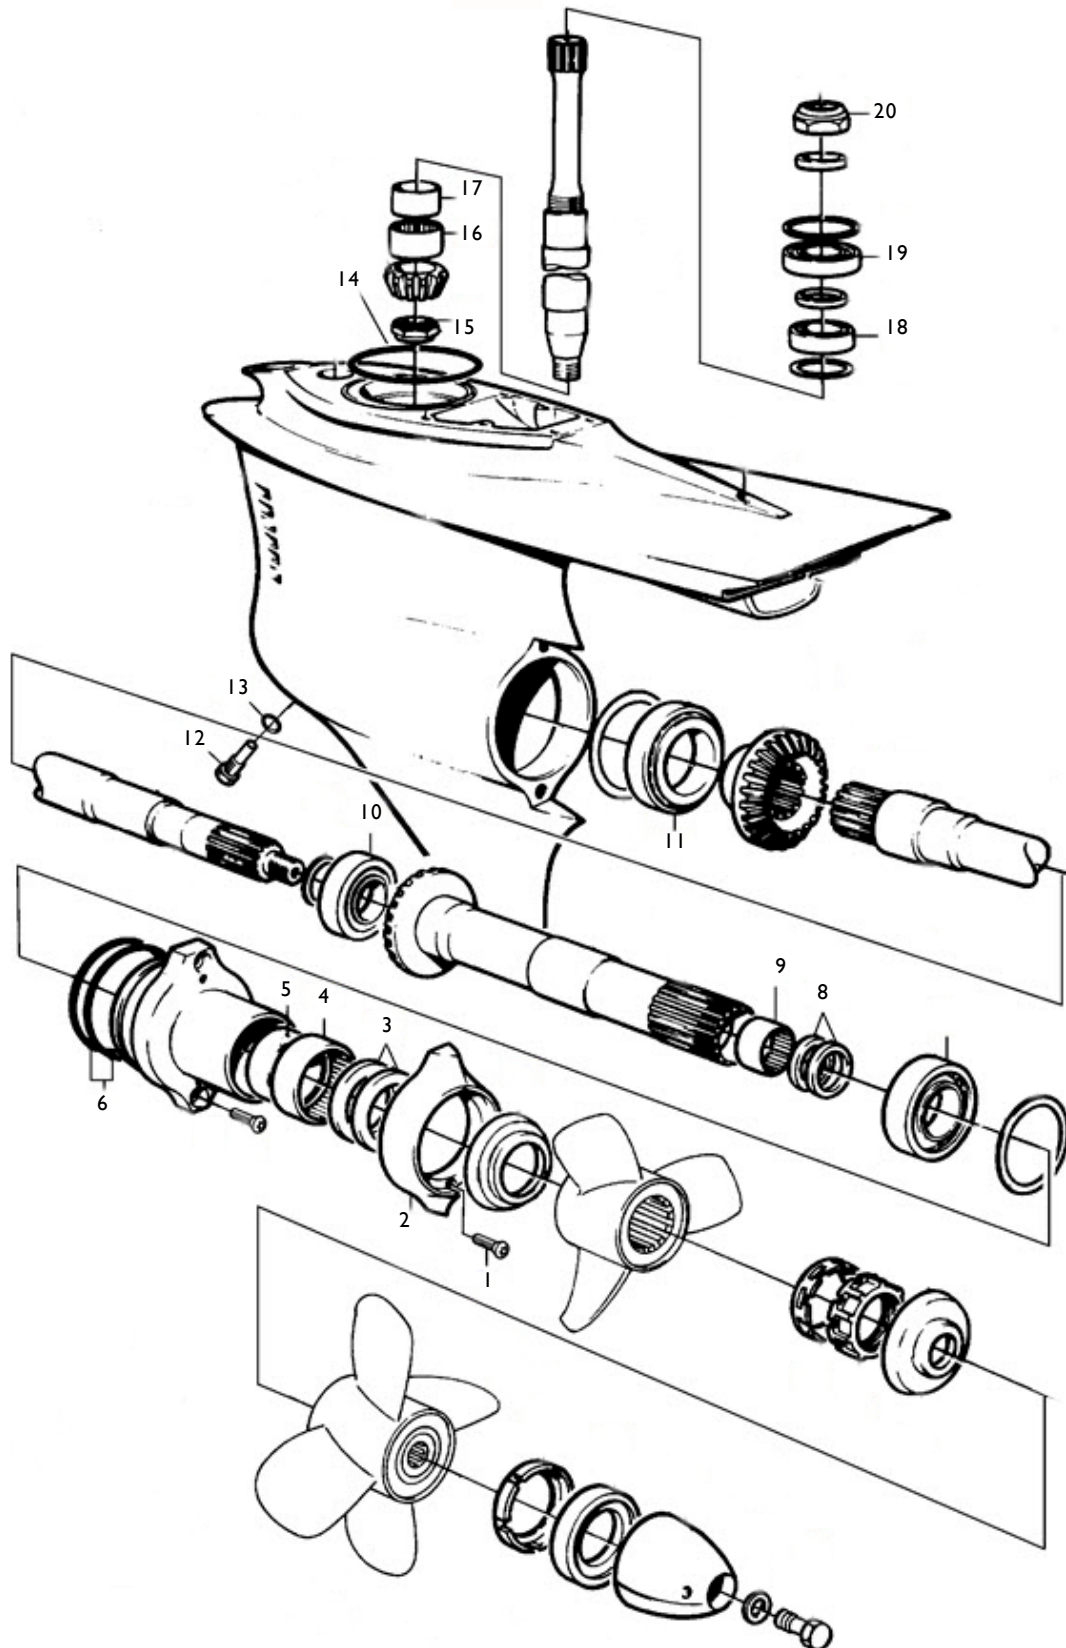

## Nedre växel / Lower unit 280DP, 290DP, DP-A, DP-A1, DP-A2, DP-B, DP-C, DP-D

Bild/ Picture	Art. nr/ Part no	Ersätter/Replaces	Benämning/ Description
1	19808	966808	Skruv/Screw
2	19821	875821	Zink anod sats/ Zinc anode kit
3	19407	851407	Packbox/Oil seal
4	19859	183859	Nållager/ Needle roller bearing
5	19683	184683	Innerring/Inner ring
6	19258	925258	O-ring
8	19871	853871, 853807+853808	Packbox 1 par/ Oil seal 1 pair
9	19272	183272	Nållager/ Needle bearing
10	19691	184691	Rulllager/Ball bearing
11	19044	11044	Rulllager/Ball bearing
12	18355	852904	Oljeplugg magnetisk/ Oil drain plug magnetic
13	19974	955974	O-ring
14	19256	925256	O-ring
16	19654	184654	Nållager/ Needle roller bearing
17	19008	184682	Innerring/Inner ring
18	19374	183374	Rulllager/Ball bearing
19	19072	11072	Rulllager/Ball bearing
20	19071	969071	Låsmutter/Lock nut



Packningsatts nedre växel/Seal kit lower unit

Art. nr/Part no	Ersätter/Replaces
19267	876267



Passar/Fits: 280DP

Anodsats aluminium/Anode kit aluminum

Art. nr/Part no	Ersätter/Replaces	Info
1-10275	875821 + 832598	Aluminium/Aluminum



Passar/Fits: 290DP

Anodsats aluminium/Anode kit aluminum

Art. nr/Part no	Ersätter/Replaces	Info
1-10277	875821 + 852835	Aluminium/Aluminum



Packningsatts oljepluggar /Seal kit oil drain plugs


Passar / fits 200, 250, 270, 270T, 275, 275A, 280, 280DP, 280T, 285A, 290, 290DP, SP-A, SP-A/MT, SP-A1, SP-A2, SP-C, SP-C1, DP-A, DP-A1, DP-A2, DP-B, DP-C, DP-C1, DP-D, DP-D1, DP-E, DPX, DPX-S, DPX-S1

Art. nr/Part no	Ersätter/Replaces
22067	N / A



Spare parts from Sweden

Nedre växel / Lower unit  
SP-A1, SP-A2, SP-C, SP-C1, SP-E

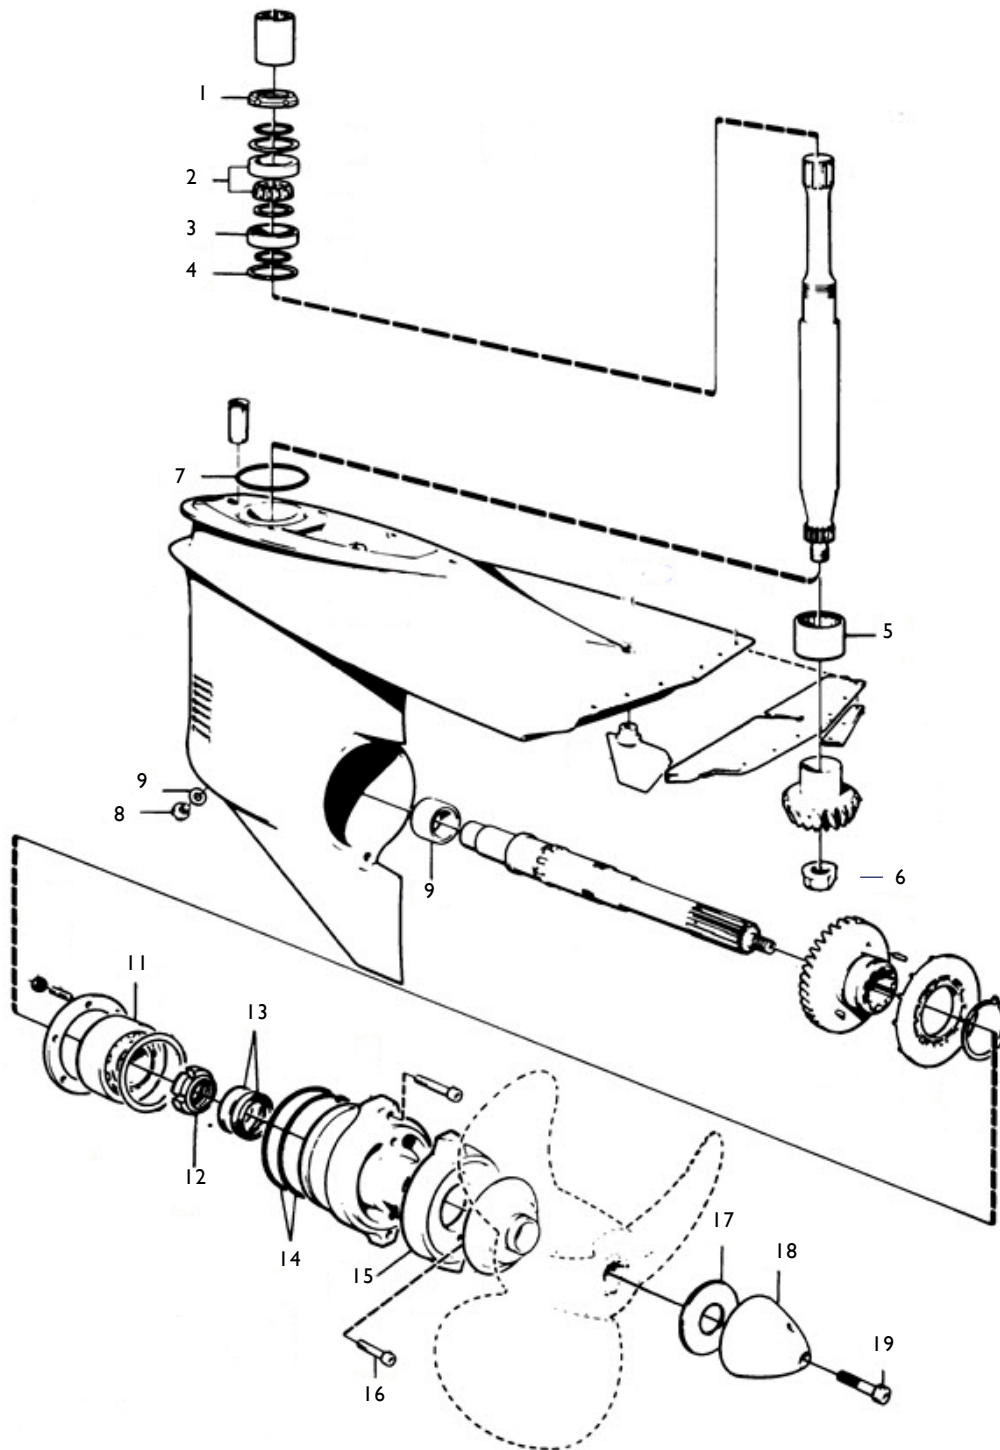

## Nedre växel / Lower unit SP-A1, SP-A2, SP-C, SP-C1, SP-E

Bild/ Picture	Art. nr/ Part no	Ersätter/Replaces	Benämning/ Description
1	19071	969071	Mutter/Nut
2	19072	11072	Kullager/Roller bearing
3	19374	183374	Kullager/Ball bearing
4	19191	832191	Packning/Gasket
5		183497	Nållager/ Needle bearing
6	19300	854300	Mutter/Nut
7	19256	925256	O-ring
8	18354	839354	Oljeplugg/Plug
9	19974	955974	O-ring
10	19390	183390	Nållager/ Needle bearing
11	19541	854541	Rulllager/Ball bearing
13	19426	897426	Packbox/Seal
14	19201	925261	O-ring
15	19815	875815	Zink ring/Zinc ring kit
16	19009	941809	Bult/Bolt
17	19888	850888	Plastbricka/ Plastic washer
18	19785	854045	Propellerkona/ Propeller cone
19	19889	850889	Bult / Bolt



Passar/Fits: **SP-A1, SP-A2, SP-C, SP-C1**  
Anodsats aluminium/Anode kit aluminium

Art. nr/Part no	Ersätter/Replaces	Info
I-10276	875815 + 852835	Aluminium/Aluminum



Passar/Fits: **200, 250, 270, 275, 280, 285, 290, SP-A, SP-A/MT, SP-A1, SP-A2, SP-C, SP-C1, 270T, 280T, 285A, 290A.**  
För långnavig propeller / for propeller with long hub

Art. nr/Part no	Ersätter/Replaces
19785	854045, 850785



Packningssats nedre växel/Seal kit lower unit

Art. nr/Part no	Ersätter/Replaces
19011	876268




Backventil / Check Valve

Passar / fits 275, 280, 285, 290, 290DP, SP-A, DP-A, DP-B, DP-C, DP-D

Art. nr/Part no	Ersätter/Replaces
19644	852644



Nedre växel / Lower unit  
DP-CI, DP-DI, DP-E, DP-G

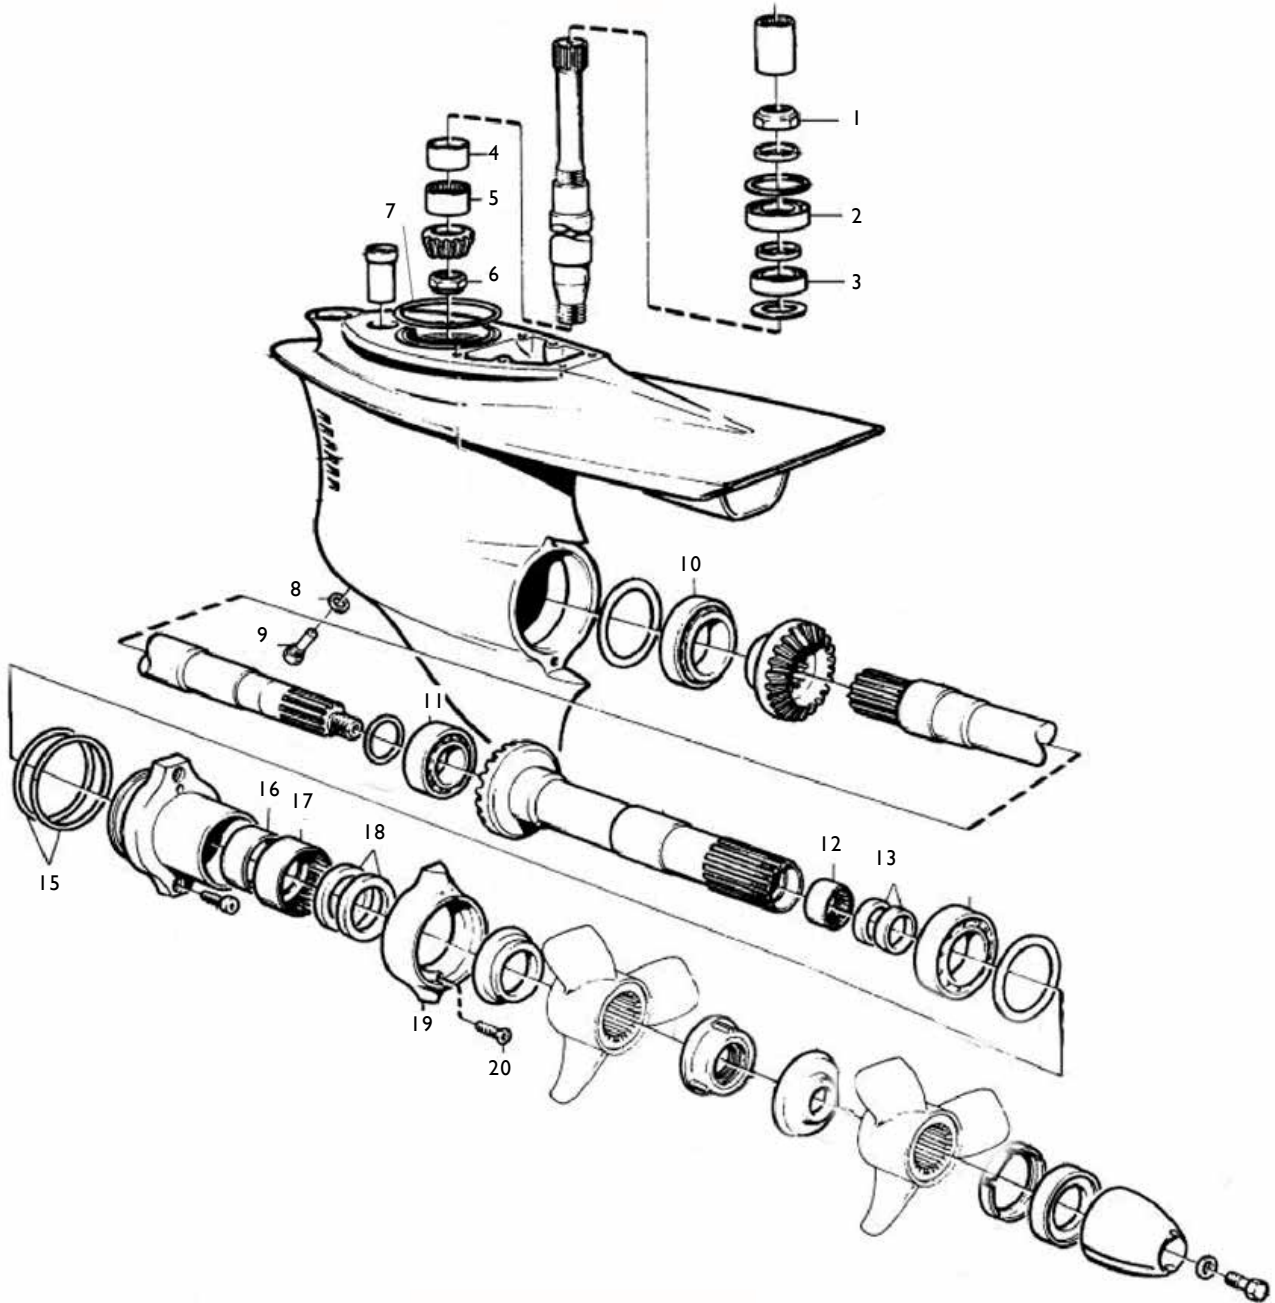

## Nedre växel / Lower unit DP-CI, DP-DI, DP-E, DP-G

Bild/ Picture	Art. nr/ Part no	Ersätter/Replaces	Benämning/ Description
1	19071	969071	Mutter/Nut
2	19072	11072	Kullager/Ball bearing
3	19374	183374	Kullager/Ball bearing
4	19008	184682	Innerring/Inner ring
5	19654	184683	Nållager/ Needle bearing
7	19256	925256	O-ring
8	19974	955974	O-ring
9	18355	852904	Oljeplugg magnetisk/ Drain plug magnetic
10	19044	11044	Rulllager/Ball bearing
11	19691	184691	Rulllager/Ball bearing
12	19272	183272	Nållager/ Needle bearing
13	19871	853871, 853807+853808	Packbox 1 par/ Oil seal 1 pair
15	19258	925258	O-ring
16	19683	184683	Innerring/Inner ring
17	19859	183859	Nållager bussning/ Needle bearing bushing
18	19407	851407	Packbox/Oil seal
19	19821	875821	Zink anod sats/ Zinc anode kit
20	19808	966808	Skruv/Screw



Packningssats nedre växel/Seal kit lower unit

Art. nr/Part no	Ersätter/Replaces
19060	N/A



Passar/Fits: DP-CI, DP-DI, DP-E, DP-G  
Anodsats aluminium/Anode kit aluminum

Art. nr/Part no	Ersätter/Replaces	Info
1-10277	875821 + 852835	Aluminium/Aluminum




Packningssats Nedre växel-mellanhus / Seal kit lower unit-intermediate housing

DP-E, SP-E  
DP-G  
DPX-A, DPX-R, DPX-S, DPX-SI

Art. nr/Part no	Ersätter/Replaces
23003	N/A



Nedre växel / Lower unit  
DPX-A, DPX-C, DPX-R, DPX-S, DPX-SI

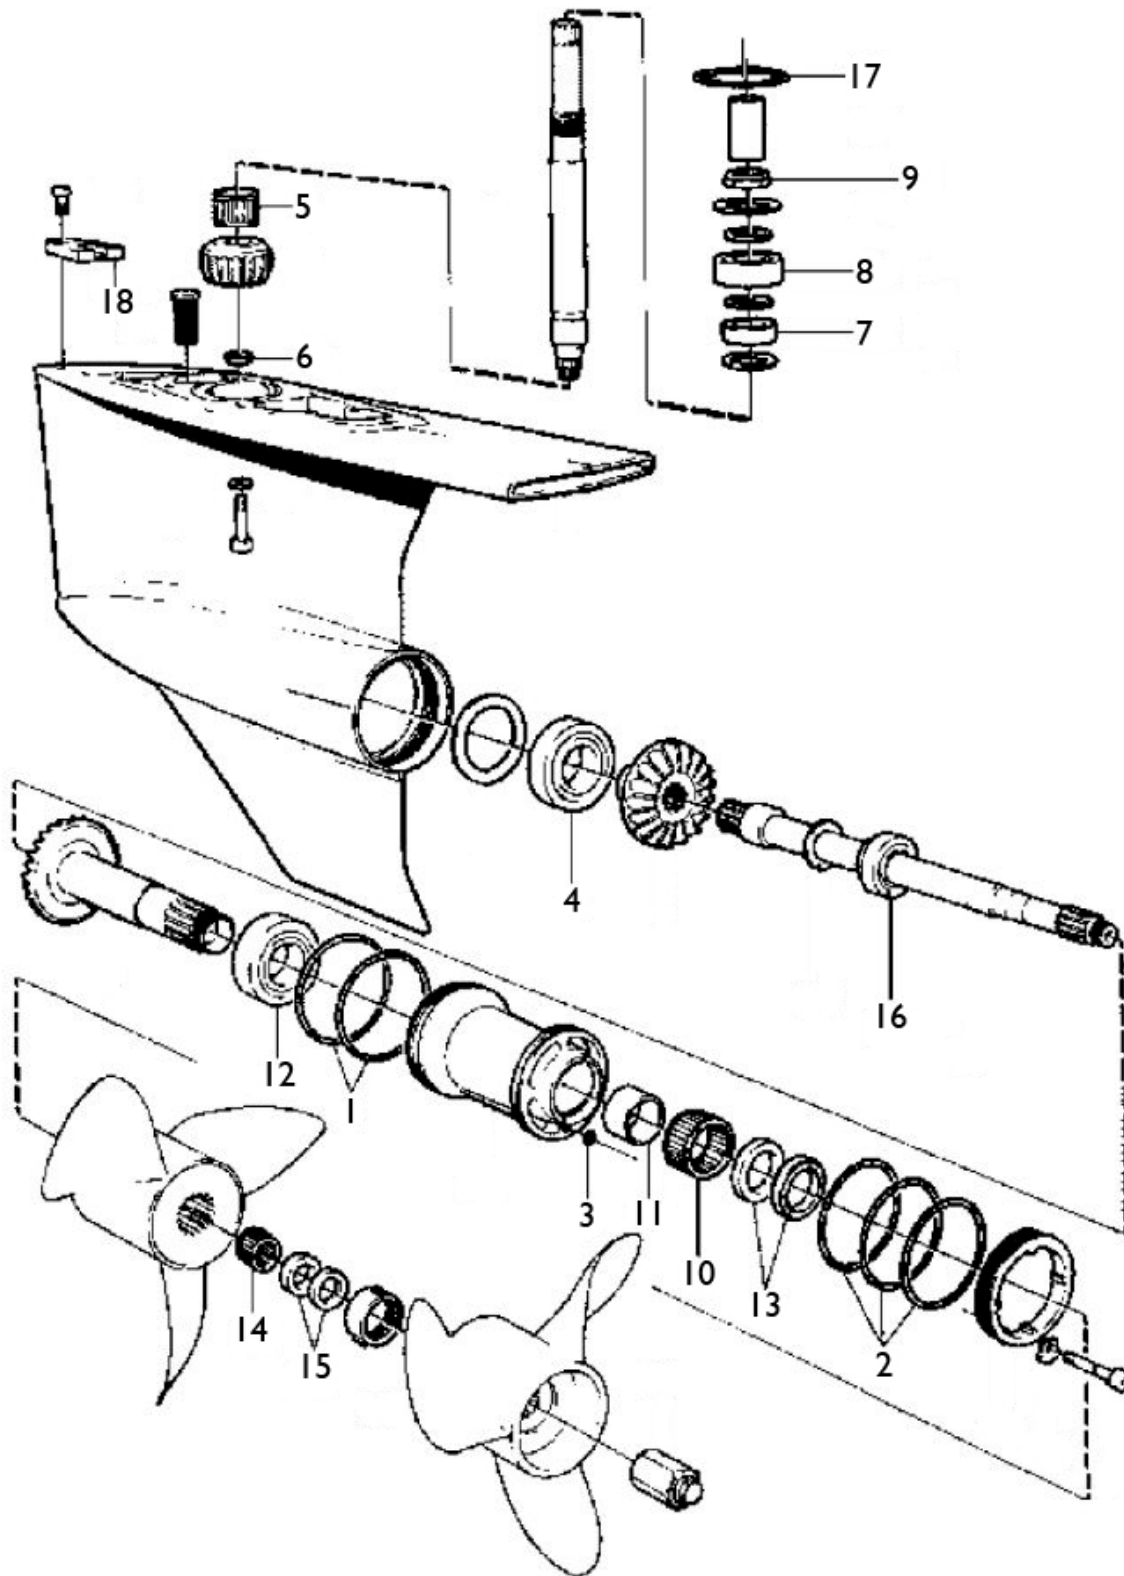

## Nedre växel / Lower unit DPX-A, DPX-C, DPX-R, DPX-S, DPX-SI

Bild/ Picture	Art. nr/ Part no	Ersätter/Replaces	Benämning/ Description
1	19232	873232	O-ring
2	19438	946438	O-ring
3	17981	955981	O-ring
4	19044	11044	Rullager/Roller bearing
5	19654	184654	Nållager/Needle bearing
7	19374	183374	Kullager/Ball bearing
8	19072	11072	Rullager/Roller bearing
9	19071	969071	Mutter/ Round nut
10	19859	183859	Nållager/Needle bearing
11	19683	184683	Innerring/Inner ring
13	19407	851407	Packbox/Seal
14	19272	183272	Nållager/Needle bearing
15	19872	853807	Packbox/Seal
16	19691	184691	Rullager/Roller bearing
17	19256	925256	O-ring
18	19638	876638	Zinkanod/Zinc anode



DPX-A, DPX-C, DPX-R, DPX-S, DPX-SI

Art. nr/Part no	Ersätter/Replaces	Info
19638	876638	Zink/Zinc



Packningssats Nedre växel-mellanhus / Seal kit lower unit-intermediate housing

DP-E, SP-E  
DP-G  
DPX-A, DPX-R, DPX-S, DPX-SI

Art. nr/Part no	Ersätter/Replaces
23003	N/A




Packningssats Nedre växel/Seal kit lower unit  
Bricka 872403 ingår ej/Washer 872403 is not included

Art. nr/Part no	Ersätter/Replaces
23001	876639



Nedre växel / Lower unit  
SX-C, SX-C1, SX-C2, SX-R, SX-R1, SX-R2, SX-M, SX-S

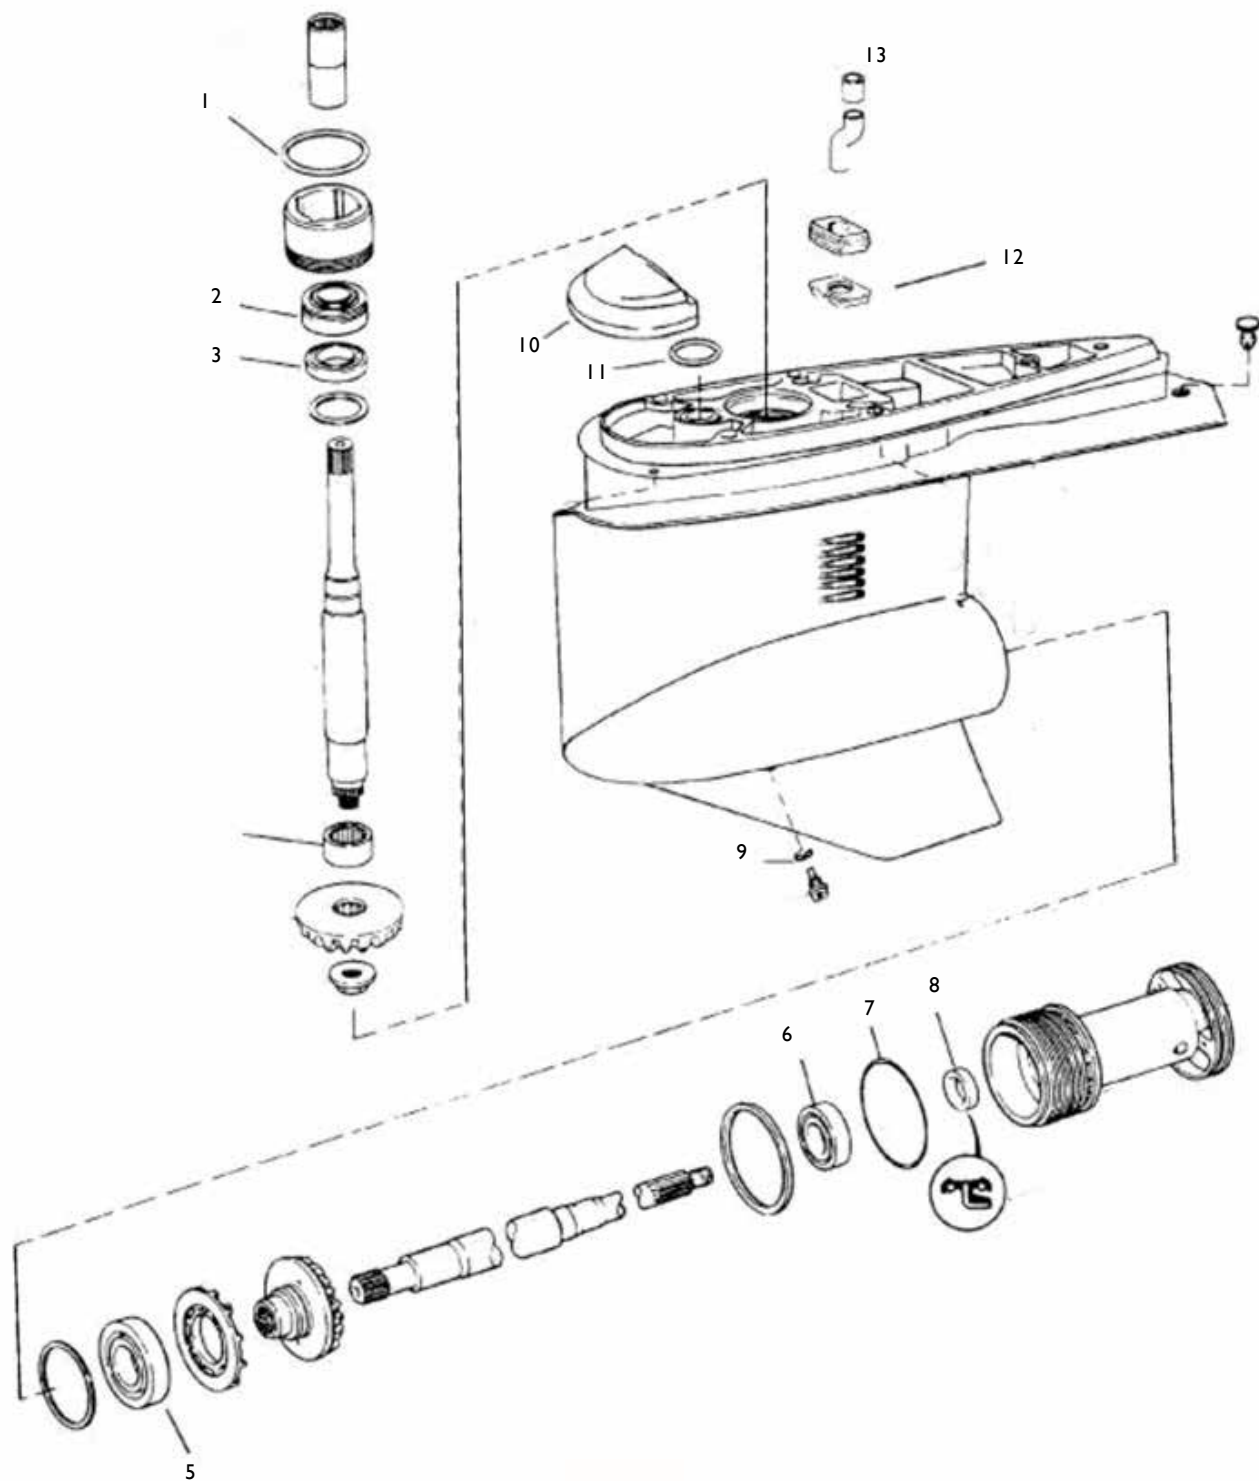

## Nedre växel / Lower unit SX-C, SX-C1, SX-C2, SX-R, SX-R1, SX-R2, SX-M, SX-S

Bild/ Picture	Art. nr/ Part no	Ersätter/Replaces	Benämning/ Description
1	19566	3852866	O-ring
2	19250	3854250	Rulllager/Roller bearing
3	19249	3854249	Rulllager/Roller bearing
5	19942	3850942	Rulllager/Roller bearing
6	19249	3854249	Rulllager/Roller bearing
7	19865	3852865	O-ring
8	19790	3863090, 3858303, 3853474	Packbox, Oil seal
9	19081	3855081	O-ring
10	19411	3855411	Anod/Anode
11	19959	3852959	O-ring
12	19595	3854595	Tätning/Seal
13	19316	3852315	Tätning/Seal



Passar/Fits: SX-C, SX-C1, SX-C2, SX-R, SX-R1, SX-R2, SX-M, SX-S  
Anodsats aluminium/Anode kit aluminum

Art. nr/Part no	Ersätter/Replaces	Info
I-10278	3854130 + 3855411	Aluminium/Aluminum



Packningssats Nedre växel/Seal kit lower unit

Art. nr/Part no	Ersätter/Replaces
23006	3855275




Passar/Fits: SX-C, SX-C1, SX-C2, SX-CT1, SX-CT2, SX-RT1,  
SX-RT2, SX-S, SX-ST  
Anod zink / Anode zinc

Art. nr/Part no	Ersätter/Replaces
19970	3852970



Nedre växel / Lower unit  
 DP-S, DP-SI, DP-SM, DP-SMTD, DP-SMTDI

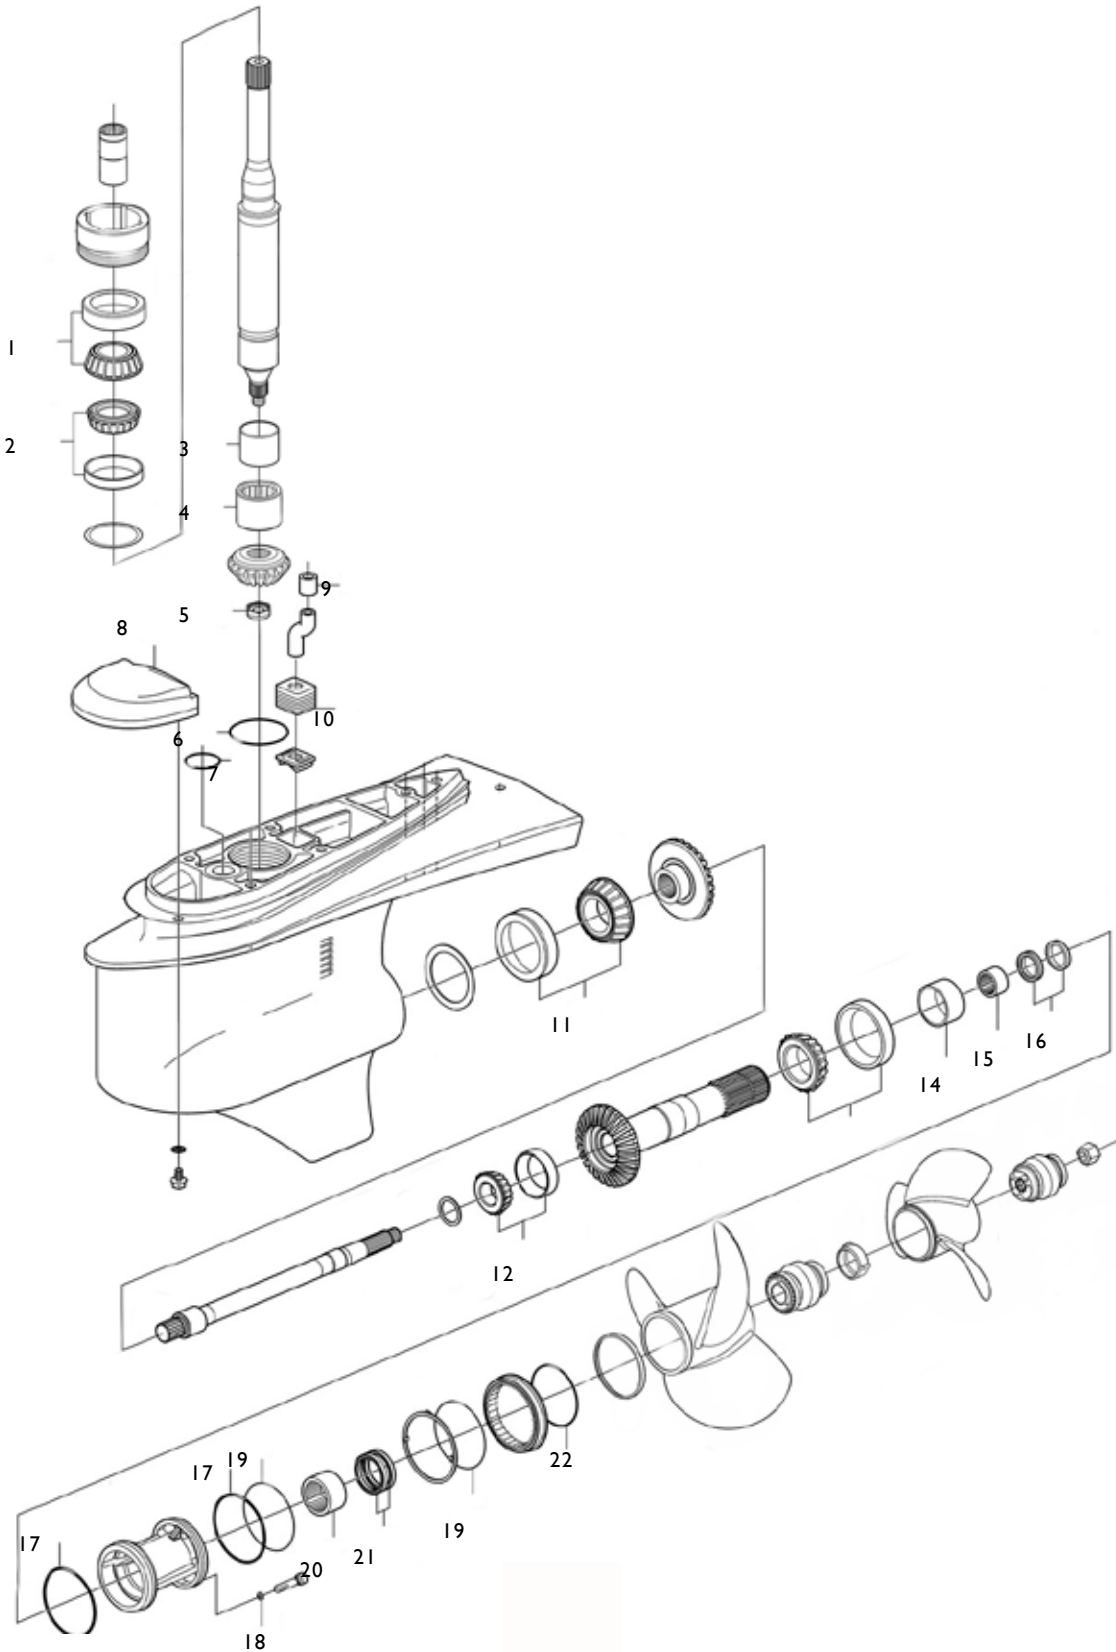

Spare parts from Sweden

## Nedre växel / Lower unit DP-S, DP-SI, DP-SM, DP-SMTD, DP-SMTDI

Bild/ Picture	Art. nr/ Part no	Ersätter/Replaces	Benämning/ Description
1	19250	3854250	Rulllager/Roller bearing
2	19249	3854249	Rulllager/Roller bearing
3	19008	184682	Innerring/Inner ring
4	19654	184654	Nållager/ Needle roller bearing
6	19566	3852866	O-ring
7	19959	3852959	O-ring
8	19411	3855411	Anod/Anode
9	19316	3852315	Tätning/Seal
10	19595	3854595	Tätning/Seal
11	19044	11044	Rulllager/Roller bearing
12	19691	184691, 3859038	Rulllager/Roller bearing
14	19683	184683	Innerring/Inner ring
15	19272	183272	Nållager/ Needle roller bearing
16	19871	853871, 853807 + 853808	Packbox sats/ Oil seal kit
17	19625	3854625	O-ring
18	17981	955981	O-ring
19	19438	946438	O-ring
20	19859	183859	Nållager/ Needle roller bearing
21	19407	851407	Packbox/Oil seal
22	19724	3854624	O-ring



**Passar/Fits: DP-SM**  
Anodsats aluminium/Anode kit aluminium

Art. nr/Part no	Ersätter/Replaces	Info
I-10278	3854130 + 3855411	Aluminium/Aluminum




Packningssats Nedre växel/Seal kit lower unit

Art. nr/Part no	Ersätter/Replaces
23002	3856002



Spare parts from Sweden

## XDP

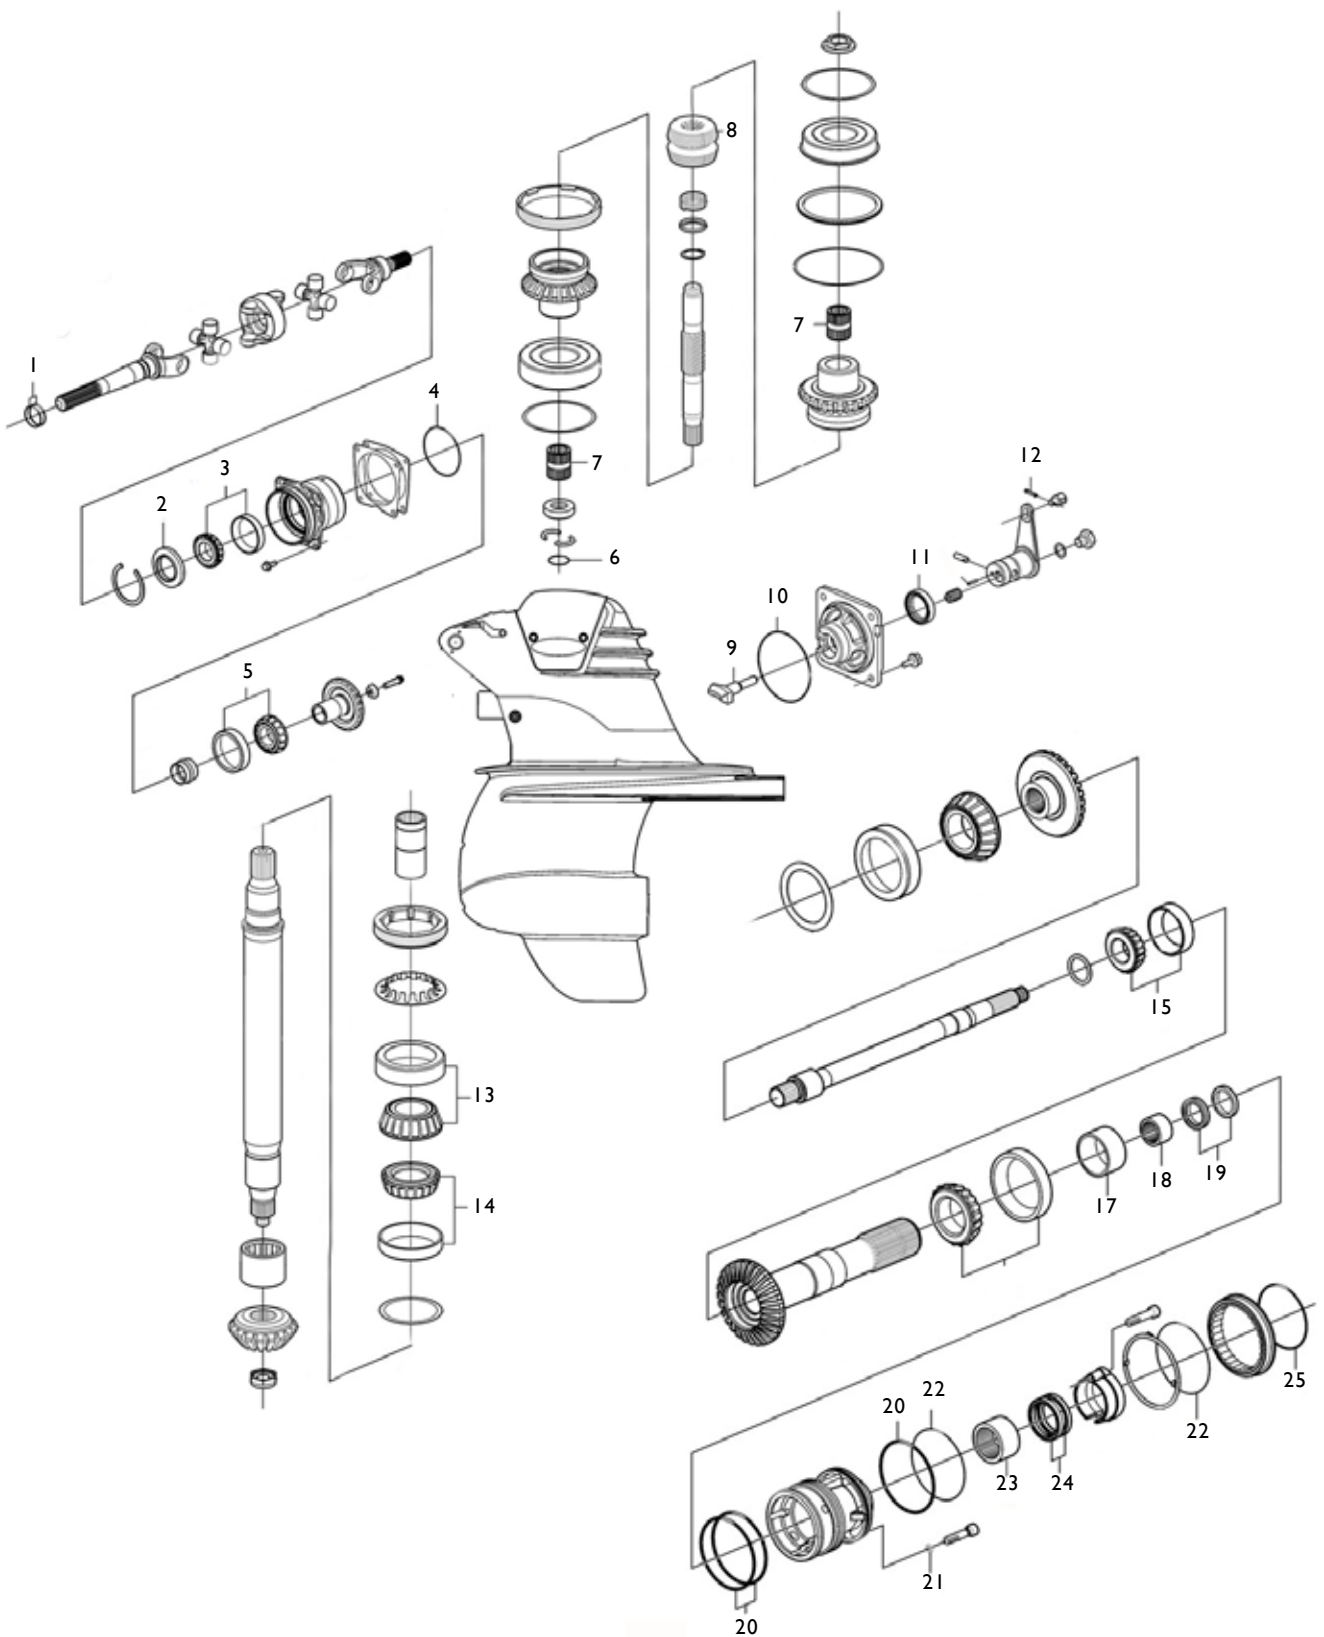

## XDP

Bild/ Picture	Art. nr/ Part no	Ersätter/Replaces	Benämning/ Description
1	19565	3852565, 997368	O-ring
2	18272	3852272	Packbox/Oil seal
3	19247	3850853	Rulllager/Roller bearing
4	19095	925095	O-ring
5	19949	3850852	Rulllager/Roller bearing
6	18656	949656	O-ring
7	19819	3852390	Nållager/ Needle roller bearing
8	19613	3807613	Växelkona/Clutch cone
9	19646	3856502	Växelförare/Dog
10	19093	925093	O-ring
11	19868	853868	Packbox/Oil seal
12	19480	3854480	Saxpinne/Split pin
13	19250	3854250	Rulllager/Roller bearing
14	19249	3854249	Rulllager/Roller bearing
15	19691	184691	Rulllager/Roller bearing
17	19683	184683	Innerring/Inner ring
18	19272	183272	Nållager/ Needle roller bearing
19	19871	853871, 853807 + 853808	Packbox sats/ Seal kit
20	19791	942791	O-ring
21	17981	955981	O-ring
22	19438	946438	O-ring
23	19859	183859	Nållager/ Needle roller bearing
24	19407	851407	Packbox/Seal
25	19865	3852865	O-ring




Packningssats komplett/Seal kit complete unit

Art. nr/Part no	Ersätter/Replaces
23023	3859050



Packningssats Övre växel/Seal kit upper unit

Art. nr/Part no	Ersätter/Replaces
23024	N/A

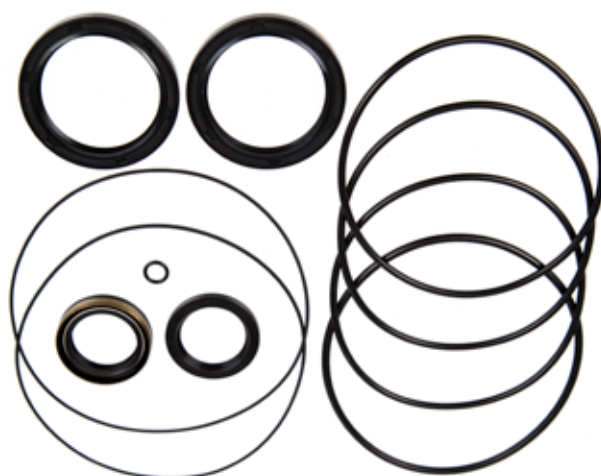


Packningssats Nedre växel/Seal kit lower unit

Art. nr/Part no	Ersätter/Replaces
23025	N/A



Nedre växel / Lower unit  
DPH, DPR

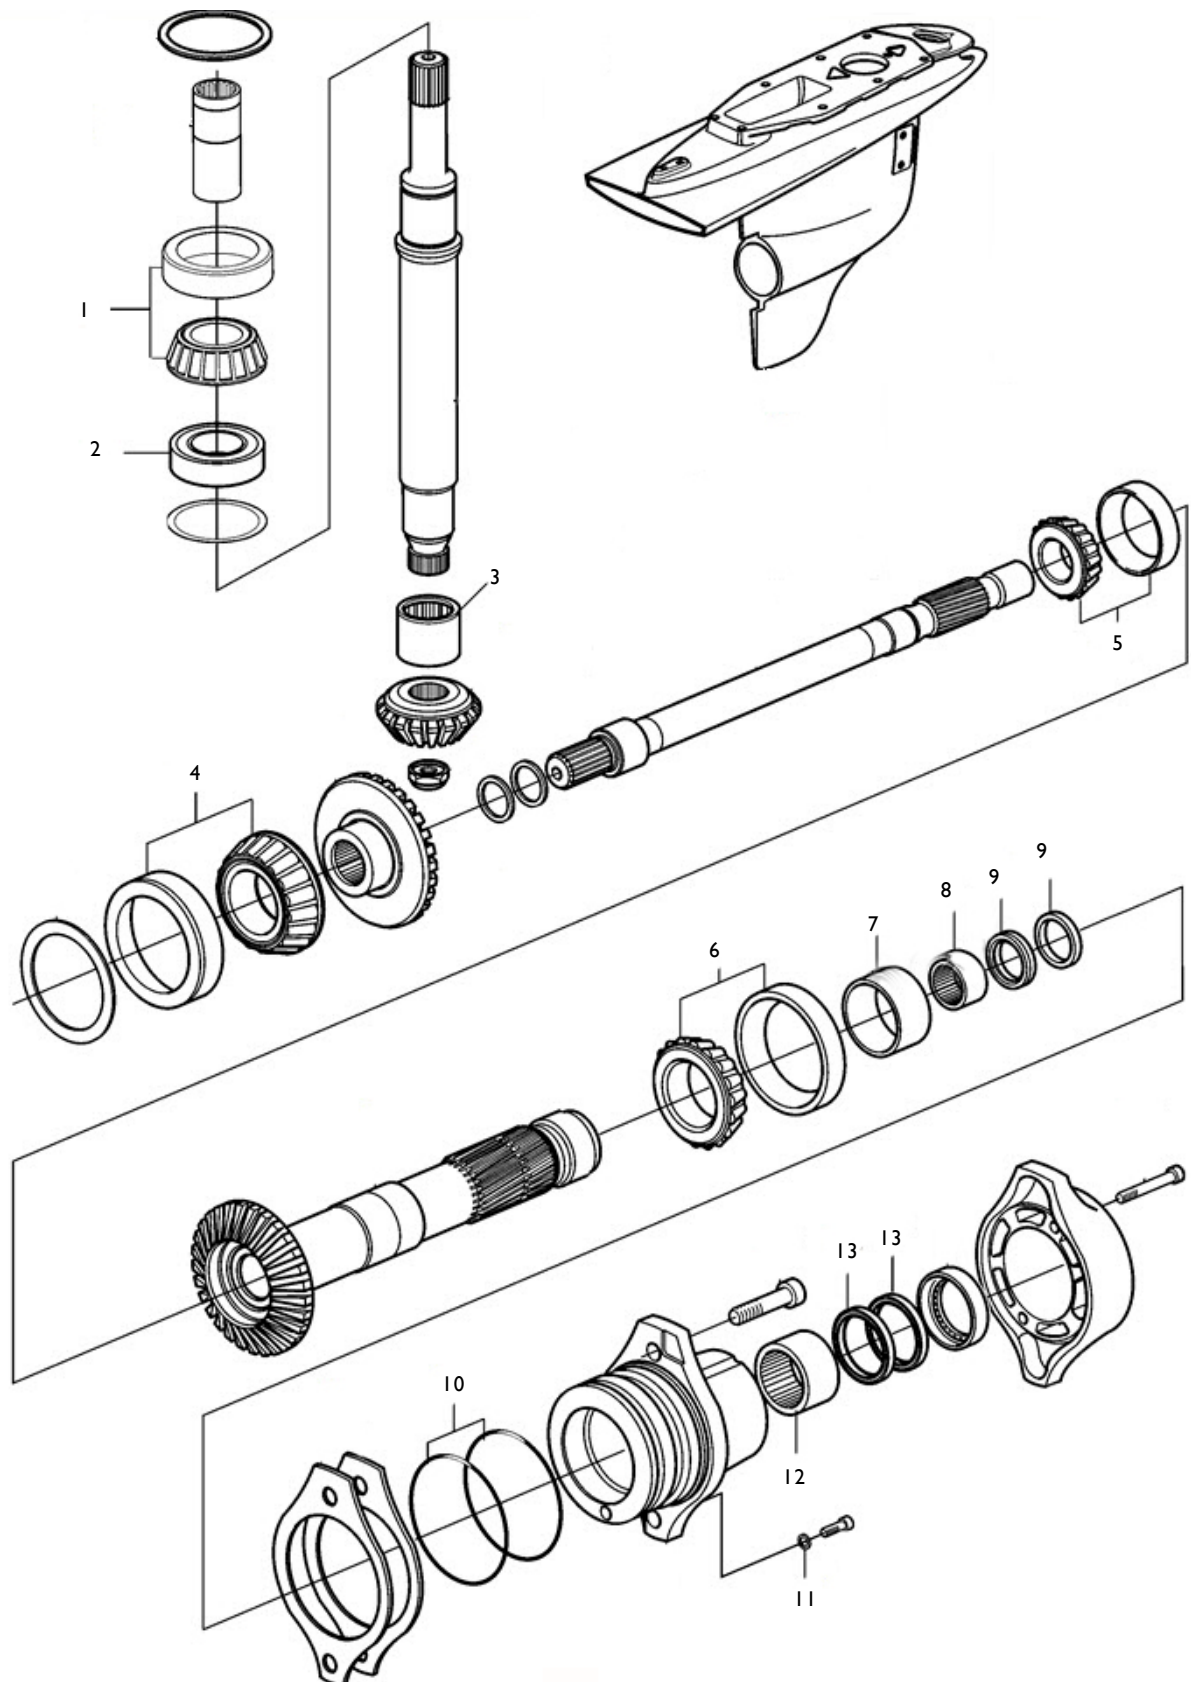

## Nedre växel / Lower unit DPH, DPR

Bild/ Picture	Art. nr/ Part no	Ersätter/Replaces	Benämning/ Description
1	15065	11065	Rulllager/Roller bearing
2	15223	984223	Kullager/Ball bearing
3	19654	184654	Nållager/ Needle roller bearing
4	15765	183765	Rulllager/Roller bearing
5	12784	425784	Rulllager/Roller bearing
6	19222	984222	Rulllager/Roller bearing
7		984225	Innerring/Inner ring
8	19390	184642	Nållager/ Needle roller bearing
9	19080	3863080, 3863081	Packbox/Seal
10	19260	925260	O-ring
11	19455	889455	Packning/Gasket
12	19224	984224	Nållager/ Needle roller bearing
13	19083	3863083, 3863082	Packbox/Seal



**Packningssats nedre växel/Seal kit lower unit**  
DPH, DPH-A, DPH-B, DPH-C  
DPR-A, DPR-B, DPR-C

Art. nr/Part no	Ersätter/Replaces
23018	2 x 925260, 1 x 3863082, 1 x 3863083, 1 x 3863080, 1 x 3863081, 1 x 889455



**Propellerkonsats / propeller hub kit**  
DPH-A, DPH-B, DPH-C, DPH-D (SN -3020295797),  
DPH-D1 (SN 3020295798-), DPH-E


Art. nr/Part no	Ersätter/Replaces
19326	21829326, 3807136



**Anodsats aluminium / Anode kit aluminum**  
DPH-A, DPH-B, DPH-C, DPH-D, DPH-D1  
DPR-A, DPR-B, DPR-C  
DPI-A, DPI-A

Art. nr/Part no	Ersätter/Replaces
1-10303	23520859 + 3588770

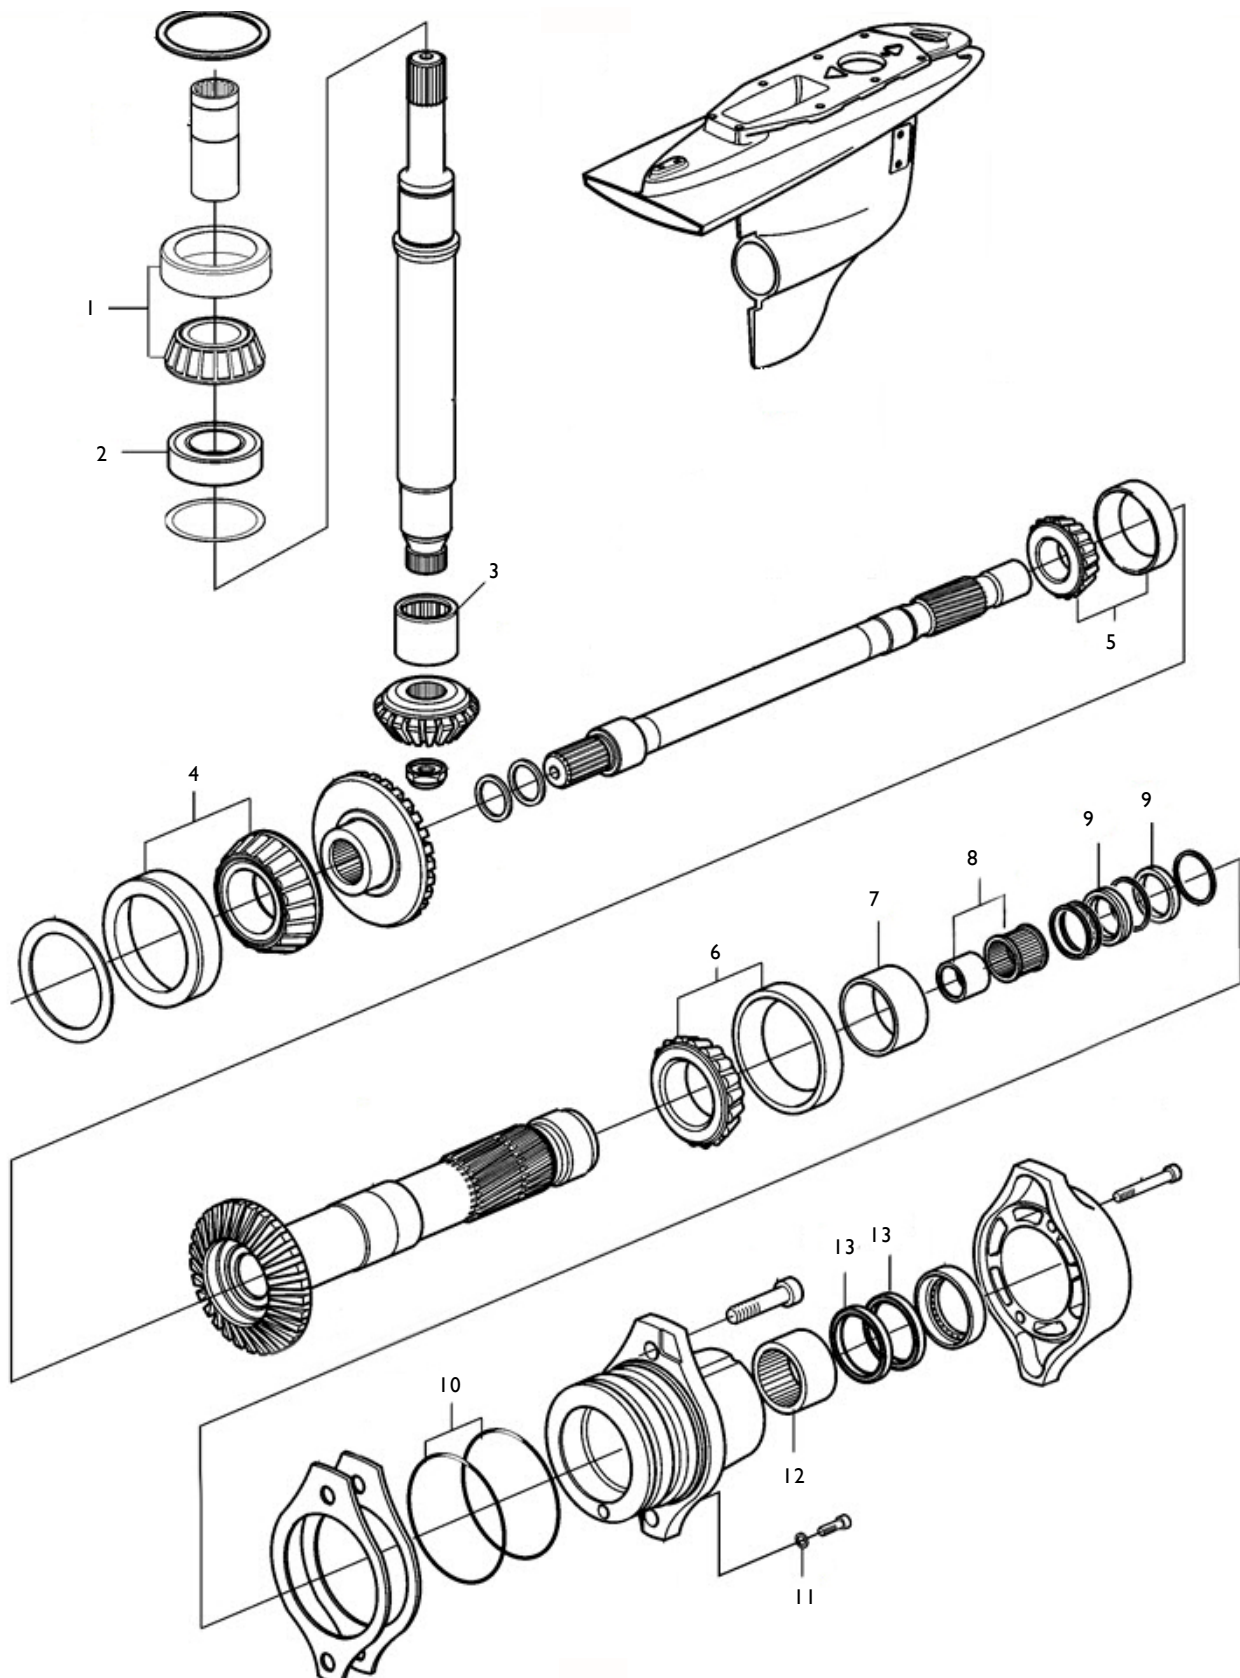

**Nedre växel / Lower unit  
DPH-D, DPR-D**

Spare parts from Sweden

## Nedre växel / Lower unit DPH-D, DPR-D

Bild/ Picture	Art. nr/ Part no	Ersätter/Replaces	Benämning/ Description
1	15065	11065	Rulllager/Roller bearing
2	15223	984223	Kullager/Ball bearing
3	19654	184654	Nållager/ Needle roller bearing
4	15765	183765	Rulllager/Roller bearing
5	12784	425784	Rulllager/Roller bearing
6	19222	984222	Rulllager/Roller bearing
7		984225	Innerring/Inner ring
8	19390	183390, 184642	Nållager/ Needle roller bearing
9	19080	3863080, 3863081	Packbox/Seal
10	19260	925260	O-ring
11	19455	889455	Packning/Gasket
12	19224	984224	Nållager/ Needle roller bearing
13	19083	3863083, 3863082	Packbox/Seal



### Propellerkonsats / propeller hub kit

DPH-A, DPH-B, DPH-C, DPH-D (SN -3020295797),  
DPH-D1 (SN 3020295798-), DPH-E

Art. nr/Part no	Ersätter/Replaces
19326	21829326, 3807136



### Anodsats aluminium / Anode kit aluminum

DPH-A, DPH-B, DPH-C, DPH-D, DPH-D1  
DPR-A, DPR-A, DPR-C  
DPI-A, DPI-A

Art. nr/Part no	Ersätter/Replaces
1-10303	23520859 + 3588770




### Packningssats nedre växel/Seal kit lower unit

DPH-E, DPH-D, DPH-D1  
DPR-D  
DPI-A

Art. nr/Part no	Ersätter/Replaces
19077	N/A

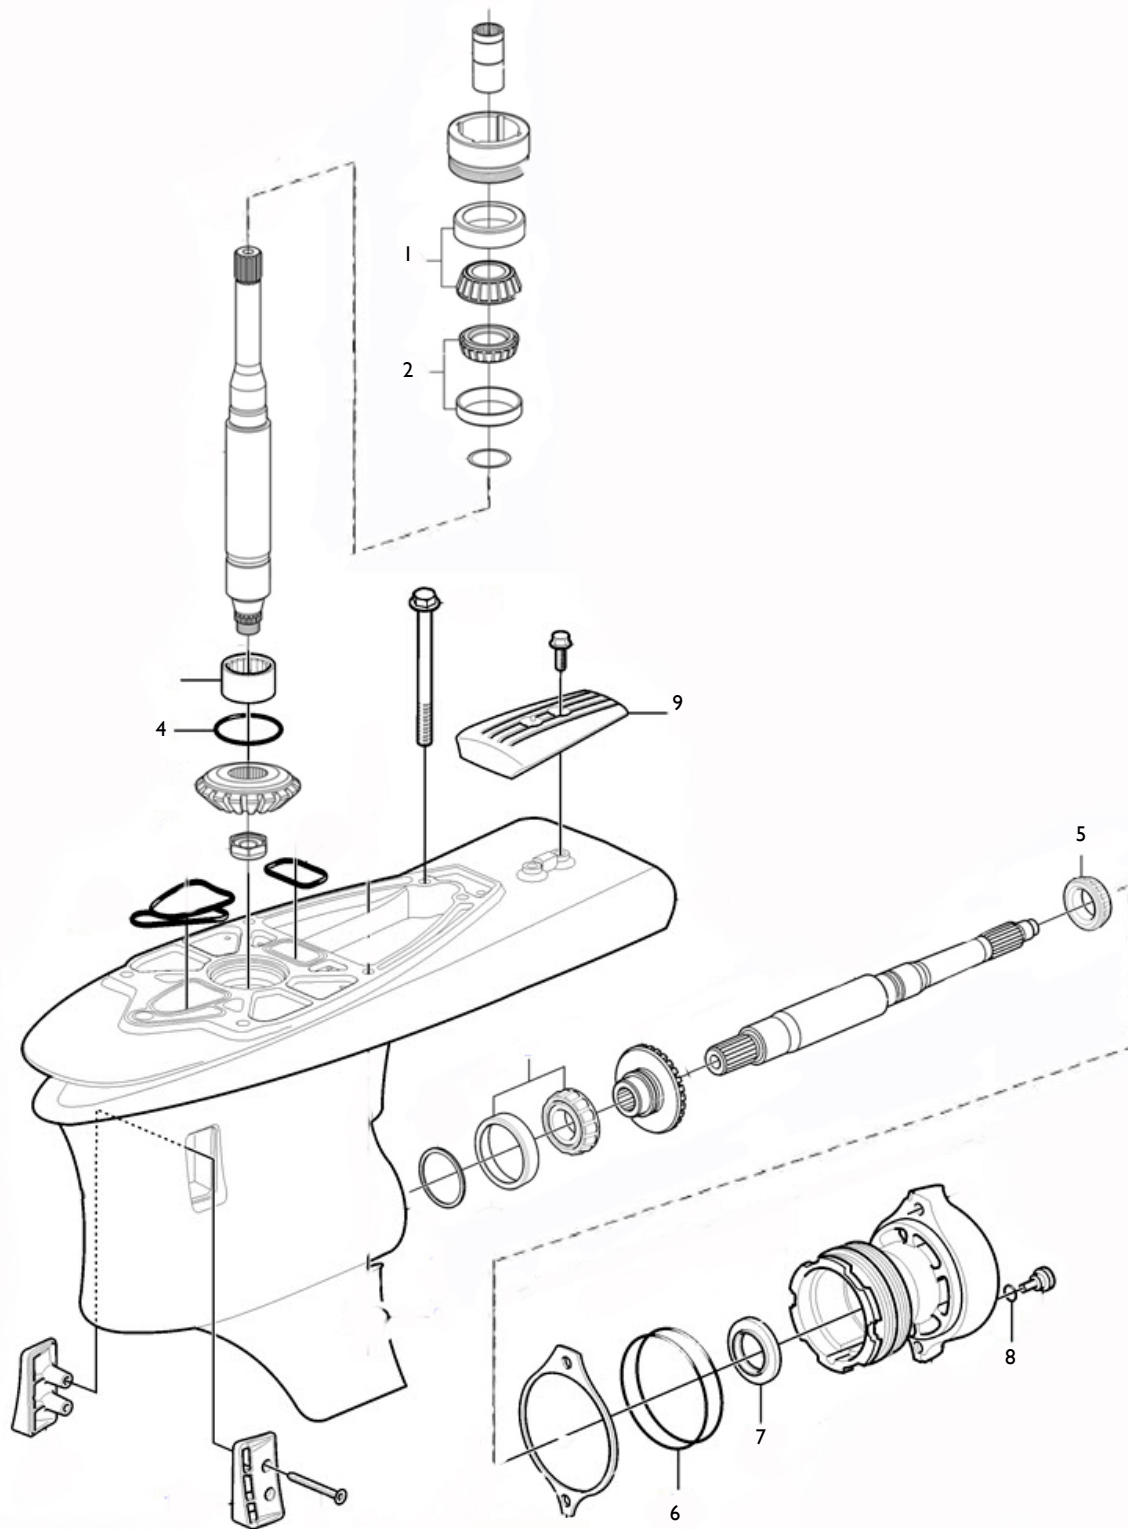

**Nedre växel / Lower unit  
SX-A, SX-D**

## Nedre växel / Lower unit SX-A, SX-D

Bild/ Picture	Art. nr/ Part no	Ersätter/Replaces	Benämning/ Description
1	19250	3854250	Rulllager/Roller bearing
2	19249	3854249	Rulllager/Roller bearing
4	19566	3852866	O-ring
5	19249	3854249	Rulllager/Roller bearing
6	19259	925259	O-ring
7	19790	3863090, 3858303, 3853474	Packbox, Oil seal
8	19081	3855081	O-ring
10	I-10289	3855411	Anode kit



### Packningsatts nedre växel/Seal kit lower unit

Art. nr/Part no	Ersätter/Replaces
23022	3888821




### Passar/Fits: SX-A, DPS-A

Anodsatts aluminium/Anode kit aluminum

Art. nr/Part no	Ersätter/Replaces	Info
I-10289	3888814, 3888816	Aluminium/Aluminum



Spare parts from Sweden

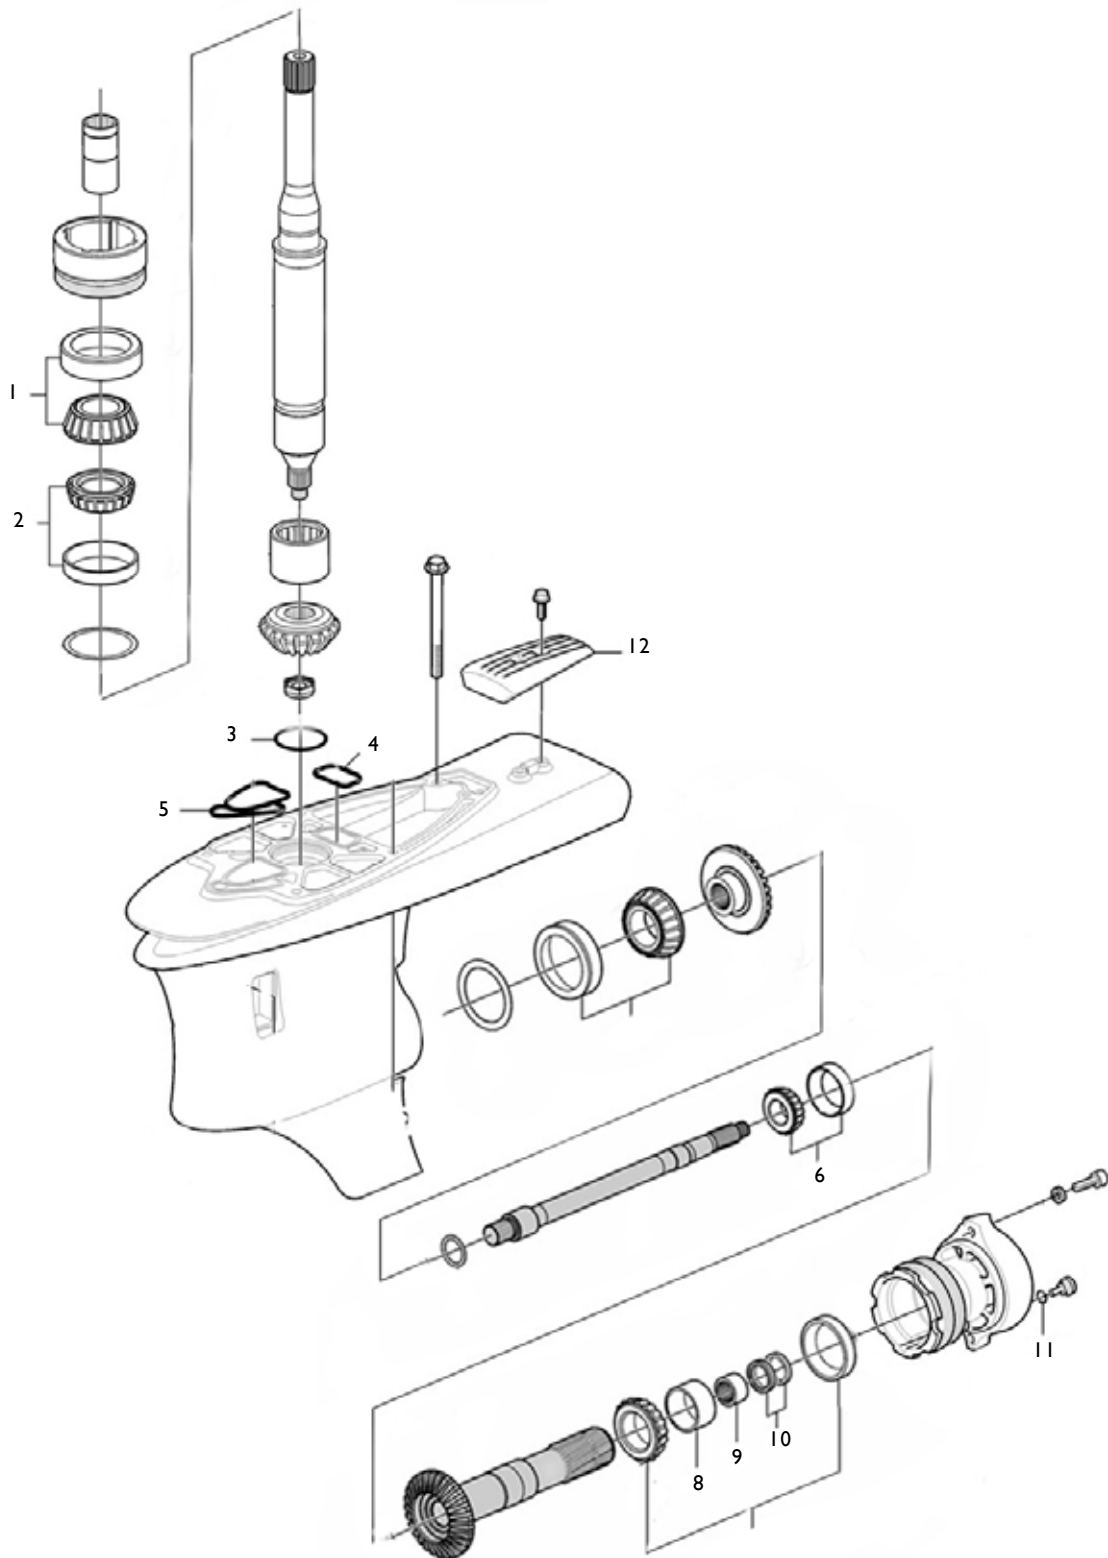**Nedre växel / Lower unit  
DPS-A, DPS-B**

Spare parts from Sweden

## Nedre växel / Lower unit DPS-A, DPS-B

Bild/ Picture	Art. nr/ Part no	Ersätter/Replaces	Benämning/ Description
1	19250	3854250	Rulllager/Roller bearing
2	19249	3854249	Rulllager/Roller bearing
3	19566	3852866	O-ring
4	19786	3889786	Packning/Gasket
5	19784	3889784	Packning/Gasket
6	19691	3859038	Rulllager/Roller bearing
8	19683	184683	Innerring/Inner ring
9	19272	183272	Nållager/ Needle bearing
10	19871	853871, 853807+853808	Packbox 1 par/ Oil seal 1 pair
11	19081	3855081	O-ring
12	I-10289	3888813 + 3888816	Anodsats aluminium/ Anode kit aluminum



Passar/Fits: **SX-A, DPS-A, DPS-B**  
Anodsats aluminium/Anode kit aluminum

Art. nr/Part no	Ersätter/Replaces	Info
I-10289	3888813 + 3888816	Aluminium/Aluminum




Packningssats nedre växel/Seal kit lower unit

Art. nr/Part no	Ersätter/Replaces
23020	3888822



Nedre växel / Lower unit  
FWD

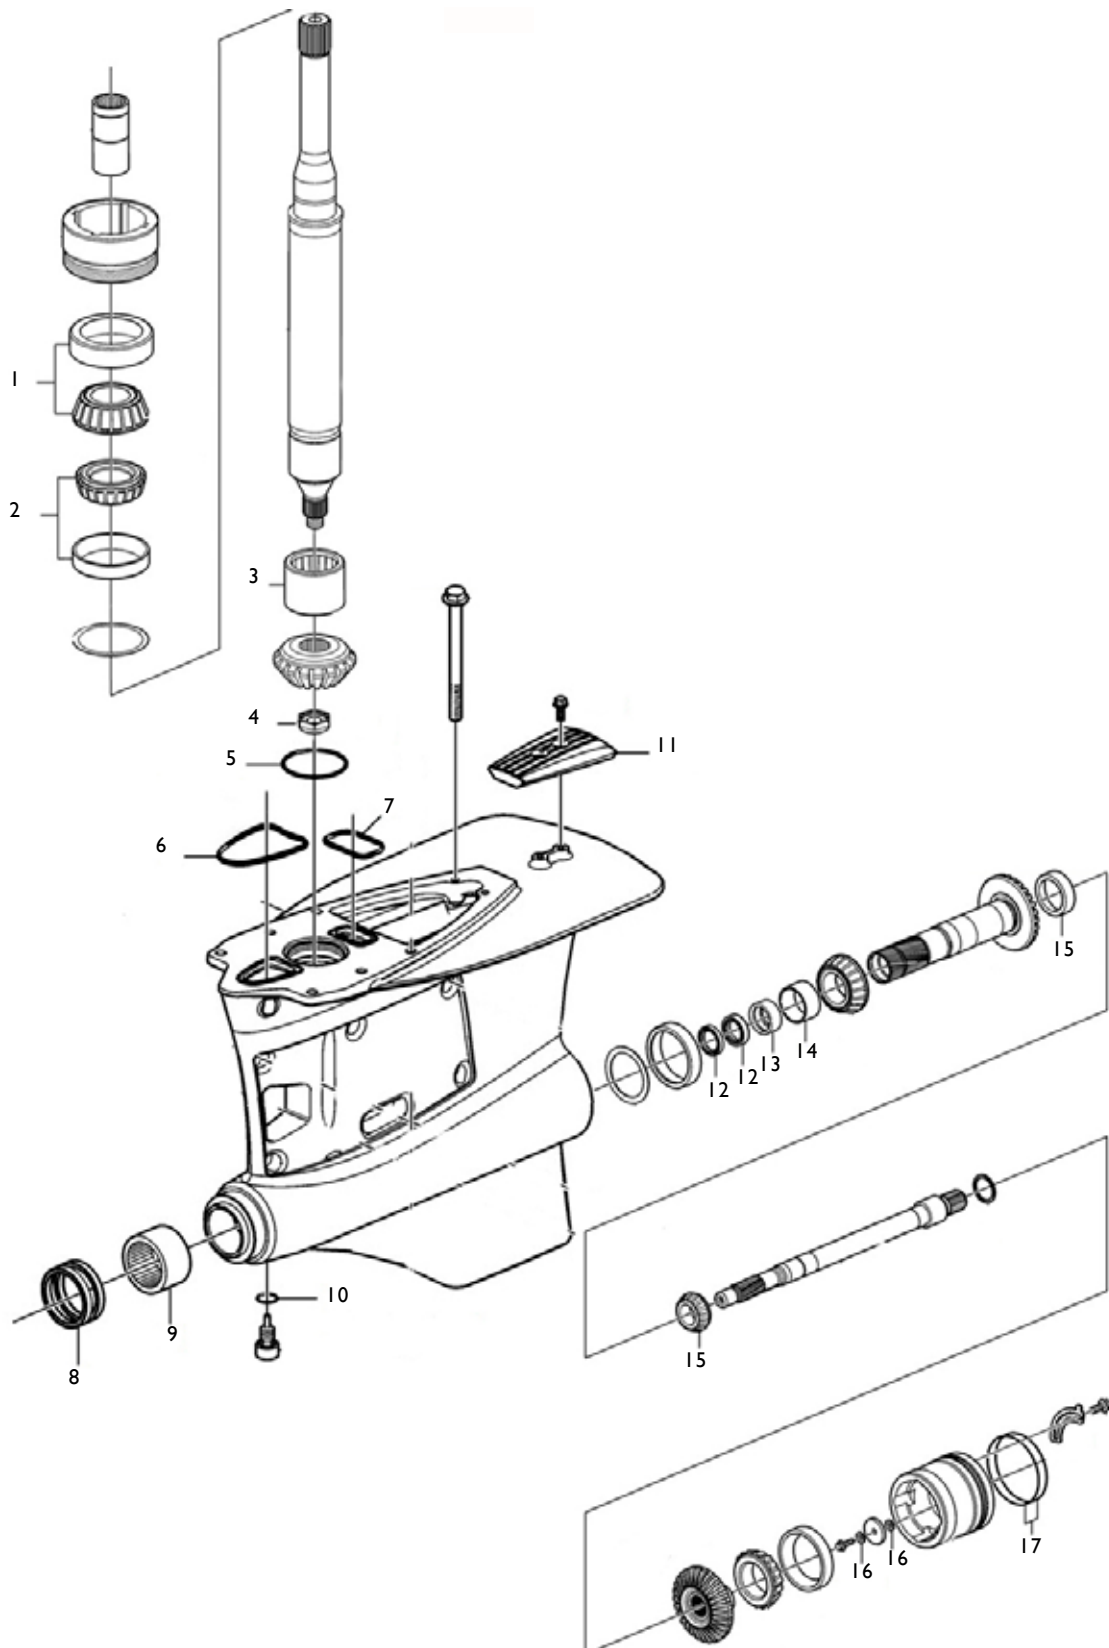

Spare parts from Sweden

## Nedre växel / Lower unit FWD

Bild/ Picture	Art. nr/ Part no	Ersätter/Replaces	Benämning/ Description
1	19250	3854250	Rulllager/Roller bearing
2	19249	3854249	Rulllager/Roller bearing
3	19654	184654	Nållager/ Needle roller bearing
5	19566	3852866	O-ring
6	19456	22430456	Packning/Gasket
7	19786	3889786	Packning/Gasket
8	19407	851407	Packbox/Seal
9	19859	183859	Nållager/ Needle roller bearing
10	14114	955972	O-ring
11	I-10289	3888813 + 3888816	Anodsats aluminium/ Anode kit aluminum
12	19871	853871, 853807+853808	Packbox I par/ Oil seal I pair
13	19272	183272	Nållager/ Needle roller bearing
14	19683	184683	Innerring/Inner ring
15	19691	184691	Rulllager/Roller bearing
16	17893	955893	Bricka/Washer
17	19259	925259	O-ring



Passar/Fits: FWD  
Anodsats aluminium/Anode kit aluminum

Art. nr/Part no	Ersätter/Replaces	Info
I-10289	3888813 + 3888816	Aluminium/Aluminum



Packningssats nedre växel/Seal kit lower unit

Art. nr/Part no	Ersätter/Replaces
23028	22612828



**Packningsatser kompletta, S-drev**  
**Gasket kits complete, Saildrive units**



I00S

Segelbåtsdrev/Sail boat drive

Art. nr/Part no	Ersätter/Replaces
19392	876392, 875389



I20S, I20S-B, I20S-C, I20S-D

Segelbåtsdrev/Sail boat drive


Art. nr/Part no	Ersätter/Replaces
19720	876391, 875720



I10S

Segelbåtsdrev/Sail boat drive

Art. nr/Part no	Ersätter/Replaces
19591	876397, 875591

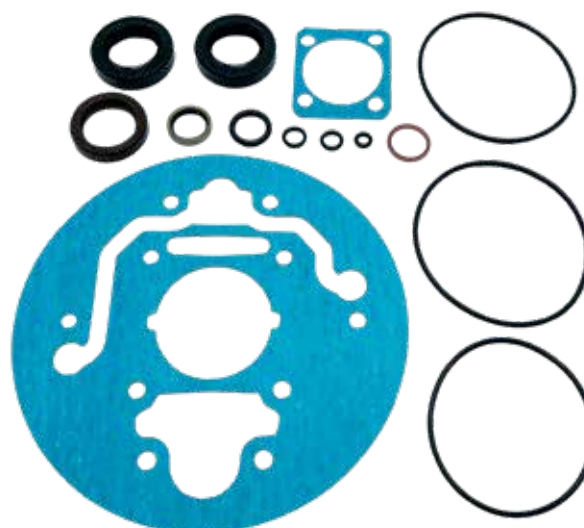

I30S, MS25S

Segelbåtsdrev/Sail boat drive

Art. nr/Part no	Ersätter/Replaces
19194	3817194



Spare parts from Sweden

## Packningskit kompletta AQ-drev Gasket kits complete AQ-drive units



100A

Art. nr/Part no	Ersätter/Replaces
19399	N/A



100B

Art. nr/Part no	Ersätter/Replaces
19392	876392, 875389



200  
250  
270, 270T  
275, 275A  
280, 280T  
285A  
290, 290A  
SP-A, SP-A/MT

Passar alla drevtyper utom Duoprop-drev/Fits all types except Duoprop drives  
Mutter 814164 ingår ej/Flange nut 814164 is not included

Art. nr/Part no	Ersätter/Replaces
19037	876266 + 876268



För drev med Duoprop-Nedre växel/For drive units with Duoprop lower housing

280DP  
290DP  
DP-A, DP-A1, DP-A2, DP-B, DP-C, DP-D

Art. nr/Part no	Ersätter/Replaces
19741	N/A



SP-A1, SP-A2  
SP-C, SP-C1, SP-E

Art. nr/Part no	Ersätter/Replaces
19033	N/A



DP-C1  
DP-D1  
DP-E  
DPX-S  
DPX-S1

Art. nr/Part no	Ersätter/Replaces
19035	N/A



Packningsatser kompletta AQ-drev  
Gasket kits complete AQ-drive units



DP-G, DPX-R

Art. nr/Part no	Ersätter/Replaces
19078	N/A



DPX-C, DPX-R, DPX-S, DPX-SI

Art. nr/Part no	Ersätter/Replaces
19721	N/A




SX-A

Art. nr/Part no	Ersätter/Replaces
23030	N/A

DPH-A, DPH-B, DPH-C  
DPR-A, DPR-B, DPR-C

Art. nr/Part no	Ersätter/Replaces
23009	N/A

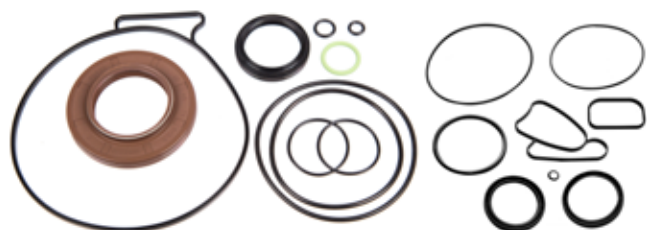

DPS-A, DPS-B

Art. nr/Part no	Ersätter/Replaces
23031	N/A

DPH-D  
DPR-D

Art. nr/Part no	Ersätter/Replaces
23027	N/A




## Packningsatser kompletta AQ-drev Gasket kits complete AQ-drive units



XDP-B, X-B, X-BLT, XHP-BLT, XXP-A, XXP-ALT, XXP-D3

Art. nr/Part no	Ersätter/Replaces
23023	3859050

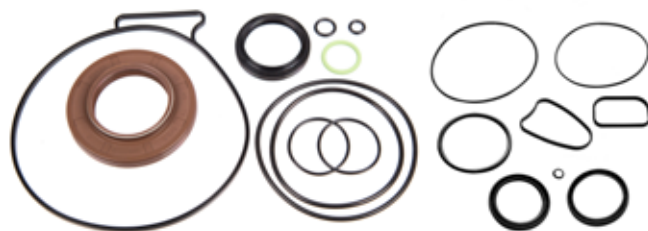

FWD

Art. nr/Part no	Ersätter/Replaces
23032	N/A

## Packningsatser övre växel S-drev Gasket kits upper gear, Saildrive



S-drev/Saildrive 100S

Art. nr/Part no	Ersätter/Replaces
22091	N/A



S-drev/Saildrive 110S

Art. nr/Part no	Ersätter/Replaces
22096	N/A




S-drev/Saildrive 120S, 120S-B, 120S-C, 120S-D

Art. nr/Part no	Ersätter/Replaces
22097	N/A



Packningskit övre växel AQ-drev  
Gasket kits upper gear unit AQ-drive units



100A

Art. nr/Part no	Ersätter/Replaces
22090	N/A




100B

Art. nr/Part no	Ersätter/Replaces
22091	N/A



- 200
- 250
- 270, 270T, 275, 275A
- 280, 280DP, 280T, 285A
- 290, 290A, 290DP
- SP-A, SP-A/MT, SP-A1, SP-A2
- SP-C, SP-C1, SP-E
- DP-A, DP-A1, DP-A2
- DP-B, DP-B1
- DP-C, DP-C1, DP-D1
- DP-E
- DP-S1
- DPX, DPX-R, DPX-S, DPX-S1

Art. nr/Part no	Ersätter/Replaces
19029	876266

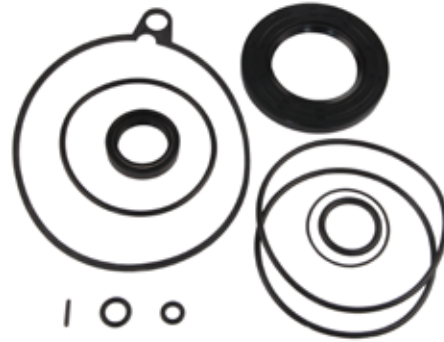

DP-G, DPX-A

Art. nr/Part no	Ersätter/Replaces
23034	



SX-C, SX-C1, SX-C2, SX-CT, SX-CT1, SX-R, SX-RT1, SX-RT2,  
SX-M, SX-MTD, SX-M1  
DP-S, DP-SM

Art. nr/Part no	Ersätter/Replaces
23007	3850594



SX-A  
DPS-A, DPS-B, DPS-B1  
FWD

Art. nr/Part no	Ersätter/Replaces
23021	3888917, 876392



## Packningskit övre växel AQ-drev Gasket kits upper gear unit AQ-drive



DPH-A, DPH-B, DPH-C, DPH-D, DPH-DI, DPH-E  
DPR-A, DPR-B, DPR-C, DPR-D

Art. nr/Part no	Ersätter/Replaces
23010	N/A



XDP-B, X-B, X-BLT, XHP-BLT, XXP-A, XXP-ALT, XXP-D3

Art. nr/Part no	Ersätter/Replaces
23024	N/A



Spare parts from Sweden

### Packningsatser nedre växel AQ-drev Gasket kits lower gear unit AQ-drive



200  
250  
270, 270T  
275, 275A  
280, 280T  
285A  
290, 290A  
SP-A, SP-A/MT

Passar alla drevtyper utom DP-drev/Fits all types except DP-drives Mutter 814164 ingår ej/Flange nut 814164 is not included

Art. nr/Part no	Ersätter/Replaces
19010	876268



280DP  
290DP  
DP-A, DP-A1, DP-A2, DP-B, DP-B1, DP-C, DP-D

För alla drev med DP-Nedre växel uton DPS och DPH/  
For all drive units with DP lower housing except DPS and DPH

Art. nr/Part no	Ersätter/Replaces
19267	876267



SP-A1, SP-A2  
SP-C, SP-C1  
SP-E

Art. nr/Part no	Ersätter/Replaces
19011	87626



DP-CI, DP-DI, DP-E, DP-G

Art. nr/Part no	Ersätter/Replaces
19060	N/A



SX-C, SX-C1, SX-C2, SX-CT, SX-CT1, SX-R, SX-RT1  
SX-M, SX-M1, SX-MTD

Art. nr/Part no	Ersätter/Replaces
23006	3855275



SX-A

Art. nr/Part no	Ersätter/Replaces
23022	3888821



## Packningskit nedre växel AQ-drev Gasket kits lower gear unit AQ-drive



DP-S, DP-SI, DP-SM

Art. nr/Part no	Ersätter/Replaces
23002	3856002



DPS-A, DPS-B

Art. nr/Part no	Ersätter/Replaces
23020	3888822



DPX-C, DPX-R, DPX-S, DPX-SI

Bricka 872403 ingår ej/Washer 872403 is not included

Art. nr/Part no	Ersätter/Replaces
23001	876639



XDP-B, X-B, X-BLT, XHP-BLT, XXP-A, XXP-ALT, XXP-D3

Art. nr/Part no	Ersätter/Replaces
23025	N/A



FWD

Art. nr/Part no	Ersätter/Replaces
23028	22612828



DPH-A, DPH-B, DPH-C

DPR-A, DPR-B, DPR-C

Art. nr/Part no	Ersätter/Replaces
23018	N/A



DPH-E, DPH-D, DPH-DI

DPR-D, DPI-A

Art. nr/Part no	Ersätter/Replaces
19077	23553896



**Packningsatts övre växel - mellanhus**  
**Gasket kit upper unit - intermediate**


AQ200  
AQ250  
AQ270, AQ270T  
AQ275, AQ275A  
AQ280, AQ280DP, AQ280T  
AQ285A  
AQ290, AQ290A, AQ290DP  
SP-A, SP-A/MT, SP-A1, SP-A2  
SP-C, SP-C1  
DP-A, DP-A1, DP-A2  
DP-B, DP-B1  
DP-C, DP-C1  
DP-D, DP-D1  
DP-E  
DP-G  
DPX  
DPX-S, DPX-S1

Art. nr/Part no	Ersätter/Replaces
22079	N/A



AQ200  
AQ250  
AQ270, AQ270T  
AQ275, AQ275A  
AQ280, AQ280DP, AQ280T  
AQ285A  
AQ290, AQ290A, AQ290DP  
SP-A, SP-A/MT, SP-A1, SP-A2  
SP-C, SP-C1  
DP-A, DP-A1, DP-A2  
DP-B, DP-B1  
DP-C, DP-C1  
DP-D

Art. nr/Part no	Ersätter/Replaces
22081	N/A

**Packningssatser mellanhus - nedre växel**  
**Gasket kits intermediate - lower unit**


DP-E, SP-E  
DP-G  
DPX-A, DPX-R, DPX-S, DPX-S1

Art. nr/Part no	Ersätter/Replaces
23003	N/A

**Packningssatser propelleraxlar**  
**Gasket kits propeller shaft**


I00A, I00B, I00S

Art. nr/Part no	Ersätter/Replaces
22082	N/A



I10S S-drev / Saildrive

Art. nr/Part no	Ersätter/Replaces
22083	N/A



## Packningskit propelleraxlar Gasket kits propeller shaft




I20C-D, I20S, I20S-B, S120C S-drev / Saildrive

Art. nr/Part no	Ersätter/Replaces
22085	N/A



I20S-E, MS25S-A\*, MS25R-A\* S-drev / Saildrive  
\*=Hel zink/one pcs zink

Art. nr/Part no	Ersätter/Replaces
23008	N/A

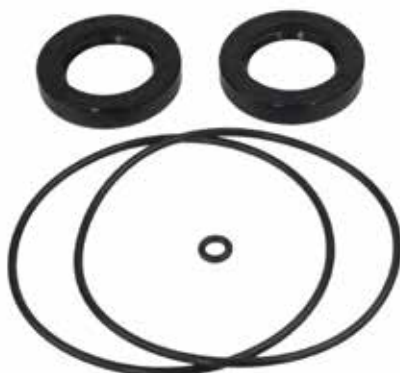

I30S-A, I30S-B, I30SR-A, I30SR-B S-drev / Saildrive  
I50S-A, I50S-B, I50SR-A, I50SR-B S-drev / Saildrive

Art. nr/Part no	Ersätter/Replaces
23033	N/A



200

Art. nr/Part no	Ersätter/Replaces
22084	N/A



250

270, 270T  
275, 275A  
280, 280T  
285A  
290, 290A  
SP-A, SP-A/MT, SP-A1, SP-A2  
SP-C, SP-C1

Ej för DP-drev/Not for DP-drives

Art. nr/Part no	Ersätter/Replaces
22086	N/A



280DP

290DP  
DP-A, DP-A1, DP-A2  
DP-B, DP-B1  
DP-C, DP-C1  
DP-D, DP-D1  
DPX-S, DPX-S1

För alla med DP-drev/For all DP-drives

Art. nr/Part no	Ersätter/Replaces
22087	N/A



### Packningssatser växelmekanism Gasket kits gearshift mechanism



100A, 100B, 100S

Art. nr/Part no	Ersätter/Replaces
22095	N/A



110S  
120C-D  
120S  
120S-B  
S120C  
200  
250  
270, 270T  
275

Packbox med enkel tätningssläpp/Oil seal with single sealing lips

Art. nr/Part no	Ersätter/Replaces
22098	N/A



275A  
280, 280DP, 280T  
285A  
290, 290A, 290DP  
SP-A, SP-A/MT, SP-A1, SP-A2, SP-C, SP-C1  
DP-A, DP-A1, DP-A2, DP-B, DP-B1, DP-C, DP-C1  
DP-D, DP-D1, DP-E, DP-G  
DPX, DPX-S, XDP-B

Packbox med dubbla tätningssytor/Oil seal with double sealing lips

Art. nr/Part no	Ersätter/Replaces
22101	N/A



**DPH, DPR**

DPH-A, DPH-C, DPH-D, DPH-D1, DPH-E  
DPR-A, DPR-B, DPR-C, DPR-D

Art. nr/Part no	Ersätter/Replaces
22112	3863085, 945624, 17276, 951936



**DPS, FWD**

DPS-A Oxi, DPS-B OX, DPS-B1 OX, FWD-B1, FWD-B2, DPS-D, DPS-D OX,  
DPS-D1, DPS-D1 OX, FWD-D1, FWD-D1 OX, FWD-D2, FWD-D2 OX, SX-D  
DPS-A, SX-A -SN4202180937, DPS-A SN4202180938-

Art. nr/Part no	Ersätter/Replaces
22175	3863085, 925093, 951936





Spare parts from Sweden

## Kullager ingående axel Övre växel Ball bearings double bearing units



120S, 120SB, 120C-D, S120C

Koniskt rulllager/Roller bearing

Yttering/Outer ring

Yttre lager i dubbellagerbox/Outer bearing for double bearing unit

Art. nr/Part no	Ersätter/Replaces
19700	183834, 183752, 183750



120S, 120SB, 120C-D, S120C

Inre lager i dubbellagerbox/Inner bearing for double bearing unit

Art. nr/Part no	Ersätter/Replaces	Info
19006	181301	Koniskt rulllager/ Roller bearing
19302	181302	Yttering/Outer ring



200, 250

270, 270T, 275, 275A

280, 280DP, 280T, 285A

290, 290A, 290DP

SP-A, SP-A/MT, SP-A1, SP-A2, SP-C, SP-C1

DP-A, DP-A1, DP-A2,

DP-B, DP-B1, DP-C, DP-C1

DP-D, DP-D1, DP-E

DP-G

DPX, DPX-S, DPX-S1

Inre lager i dubbellagerbox/Inner bearing for double bearing unit

Art. nr/Part no	Ersätter/Replaces
19949	3850852



200, 250

270, 270T, 275, 275A

280, 280DP, 280T, 285A

290, 290A, 290DP

SP-A, SP-A/MT, SP-A1, SP-A2, SP-C, SP-C1

DP-A, DP-A1, DP-A2,

DP-B, DP-B1, DP-C, DP-C1

DP-D, DP-D1, DP-E

DP-G

DPX, DPX-S, DPX-S1

Yttre lager i dubbellagerbox/Outer bearing for double bearing unit

Art. nr/Part no	Ersätter/Replaces
19247	183247, 183449, 3850853



Främre lager i lagerboxen i övre växeln/the forward bearing for the bearing box in upper gearcase

DPH-A, DPH-C, DPH-D1, DPH-E, DPR-A, DPR-B, DPR-C, DPR-D

Art. nr/Part no	Ersätter/Replaces
15043	11043



Aktre lager i lagerboxen i övre växeln/the rear bearing for the bearing box in upper gearcase

DPH-A, DPR-A, DPR-B

Art. nr/Part no	Ersätter/Replaces
12096	11096



## Kullager vertikalaxel Övre växel Ball bearings vertical shaft upper gear units



80  
100A, 100B, 100S\*  
110S\*

\*=S-drev / saildrive

2 st åtgär: Låsring 19030 kan köpas separat / 2 pcs required. Lock ring 19030 can be purchased separately

Art. nr/Part no	Ersätter/Replaces	Info
19087	181287	
19030	814030	Låsring/Lock ring



120C-D, 120S, 120SB, S120C  
S-drev / Saildrive

2 st åtgär/2 pcs required

Låsring 19030 kan köpas separat/  
Lock ring 19030 can be purchased separately

Art. nr/Part no	Ersätter/Replaces
19756	851756



270, 270T  
275, 275A  
280, 280DP, 280T  
285A  
290, 290A, 290DP  
SP-A, SP-A/MT  
DP-A  
DP-B

2 st åtgär/2 pcs required

Art. nr/Part no	Ersätter/Replaces
19542	853542



SP-A1, SP-A2  
SP-C, SP-C1  
DP-A1, DP-A2  
DP-B1  
DP-C, DP-C1  
DP-D, DP-D1  
DP-E  
DP-G  
DPX  
DPX-S, DPX-S1  
SX

2 st åtgär/2 pcs required

Art. nr/Part no	Ersätter/Replaces
19019	3857176, 854670, 3852389



DPH-A, DPH-B, DPH-C, DPH-D1  
DPR-A, DPR-B, DPR-C, DPR-D

Art. nr/Part no	Ersätter/Replaces
19430	993430



DPH-A, DPH-B, DPH-C, DPH-D1  
DPR-A, DPR-B, DPR-C, DPR-D

Art. nr/Part no	Ersätter/Replaces
19804	181804



### Nållager vertikalaxel Övre växel Needle bearing vertical shaft upper gear



100A, 100B, 100S  
110S

4 st åtgår/4 pcs required

Art. nr/Part no	Ersätter/Replaces
19068	181268



280, 280DP, 280T, 285A  
200, 250  
270, 270T, 275, 275A  
290, 290A, 290DP  
SP-A, SPA/MT, SP-A1, SP-A2  
SP-C, SP-C1  
DP-A, DP-A1, DP-A2  
DP-B, DP-B1, DP-C, DP-C1  
DP-D, DP-D1, DP-E  
DP-G  
DP-S, DP-S1  
DPX, DPX-S, DPX-S1  
SX, SX-C1, SX-C1AC  
SX-CT1, SX-CT2, SX-CLT, SX-RT1  
XDP-B

2 st åtgår/2 pcs required

Art. nr/Part no	Ersätter/Replaces
19819	3852390, 853819



DPH-A, DPH-B, DPH-C, DPH-D1  
DPR-A, DPR-B, DPR-C, DPR-D

Art. nr/Part no	Ersätter/Replaces
19778	184778

### Nållager upphängningsgaffel Needle bearings hook up fork



80  
100A, 100B

2 st åtgår/2 pcs required

Art. nr/Part no	Ersätter/Replaces
19289	181289



200  
250  
270, 270T  
275, 275A  
280, 280DP, 280T  
285A  
290, 290A, 290DP  
SP-A, SP-A/MT, SP-A1, SP-A2  
SP-C, SP-C1  
DP-A, DP-A1, DP-A2  
DP-B, DP-B1  
DP-C

Art. nr/Part no	Ersätter/Replaces
19391	183391



## Övre lager vertikalaxel Nedre växel Upper bearing vertical shaft lower gear units



80  
100, 100B  
100S\*, 110S\*  
\* = S-drev / Saildrive

Art. nr/Part no	Ersätter/Replaces
19559	18559



S120C-D, S120S, S120SB, S120C  
S-drev / Saildrive

Art. nr/Part no	Ersätter/Replaces
19700	183834, 183752, 183750



200, 250  
270, 270T, 275  
280, 280DP, 280T, 285A  
290, 290A, 290DP  
SP-A, SP-A/MT, SP-A1, SP-A2  
SP-C, SP-C1  
DP-A, DP-A1, DP-A2  
DP-B, DP-B1, DP-C, DP-C1  
DP-D, DP-D1  
DP-G  
DP-S1  
DPX  
DPX-S, DPX-S1

Koniskt lager/Roller bearing

Art. nr/Part no	Ersätter/Replaces
19072	11072



270, 270T, 275, 275A  
280, 280DP, 280T, 285A  
290, 290A  
SP-A, SP-A/MT, SP-A1, SP-A2  
SP-C, SP-C1  
DP-A, DP-A1, DP-A2  
DP-B, DP-B1, DP-C, DP-C1  
DP-D, DP-D1  
DP-E  
DP-G  
DP-S1  
DPX  
DPX-S, DPX-S1

Kullager under koniska lagret/Ball bearing under roller bearing

Art. nr/Part no	Ersätter/Replaces
19374	183374



DPH-A, DPH-B, DPH-C, DPH-D, DPH-D1, DPH-E  
DPR-A, DPR-B, DPR-C, DPR-D

Art. nr/Part no	Ersätter/Replaces	Info
15065	11065	Lagersats/ Bearing kit



### Axiallager vertikalaxel Nedre växel Axial bearing vertical shaft lower gear



80  
100, 100B,  
100S\*, 110S\*  
\*= S-drev / Saildrive

Art. nr/Part no	Ersätter/Replaces
19004	806620



### Nedre lager vertikalaxel Nedre växel Lower bearings vertical shaft lower gear



80  
100, 100B  
100S\*, 110S\*  
\*= S-drev / Saildrive

Art. nr/Part no	Ersätter/Replaces
19288	181288

### Nedre lager vertikalaxel Nedre växel Lower bearings vertical shaft lower gear



280DP, 290DP  
DP-A, DP-A1, DP-A2  
DP-B, DP-B1  
DP-C, DP-C1, DP-D, DP-D1, DP-E  
DP-G  
DP-S, DP-S1, DPS-A OXi, DPS-B, DPS-B OX, DPS-B1, DPS-B1 OX, DPS-D,  
DPS-D OX, DPS-D1, DPS-D1 OX  
DPX, DPX-A, DPX-R, DPX-S, DP-S1  
DPH-A, DPH-C, DPH-D, DPH-D1, DPH-E  
DPR-A, DPR-A, DPR-B, DPR-C, DPR-D

Art. nr/Part no	Ersätter/Replaces	Info
19654	184654	Nållager/ Needle bearing
19008	184682	Innerring/Inner ring



SX-A, SX-C, SX-C1, SX-C2, SX-CT, SX-CT1, SX-CT2, SX-D, SX-M,  
SX-MTD, SX-MTD3, SX-R, SX-R1, SX-RT1, SX-R2, SX-RT2 SX-M, SX-S  
XDP  
DP-S, DP-SM, DP-SMTD, DP-SMTD1, DP-SMTD3, DP-S1,  
DPS-A, DPS-A OXi, DPS-B, DPS-B OX  
FWD, FWD-B1, FWD-B2, FWD-D1, FWD-D1 OX, FWD-D2, FWD-D2  
OX

Art. nr/Part no	Ersätter/Replaces
19250	3854250



DPH-A, DPH-B, DPH-C, DPH-D, DPH-D, DPH-D1, DPH-E  
DPR-A, DPR-B, DPR-C, DPR-D

Art. nr/Part no	Ersätter/Replaces
15223	984223



## Inre lager propelleraxel Inner bearing propeller shafts



100A, 100B  
100S\*, 110S\*\*

\* S-drev / Saildrive  
\*\*För utväxling 1,66:1 (S-drev) / \* Ratio 1,66:1 (Saildrive)

Art. nr/Part no	Ersätter/Replaces
19413	181413



110S\*  
200, 250  
270, 270T, 275, 275A  
280, 280T, 285A  
290, 290A  
SP-A, SP-A/MT, SP-A1, SP-A2  
SP-C, SP-C1

\*=För utväxling 2,15:1 (S-drev) / Ratio 2,15:1 (Saildrive)

Art. nr/Part no	Ersätter/Replaces
19390	183390



120C-D, 120S, 120SB, S120C  
SX-A, SX-C, SX-C1, SX-C2, SX-R, SX-R1, SX-R2, SX-M, SX-S  
DP-S, DP-S1, DP-SM, DP-SMTD, DP-SMTD1  
XDP  
DPS-A, DPS-B  
FWD

Art. nr/Part no	Ersätter/Replaces	Info
19249	3854249	Lagersats/ Bearing kit



280DP, 290DP  
DP-A, DP-A1, DP-A2  
DP-B, DP-B1, DP-C, DP-C1  
DP-D, DP-D1, DP-E  
DP-S, DP-S1  
DPX, DPX-S, DPX-S1

Inre lager på inre propelleraxel / Inner bearing on inner propeller shaft

Art. nr/Part no	Ersätter/Replaces
19044	11044



280DP, 290DP  
DP-A, DP-A1, DP-A2  
DP-B, DP-B1, DP-C, DP-C1  
DP-D, DP-D1, DP-E  
DP-S, DP-S1  
DPX, DPX-S, DPX-S1

Inre lager på yttre propelleraxel / Inner bearing on outer propeller shaft  
Röraxel/Pipe shaft

Art. nr/Part no	Ersätter/Replaces
19691	184691



### Inre lager propelleraxel Inner bearing propeller shafts



280DP, 290A, 290DP, DP-A, DP-A1, DP-A2, DP-B, DP-B1, DP-C, DP-D,  
DP-D1, DP-C1, DP-D1, DP-E, DP-G  
DP-S, DP-S1, DPS-A  
DP-SM, DP-SMTD, DP-SMTD1, DP-SMTD3  
DPS-A, DPS-B, DPS-B1, DPS-B OX, DPS-D, DPS-D1, DPS-D OX, DPS-D1  
OX  
DPX-A, DPX-R, DPX-S1  
XDP-B, XDP-D3

Art. nr/Part no	Ersätter/Replaces	Info
19765	184765	Lagersats/ Bearing kit



DPH, DPH-A, DPH-B, DPH-C, DPH-D, DPH-D1, DPH-E  
DPR-A, DPR-B, DPR-C, DPR-D  
DPI-A

Art. nr/Part no	Ersätter/Replaces	Info
19222	984222	Lagersats/ Bearing kit



DPH-A, DPH-B, DPH-C, DPH-D, DPH-D1, DPH-E  
DPR-A, DPR-B, DPR-C, DPR-D  
DPI-A

Art. nr/Part no	Ersätter/Replaces	Info
15765	183765	Lagersats/ Bearing kit



DPH, DPH-A, DPH-B, DPH-C, DPH-D, DPH-D1, DPH-E  
DPR-A, DPR-B, DPR-C, DPR-D  
DPI-A

Art. nr/Part no	Ersätter/Replaces	Info
12784	425784	Lagersats/ Bearing kit



## Yttre lager propelleraxel Outer bearing propeller shafts



100A, 100B  
100S\*, 110S\*\*

\* S-drev / Saildrive

\*\*För utväxling 1,66:1 (S-drev) / \* Ratio 1,66:1 (Saildrive)

Art. nr/Part no	Ersätter/Replaces
19286	181286



110S\*  
200  
250

\*=För utväxling 2,15:1 (S-drev) / Ratio 2,15:1 (Saildrive)

Art. nr/Part no	Ersätter/Replaces
19390	183390



270, 270T  
275, 275A  
280, 280T  
285A  
290, 290A  
SP-A, SP-A/MT, SP-A1, SP-A2  
SP-C, SP-C1

Art. nr/Part no	Ersätter/Replaces
19541	854541



280DP  
290DP  
DP-A, DP-A1, DP-A2  
DP-B, DP-B1  
DP-C, DP-C1  
DP-D, DP-D1  
DP-S, DP-S1  
DPX  
DPX-S, DP-S1  
XDP-B

Yttre nållager på inre propelleraxel / Outer bearing on inner propeller shaft

Art. nr/Part no	Ersätter/Replaces
19272	183272



280DP  
290DP  
DP-A, DP-A1, DP-A2  
DP-B, DP-B1  
DP-C, DP-C1  
DP-D, DP-D1  
DP-E  
DP-G  
DP-S, DP-S1  
DPX  
DPX-S, DPX-S1  
XDP-B

Yttre lager på yttre propelleraxel / Outer bearing on outer propeller shaft

Art. nr/Part no	Ersätter/Replaces	Info
19859	183859	Nållager / Needle bearing
19683	184683	Innerring / Inner ring



DPH-A, DPH-B, DPH-C, DPH-D1  
DPR-A, DPR-B, DPR-C, DPR-D

Art. nr/Part no	Ersätter/Replaces
19224	984224



### Skjuthylsor - Glidskor Sliding sleeves - Shoe dog



250  
270, 270T, 275, 275A  
280, 280T, 285A  
290  
SP-A, SP-A1, SP-A2, SP-C, SP-C1, SP-E  
DP-A, DP-A1, DP-A2  
DP-B, DP-B1  
DP-C, DP-C1  
DP-D, DP-D1  
DP-E  
DP-G  
DP-S, DP-S1, DP-SM, DP-SMTD, DP-SMTD1, DP-SMTD3  
DPS-A, DPS-A OXi, DPS-B, DPS-B OX, DPS-B1, DPS-B1 OX  
DPX-A, DPX-R, DPX-S1  
FWD-B1, FWD-B2  
SX-A, SX-C, SX-C1, SX-C2, SX-CT, SX-CT1, SX-CT2, SX-M, SX-M1,  
SX-MTD, SX-MTD3  
XDP-B, XDP-D3  
DP-G  
MS3B, MS3C, MS4A, MS4B, MS5A, MS5B

Alla versioner/All versions

Art. nr/Part no	Ersätter/Replaces	Info
19613	3807613, 3855783	Skjuthylsa / Sliding sleeve
19646	3856502, 3852293, 3852396, 814601, 814603, 852949, 854370	Glidsko / Shoe "dog"



DPH-A, DPH-B, DPH-C, DPH-D, DPH-D1, DPH-E  
DPR-A, DPR-B, DPR-C, DPR-D

Alla versioner/All versions

Art. nr/Part no	Ersätter/Replaces	Info
19003	3849006, 3862369	Skjuthylsa / Sliding sleeve
19387	3862387	Glidsko / Shoe "dog"

### Slitbrickor dubbellagerboxar Thrust washers double bearing units



200  
250

Alla versioner/All versions

Art. nr/Part no	Ersätter/Replaces
19315	897315



270, 270T  
275, 275A  
280, 280DP, 280T  
285A  
290, 290A, 290DP  
SP-A, SP-A/MT, SP-A1, SP-A2  
SP-C, SP-C1  
DP-A, DP-A1, DP-A2  
DP-B, DP-B1  
DP-C, DP-C1  
DP-D, DP-D1  
DP-E  
DP-G  
DPX  
DPX-S, DP-S1  
MS3, MS4A

Alla versioner/All versions

Art. nr/Part no	Ersätter/Replaces
19075	832675



## Skrusatser dubbellagerbox Bolt kits double bearing units



200  
250  
270, 270T  
275  
280, 280DP, 280T  
290

Samtliga utföranden/All versions  
Längd/Length 63 mm

Art. nr/Part no	Ersätter/Replaces
22099	956590 x 4 + 942598 x 4



275A  
285A  
290A, 290DP  
SP-A, SP-A/MT, SP-A1, SP-A2  
SP-C, SP-C1  
DP-A, DP-A1, DP-A2  
DP-B, DP-B1  
DP-C, DP-C1  
DP-D, DP-D1  
DP-E  
DP-G  
DPX  
DPX-S, DPX-S1

Samtliga utföranden/All versions  
Längd/Length 70 mm

Art. nr/Part no	Ersätter/Replaces
22100	956591 x 4 + 942598 x 4



Spare parts from Sweden

### Knutkors Universal joints



100B, 100S (saildrive)

Art. nr/Part no	Ersätter/Replaces
19158	832158



200, 250  
270, 270T, 275, 275A  
280, 280DP, 280T, 285A  
290, 290A, 290DP  
SP-A, SP-A/MT, SP-C  
DP-A, DP-B

För drivknut med grova splines/For universal joint with large splines

Art. nr/Part no	Ersätter/Replaces
19255	853255, 897707



SP-A1, SP-A2, SP-C, SP-C1, SP-E  
DP-A1, DP-A2, DP-B1  
DP-C, DP-C1  
DP-D, DP-D1, DP-E  
DP-G  
DP-S1  
DPX-A, DPX-R, DPX-S, DPX-S1

För drivknut med fina splines/For universal joint with fine splines

Art. nr/Part no	Ersätter/Replaces
19619	3860232, 854619



DP-S, DP-S1  
DP-SM  
SX-C, SX-C1, SX-C2  
SX-CT, SX-CT1, SX-CT2  
SX-R, SX-RT1, SX-RT2  
SX-S, SX-ST  
SX-M, SX-MTD

Art. nr/Part no	Ersätter/Replaces
19612	3850812



DPH, DPR, DPI  
DPH-A, DPH-C, DPH-D1, DPH-E  
DPR-A, DPR-B, DPR-C, DPR-D  
DPI-A

Art. nr/Part no	Ersätter/Replaces
19136	3843136



## Packningskit knutkors Seal kits universal joints



200  
250

Art. nr/Part no	Info
22150	Används vid montering av knutkors 19255 / To be used when mounting universal joint 19255



DPH-A, DPH-B, DPH-C, DPH-D  
DPR-A, DPR-B, DPR-C, DPR-D  
DPI-A

Art. nr/Part no	Info
23019	Används vid montering av knutkors 19136 / To be used when mounting universal joint 19136



270, 270T  
275, 275A  
280, 280DP, 280T  
285A  
290, 290A, 290DP  
SP-A, SP-A/MT, SP-A1, SP-A2, SP-C, SP-C1  
DP-A, DP-A1, DP-A2, DP-B, DP-B1, DP-C, DP-C1, DP-D, DP-D1, DP-E  
DPX, DPX-S

Art. nr/Part no	Info
22151	Används vid montering av knutkors 19255 / To be used when mounting universal joint 19255



SX-S, SX-C, SX-C1, SX-C2, SX-RT1, SX-RT2, SX-M, SX-MTD, SX-A  
DP-S, DP-S1, DP-SM, DP-SMTD, DP-SMTD1  
DPS-A, DPS-B  
FWD

Art. nr/Part no	Info
23029	Används vid montering av knutkors 19612 / To be used when mounting universal joint 19612



## Gummiringar klämring sköld Rubber rings clamping ring transom



### Hård/Hard - Ytter/Outer 200 mm

2 st åtgår/2pcs required

AQ60F\*, AQ80\*, AQ90\*, AQ95\*, AQ100\*  
 AQ105\*, AQ110\*, AQ115A\*, AQ115B\*  
 AQ130A\*, AQ130B\*, AQ130C\*, AQ130D\*  
 AQ165A, AQ170A, AQ170B, AQ170C, AQ170D  
 AQ120A\*, AQ120B  
 AQ125A, AQ125B  
 AQ131A, AQ131D  
 230A, 230B, B230, B230E, B230F, B230FB, B230FX, 250A, 250B  
 AQ175A, AQ190A, AQ240A  
 AQ200A, AQ200C, AQ200D, AQ200F  
 AQ210A, AQ211A  
 AQ225A, AQ225B, AQ225C, AQ225D, AQ225E, AQ225F, AQ231A,  
 AQ231B, AQ255A, AQ255B, AQ260A, AQ260B, AQ271A, AQ271B,  
 AQ271C, AQ271D, AQ280A, AQ290A, AQ311A, AQ311B  
 500A, 500B, 501A, 501B, 570A, 571A, 572A, 740A, 740B, BB740A  
 AQD19\*, AQD29, AQD29A, AQD32A  
 4.3GLPLKE, 4.3GLPNCB, 4.3GSPLKE, 4.3GSPNCB, 4.3GSPNCM,  
 4.3GIPLKECE, 4.3GIPNCBCE, 4.3GIPNCMCE  
 5.0FiPMDA, 5.0FiPMDM, 5.0FiPHURCE, 5.0FiPHUSCE, 5.0FLPHUR,  
 5.0FLPHUS, 5.0FLPMDA  
 5.7GiPHUS, 5.7GIPLKECE, 5.7GIPMDA, 5.7GIPMDACE, 5.7GIPNCBCE,  
 5.7GIPNCMCE, 5.7GLPLKE, 5.7GLPMDA, 5.7GSPLKE, , 5.7GSIPLKE  
 5.8FiPHURCE, 5.8FiPMDA, 5.8FiPMDM, 5.8FLPHUR, 5.8FLPMDA, 5.8FSIP-  
 HURCE, 7.4GIPLKECE, 7.4GIPNCBCE, 7.4GIPNCMCE, 7.4GLPLKE,  
 7.4GLPMDA, 7.4GLPMDM, 7.4GLPNCB, 7.4GLPNCM, 7.4GSIXNCB,  
 7.4GSIXNCM, 8.2GLPMDA, 8.2GLPMDM, 8.2GSIXNCB  
 DPX375-A, DPX375-B, DPX375-BF, DPX375-CF, DPX385XBYDCE,  
 DPX385XEF, DPX385XLKE, DPX415XEF, DPX415XLKE, DPX420-A,  
 DPX420-B, DPX420-BF, DPX420-CF  
 D4-150A-G  
 D4-225A-C, D4-225A-D, D4-225A-E, D4-225A-F, D4-225I-C, D4-225I-D  
 D4-230A-G  
 D4-260A-C, D4-260A-D, D4-260A-E, D4-260A-F, D4-270A-G  
 D4-300A-C, D4-300A-D, D4-300A-E, D4-300A-F, D4-300A-G, D4-320A-G  
 D6-280A-A, D6-280A-B, D6-280A-C, D6-280A-D, D6-280A-E, D6-280I-C,  
 D6-280I-D  
 D6-300A-F, D6-300A-G  
 D6-310A-A, D6-310A-B, D6-310A-C, D6-310A-D, D6-310A-E, D6-310I-C,  
 D6-310I-D  
 D6-330A-B, D6-330A-C, D6-330A-D, D6-330A-E, D6-330A-F, D6-330I-C,  
 D6-330I-D, D6-340A-G, D6-350A-A, D6-350A-B  
 D6-370A-B, D6-370A-C, D6-370A-D, D6-370A-E, D6-370A-F  
 D6-380A-G, D6-400A-E, D6-400A-F, D6-400A-G, D6-440A-G

Transmissioner: DPH-A, DPH-B, DPH-C, DPH-DI, DPH-E, DPR-A, DPR-B,  
 DPR-C, DPR-D, DPX-R, DPI-A

\* Utan främre motorbalk/\* Without forward support

Art. nr/Part no	Ersätter/Replaces
19190	804190



### Mjuk/Soft - Ytter/Outer 200 mm

2 st åtgår/2pcs required

MB10A/100S  
 AQ60F\*, AQ90\*, AQ95\*, AQ100\*  
 AQ105\*, AQ110\*  
 AQ115A\*, AQ115B\*  
 AQ120B, AQ140A, AQ125A, AQ145A, AQ145B  
 AQ130A\*, AQ130B\*  
 AQ131B, AQ131C  
 AQ151A, AQ151B, AQ151C  
 AQ171A, AQ171C  
 AQ205A  
 230A, 230B, B230, B230E, B230F, B230FB, B230FX  
 250A, 250B, 251A  
 430A, 430B, 431A, 431B, 432A, 434A  
 500B, 501B, 570A, 572A, 740B  
 4.3GIPLKECE, 4.3GIPNCBCE, 4.3GIPNCMCE, 4.3GLPLKE, 4.3GLPNCB,  
 4.3GSPLKE, 4.3GSPMDA, 4.3GSPNCB, 4.3GSPNCM  
 MD5A/100S, MD5B/100S, MD5C/100S  
 MD6A/100S, MD6B/100S  
 MD7A/100S, MD7B/100S  
 MD11C/100S, MD11D/100S, MD17C/100S, MD17D/100S  
 AD30A, AQAD30A  
 AD31, AD31B, AQAD31A, AD31D, AD31D-A, AD31XD, TMD31B,  
 TAMD31B, TMD31D, TAMD31D, TAMD31M  
 AD40B, AQAD40A, AQAD40B, AQD40A  
 AD41A, D41B, AD41B, AD41BJ, AQAD41A, TMD41A, TAMD41A,  
 TAMD41P, D41A, D41D  
 AQD2B, AQD19\*  
 AQD21A, AQD21B  
 KAD32P  
 KAD42A, KAD42B, KAD42P-A, KAMD42B, TAMD42B, TAMD42WJ-A  
 KAD43P-A, KAMD43P, KAMD43P-A, KAMD43P-B, KAMD43P-C  
 KAD44P, KAD44P-B, KAD44P-C  
 KAD300-A, KAMD300-A  
 D3-140A-G, D3-170A-G, D3-170A-H  
 D3-200A-G, D3-200A-H  
 D4-150A-G  
 D4-210A-A, D4-210A-B  
 D4-225A-A, D4-225A-B, D4-225A-C, D4-225A-D, D4-225A-E, D4-225A-F,  
 D4-225I-C, D4-225I-D  
 D4-230A-G  
 D4-260A-A, D4-260A-B, D4-260A-C, D4-260A-D, D4-260A-E, D4-260A-F  
 D4-270A-G  
 D4-300A-A, D4-300A-C, D4-300A-D, D4-300A-E, D4-300A-F, D4-300A-G  
 D4-320A-G  
 D6-300A-G, D6-340A-G, D6-380A-G, D6-400A-G, D6-440A-G  
 Transmissioner: 290A, SP-A, SP-A1, SP-C1, DP-B, DP-D, DP-E, DP-G,  
 DPH-A, DPH-B, DPH-E, DPI-A, DPX, DPX-C, DPX-R

\* Med främre motorbalk/\* For forward support

Art. nr/Part no	Ersätter/Replaces
19967	813967



## Gummiring kardanaxel Rubber ring jackshaft



### Kardanaxel/Jackshaft

AD30A, AQAD30A  
AD31D-A, AD31L-A, AD31P-A, TAMD31A, TAMD31B, TAMD31D  
KAD32P  
AD40B, AQAD40B  
AD41B, AD41BJ, AD41D, D41D, D41L-A, AD41L-A, AD41P-A, TAMD41A,  
TAMD41B, TMD41D, TAMD41D  
KAD42B, KAD42P-A  
KAD43P-A, KAD43P-B  
KAD44P  
D4-150A-G  
D4-180I-B, D4-180I-C, D4-180I-D, D4-180I-E, D4-180I-F  
D4-210A-A, D4-210A-B, D4-210I-A, D4-210I-B  
D4-225A-B, D4-225A-C, D4-225A-D, D4-225A-E, D4-225A-F  
D4-225I-B, D4-225I-C, D4-225I-D, D4-225I-E, D4-225I-F  
D4-230A-G  
D4-260A-A, D4-260A-B, D4-260A-C, D4-260A-D, D4-260A-E, D4-260A-F,  
D4-260D-B, D4-260D-C, D4-260D-E, D4-260D-F, D4-260I-A, D4-260I-B,  
D4-260I-C, D4-260I-D, D4-260I-E, D4-260I-F  
D4-270A-G  
D4-300A-A, D4-300A-C, D4-300A-D, D4-300A-E, D4-300A-F, D4-300A-G,  
D4-300D-A, D4-300D-C, D4-300D-D, D4-300D-E, D4-300D-F, D4-300I-A,  
D4-300I-B, D4-300I-C, D4-300I-D, D4-300I-E, D4-300I-F  
D4-320A-G  
D6-300A-G  
D6-340A-G  
D6-380A-G  
D6-400A-G  
D6-440A-G

Transmissioner/Transmissions: DP-A, DP-C, DP-CI, DP-D, DP-E, DP-G,  
DP-S, DPH-A, DPH-AP, DPH-AS, DPH-B, DPH-BP, DPH-BS, DPH-C,  
DPH-D, DPH-E, DPR-A, DPR-B, DPR-C, DPI-A, DPX, DPX-A, DPX-C,  
DPX-R, DPX-S

Art. nr/Part no	Ersätter/Replaces
19464	858464

## Skruvsats klämring Screw kit clamping ring



### Galvad skruvsats / Galvanized screw kit.

Passar alla Aquamaticdrev Säljes i sats om 6 st skruvar /  
Fits all Aquamatic drives. Sold in kits of 6 screws.

Art. nr/Part no	Ersätter/Replaces	Fpk/Pack
19844	191844	6

## Flänssats klämring Flange kit clamp ring



### Rostfri flänssats / Stainless flange kit

Passar alla Aquamaticdrev. Säljes i sats om 3 st flänisar /  
Fits all Aquamatic drives. Sold in kits of 3 flanges.

Art. nr/Part no	Ersätter/Replaces	Fpk/Pack
19624	806624	3



### Lagertapp Bearing pin



200  
250  
270  
275  
280  
285  
290, 290A  
SP-A, SP-A1, SP-A2, SP-A/MT  
DP-A, DP-A1, DP-A2, DP-B, DP-B1  
DPX

Art. nr/Part no	Ersätter/Replaces
18175	853175, 897831

### Låsskruvssats lagertapp Screw kit bearing pin



200  
250  
270  
275  
280  
285  
SP-A, SP-A/MT

Art. nr/Part no	Ersätter/Replaces	Info
22092	941873x2 941670 x 2	5/16" UNC



290, 290A, 290DP  
SP-A, SP-A1, SP-A2  
SP-C, SP-C1  
DP-A, DP-A1, DP-A2  
DP-B, DP-B1  
DP-C, DP-C1  
DP-D, DP-D1  
DPX

Art. nr/Part no	Ersätter/Replaces	Info
22093	963699 x 2 941670 x 2	M8



## Bussningsatser upphängning Bushing kits hook up forks



80  
100, 100B  
200  
250  
270, 275, 275A  
280, 280L, 280DP, 280PT  
285A  
SP-A/MT

Sats om 2 bussningar/Set of 2 bushings

Art. nr/Part no	Ersätter/Replaces	Info
19278	826341, 876278, 826341	Inner Ø: 18,4 mm, Outer Ø: 24,8 mm



290, 290A, 290DP  
SP-A, SP-A1, SP-A2  
SP-C, SP-C1, SP-E  
DP-A, DP-A1, DP-A2  
DP-B, DP-B1  
DP-C, DP-C1  
DP-D, DP-D1

Sats om 2 bussningar/Set of 2 bushings

Art. nr/Part no	Ersätter/Replaces	Info
19279	853223, 876279	Inner Ø: 18,4 mm, Outer Ø: 24,8 mm



270T  
280T

Sats om 2 bussningar/Set of 2 bushings

Art. nr/Part no	Ersätter/Replaces
22080	832820 x 2



SP-E  
DP-A1  
DP-C, DP-C1  
DP-D, DP-D1  
DP-E  
DP-G  
DPX-A, DPX-R, DPX-R1, DPX-S, DPX-S1

Sats om 2 bussningar/Set of 2 bushings

Art. nr/Part no	Ersätter/Replaces	Info
19507	872096 x 2	Inner Ø: 24,75 mm, Outer Ø: 29,85 mm



DPH-A, DPH-B, DPH-C, DPH-D, DPH-D1, DPH-E  
DPR-A, DPR-B, DPR-C, DPR-D  
DPI-A

Sats om 2 bussningar/Set of 2 bushings

Art. nr/Part no	Ersätter/Replaces	Info
19903	3862903	Inner Ø 30 mm



### Plunsch Pivot pin



200, 250  
270, 270T, 275A, 280, 280T, 280L, 280DP  
285, 285A  
290, 290A, 290DP  
SP-A, SP-A/MT, SP-A1, SP-A2, SP-C, SP-C1, SP-E,  
DP-A, DP-A1, DP-A2, DP-B, DP-B1, DP-C, DP-C1  
DP-D, DP-D1  
DP-E  
DP-G  
DPX-A

Art. nr/Part no	Ersätter/Replaces	Info
18706	852705, 941807	Thread screws 3/8"-32

### Bussning plunsch Bushing pivot pin



200, 250  
270, 270T, 275A, 280, 280T, 280L, 280DP  
285, 285A  
290, 290A, 290DP  
SP-A, SP-A/MT, SP-A1, SP-A2, SP-C, SP-C1, SP-E,  
DP-A, DP-A1, DP-A2, DP-B, DP-B1, DP-C, DP-C1  
DP-D, DP-D1  
DP-E  
DP-G  
DPX-A

Art. nr/Part no	Ersätter/Replaces
18048	853048



200  
250  
270, 270T  
275, 275A  
280, 280T  
285

Gänga/Thread 1/2" UNC

Art. nr/Part no	Ersätter/Replaces
18716	832716

### Styrhjämskruvar Shoulder screws



200  
250  
270, 270T  
275, 275A  
280, 280T  
285

Gänga/Thread M18

Art. nr/Part no	Ersätter/Replaces
18696	839696

### Saxpinnar & brickor Cotter pins & washers



Art. nr/ Part no	Ersätter/ Replaces	Info	Fpk/ Pack
19053	17253	Saxpinne för länkarm och växelmekanism/ Cotter pin for control rod and gear shift mechanism. Ø 2 mm, L=16 mm	5
19480	3854480	Saxpinne för länkarm och växelmekanism Cotter pin for control rod and gear shift mechanism SX-A, FWD, DPS-A, DPS-B, XDP	1
19276	17276	Saxpinne för reglagetärning / Cotter pin for control cable cube. Ø 2,5 mm, L=20 mm	5
19091	940191	Rostfri bricka för reglagetärning / Stainless washer for control cable cube	5
19707	967707	Saxpinne för trimcylinder - rostfri Cotter pin for trim cylinder - stainless	5



## Kuggsegment, nitmutter, skruv Gear segment, rivet nut, screw



### 290, 290DP, SP, DP

290, 290A, 290DP

SP-A, SP-A1, SP-A2

SP-C, SP-C1, SP-E

DP-A, DP-A1, DP-A2, DP-B, DP-B1, DP-C, DP-C1, DP-D, DP-D1

DP-E, DP-G

Art. nr/Part no	Ersätter/Replaces
18812	872812, 854063



### 290, 290DP, SP, DP

290, 290A, 290DP

SP-A, SP-A1, SP-A2

SP-C, SP-C1, SP-E

DP-A, DP-A1, DP-A2, DP-B, DP-B1, DP-C, DP-C1, DP-D, DP-D1

DP-E, DP-G

Art. nr/Part no	Ersätter/Replaces
18760	853760



### 290, 290DP, SP, DP

290, 290A, 290DP

SP-A, SP-A1, SP-A2

SP-C, SP-C1, SP-E

DP-A, DP-A1, DP-A2, DP-B, DP-B1, DP-C, DP-C1, DP-D, DP-D1

DP-E, DP-G

Art. nr/Part no	Ersätter/Replaces
18759	853759

## Spårryttare, skyddshatt Clip, protecting hat



### SX, DP-S

Passar AQ-drev SX och DP-S med sköldar: TSK SX-M, TSK SX-MDA, TSK SX-MDB, TSK SX-MDC, TSK SX-MHP, TSK SX-MBAC, TSK SX-MLT, TSK SX-MACLT

Passar trimkolv 3857470

Fits AQ drive SX and DP-S with transom: TSK SX-M, TSK SX-MDA, TSK SX-MDB, TSK SX-MDC, TSK SX-MHP, TSK SX-MBAC, TSK SX-MLT, TSK SX-MACLT.

Fits power trim cylinder p/n 3857470

Art. nr/Part no	Ersätter/Replaces	Info
18521	3857521	Tjocklek/thickness 1,2 mm



### SX, DP-S

Passar AQ-drev SX och DP-S med sköldar: TSK SX-M, TSK SX-MDA, TSK SX-MDB, TSK SX-MDC, TSK SX-MHP, TSK SX-MBAC, TSK SX-MLT, TSK SX-MACLT

Passar trimkolv 3857470

Fits AQ drive SX and DP-S with transom: TSK SX-M, TSK SX-MDA, TSK SX-MDB, TSK SX-MDC, TSK SX-MHP, TSK SX-MBAC, TSK SX-MLT, TSK SX-MACLT.

Fits power trim cylinder p/n 3857470

Art. nr/Part no	Ersätter/Replaces
18522	3857522



### Slangsatser Hose kits



200, 250  
270, 275A  
280, 280T, 280DP, 280PT  
285, 285A  
290A, SP-A/MT

Slangklammor ingår/Hose clamps included

Art. nr/Part no	Ersätter/Replaces
19822	875822



270T  
280T

Slangklammor ingår/Hose clamps included

Art. nr/Part no	Ersätter/Replaces
19831	832831



290, 290A, 290DP  
SP-A, SP-A1, SP-A2, SP-C, SP-C1, SP-E  
DP-A, DP-A1, DP-A2  
DP-B, DP-B1  
DP-C, DP-C1  
DP-D, DP-D1, DP-E  
DP-G  
DP-S, DP-S1  
DPX, DPX-A, DPX-C, DPX-R, DPX-S1

Slangklamma och o-ring ingår/Hose clamp and o-ring included

Art. nr/Part no	Ersätter/Replaces
19630	876632, 875847, 854555



SX-C, SX-C1, SX-C2, SX-R, SX-R1, SX-R2, SX-S, SX-SLT  
SX-M, SX-MDA, SX-MDB, SX-MDC, SX-MLT

Slangklammor ingår/Hose clamps included

Art. nr/Part no	Ersätter/Replaces
19097	3852352



SX-M

Slangklammor ingår/Hose clamps included

Art. nr/Part no	Ersätter/Replaces
19890	3807890



Slangklämma rostfri/Hose clamp stainless, 26-38 mm

Art. nr/Part no	Ersätter/Replaces
51075	22274884



## Slanganslutningar Water hose connections



200  
250  
270,  
275  
280, 280DP  
285A  
290, 290A, 290DP  
SP-A, SP-A/MT, SP-A1, SP-A2  
SP-C, SP-C1  
DP-A, DP-A1, DP-A2  
DP-B, DP-B1  
DP-C  
DP-D

Packning 19356 ingår/Gasket 19356 included

Art. nr/Part no	Ersätter/Replaces
19766	854031, 851766, 897600



AQ270T  
AQ280T, AQ280PT

Packning 19356 ingår/Gasket 19356 included

Art. nr/Part no	Ersätter/Replaces
19846	832846



SP-C1, SP-E  
DP-C1  
DP-D1  
DP-E  
DP-G  
DP-S  
DPX-A, DPX-C, DPX-R, DPX-S, DPX-S1

O-ring ingår/O-ring included

Art. nr/Part no	Ersätter/Replaces
19752	872752



DPH-A, DPH-B, DPH-C, DPH-D, DPH-D1, DPH-E  
DPR-A, DPR-B, DPR-C, DPR-D  
DPI-A

O-ring ingår/O-ring included

Art. nr/Part no	Ersätter/Replaces
19192	40005192



### Ställpinne Adjusting pin



200  
250  
270, 270T  
275, 275A  
280, 280L, 280T, 280DP  
285A  
290, 290A, 290DP

2 rostfria muttrar och brickor ingår / 2 stainless nuts and washers included

Art. nr/Part no	Ersätter/Replaces
19301	814301

### Fjädersats backhake Spring set rev. tilt inhibitor



250  
270  
275, 275A  
280, 280DP, 280L  
285A,  
290, 290A, 290DP  
SP-A, SP-A/MT, SP-A1, SP-A2  
DP-A, DP-A1, DP-A2  
DP-B, DP-B1

Art. nr/Part no	Ersätter/Replaces	Info
22056	2x814332, 1x832534, 1x814396	Rostfritt / stainless

### Trimfena Trim fin



280, 290, SP  
280, 280T  
290, 290A  
SP-A, SP-A1, SP-A2, SP-C

Art. nr/Part no	Ersätter/Replaces	Info
15040	854040	Aluminium / Aluminum

### Monteringsdetaljer drevkåpa Mounting details drive cover



200, 250  
270, 270T,  
280, 280T, 285  
290, 290DP  
SP-A, SP-C  
DP-A, DP-B, DP-C, DP-D

Hake till övre fästet för täckkåpan, kombineras med skruv 19218 / Hatch for the upper fastening on the gear cover. To be combined with screw 19218.

Art. nr/Part no	Ersätter/Replaces	Info
19873	897893	Rostfritt / stainless



200, 250  
270, 270T,  
280, 280T, 285  
290, 290DP  
SP-A, SP-C  
DP-A, DP-B, DP-C, DP-D

Skruv till övre fästet för täckkåpan, kombineras med låshake 19873 / Screw for the upper fastening on the gear cover. To be combined with hatch 19873.

Art. nr/Part no	Ersätter/Replaces	Info
19218	943218	Rostfritt / stainless



200, 250  
270, 270T,  
280, 280T, 285  
290, 290DP  
SP-A, SP-C  
DP-A, DP-B, DP-C, DP-D

Skruv till nedre fästet för täckkåpan / Screw for the lower fastening on the gear cover.

Art. nr/Part no	Ersätter/Replaces	Info
19816	941816	Rostfritt / stainless



## Gummitätningar sköld Rubber seal shield



200, 250  
270, 270T  
275, 275A  
280, 280T, 280DP, 280L, 285  
SP-A/MT

Art. nr/Part no	Ersätter/Replaces	Info
19726	897726	L = 143 cm Ø 14,7 mm



290, 290A, 290DP, DP290A  
SP-A, SP-A1, SP-A2, SP-C, SP-C1  
DP-A, DP-A1, DP-A2,  
DP-B, DP-B1,  
DP-C, DP-C1  
DP-D, DP-D1  
DP-E  
DP-G  
DP-S  
DPX-A, DPX-C, DPX-R

Art. nr/Part no	Ersätter/Replaces	Info
19015	852868	L = 168 cm Ø 13 mm

## Gummikuddar sköld Rubber blocks shield



270, 270T  
275, 275A  
280, 280T, 280L, 280DP  
285  
SP-A/MT

Art. nr/Part no	Ersätter/Replaces	Info
19531	875531	CC 85 mm



290, 290A, 290DP, DP290A  
SP-A, SP-A1, SP-A2, SP-C  
DP-A, DP-A1, DP-A2  
DP-B, DP-B1  
DP-C  
DP-D

Art. nr/Part no	Ersätter/Replaces	Info
19133	854133, 852772	CC 125 mm



### Backventil avgas för drev Exhaust rubber lip for drive



#### Backventil / Check valve

275A  
280B  
285A  
290, 290A, 290DP  
SP-A, SP-A1, SP-A2  
SP-C, SP-C1  
SP-E  
DP-A, DP-A2  
DP-B  
DP-C, DP-C1  
DP-D, DP-D1

Art. nr/Part no	Ersätter/Replaces	Info
19644	852644	215 mm x 70 mm



#### Backventil / Check valve

SP-A2  
SP-C, SP-C1  
DP-A, DP-A2  
DP-C  
DP-D, DP-D1  
DP-E

Art. nr/Part no	Ersätter/Replaces	Info
19643	872438	135 mm x 70 mm

### Påfyllningsplugg Oil fill plug



200, 250  
270, 270T, 275A  
280, 280B, 280T, 285A  
290, 290A, 290DP  
SP-A, SP-A1, SP-A2, SP-C, SP-C1, SP-E  
DP-A, DP-A1, DP-A2, DP-B, DP-B1, DP-C, DP-C1, DP-D, DP-D1, DP-E  
DPX-R, DPX-S1  
Backslag/gearcases: MS3B, MS3C, MS4A, MS4A, MS5A

Art. nr/Part no	Ersätter/Replaces
18179	981965, 814179

### Oljepluggar Oil drain plugs



270, 270T  
275, 275A  
280, 280B, 280DP, 280T, 285A  
290, 290A, 290DP  
SP-A, SP-A/MT, SP-A1, SP-A2  
SP-C, SPC1, SP-E  
DP-A, DP-A2, DP-B  
DP-C, DP-C1  
DP-D, DP-D1  
DP-E  
DP-G  
DPX, DPX-S, DPX-S1  
S-drev/saildrive MS25S, MS25S-A, MS25SR, MS25SR-A, I20S-B, S120C, I20SC, I20S-D, I20S-E

Art. nr/Part no	Ersätter/Replaces	Info
18355	852904	Magnetisk/Magnetic, 3/8" UNC



270, 270T  
275, 275A  
280, 280B, 280DP, 280T  
285A, 290, 290A, 290DP  
SP-A, SP-A/MT, SP-A1, SP-A2, SP-C, SP-C1, SP-E  
DP-A, DP-A2, DP-B, DP-B1, DP-C  
DP-C1, DP-D, DP-D1  
DP-E, DP-G  
DPX, DPX-S, DPX-S1  
S-drev/Saildrive: I20C, S120C, I20S-D, I20S-E, MS25S-A, MS25SR-A

Art. nr/Part no	Ersätter/Replaces	Gänga/Thread
18354	839354	3/8" UNC



## Packningskit oljepluggar Gasket kits oil plugs



80  
100A, 100B, 100S  
S-drev/Saildrive 100S, 110S

Art. nr/Part no	Ersätter/Replaces
22066	N/A



DPH-A, DPH-B, DPH-C, DPH-D, DPH-D1, DPH-E  
DPR-A, DPR-B, DPR-C  
DPI-A

Art. nr/Part no	Ersätter/Replaces
23061	N/A




200, 250  
270, 270T  
275, 275A  
280, 280DP, 280T, 285A  
290, 290DP  
SP-A, SP-A/MT, SP-A1, SP-A2  
SP-C, SP-C1  
DP-A, DP-A1, DP-A2  
DP-B  
DP-C, DP-C1  
DP-D, DP-D1  
DP-E  
DPX  
DPX-S, DPX-S1

Art. nr/Part no	Ersätter/Replaces
22067	N/A



DPS-A  
DPS-B  
FWD  
SX-A

Art. nr/Part no	Ersätter/Replaces
23062	N/A

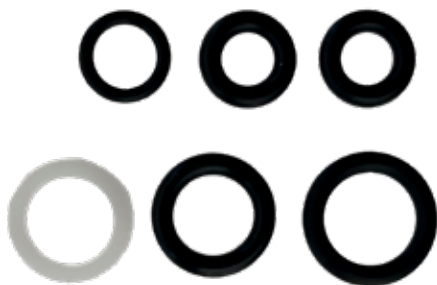

SX-C, SX-R, SX-S, SX-M  
DP-G  
DP-SM  
DPX-A  
XDP

Art. nr/Part no	Ersätter/Replaces
23026	N/A



I20C-D, I20S, I20S-B, S120C

Art. nr/Part no	Ersätter/Replaces
22071	I x 925054, I x 804261, I x 1664473



### Reglagekablar (lågfriktion) Remote control cables (low friction)



Art. nr/ Part no	Referens nr/ OEM nr	Längd/ Length ft	Längd/ Length m
40229L	3595377	5	1,54
40328N	40005275	6	1,83
40329R	21407220	7	2,14
40330Z	21407221	8	2,44
40331B	21407222	9	2,75
40332D	21407223	10	3,05
40333F	21407224	11	3,36
40334H	21407225	12	3,66
40336M	21407226	13	3,97
40337P	21407227	14	4,27
40193S	21407228	15	4,59
40338S	21407229	16	4,88
40339U	21407230	17	5,19
40340C	21407231	18	5,49
40341E	21407232	19	5,80
40342G	21407233	20	6,10
40343J	21407234	21	6,41
40344L	21407235	22	6,72
40345N	21407236	23	7,03
40346R	21407237	24	7,33
40347T	21407238	25	7,62
40348V	21407239	26	7,92
40349X	21407240	27	8,23
40350F	21407241	28	8,50
40351H	21407242	29	8,84
40352K	21407243	30	9,14
40353M	21407244	31	9,45
40354P	21407245	32	9,75
40355S	21407246	33	10
40356U	21407247	34	10,37
40357W	21407248	35	10,67
40359A	21407250	37	11,28
40361L	21407252	39	11,90
40362N	21407253	40	12,20

### Skyddsslang växelväjer Protecting hose shift cable



200  
250  
270, 270T  
275, 275A  
280, 280T, 280L, 280DP  
285  
290, 290A, 290DP, DP290A  
SP-A, SP-A/MT, SP-A1, SP-A2, SP-C, SP-C1  
DP-A, DP-A1, DP-A2, DP-B, DP-B1  
DP-C, DP-C1  
DP-D, DP-D1  
DP-E  
DP-G  
DP-S  
DPX-A, DPX-C, DPX-R

Art. nr/Part no	Ersätter/Replaces	
18091	839091	



## Servicesatser "sjösättningsatts drev" Spring launch kits AQ-drive



250  
270  
275, 275A

Art. nr/Part no	Ersätter/Replaces	Info
19115	877115	Zink/Zinc
19115-1		Aluminium/Aluminum



280DP

Art. nr/Part no	Ersätter/Replaces	Info
19117	877117	Zink/Zinc
19117-1		Aluminium/Aluminum



280, 280PT  
285A

Art. nr/Part no	Ersätter/Replaces	Info
19116	877116	Zink/Zinc
19116-1		Aluminium/Aluminum



290, 290A  
SP-A, SP-A1, SP-A2

Art. nr/Part no	Ersätter/Replaces	Info
19118	24075023, 877118	Zink/Zinc
19118-1		Aluminium/Aluminum



Spare parts from Sweden

### Servicesatser "sjösättningsatts drev" Spring launch kits AQ-drive



290DP  
DP-A, DP-AI  
DP-B, DP-BI

Art. nr/Part no	Ersätter/Replaces	Info
19119	877119, 24075024	Zink/Zinc
19119-1		Aluminium/Aluminum



DP-E  
SP-E

Art. nr/Part no	Ersätter/Replaces	Info
19121	877121	Zink/Zinc
19121-1		Aluminium/Aluminum



DP-C, DP-D, DP-E

Art. nr/Part no	Ersätter/Replaces	Info
19122	24075026, 877122	Zink/Zinc
19122-1		Aluminium/Aluminum



DP-G

Art. nr/Part no	Ersätter/Replaces	Info
19123	23307656	Zink/Zinc
19123-1		Aluminium/Aluminum



## Servicesatser "sjösättningsatts drev" Spring launch kits AQ-drive



SX-C, SX-C1, SC-R, SX-RI, SX-M  
DP-S, DP-S1, DP-SM  
SP-C, SP-E

Art. nr/Part no	Ersätter/Replaces	Info
19120	24075025, 877120	Zink/Zinc
19120-1		Aluminium/Aluminum



DPH-A, DPH-B, DPH-C, DPH-D1  
DPR-A, DPR-A, DPR-C, DPR-D

Art. nr/Part no	Ersätter/Replaces	Info
19124	23307655	Zink/Zinc
19124-1		Aluminium/Aluminum



Spare parts from Sweden

### Drivknutbälgsatser Drive bellow kits



AQ80  
AQ100, AQ100S  
S-drev/Saildrive 100S

ABA rostfria och syrafasta slangklammor ingår / ABA stainless steel hose clamps included

Art. nr/Part no	Ersätter/Replaces
19827	875512, 875827, 804186



**DPH, DPR, DPI**  
DPH-A, DPH-B, DPH-C, DPH-D, DPH-DI, DPH-E  
DPR-A, DPR-B, DPR-C, DPR-D  
DPI-A

ABA rostfria och syrafasta slangklammor ingår / ABA stainless steel hose clamps included

Art. nr/Part no	Ersätter/Replaces
19509	3594509



200, 250  
270, 270T  
275A  
280, 280DP, 280B, 280T, 280L, 285A  
290, 290A, 290DP  
SP-A, SP-A/MT, SP-A1, SP-A2, SP-C, SP-C1, SP-E  
DP-A, DP-A1, DP-A2, DP-B, DP-B1, DP-C, DP-C1, DP-D, DP-D1, DP-E  
DP-G  
DPX-A, DPX-R, DPX-S1

ABA rostfria och syrafasta slangklammor ingår / ABA stainless steel hose clamps included

Art. nr/Part no	Ersätter/Replaces
19294	876294, 875826, 897889



**SX, DPS, FWD**  
SX-A, SX-C, SX-C1, SX-C1AC, SX-C2AC, SX-C2, SX-CT1, SX-CT2,  
SX-D, SX-M, SX-M1, SX-MAC, SX-MACLT, SX-MBAC, SX-MDA, SX-MDB,  
SX-MDC, SX-MHP, SX-MLT, SX-MTD, SX-MTD3, SX-R, SX-RT1, SXOXi-  
AACL, SX-OXi-ACC, SX-OXi-ACCL, SX-R, SX-R1, SX-R2, SX-S, SX-SLT  
DP-S, DP-S1, DP-SM, DP-SMTD, DP-SMTD1, DP-SMTD3  
DPS-A, DPS-A OXi, DPS-B, DPS-B OX, DPS-B1, DPS-D, DPS-D OX, DPS-  
D1, DPS-D1 OX  
FWD-B1, FWD-B2, FWD-D1, FWD-D1 OX, FWD-D2, FWD-D2 OX

ABA rostfria och syrafasta slangklammor ingår / ABA stainless steel hose clamps included

Art. nr/Part no	Ersätter/Replaces
19127	22197130, 3841481, 3854127



## Avgasbälgsatser Exhaust bellow kits



200, 250  
270, 270T, 275  
280, 280T, 280DP, 285A  
290, 290A, DP290A, 290DP  
SP-A, SP-A/MT, SP-A1, SP-A2  
SP-C, SP-C1, SP-E  
DP-A, DP-A1, DP-A2  
DP-B, DP-B1, DP-C, DP-C1  
DP-D, DP-D1, DP-E  
DPX-C, DPX-R, DPX-S1

### Utan klaffar/Without flaps

ABA rostfria och syrafasta slangklammor ingår / ABA stainless steel hose clamps included

Art. nr/Part no	Ersätter/Replaces
19848	876631, 875848



200, 250,  
270, 270T, 275,  
280, 280T, 280T, 280DP, 285A  
290, 290A, 290DP  
SP-A, SP-A/MT, SP-A1, SP-A2, SP-C1  
DP-A, DP-A1, DP-A2  
DP-B, DP-B1, DP-C, DP-C1  
DP-D, DP-D1, DP-E  
DPX

För V8 och 40 motorer/For V8 and type 40-engines  
Avgasbälg med klaffar används om klaff saknas vid drevets avgasutlop  
Bellow with flaps is used if flap is missing on the exhaust outlet

### Med klaffar/with flaps.

ABA rostfria och syrafasta slangklammor ingår / ABA stainless steel hose clamps included

Art. nr/Part no	Ersätter/Replaces
19828	876633, 875828, 875829, 850004



### SX, DPS, FWD

SX-A, SX-AAC, SX-D, SX-OXi-ACC, SX-OXi-AACL  
DPS-A, DPS-A OXi, DPS-B, DPS-B OX, DPS-B1, DPS-D, DPS-D OX, DPS-D1, DPS-D1 OX  
FWD-B1, FWD-B2, FWD-B3, FWD-D1, FWD-D1 OX, FWD-D2, FWD-D2 OX

ABA rostfria och syrafasta slangklammor ingår / ABA stainless steel hose clamps included

Art. nr/Part no	Ersätter/Replaces
19916	3888916



### SX, DP-S

SX-C, SX-C1, SX-C1AC, SX-C2, SX-C2AC, SX-CLT M10, SX-CLT1, SX-R, SX-R1, SX-R2, SX-S, SX-SLT, SX-M, SX-M1, SX-MAC, SX-MACLT, SX-MBAC, SX-MTD, SX-MTD3, SX-MDA, SX-MDB, SX-MDC, SX-MHP, SX-MLT  
DP-SM, DP-SMTD, DP-SMTD1, DP-SMTD3

ABA rostfria och syrafasta slangklammor ingår / ABA stainless steel hose clamps included

Art. nr/Part no	Ersätter/Replaces
19069	3850426



### Avgasbälgsatser Exhaust bellow kits



DPH-A, DPH-B, DPH-C, DPH-D, DPH-DI, DPH-E  
DPR-A, DPR-B, DPR-C, DPR-D  
DPI-A

ABA rostfria och syrafasta slangklammor ingår/ABA stainless steel hose clamps included

Art. nr/Part no	Ersätter/Replaces
19753	3588753



DP-G  
DPX-A

ABA rostfria och syrafasta slangklammor ingår/ABA stainless steel hose clamps included

Art. nr/Part no	Ersätter/Replaces
19384	3860384

### Segeldrevsdamask/ Sail drive mounting cover



110S, 120S, 130S, MS25S, 150S

110S

120S, 120S-A, 120SB, S120C, 120S-E, 120S-D

130S, 130S-A, 130S-B, 130S-C, 130SR, 130SR-A, 130SR-B, 130SR-C


MS25S, MS25S-A, MS25SR-A

150S, 150S-A, 150S-B, 150S-C, 150SR, 150SR-A, 150SR-B, 150SR-C

Art. nr/Part no	Ersätter/Replaces
19932	22303438, 854932



## Anoder segelbåtsdrev Anodes sail drives

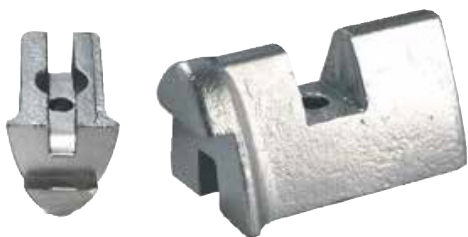

50S

Art. nr/Part no	Ersätter/Replaces	Info
19705	855105	Zink/Zinc



100S

Ej för 100S med foldingpropeller. / Not for 100S with folding propeller  
Skravar ingår/Screws included

Art. nr/Part no	Ersätter/Replaces	Info
19810	875810	Zink/Zinc
19810-1		Aluminium



110S

Skravar och O-ring ingår/Screws and O-ring included

Art. nr/Part no	Ersätter/Replaces	Info
19812	875812	Zink/Zinc
19812-1		Aluminium
19812-2	876603	Magnesium



120S, S120C, 120SB, 120S-D, 120S-E, S120C  
MS25S-A, MS25SR-A

Skravar ingår/Screws included

Art. nr/Part no	Ersätter/Replaces	Info
19983	876286	Zink/Zinc
19983-1	23973978	Aluminium
19066-2	876604	Magnesium



130S, 130S-A, 130S-B, 130S-C, 130S-D, 130SR, 130SR-A, 130SR-B, 130SR-C, 130SR-D  
MS25S, MS25S-A, MS25SR, MS25SR-A  
150S, 150S-A, 150S-B, 150S-C, 150S-D, 150SR, 150SR-A, 150SR-B, 150SR-C, 150SR-D

Skravar ingår/Screws included

Art. nr/Part no	Ersätter/Replaces	Info
19305	3888305, 22651246	Zink/Zinc
19305-1	23615636	Aluminium
19305-2	3888306, 22651247	Magnesium



Spare parts from Sweden

### Anoder foldingpropellrar Anodes folding propellers



Anodsats för Volvo Penta 2-bladig folding propeller tidigt utförande /  
Anode kit for Volvo Penta 2-bladed folding propeller earlier version  
Skrubar ingår/Screws included

Art. nr/Part no	Ersätter/Replaces	Info
19018	852018	Zink/Zinc
19028-1		Aluminium
19018-2	853430	Magnesium



Anodsats för Volvo Penta 2-bladig foldingpropeller / Anode kit for Volvo  
Penta 2-bladed folding propeller. Skruvar ingår/Screws included

Art. nr/Part no	Ersätter/Replaces	Info
19497	3888491, 2394207	Zink/Zinc



Anodsats för Volvo Penta 3-bladig foldingpropeller / Anode kit for Volvo  
Penta 3-bladed folding propeller. Skruvar ingår/Screws included

Art. nr/Part no	Ersätter/Replaces	Info
19499	3858399	Zink/Zinc
19499-1	23974203	Aluminium
19499-2	3858400	Magnesium



Anodsats för Volvo Penta 4-bladig foldingpropeller / Anode kit for Volvo  
Penta 4-bladed folding propeller. Skruvar ingår/Screws included

Art. nr/Part no	Ersätter/Replaces	Info
19498	3584442	Zink/Zinc

### Anoder sköldar AQ-drev Anodes transom plate AQ drive



200  
250\*

För sköld/For shield.  
\*Tidigare utförande/Earlier version

Art. nr/Part no	Ersätter/Replaces	Info
19929	838929, 804107, 800476, 858501	Zink/Zinc
19929-1		Aluminium



250\*  
270, 275, 280, 280DP, 280PT, 285  
SP-A/MT  
Kardanaxel/Cardan shaft

\* Senare utförande/Later version  
Passar ej 270T, 280T drev/Not for 270T, 280T drives

Art. nr/Part no	Ersätter/Replaces	Info
19598	832598	Zink/Zinc
19598-1		Aluminium
19598-2	873179	Magnesium



270T, 280T

Art. nr/Part no	Ersätter/Replaces	Info
19334	832934	Zink/Zinc



## Anoder sköldar AQ-drev Anodes transom plate AQ drive



290, 290A, 290DP, DP290A  
SP-A, SP-A1, SP-A2  
SP-C, SP-C1  
DP-A, DP-A1, DP-A2  
DP-B, DP-B1  
DP-C, DP-C1  
DP-D, DP-D1  
DP-E,  
DP-G  
DP-S  
PjX-S, PjX-C, PjX-C1  
SP-E

Art. nr/Part no	Ersätter/Replaces	Info
19835	852835	Zink/Zinc
19835-1		Aluminium
19835-2	873178	Magnesium



DPX-A, DPX-C, DPX-R

Art. nr/Part no	Ersätter/Replaces	Info
19139	872139	Zink/Zinc
19139-1	23813192	Aluminium/ Aluminum



SX-C, SX-C1, SX-C1AC, SX-C2, SX-CT1, SX-CT2, SX-CLT, SX-R, SX-R1,  
SX-R2, SX-S, SX-M, SX-M1, SX-MAC, SX-MACLT, SX-MTD3, SX-MTD3,  
SX-MBAC, SX-MDA, SX-MDB, SX-MDC, SX-MHR, SX-MLT, SX-R, SX-R1,  
SX-R2, SX-RT1, SX-S, SX-SLT  
DP-S, DP-S1, DP-SM, DP-SMTD, DP-SMTD1, DP-SMTD3

Art. nr/Part no	Ersätter/Replaces	Info
19130	3854130	Zink/Zinc
19130-1	3586461	Aluminium
19130-2	3855610	Magnesium



DPH-A, DPH-B, DPH-C, DPH-D, DPH-D1, DPH-E  
DPR-A, DPR-B, DPR-C, DPR-D  
DPI-A

Art. nr/Part no	Ersätter/Replaces	Info
19745	3588745	Zink/Zinc
19745-1	3588770	Aluminium
19745-2	3588768	Magnesium



### Anodringar AQ-drev Anode ring kits AQ drives



80  
100, 100B

Skrudar ingår/Screws included

Art. nr/Part no	Ersätter/Replaces	Info
19810	875810	Zink/Zinc
19810-1		Aluminium / Aluminum



200

Skrudar ingår/Screws included

Art. nr/Part no	Ersätter/Replaces	Info
19809	875809	Zink/Zinc
19809-1		Aluminium / Aluminum



250  
270, 270T  
275, 275A  
285A  
SP-A/MT  
SP-A1, SP-A2, SP-C

Skrudar ingår/Screws included

Art. nr/Part no	Ersätter/Replaces	Info
19805	875805	Zink/Zinc
19805-1		Aluminium / Aluminum
19805-2	876136	Magnesium



280, 280PT, 280T,  
285  
290, 290A  
SP-A, SP-A1, SP-A2, SP-C, SP-C1, SP-E

Skrudar ingår/Screws included

Art. nr/Part no	Ersätter/Replaces	Info
19815	875815	Zink/Zinc
19815-1		Aluminium/Aluminum
19815-2	876137	Magnesium



280DP, 290DP  
DP-A, DP-A1, DP-A2  
DP-B, DP-B1  
DP-C, DP-C1  
DP-D, DP-D1  
DP-E  
DP-G

Skrudar ingår/Screws included

Art. nr/Part no	Ersätter/Replaces	Info
19821	875821	Zink/Zinc
19821-1	23974010	Aluminium/Aluminum
19821-2	876138	Magnesium



## Anoder AQ-drev Anodes AQ drives



SX-M, SX-M1, SX-MTD, SX-MTD3, SX-MACLT, SX-MBAC, SX-MDA, SX-MDB, SX-MDC, SX-MHP, SX-MLT  
DP-SM, DP-SMTD, DP-SMTD1, DP-SMTD3  
DPX-S, DPX-S1, DPX-R

Art. nr/Part no	Ersätter/Replaces	Info
19395	873395	Zink/Zinc
19395-1	3863480	Aluminium / Aluminum



DPX-A, DPX-C, DPX-R, DPX-S, DPX-S1

Art. nr/Part no	Ersätter/Replaces	Info
19638	876638	Zink/Zinc



SX-C, SX-C1, SX-C1AC, SX-C2, SX-C2AC, SC-CT, SX-CT1, SX-CT2, SX-CLT M10, SX-R, SX-R1, SX-RT1, SX-R2, SX-RT2, SX-M, SX-M1, SX-MBAC, SX-MAC, SX-MDA, SX-MDB, SX-MDC, SX-MHP, SX-MTD, SX-MTD3, SX-MLT, SX-S, SX-ST  
DP-S, DP-S1, DP-SM, DP-SMTD, DP-SMTD1, DP-SMTD3

Art. nr/Part no	Ersätter/Replaces	Info
19411	3855411	Zink/Zinc
19411-1	3863193	Aluminium/Aluminum
19411-2	3855412	Magnesium



DPH-A, DPH-B, DPH-C, DPH-D1, DPH-E  
DPR-A, DPR-B, DPR-C, DPR-D  
DPI-A

Art. nr/Part no	Ersätter/Replaces	Info
19746	3588746	Zink/Zinc
19746-1	3588748	Aluminium / Aluminum
19746-2		Magnesium



SX-A, SX-D  
DPS-A, DPS-A OXi, DPS-B, DPS-B1, DPS-B1 OX, DPS-D, DPS-D OX, DPS-D1, DPS-D1 OX  
FWD-B1, FWD-B2, FWD-D1, FWD-D1 OX, FWD-D2, FWD-D2 OX

Skrubar ingår/Screws included

Art. nr/Part no	Ersätter/Replaces	Info
19817	3888817	Zink/Zinc
19817-1	3888816	Aluminium/ Aluminum
19817-2	3888818	Magnesium



SX-A, SX-D  
DPS-A, DPS-A OXi, DPS-B, DPS-B1, DPS-B1 OX, DPS-B OX, DPS-D, DPS-D1, DPS-D1 OX  
FWD-B1, FWD-B2, FWD-D1, FWD-D1 OX, FWD-D2, FWD-D2 OX

Skrubar ingår/Screws included

Art. nr/Part no	Ersätter/Replaces	Info
19814	3888814	Zink/Zinc
19814-1	3888813, 23164609	Aluminium / Aluminum
19814-2	3888815	Magnesium



### Anoder AQ-drev Anodes AQ drives



DPH-A, DPH-B, DPH-C, DPH-D I, DPH-E  
DPR-A, DPR-B, DPR-C, DPR-D  
DPI-A

Art. nr/Part no	Ersätter/Replaces	Info
19859-1	23520859	Aluminum
19859-2	2352860	Magnesium



SX-C, SX-C1, SX-C2, SX-CT1, SX-CT2, SX-RT1, SX-RT2, SX-S, SX-ST

Art. nr/Part no	Ersätter/Replaces	Info
19970	3852970	Zink/Zinc



IPS-A, IPS-B, IPS-C, IPS-D, IPS-E, IPS-F

Art. nr/Part no	Ersätter/Replaces	Info
19875	23172849, 40005875	Aluminum/Aluminum
19981	3593981	Zink/Zinc

### Anodsatser AQ-drev Anode kits AQ drives



280, 280PT, 280T, 285

Art. nr/Part no	Ersätter/Replaces	Info
I-10274	875815 + 832598	Aluminum/Aluminum



280DP

Art. nr/Part no	Ersätter/Replaces	Info
I-10275	23974010 + 832598	Aluminum/Aluminum



280, 280PT, 280T, 285, 290, 290A, SP-A, SP-A1, SP-A2, SP-C, SP-C1

Art. nr/Part no	Ersätter/Replaces	Info
I-10276	875815 + 3588770	Aluminum/Aluminum



## Anodsatser AQ-drev Anode kits AQ drives



AQ290DP

Art. nr/Part no	Ersätter/Replaces	Info
I-10277	23974010 + 3588770	Aluminum/Aluminum



DPH-A, DPH-B, DPH-C, DPH-D, DPH-DI, DPH-E  
DPR-A, DPR-A, DPR-C, DPR-D  
DPI-A

Art. nr/Part no	Ersätter/Replaces	Info
I-10303		Aluminum/Aluminum



SX, SX-C, SX-C1, SX-C2, SX-R, SX-R1, SX-R2, SX-M, SX-S, DP-SM

Art. nr/Part no	Ersätter/Replaces	Info
I-10278	3586461 + 3863193	Aluminum/Aluminum

## Anod parallellstag Anode steering tie bar



DPH-A, DPH-B, DPH-C, DPH-D  
DPR-A, DPR-B, DPR-C, DPR-D

Art. nr/Part no	Ersätter/Replaces	Info
19400	3807400	Zink/Zinc
19401	3807400 A	Aluminium



SX-A, SX-D  
DPS-A, DPS-A Oxi, DPS-B, DPS-B1, DPS-B1 OX, DPS-D, DPS-D OX,  
DPS-D1, DPS-D1 OX  
FWD-B1, FWD-B2, FWD-D1, FWD-D1 OX, FWD-D2, FWD-D2 OX

Art. nr/Part no	Ersätter/Replaces	Info
I-10289	3888813 + 23164609	Aluminum/Aluminum

## Extra anod upphängningsgaffel Extra anode suspension yoke



För SP och DP - drev/For SP and DP -drive  
1 eller 2 ätgär efter behov /1 or 2 required after need  
Skruv ingår/screw included

Art. nr/Part no	Ersätter/Replaces	Info
19793	872793	Zink/Zinc
19793-1	23986753	Aluminium/Aluminum
19793-2	23986752	Magnesium



### Axelanoder Shaft anodes



**Axelanod/Shaft anode - metrisk gänga / metric thread**  
Skrivas på axelns gänga/to be mounted on the threads of the shaft

Art. nr/Part no	Ersätter/Replaces	Info
20411	873411	M16, Zink/Zinc
20411-2		M16, Magnesium
20412	873412	M20, Zink/Zinc
20412-2		M20, Magnesium
20413	873413	M24, Zink/Zinc
20413-2		M24, Magnesium
20415	873415	M30, Zink/Zinc



**Axelanod/Shaft anode**  
Skrivas fast runt axeln/to be mounted around the shaft

Art. nr/Part no	Ersätter/Replaces	Info
20522	N/A	Axel/shaft Ø 22 mm, zink/zinc
20525	N/A	Axel/shaft Ø 25 mm, zink/zinc
20525-1	N/A	Axel/shaft Ø 25 mm, aluminum
20528	N/A	Axel/shaft Ø 28 mm, zink/zinc
20530	N/A	Axel/shaft Ø 30 mm, zink/zinc
20530-1	N/A	Axel/shaft Ø 30 mm, aluminum
20535	N/A	Axel/shaft Ø 35 mm, zink/zinc
20535-1	N/A	Axel/shaft Ø 35 mm, aluminum
20538	N/A	Axel/shaft Ø 38 mm, zink/zinc
20440	N/A	Axel/shaft Ø 40 mm, zink/zinc
20540-1	N/A	Axel/shaft Ø 40 mm, aluminum



**Axelanod/Shaft anode - tumgänga / imperial thread**  
Skrivas på axelns gänga/to be mounted on the threads of the shaft

Art. nr/Part no	Ersätter/Replaces	Info
19913	833913	för axel 25&30mm, gänga 3/4" for shaft 25&30mm, thread 3/4"
19915	833915	för axel 35 mm, gänga 7/8" for shaft 35 mm, thread 7/8"
19140	828140	för axel 40 mm, gänga 1" for shaft 40 mm, thread 1"



## Anoder bogpropellrar Anodes bow thrusters



### Volvo Penta QL Quality Line

BP800  
BP900  
BP1200  
BP1300  
SP800  
SP900  
SP1200  
SP1300  
BP1000H  
BP1500H

Art. nr/Part no	Ersätter/Replaces	Info
41276	41100276	Zink/Zinc



### Volvo Penta QL Quality Line

BP500  
BP600  
SP600

Art. nr/Part no	Ersätter/Replaces	Info
41098	41100098	Zink/Zinc



Spare parts from Sweden

## Powertrim Hydraulpumpar Power trim Hydraulic pumps



### Senare modell / Late type

290, 290A, 290DP, SP-A, SP-A1, SP-A2, SP-C, SP-E, DP-A, DP-A1, DP-A2, DP-B, DP-B1, DP-C, DP-C1, DP-D, DP-D1, DP-E

Art. nr/Part no	Ersätter/Replaces
19985	3586765, 852928, 853084, 854346, 872449, 873051, 3857006, 3857243, 3857265



### Tidig modell/Early type

290, 290A, 290DP, SP-A, DP-A,

Art. nr/Part no	Ersätter/Replaces
19051	852928, 873051

## Powertrim relä Powertrim relay



### Relä Powertrim-pump / Relay for power trim pump

Likadana reläer för upp och ner / same relays for up and down. Passar äldre / fits older PT-pump 852928

230B, 231LB, 250A, 250B, 251A, 271LB  
430, 430A, 430B, 431A, 431B, 432A, 434A,  
500A, 500B, 501A, 501B, 570, 570A, 571A, 572A, 740B,  
AQ131A, AQ131B, AQ131C, AQ131D, AQ145B  
AQ151A, AQ151B, AQ151C  
AQ171A, AQ171C  
AQ175A, AQ205A  
AQ200D, AQ200F, AQ211A, AQ225D, AQ225F, AQ231A, AQ231B, AQ260A,  
AQ271A, AQ271B, AQ271C, AQ271D, AQ290A, AQ311A, AQ311B  
AQAD30A, AD30A,  
MD40A, AQD40A, AQAD40A, AQAD40B, TMD40A, TAMD40A, TMD40B,  
TAMD40B, AD40B, TMD40C  
MD31A, AD31, TMD31B, AD31B, TAMD31B, TMD31D, TMD31L-A,  
TAMD31D, TAMD31L, TAMD31L-A, TAMD31M, TAMD31M-A, TAMD31P,  
TAMD31P-A, TAMD31P-B, TAMD31S, AD31D, AD31D-A, AD31L-A, AD31P-  
A, AD31XD,  
D41B, D41L-A, AD41A, AD41B, AD41B, TMD41B, TAMD41B, TMD41L-A,  
TAMD41H-A, TAMD41H-B, TAMD41P, TAMD41P-A, TAMD41P-B, AD41L-A,  
AD41P-A  
KAD42A, TAMD42B  
Drev 275A, 285A, DP-A, DP-A2, DP-C, DP-C1, DP-D, DP-D1, DP-E, DPX-C,  
DPX-R, SP-A2, SP-C, SP-C1, SP-E, DP-E, DP-S,

Art. nr/Part no	Ersätter/Replaces	Info
19492	1324492	12V-20/30A



### Relä Powertrim-pump / Relay for power trim pump

Likadana reläer för upp och ner / same relays for up and down. Passar nyare / fits later PT-pump 3586765

AQAD31A, AQAD31B, AD31D, AD31L-A, AD31P-A,  
AD31XD, KAD32P-A, AD41D, AD41L-A, AD41P-A, D41D  
D41L-A, KAD42A, KAD42B, KAD42P-A, KAMD42P-A  
KAD43P-A, KAD44P-A, KAD44P-B, KAD44P-C, KAD300A  
AQ151, 230, 250, V6, V8, 500, 501, 740, AQ271  
SP-E, 290DP, DP-C1, DP-D1, DP-C, DP-E, DPX-A, DPX-R, DPX-C, DP-S

Art. nr/Part no	Ersätter/Replaces	Info
19357	854357	12V-30/40A



## Powertrimmotorer Trim and tilt motors



AQAD30A  
AQAD40A, AQAD  
AQ120B  
AQ125A, AQ125B  
AQ131A, AQ131D  
AQ140A  
AQ145A  
AQ175A  
AQ190A, AQ240A  
AQ225D, AQ225E  
AQ231B  
AQ260A, AQ260B  
AQ27 1B, AQ271D  
AQ290A

**Drev/Drives**  
270, 275, 280, 285

Art. nr/Part no	Ersätter/Replaces
19834	850834



SX-M  
DPH-A, DPH-B, DPH-C, DPH-D  
DPR-A, DPR-B, DPR-C, DPR-D

Art. nr/Part no	Ersätter/Replaces
19475	3861575



SX-C, SX-CI, SX-R, SX-RI, SX-S

Art. nr/Part no	Ersätter/Replaces
19845	3853945

## Mikrobrytare Micro switches



**200, 250, 270, 275, 280, 285**

Monteras i elboxen / Mounted in the electrical box  
Ny modell/New modell

Art. nr/Part no	Ersätter/Replaces
17710	850710



**200, 250, 270, 275, 280, 285**

Monteras i panelen / Mounted in the panel  
Gammal modell/old modell

Art. nr/Part no	Ersätter/Replaces
17848	897848



## Packningsatser powertrimkolvar Seal kits power trim cylinders



Tidig modell/Early modell  
AQ290, 290DP

Passar fyrkantig trimcylinder / fits square powertrimcylinder 853439, 3860978


Art. nr/Part no	Ersätter/Replaces
22164	N/A



AQ290, AQ290DP  
SP-A, SP-A1, SP-A2, SP-E  
DP-A, DP-A1, DP-A2, DP-B, DP-B1, DP-C1  
DP-E, DP-G  
DPX-A, DPX-S

Passar trimcylinder / fits power trim cylinder 872612, 3860881

Art. nr/Part no	Ersätter/Replaces
22165	N/A

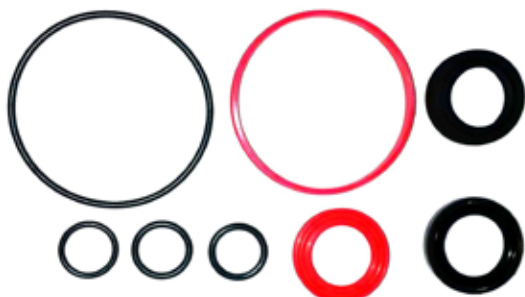

DPH-A, DPH-B, DPH-C, DPH-D, DPH-E,  
DPR-A, DPR-B, DPR-C

Passar trimcylinder / fits power trim cylinder 3888301, 3887960, 21840806,  
2180807

Art. nr/Part no	Ersätter/Replaces
22169	N/A



DPS-A, SX-A

Passar trimcylinder / fits power trim cylinders 3889955, 3889954, 3889956,  
3889957, 3889959


Art. nr/Part no	Ersätter/Replaces
22172	N/A



SX, DP-SM, SX-M, SX-S

Passar trimcylindrar / fits power trim cylinders 3885196, 3850683, 3857470,  
3857471, 3852392, 3885196

Art. nr/Part no	Ersätter/Replaces
22173	N/A

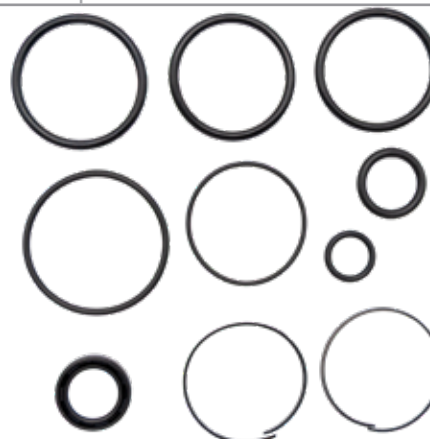

SX, DP-SM, SX-M, SX-S

Passar trimcylindrar / fits power trim cylinders 3885196, 3850683, 3857470,  
3857471, 3852392, 3885196

Art. nr/Part no	Ersätter/Replaces
22174	N/A




## Packningsatser styrkolvar Seal kits steering cylinders



DPH, DPR tidiga modeller / early models

Passar stycylinder / Fits power steering cylinder 21745117

Art. nr/Part no	Ersätter/Replaces
22177	N/A

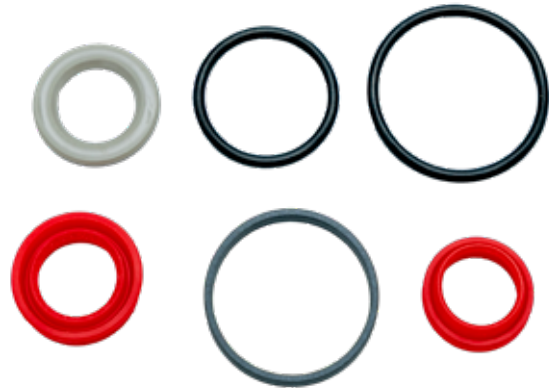

DPH-A, DPH-B, DPH-C, DPH-D1, DPH-E  
DPR-A, DPR-B, DPR-C, DPR-D  
DPI-A

Passar stycylinder / Fits power steering cylinder 22452003, 22452005

Art. nr/Part no	Ersätter/Replaces
22176	N/A



DPH-A, DPH-B, DPH-C, DPH-D1, DPH-E  
DPR-A, DPR-B, DPR-C, DPR-D  
DPI-A

Passar stycylinder / Fits power steering cylinder 21745119

Art. nr/Part no	Ersätter/Replaces
22170	N/A



DPX-A, DPX-C, DPX-R

Yttre packningssats / Outer gasket kit  
Passar stycylinder / Fits steering cylinder 3861556

Art. nr/Part no	Ersätter/Replaces
22171	N/A



## Ändmuttrar End caps



AQ290, AQ290DP  
SP-A, SP-A1, SP-A2, SP-E  
DP-A, DP-A1, DP-A2, DP-B, DP-B1, DP-C1  
DP-E, DP-G  
DPX-A, DPX-S

Passar trimcylinder / Fits powertrimcylinder 872612, 3860881  
Mät diametern över gängorna. Measure diameter over the threads.

Art. nr/Part no	Ersätter/Replaces	Info
19001	N/A	Diameter 39,4mm I 9/16-18
19002	N/A	Diameter 39,8mm M40x1.5



DPH  
DPR

Passar till trimcylindrar / Fits power trim cylinders 3888301, 3887960, 21840806, 21840807

Art. nr/Part no	Ersätter/Replaces
19088	N/A

## Verktyg ändmutter End cap tool



Verktyg för 19001, 19002, 19088/Tool for 19001, 19002, 19088

Art. nr/Part no	Ersätter/Replaces
19880	N/A

## Kolvstänger trimcylindrar Pistons trim cylinders



**AQ290, SP, DP, DPE, DPX, DP-G, DP-S**

Passar trimcylindrar / Fits power trim cylinders 3860881, 872837

Art. nr/Part no	Ersätter/Replaces
25001	N/A



**DPH, DPR**

Passar trimcylindrar / Fits power trim cylinders 21840806, 21840807, 22121309, 3888301

Art. nr/Part no	Ersätter/Replaces
25002	N/A

## Monteringsats trimcylinder Hook up kit trim cylinder



**DP-S, SX**

DP-S, DP-S1  
DP-SM, DP-SMTD  
SX-C, SX-M, SX-R, SX-S

Art. nr/Part no	Ersätter/Replaces
19907	2 x 3853423 + 2 x 3853424



**Powertrim hydraulslangar  
Power trim hoses**



**SX-C**

SX-C, SX-C1, SX-C1AC, SX-R, SX-R1, SX-R2, SX-CLT1, SX-S, SX-SLT  
Hydraulslang från manifold till powertrimcylinder styrbord, ner  
Hydraulic hose from manifold to power trim cylinder, starboard, down

Art. nr/Part no	Ersätter/Replaces	Info
19854	3853854	Passar/fits pt-cylinder 3857470, 3850683



**SX-C**

SX-C, SX-C1, SX-C1AX, SX-R, SX-R1, SX-R2, SX-CLT1, SX-SLT, SX-S, SX-M,  
SX-MACLT, SX-MBAC, SX-MDA, SX-MDB, SX-MDC, SX-MHP  
Hydraulslang från powertrimcylinder till manifold, styrbord, upp  
Hydraulic hose from power trim cylinder to manifold, starboard, up

Art. nr/Part no	Ersätter/Replaces	Info
19855	3853855	Passar/fits pt-cylinder 3857470, 3850683



**SX-C**

SX-C, SX-C1, SX-C1AC, SX-R, SX-R1, SX-R2, SX-CLT, SX-CLT1, SX-S, SX-SLT  
Hydraulslang från manifold till powertrimcylinder babord, ner  
Hydraulic hose from manifold to power trim cylinder, port, down

Art. nr/Part no	Ersätter/Replaces	Info
19956	3853856	Passar/fits pt-cylinder 3857470, 3850683



**SX-C**

SX-C, SX-C1, SX-C2, SX-CT, SX-CT1, SX-CT2, SX-RT1, SX-RT2DP-S, DP-S1  
TSK SX-CLT, TSK SX-C, TSK SX-R, TSK SX-C1, TSK SX-C1AC, TSK SX-R1,  
TSK SX-R2, TSK SX-CLT1, TSK SX-S, TSK SX-SLT  
Hydraulslang retur från kolv till manifold babord, upp  
Hydraulic hose return from piston to manifold, port, up

Art. nr/Part no	Ersätter/Replaces	Info
19857	3853857	Passar/fits pt-cylinder 3850683, 3852414



**SX-M**

SX-M, SX-MACLT, SX-MLT, SX-MBAC, SX-MDA, SX-MDB, SX-MDC, SX-MHP,  
SX-MACLT  
Hydraulslang från manifold till powertrimcylinder babord, ner  
Hydraulic hose from manifold to power trim cylinder, port, down

Art. nr/Part no	Ersätter/Replaces	Info
19523	3857523	Passar/fits pt-cylinder 3857470, 3857471



**SX-M**

SX-M, SX-MACLT, SX-MLT, SX-MBAC, SX-MDA, SX-MDB, SX-MDC, SX-MHP,  
SX-MACLT  
Hydraulslang från manifold till powertrimcylinder styrbord, ner  
Hydraulic hose from manifold to power trim cylinder, starboard, down

Art. nr/Part no	Ersätter/Replaces
19524	3857524



# 384 Powertrim & styrning • Power trim & steering

## Powertrim hydraulslangar Power trim hoses



### 290, SP, DP

290, 290DP, SP-A, SP-A1, SP-A2, DP-A, DP-A1, DP-A2

Art. nr/Part no	Ersätter/Replaces	Info
19995	872595	Passar/fits pt-cylinder 872612



### 290, SP, DP

290, 290A, 290DP, SP-A, SP-A1, SP-A2, DP-A, DP-A1, DP-A2, DP-B, DP-B1

Hydraulslang från powertrimpumpen till skölden

Hydraulic hose from the power trim pump to the transom

Art. nr/Part no	Ersätter/Replaces
19839	852839



### DPH

DPH-A, DPH-B, DPH-C, DPH-D, DPH-D1

DPR-A, DPR-B, DPR-C, DPR-D

O-ringar och muttrar ingår i satsen/O-rings and nuts are included in kit

Art. nr/Part no	Ersätter/Replaces	Info
22300	21721548 + 21721550	Rostfri/Stainless



### DPH

DPH-A, DPH-B, DPH-C, DPH-D, DPH-D1

DPR-A, DPR-B, DPR-C, DPR-D

Hydraulslang från powertrimpump till powertrimcylinder.

Hydraulic hose from power trim pump to power trim cylinder

Art. nr/Part no	Ersätter/Replaces	Info
19948	21721548	Passar/fits pt-cylinder 3888301, 21840806



### DPH

DPH-A, DPH-B, DPH-C, DPH-D, DPH-D1

DPR-A, DPR-B, DPR-C, DPR-D

Hydraulslang från powertrimpump till powertrimcylinder.

Hydraulic hose from power trim pump to power trim cylinder

Art. nr/Part no	Ersätter/Replaces	Info
19550	21721550, 23392301, 3809560	Passar/fits pt-cylinder 3888301, 21840806



Spare parts from Sweden

## Hydraulledning powertrim Hydraulic tube, power trim



### 290, SP, DP, DP-S, DPX

290, 290DP,  
SP-A, SP-A1, SP-A2, SP-C, SP-E  
DP-A, DP-A1, DP-A2, DP-B, DP-B1, DP-C, DP-C1, DP-D1, DP-E, DP-G  
DP-S  
DPX-A, DPX-C, DPX-R, DPX-S, DPX-S1

Hydraulledning mellan trimkolvar, bakre / Hydraulic tube connection between power trim pistons, rear

Art. nr/Part no	Ersätter/Replaces	Info
19697	854697	Passar/fits 872612, 853439, 854610, 854695, 872837, 3860881



### 290, SP, DP, DP-S, DPX

290, 290DP,  
SP-A, SP-A1, SP-A2, SP-C, SP-E  
DP-A, DP-A1, DP-A2, DP-B, DP-B1, DP-C, DP-C1, DP-D1, DP-E, DP-G  
DP-S  
DPX-A, DPX-C, DPX-R, DPX-S, DPX-S1

Hydraulledning mellan trimkolvar, främre / Hydraulic tube connection between power trim pistons, forward

Art. nr/Part no	Ersätter/Replaces	Info
19796	854696	Passar/fits 872612, 853439, 854610, 854695, 872837, 3860881



## Tätningssringar styrgafflar Seal ring steering forks



### V-ring

Inre diameter 28mm, tidigare utförande / Inner diameter 28mm, earlier version

Art. nr/Part no	Ersätter/Replaces
19359	814359



### V-ring

Inre diameter 36mm, senare utförande / Inner diameter 36mm, later version

Art. nr/Part no	Ersätter/Replaces
19195	839195



SP-C  
DP-C, DP-C1  
DP-D, DP-D1  
DP-E,  
DP-G  
DP-S  
DPX, DPX-A, DPX-C, DPX-R  
SP-E

Packbox inre diameter 40mm  
Seal ring inner diameter 40mm

Art. nr/Part no	Ersätter/Replaces
19313	977313

## Bussningar styrgafflar Bushings steering forks



AQ275  
AQ280  
AQ290  
SP-A, SP-A1, SP-A2, SP-A/MT1  
DP-A, DP-A1, DP-A2, DP-B1

### Övre/Upper

Art. nr/Part no	Ersätter/Replaces	Info
18863	872363, 853864	Inner Ø 36 mm



AQ275  
AQ280  
AQ290  
SP-A, SP-A1, SP-A2, SP-A/MT  
DP-A, DP-A1, DP-A2, DP-B1

### Nedre/Lower

Art. nr / Part no	Ersätter / Replaces	Info
18862	872362, 853863	Inner Ø 39 mm

## Låsskruv styrgaffel Locking screw steering fork



SP-C, SP-C1  
DP-C, DP-C1  
DP-D, DP-D1  
DP-E  
DP-G  
DP-S

Art. nr/Part no	Ersätter/Replaces	Info
19904	947904	M8 x 20 mm



## Propelleraxeltätning Propeller shaft sealing



EVO Millimeter/Metric

Art. nr/ Part no	Referens nr/ OEM nr	Axel/ Shaft	Diameter hylsrör/ Sterndrive tube
91724-1		25 mm	39 mm
91254-1		25 mm	43 mm
91422-1		30 mm	49 mm
91526-1		35 mm	55 mm
91527-1		40 mm	60 mm
91722-1		45 mm	65 mm
91723-1		50 mm	70 mm

EVO Tum/Imperial

Art. nr/ Part no	Referens nr/ OEM nr	Axel/ Shaft	Diameter hylsrör/ Sterndrive tube
91872-1		1"	1-45/64"
91874-1		1-1/4"	2-1/16"
91876-1		1-1/2"	2-9/32"
91878-1		1-3/4"	2-17/32"
91881-1		2"	2-3/4"



Standard Millimeter/Metric

Art. nr/ Part no	Referens nr/ OEM nr	Axel/ Shaft	Diameter hylsrör/ Sterndrive tube
91724	N/A	25 mm	39 mm
91254	828254	25 mm	43 mm
91422	828422	30 mm	49 mm
91526	828526	35 mm	55 mm
91527	828527	40 mm	60 mm
91722	3819722	45 mm	65 mm
91723	3819723	50 mm	70 mm

## Propelleraxellager Cutless bearings



Vattensmorda gummilager/Aqualube cutless bearings

Art. nr/Part no	Ersätter/Replaces	Info
92914	812914	25 x 38 x 100 mm
92916	N/A	30 x 45 x 120 mm
92175	827175	35 x 48 x 140 mm
92131	828131	40 x 55 x 160 mm
92187	828187	45 x 60 x 180 mm



## Propeller SX drev

### Michigan Vortex 3

Lösnavspropeller/Exchangeable hub propeller.  
Välj till navsats 121-205/Select hub kit 121-205

Art. nr/Part no	Benämning/Description	Storlek/Size	Blad/Blades	Rotation
121-992001	Propeller Michigan Vortex 3 Aluminum	16 X 13"	3	höger/right
121-992002	Propeller Michigan Vortex 3 Aluminum	15-1/4 X 15"	3	höger/right
121-931516	Propeller Michigan Vortex 3 Aluminum	16 X 16"	3	höger/right
121-992003	Propeller Michigan Vortex 3 Aluminum	15 X 17"	3	höger/right
121-992004	Propeller Michigan Vortex 3 Aluminum	14-1/2 X 19"	3	höger/right
121-992005	Propeller Michigan Vortex 3 Aluminum	14-1/4 X 21"	3	höger/right
121-992006	Propeller Michigan Vortex 3 Aluminum	14 X 23"	3	höger/right
Art. nr/Part no	Benämning/Description			
121-205	Michigan XHS navsats/hub kit			



### Michigan Vortex 4

Lösnavspropeller/Exchangeable hub propeller.  
Välj till navsats 121-205/Select hub kit 121-205

Art. nr/Part no	Benämning/Description	Storlek/Size	Blad/Blades	Rotation
121-992202	Propeller Michigan Vortex 4 Aluminum	15 X 16"	4	höger/right
121-992203	Propeller Michigan Vortex 4 Aluminum	14-1/2 X 18"	4	höger/right
121-992204	Propeller Michigan Vortex 4 Aluminum	14 X 20"	4	höger/right
Art. nr/Part no	Benämning/Description			
121-205	Michigan XHS navsats/hub kit			



### Michigan Apollo 3

Lösnavspropeller/Exchangeable hub propeller.  
Välj till navsats 121-205/Select hub kit 121-205

Art. nr/Part no	Benämning/Description	Storlek/Size	Blad/Blades	Rotation
121-993042	Propeller Michigan Apollo 3 Stainless steel	14-3/8 X 15"	3	höger/right
121-993052	Propeller Michigan Apollo 3 Stainless steel	14-3/8 X 15"	3	vänster/left
121-993043	Propeller Michigan Apollo 3 Stainless steel	14-1/4 X 17"	3	höger/right
121-993053	Propeller Michigan Apollo 3 Stainless steel	14-1/4 X 17"	3	vänster/left
121-993044	Propeller Michigan Apollo 3 Stainless steel	14-1/8 X 19"	3	höger/right
121-993054	Propeller Michigan Apollo 3 Stainless steel	14-1/8 X 19"	3	vänster/left
121-993045	Propeller Michigan Apollo 3 Stainless steel	14 X 21"	3	höger/right
121-993055	Propeller Michigan Apollo 3 Stainless steel	14 X 21"	3	vänster/left
121-993046	Propeller Michigan Apollo 3 Stainless steel	15-7/8 X 23"	3	höger/right
121-993056	Propeller Michigan Apollo 3 Stainless steel	15-7/8 X 23"	3	vänster/left
Art. nr/Part no	Benämning/Description			
121-205	Michigan XHS navsats/hub kit			



### Michigan Apollo 3 XL

Lösnavspropeller/Exchangeable hub propeller.  
Välj till navsats 121-205/Select hub kit 121-205

Art. nr/Part no	Benämning/Description	Storlek/Size	Blad/Blades	Rotation
121-993023	Propeller Michigan Apollo 3 XL Stainless steel	15-1/2 X 17"	3	höger/right
121-993033	Propeller Michigan Apollo 3 XL Stainless steel	15-1/2 X 17"	3	vänster/left
121-993024	Propeller Michigan Apollo 3 XL Stainless steel	15-1/4 X 19"	3	höger/right
121-993034	Propeller Michigan Apollo 3 XL Stainless steel	15-1/4 X 19"	3	vänster/left
121-993025	Propeller Michigan Apollo 3 XL Stainless steel	14-3/4 X 21"	3	höger/right
121-993035	Propeller Michigan Apollo 3 XL Stainless steel	14-3/4 X 21"	3	vänster/left
121-993026	Propeller Michigan Apollo 3 XL Stainless steel	14-5/8 X 23"	3	höger/right
121-993036	Propeller Michigan Apollo 3 XL Stainless steel	14-5/8 X 23"	3	vänster/left
Art. nr/Part no	Benämning/Description			
121-205	Michigan XHS navsats/hub kit			



Spare parts from Sweden

## Propeller SX drev

### Michigan Apollo 4

Lösnavspropeller/Exchangeable hub propeller.  
Välj till navsats 121-205/Select hub kit 121-205

Art. nr/Part no	Benämning/Description	Storlek/Size	Blad/Blades	Rotation
121-993203	Propeller Michigan Apollo 4 Stainless steel	14-5/8 X 16"	3	höger/right
121-993213	Propeller Michigan Apollo 4 Stainless steel	14-5/8 X 16"	3	vänster/left
121-993204	Propeller Michigan Apollo 4 Stainless steel	14-3/8 X 18"	3	höger/right
121-993214	Propeller Michigan Apollo 4 Stainless steel	14-3/8 X 18"	3	vänster/left
121-993205	Propeller Michigan Apollo 4 Stainless steel	14-1/8 X 20"	3	höger/right
121-993215	Propeller Michigan Apollo 4 Stainless steel	14-1/8 X 20"	3	vänster/left
121-993206	Propeller Michigan Apollo 4 Stainless steel	14 X 22"	3	höger/right
121-993216	Propeller Michigan Apollo 4 Stainless steel	14 X 22"	3	vänster/left
Art. nr/Part no	Benämning/Description			
121-205	Michigan XHS navsats/hub kit			



### Michigan Ballistic XHS

Lösnavspropeller/Exchangeable hub propeller.  
Välj till navsats 121-205/Select hub kit 121-205

Art. nr/Part no	Benämning/Description	Storlek/Size	Blad/Blades	Rotation
121-933515	Propeller Michigan Ballistic XHS Stainless steel	14-7/8 X 15	3	höger/right
121-933517	Propeller Michigan Ballistic XHS Stainless steel	14-3/4 X 17"	3	höger/right
121-937517	Propeller Michigan Ballistic XHS Stainless steel	14-3/4 X 17"	3	vänster/left
121-933519	Propeller Michigan Ballistic XHS Stainless steel	14-1/2 X 19"	3	höger/right
121-937519	Propeller Michigan Ballistic XHS Stainless steel	14-1/2 X 19"	3	vänster/left
121-933521	Propeller Michigan Ballistic XHS Stainless steel	14-3/8 X 21"	3	höger/right
121-937521	Propeller Michigan Ballistic XHS Stainless steel	14-3/8 X 21"	3	vänster/left
121-933523	Propeller Michigan Ballistic XHS Stainless steel	14-1/4 X 23"	3	höger/right
121-937523	Propeller Michigan Ballistic XHS Stainless steel	14-1/4 X 23"	3	vänster/left
Art. nr/Part no	Benämning/Description			
121-205	Michigan XHS navsats/hub kit			



## Duo propeller 280-290 DP

### Michigan Duo Propeller

Fast nav/Fixed hub  
A-dieselmotorer/diesel engines  
B-bensinmotorer/petrol engines

Art. nr/Part no	Benämning/Description	Modell/Model	Motorer/Engines
121-085010	Duo propeller Michigan	A3	Diesel
121-085013	Duo propeller Michigan	A4	Diesel
121-085016	Duo propeller Michigan	A5	Diesel
121-085019	Duo propeller Michigan	A6	Diesel
121-085022	Duo propeller Michigan	A7	Diesel
121-086007	Duo propeller Michigan	B3	Bensin/Petrol
121-086010	Duo propeller Michigan	B4	Bensin/Petrol
121-086013	Duo propeller Michigan	B5	Bensin/Petrol
121-086016	Duo propeller Michigan	B6	Bensin/Petrol
121-086019	Duo propeller Michigan	B7	Bensin/Petrol



Spare parts from Sweden

## Fisklinebricka Thrust washer (Fishing line protector)



250  
270  
275

Art. nr/Part no	Ersätter/Replaces
19534	839534



280  
285  
290

Ej för DP-drev/Not for DP drive

Art. nr/Part no	Ersätter/Replaces
19423	839423

## Låsskruv folding propellerblad Locking screw folding propeller blades



För 14" och 15" propeller/For 14" and 15" propellers  
Rostfri/Stainless  
Längd/Length 20 mm

Art. nr/Part no	Ersätter/Replaces	Info
19904	947904	M8 x 20 mm

## Brytpinnesats Drive pin kit



100  
100B  
100S (saildrive)

Art. nr/Part no	Ersätter/Replaces
22094	806661 x 1, 17268 x 1

## Saxpinne folding propellermutter Cotter pin folding propeller nut



För alla S-drev utom 100S/For all saildrives except 100S  
Rostfri/Stainless

Art. nr/Part no	Ersätter/Replaces
19007	949807

## Distansbricka (plast) Spacer (plastic)



200, 250  
270, 270T, 275, 275A  
280, 280B, 280T  
285A, 290, 290A  
SP-A, SP-A/MT, SP-A1, SP-A2  
SP-C, SP-C1, SP-E

S-drev/saildrive 110S, 120SB, S120C, 130S, 130S-B, 130SR, 130SR-A, 130SR-B, 150S, 150S-B, 150SR. 150SR-B med fast propeller/with fixed propeller

För propellerkona med låsskruv/For propeller cone with locking screw

Art. nr/Part no	Ersätter/Replaces
19888	850888



## Låsbricka propellerkona/ Tab washer propeller cone

200  
250  
270, 270T  
275, 275A  
280, 280T  
285, 285A  
290  
SP-A, SP-A/MT, SP-A1, SP-A2  
SP-C, SP-C1



För propellerkona utan låsskruv / For propeller cone without locking screw

Art. nr/Part no	Ersätter/Replaces
19367	897367

## Distansbricka propellerkona Spacer propeller cone

200  
250  
270, 270T, 275, 275A  
280, 280T, 285, 285A  
290  
SP-A, SP-A/MT, SP-A1, SP-A  
SP-C, SP-C1



För SP-drev med kortnavig propeller / For SP-drive with short hub propeller.  
Ej för DP-drev / Not for DP-drive

Art. nr/Part no	Ersätter/Replaces
19261	854047, 851261

## Låsskruv propellerkona Locking screw propeller cone

200  
250  
270, 270T, 275, 275A  
280, 280T, 285, 285A  
290  
SP-A, SP-A/MT, SP-A1, SP-A2  
SP-C, SP-C1



För propellerkona med låsskruv (19785) / For propeller cone with locking screw (19785)

Art. nr/Part no	Ersätter/Replaces
19889	850889

## Propellerkona Propeller cone

100A, 100B



Art. nr/Part no	Ersätter/Replaces
19660	806660

200  
250  
270, 270T  
275, 275A  
280, 280T  
285, 285A  
290  
SP-A, SP-A/MT, SP-A1, SP-A2  
SP-C, SP-C1



Ej för DP-drev/Not for DP-drive

För kortnavig propeller behövs distansbricka 19261 / For propeller with short hub spacer washer 19261 is required. Skruv/Screw 850889 ingår/is included

Art. nr/Part no	Ersätter/Replaces
19785	854045, 850785

DPH  
DPH-A  
DPH-C  
DPH-D (SN -3020295797)  
DPH-D1 (SN 3020295798-)  
DPH-E



Låsbulst ingår

Art. nr/Part no	Ersätter/Replaces
19326	21829326



### Servicesatser motor Maintenance kits engine

**IGM, IGM10**

IGM, IGM10, IGM10-B, IGM10C, IGM10L, IGM10VE

Art. nr/Part no	Ersätter/Replaces
8-10000	1 x 119660-35150, 1 x 104500-55710, 1 x 178270-12540, 1 x 128176-42071

**2GMF, 2GM20F, 3GMF, 3GM30F**

2GMF, 2GM20F, 3GMF, 3GM30F

Art. nr/Part no	Ersätter/Replaces
8-10020	1 x 119660-35150, 1 x 104500-55710, 1 x 178270-12540, 1 x 124223-42092

**2GM, 3GM**2GM, 2GM20, 2GM20B, 2GM20C, 2GM20VE  
3GM, 3GM30

Art. nr/Part no	Ersätter/Replaces
8-10010	1 x 119660-35150, 1 x 104500-55710, 1 x 178270-12540, 1 x 104211-42070
8-10010-2	sats utan impeller/kit without impeller

**2YM, 3GM30, 3YM**2YM, 3GM30, 3YM  
2YM15  
3GM30-YEU, 3GM30F-YEU  
3YM20, 3YM30

Art. nr/Part no	Ersätter/Replaces
8-10030	1 x 119660-35150, 1 x 104500-55710, 1 x 178270-12540, 1 x 128990-42200



## Servicesatser motor Maintenance kits engine



**2QM20, 3QM30, 3HM**  
2QM20  
3QM30  
3HM, 3HMF  
3HM35, 3HM35F

Art. nr/Part no	Ersätter/Replaces
8-10035	1 x 124085-35113, 1 x 104500-55710, 1 x 124770-12540, 1 x 124223-42092



**4JH2, 4JH3, 4JH4**  
4JH2-UTE  
4JH3-DTE/TE/HTE  
4JH4-DTE/T/THE

Art. nr/Part no	Ersätter/Replaces
8-10050	1 x 129150-35153, 1 x 104500-55701, 1 x 129470-12330, 1 x 129670-42531



**3JH3E, 3JH4E**  
3JH3E, 3JH4E

Art. nr/Part no	Ersätter/Replaces
8-10040	1 x 119660-35150, 1 x 129470-55701, 1 x 129470-12330, 1 x 129670-42531
8-10040-2	sats utan impeller/kit without impeller



**4JH, 4JH2, 4JH3, 4JH4E**  
4JHE, 4JH-TE, 4JH-DTE/HTE  
4JH2E, 4JH2-TE, 4JH2-DTE/HTE  
4JH3E-YEU  
4JH4E

Art. nr/Part no	Ersätter/Replaces
8-10060	1 x 129150-35153, 1 x 129470-55701, 1 x 129470-12330, 1 x 129670-42531
8-10060-2	sats utan impeller/kit without impeller



### Servicesatser motor Maintenance kits engine



**4JH4AE, 4JH5E**  
4JH4AE, 4JH5E

Art. nr/Part no	Ersätter/Replaces
8-10070	1 x 129150-35153, 1 x 119802-55801, 1 x 129670-42531



**6LY**  
6LYA-UTE, 6LYA-STE  
6LY2A-ST(E)(P)  
6LY3-ETP

Art. nr/Part no	Ersätter/Replaces
8-10095	1 x 119593-35100, 1 x 119593-35400, 1 x 41650-502330, 1 x 119593-18880, 1 x 119574-42550



**4LH**  
4LH-DTE, 4LH-STE  
4LHA-DTE, 4LHA-STE

Art. nr/Part no	Ersätter/Replaces
8-10080	1 x 127695-35150, 1 x 41650-502320, 1 x 120650-42310



**6LP**  
6LP-DT/DTE/STE  
6LPA-D/STE/STP

Art. nr/Part no	Ersätter/Replaces
8-10090	1 x 119770-90620, 1 x 119773-55510, 1 x 119593-18880, 1 x 119773-42600



## Bränslefilter Fuel filters



**1GM, 2GM, 3GM, SB8, SB12, YSB8, YSB12, YSM8, YSM12**  
 1GM10, 1GM10-B, 1GM10C, 1GM10L, 1GM10VE  
 2GM, 2GMF, 2GM20, 2GM20-YEU, 2GM20B, 2GM20C  
 2GM20C-YEU, 2GM20F, 2GM20F-YEU, 2GM20FC-YEU, 2GM20FVE  
 2GM20VE  
 2QM15, 2QM20  
 2YM15, 2YM15C  
 3GM, 3GMD, 3GMF  
 3GM30, 3GM30-YEU, 3GM30B, 3GM30C, 3GM30C-YEU, 3GM30F  
 3GM30F-YEU, 3GM30FC-YEU, 3GM30FVE, 3GM30VE  
 3HM, 3HMF, 3HM35, 3HM35C, 3HM35F  
 3QM30  
 3YM20, 3YM20C  
 3YM30, 3YM30C  
 SB8, SB8-CY, SB8-EX, SB8G-CY, SB8G-EX, SBF8, SBF8G  
 SB12, SB12-CY, SB12-EX, SB12G-CY, SB12G-EX, SBF12, SBF12G  
 YSB8, YSB8-R, YSB8-CY, YSB8-ECX, YSB8G-CY, YSB8G-ECX, YSB8G-R  
 YSBF8, YSBF8G  
 YSB12, YSB12-R, YSB12-CY, YSB12-ECX, YSB12G-CY, YSB12G-ECX,  
 YSB12G-R  
 YSBF12, YSBF12G  
 YSM8, YSM8-J, YSM8-R, YSM8-Y  
 YSM12, YSM12-J, YSM12-R, YSM12-Y

**O-ring ingår / O-ring included**

Art. nr/Part no	Ersätter/Replaces
8-55710	104500-55710



**2QM, 3QM**

Art. nr/Part no	Ersätter/Replaces
8-35210	124220-35210



**3JH, 4JH, 4JM**  
 3JH2, 3JH2BE, 3JH2E, 3JH2Z  
 3JH3, 3JH3E, 3JH3Z, 3JH3Z1, 3JH3Z2  
 3JH4BE, 3JH4E  
 4JH-HTE, 4JH-TE, 4JHE  
 4JH2-DTE, 4JH2-HTE, 4JH2-TE, 4JH2-UTE  
 4JH2E  
 4JH3CE, 4JH3E  
 4JH4E  
 4JM-T

Art. nr/Part no	Ersätter/Replaces
8-55712	129470-55703, 129470-55702



**4JH4AE, 3JH5E, 4JH5E**

Art. nr/Part no	Ersätter/Replaces
8-55801	119802-55801



**4JH**  
 4JH45  
 4JH57  
 4JH80  
 4JH110

Art. nr/Part no	Ersätter/Replaces
8-55800	129A00-55800, 129A00-55810, 129A0055800HD



## Bränslefilter Fuel filters

**4JH**

4JH2-UTB, 4JH2-UTE  
4JH3-DTE, 4JH3-HTE, 4JH3-TCE  
4JH3-TE  
4JH4-HTE, 4JH4-TE

Art. nr/Part no	Ersätter/Replaces
8-55711	129574- 55711, 129574-55710

**4JH, 4LH**

4JH, 4JH-HT, 4JH-T  
4JH3, 4JH3ZA  
4LH-DTE, 4LH-STE  
4LHA-DTE, 4LHA-DTP, 4LHA-DTZE  
4LHA-DTZP, 4LHA-STE  
4LHA-STP, 4LHA-STZE, 4LHA-STZP

Art. nr/Part no	Ersätter/Replaces
8-55713	41650-502320

**4LH, 4LHA**

4LH-TE, 4LH-HTE  
4LHA-HT(Z)(E)(P)

Art. nr/Part no	Ersätter/Replaces
8-12185	121857-55710

**4BY, 6BY**

Art. nr/Part no	Ersätter/Replaces
8-55020	120650-55020

**6LP**

6LP-DTE, 6LP-DTP, 6LP-DTZE, 6LP-DTZEI, 6LP-DTZP  
6LP-STE, 6LP-STP, 6LP-STZE, 6LP-STZEI  
6LPA-DTE, 6LPA-DTP, 6LPA-DTZE, 6LPA-DTZP, 6LPA-STE  
6LPA-STP, 6LPA-STZP

Art. nr/Part no	Ersätter/Replaces
8-55714	119773-55510

**6LY**

6LY-UTE, 6LY-STE  
6LYA-UTE, 6LYA-STE  
6LY2A-ST(E)(P)  
6LY3-ETP

Art. nr/Part no	Ersätter/Replaces
8-50233	41650-502330



## Oljefilter Oil filters



**1GM, 2GM, 2YM, 3GM, 3JH, 3YM**  
 1GM, 1GM10, 1GM10-B, 1GM10C, 1GM10L, 1GM10VE  
 2GM, 2GM20, 2GM20-YEU, 2GM20B, 2GM20C, 2GM20C-YEU, 2GM20F  
 2GM20F-YEU, 2GM20FC-YEU, 2GM20VE  
 2GMF  
 2QM15  
 2YM15, 2YM15C  
 3GM, 3GMD, 3GMF  
 3GM30, 3GM30-YEU, 3GM30B, 3GM30C, 3GM30C-YEU, 3GM30F  
 3GM30F-YEU, 3GM30FC-YEU, 3GM30FVE, 3GM30VE  
 3JH2, 3JH2BE, 3JH2E, 3JH2Z  
 3JH3, 3JH3E, 3JH3Z, 3JH3Z1, 3JH3Z2  
 3JH4E  
 3YM20, 3YM20C  
 3YM30

Art. nr/Part no	Ersätter/Replaces
8-35151	119305-35151



**2QM, 3HM, 3QM, 4JM**  
 2QM, 2QM20  
 3HM, 3HMF, 3HM35, 3HM35C, 3HM35F  
 3QM, 3QM30  
 4JM-T

Art. nr/Part no	Ersätter/Replaces
8-35113	124085-35170, 124085-35113 124085-35110, 124550-35170



**4JH**  
 4JH-HT, 4JH-HTE, 4JH-T, 4JH-TE  
 4JH2-DTE, 4JH2-HTE, 4JH2-TE, 4JH2-UTB, 4JH2-UTE, 4JH2E  
 4JH3, 4JH3-DTE, 4JH3-HTE, 4JH3-TCE, 4JH3-TE, 4JH3CE, 4JH3E, 4JH3ZA  
 4JH4E, 4JH4-HTE, 4JH4-TE, 4JHE

Art. nr/Part no	Ersätter/Replaces
8-35152	129150-35153, 129150-35152



**4BY, 4BY2, 6BY, 6BY2**

Art. nr/Part no	Ersätter/Replaces
8-16500	165000-69520, 165000-69590



**4LH**  
 4LH-TE  
 4LH-HTE

Art. nr/Part no	Ersätter/Replaces
8-35170	119005-35170, 119005-35151, 119005-35100



**4LH, 4LHA, 6CX, 6LP**  
 4LH-DTE, 4LH-STE  
 4LHA-HTE, 4LHA-DTE, 4LHA-STE  
 6CX, 6LP-DTA

Art. nr/Part no	Ersätter/Replaces
8-35150	127695-35150



## Oljefilter Oil filters



### 6LP, 6LPA

6LP-DTE, 6LP-DTP, 6LP-DTZE, 6LP-DTZEI, 6LP-DTZP  
6LP-DTZPI, 6LP-STE, 6LP-STP, 6LP-STZE, 6LP-STZEI  
6LPA-DTE, 6LPA-DTP, 6LPA-DTZE, 6LPA-DTZP  
6LPA-STE, 6LPA-STP, 6LPA-STZP

Art. nr/Part no	Ersätter/Replaces
8-35153	119770-90620



### 6LYA, 6LY

6LYA-UTE, 6LYA-STE, 6LY2-STE  
6LY3  
Primärfilter / Primary filter

Art. nr/Part no	Ersätter/Replaces
8-35100	119593-35100



### 6LYA, 6LY

6LYA-UTE, 6LYA-STE, 6LY2-STE  
6LY3  
By-pass filter

Art. nr/Part no	Ersätter/Replaces
8-35400	119593-35400



## Luftfilter Air filters



**IGM10**  
IGM10, IGM10-B, IGM10C, IGM10L, IGM10VE

Art. nr/Part no	Ersätter/Replaces
8-56540	128171-12540




**2GM, 2YM, 3GM, 3YM**  
2GM, 2GMF  
2GM20, 2GM20B, 2GM20C  
2GM20F, 2GM20FVE, 2GM20VE  
2YM15, 2YM15C  
3GM, 3GMD, 3GMF  
3GM30, 3GM30B, 3GM30C  
3GM30F, 3GM30FVE, 3GM30VE  
3YM20, 3YM30

Art. nr/Part no	Ersätter/Replaces
8-56541	128270-12540, 128377-12530



**2QM, 3QM, 3HM**  
2QM  
2QM15  
3QM  
2QM20  
3QM30  
3HM, 3HMF  
3HM35, 3HM35F

Art. nr/Part no	Ersätter/Replaces
8-12540	124770-12540



**3JH, 4JH**  
3JH2E/BE, 3JH3E/CE  
4JH-TE, 4JH-DTE, 4JHHTE  
4JH2-CE, 4JH2-DTE, 4JH2-TE, 4JH2-HTE, 4JH2-UTE, 4JH2E  
4JH3-DTE, 4JH3-HTE, 4JH3TE, 4JH3-TCE  
4JH4-HTE, 4JH4-TE, 4JHE

Art. nr/Part no	Ersätter/Replaces
8-56542	129470-12330



**4LH, 4LHA**  
4LH-TE, 4LH-HTE, 4LH-STE  
4LHA-HT(Z)E, 4LHA-DT(Z)E, 4LHA-ST(Z)E, 4LHA-STE(P), 4LHA-STZE(P), 4LHA-DTE(P), 4LHA-DTZE(P), 4LHA-HTE(P), 4LHA-HTZE(P)

Art. nr/Part no	Ersätter/Replaces
8-18880	119195-18880



**6LP, 6LY, 6LYA**  
6LP-DTE\*, 6LP-DTP\*, 6LP-DTZE\*, 6LP-DTZEI\*, 6LP-DTZP\*  
6LP-DTZPI\*, 6LP-STE\*, 6LP-STP\*, 6LP-STZE\*, 6LP-STZEI\*  
6LPA-DTE, 6LPA-DTP, 6LPA-DTZE, 6LPA-DTZP  
6LPA-STE, 6LPA-STP, 6LPA-STZP  
6LY-STE, 6LY-UTE  
6LY2-STE, 6LY2-STP, 6LY2A-STE, 6LY2A-STP  
6LY3-ETP, 6LY3-STP, 6LY3-UTP  
6LYA-STE, 6LYA-STP, 6LYA-UTE, 6LYM-STE, 6LYM-UTE

\* Tidig version/Early version

Art. nr/Part no	Ersätter/Replaces
8-56543	119593-18880



### Drivremmar Drive belts



**IGM, IGM10**  
IGM, IGM10  
(SN -E03690)

Art. nr/Part no	Ersätter/Replaces	Info
8-77350	128170-77350	13x735, Generator/Alternator



**2GM, 3GM, 3GM30**  
2GM  
3GM  
3GM30-YEU

Art. nr/Part no	Ersätter/Replaces	Info
8-03000	25132-003000	13x790, Generator/Alternator



**IGM, IGM10, 2QM15, SB12**  
IGM\*, IGM10\*  
2QM15, SB12  
(\* = SN E03690-)

Art. nr/Part no	Ersätter/Replaces	Info
8-77790	128170-77350E	10x780, Generator/Alternator



**2GM20, 3HM, 3GM30**  
2GM20  
3HM  
3GM30

Art. nr/Part no	Ersätter/Replaces	Info
8-28670	128670-77350	13x817, Generator/Alternator



**2GM, 2YM15, 3HM, 3GM, 3YM, YSM8, YSM12**  
2GM, 2GMF  
2GM20, 2GM20-YEU, 2GM20F, 2GM20F-YEU  
2YM15  
3HM, 3HMF, 3HM35, 3HM35F  
3GM, 3GMF, 3GM30, 3GM30-YEU, 3GM30F, 3GM30F-YEU  
3YM20, 3YM30  
YSM8  
YSM12

Art. nr/Part no	Ersätter/Replaces	Info
8-78780	104511-78780	10x450, Circulation pump



**2GM20F, 3GM30F**  
2GM20F, 2GM20F-YEU  
3GM30F, 3GM30F-YEU

Art. nr/Part no	Ersätter/Replaces	Info
8-25132	25132-003700	Generator/Alternator



## Drivremmar Drive belts



**2QM, 3QM**  
2QM  
3QM

Art. nr/Part no	Ersätter/Replaces	Info
8-03700	25112-003700	13x920, Generator/Alternator



**YSM8, YSM12**  
YSM8  
YSM12

Art. nr/Part no	Ersätter/Replaces	Info
8-04271	104271-77350	10x674, Generator/Alternator



**YSE12, YSB12**  
YSE12, YSB12

Art. nr/Part no	Ersätter/Replaces	Info
8-04514	104514-77350	10x570, Generator/Alternator



**YSB8, YSE8**  
YSB8, YSE8

Art. nr/Part no	Ersätter/Replaces	Info
8-42780	104214-42780	10x750, Circulation pump



**YSE12, YSB12**  
YSE12, YSB12

Art. nr/Part no	Ersätter/Replaces	Info
8-03300	25137-003300	10x837, Circulation pump



**2YM15, 3YM20**  
Multirem/V-ribbed belt

Art. nr/Part no	Ersätter/Replaces	Info
8-28790	128790-77580	6PK990, Generator/Alternator



## Drivremmar Drive belts

**3YM30**

3YM30 (SN E20848- ), 3YM30AE  
Multirem/V-ribbed belt

Art. nr/Part no	Ersätter/Replaces	Info
8-28990	128990-77580	6PK1000, Generator/Alternator

**3JH2, 3JH3**

3JH2E  
3JH2T  
3JH3E

Art. nr/Part no	Ersätter/Replaces	Info
8-42310	129940-42310	13x1140, Generator/Alternator

**3JH4E, 3JH5E, 4JH4, 4JH5E**

3JH4E  
3JH5E  
4JH4E, 4JH4AE  
4JH5E

Art. nr/Part no	Ersätter/Replaces	Info
8-04300	25152-004300	13x1118, Generator/Alternator

**3JH, 4JH**

3JH40-CR  
4JH45-CR, 4JH57-CR, 4JH80-CR, 4JH110-CR  
Multirem/V-ribbed belt

Art. nr/Part no	Ersätter/Replaces	Info
8-29675	129675-42280	6PK1240, Generator/Alternator

**3JH2, 3JH25A, 3JH3, 4JH**

3JH2-CE, 3JH2-TE, 3JH2-TCE

3JH25A

3JH3

4JH-HTE, 4JH-HTZ, 4JH-HTZAE, 4JH-TE, 4JH-TZ

Art. nr/Part no	Ersätter/Replaces	Info
8-04500	25132-004500	13x1165, Generator/Alternator

**4JH2, 4JH3**

4JH2E, 4JH2-TE, 4JH2-HTE, 4JH2-DTE, 4JH2-UTE

4JH3E, 4JH3-TE, 4JH3-HTE

Art. nr/Part no	Ersätter/Replaces	Info
8-04600	25132-004600	13x1190, Generator/Alternator



## Drivremmar Drive belts



**4JH4-TE, 4JH4-HTE**  
4JH4-TE, 4JH4-HTE

Art. nr/Part no	Ersätter/Replaces	Info
8-29671	129671-42280	13x1180, Generator/Alternator



**6LP**  
6LP-DET  
6LP-STE  
6LP-DTP  
6LP-STP

Sats med 2 remmar/Kit with 2 drive belts

Art. nr/Part no	Ersätter/Replaces	Info
8-77260	119775-77260	10x1005, Generator/Alternator



**4LH, 4LHA**  
4LH-TE, 4LH-HTE, 4LH-DTE, 4LH-STE  
4LHA-HTE(P), 4LHA-DTE(P), 4LHA-STE(P)+Z

Art. nr/Part no	Ersätter/Replaces	Info
8-42280	121850-42280	Generator/Alternator



**6LYA, 6LY2**  
6LYA-UTE, 6LYA-STE, 6LYA-STP  
6LY2-STE, 6LY2-STP

Art. nr/Part no	Ersätter/Replaces	Info
8-19593	119593-42280	13x1365, Generator/Alternator



Spare parts from Sweden

### Sotningsatser Decarbonizing kits



IGM

Art. nr/Part no	Ersätter/Replaces
60000	728170-92600




3GM30, 3GM30F

Art. nr/Part no	Ersätter/Replaces
60003	728374-92605



IGM10

Art. nr/Part no	Ersätter/Replaces
60001	728171-92601

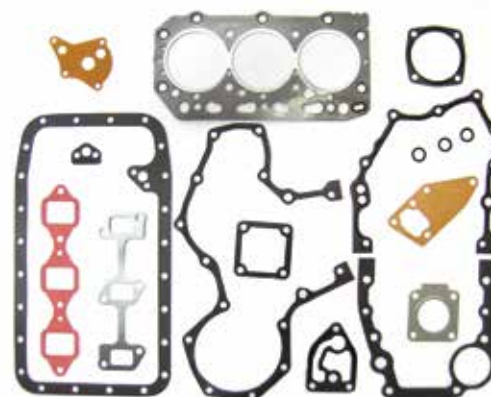


3JH2E, 3JH2TE

Art. nr/Part no	Ersätter/Replaces
60004	729171-92600



2GM20, 2GM20F

Art. nr/Part no	Ersätter/Replaces
60002	728271-92605

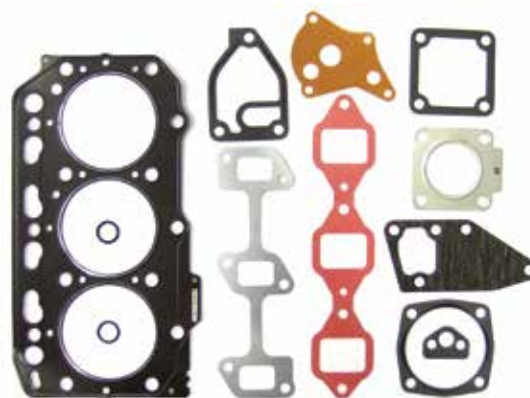


3JH3EYEU

Art. nr/Part no	Ersätter/Replaces
60005	729270-92601



## Sotningssatser Decarbonizing kits

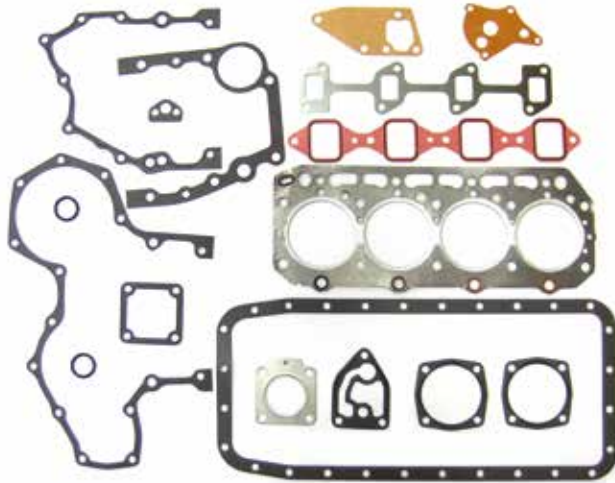


4JHE, 4JHTE, 4JHDTE

Art. nr/Part no	Ersätter/Replaces
60006	729470-92605




4LHTE, 4LH-HTE, 4LH-DTE, 4LH-STE

Art. nr/Part no	Ersätter/Replaces
60008	719171-92602

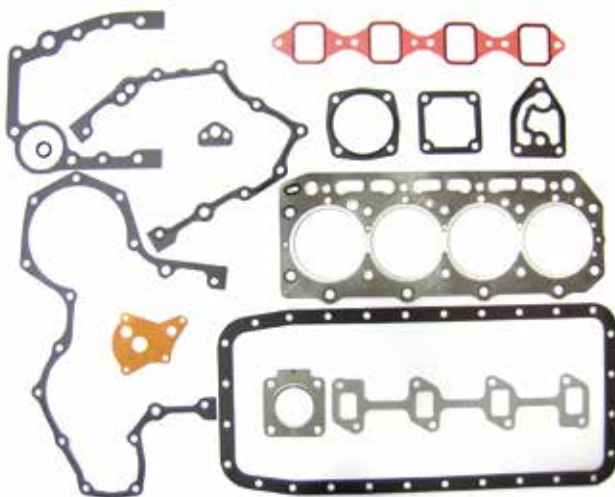

4JH2E, 4JH2-TE, 4JM2-HTE, 4JH2-DTE, 4JH2-UTE

Art. nr/Part no	Ersätter/Replaces
60007	729573-92605

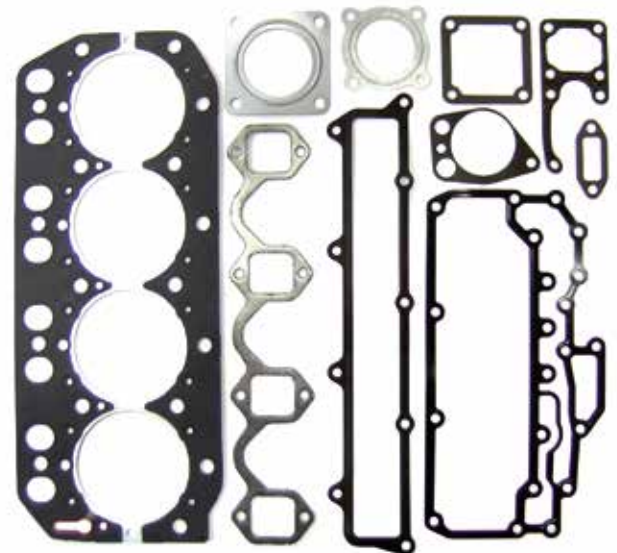

4LHA-HTE, 4LHA-DTE, 4LHA-STE

Art. nr/Part no	Ersätter/Replaces
60009	719173-92600



### Topplöckspackningar Cylinder head gaskets

**IGM**

Art. nr/Part no	Ersätter/Replaces
8-28170	128170-01331

**2GM**

2GM20, 2GM20D, 2GM20F, 2GM20-YEU

Art. nr/Part no	Ersätter/Replaces
8-28271	128271-01911

**IGM10**

Art. nr/Part no	Ersätter/Replaces
8-28171	128171-01911

**3GM**

3GM30, 3GM30B, 3GM30C, 3GM30F, 3GM30FVE, 3GM30-YEU, 3GM30FC-YEU

Art. nr/Part no	Ersätter/Replaces
8-28374	128171-01911



## Bränslepumpar Fuel pumps



**IGM**  
IGM, IGM10, IGM10C

Packning ingår / gasket included

Art. nr/Part no	Ersätter/Replaces
8-52010	105582-52010



**2YM, 3YM, 3JH**  
2YM15, 3JH2, 3YM20, 3YM30

Packning ingår / gasket included

Art. nr/Part no	Ersätter/Replaces	Info
8-52101	105582-52010	anslutning/connection 8 mm



**2GM, 3GM**  
2GM20, 3GM30

Packning ingår / gasket included

Art. nr/Part no	Ersätter/Replaces
8-52010-1	129301-52020, 128270-52010



Spare parts from Sweden

## Impellersatser Impeller kits



### IGM, IGM10

IGM, IGM10, IGM10-B, IGM10C, IGM10L, IGM10VE

Art. nr/Part no	Ersätter/Replaces
8-24002	128176-42071



### 2GM, 2QM, 3GM, 3QM, YSB8, YSB12, YSM12, SB12

2GM20, 2GM20B, 2GM20C, 2GM20VE  
2QM\*, 2QM15, 2QM20\*  
3GM, 3GMD  
3GM30, 3GM30B, 3GM30C, 3GM30VE  
3QM\*, 3QM30\*  
SB8, SB8-CY, SB8-EX, SB8G-CY, SB8G-EX, SBF8, SBF8G  
YSB8, YSB8-CY, YSB8-ECX, YSB8-R, YSB8G-CY, YSB8G-ECX  
YSB8G-R, YSBF8, YSBF8G, YSE8, YSE8L, YSM8, YSM8-J, YSM8-R, YSM8-Y  
SB12, SB12-CY, SB12-EX, SB12G-CY, SB12G-EX, SBF12, SBF12G  
YSB12, YSB12-CY, YSB12-ECX, YSB12-R, YSB12G-CY, YSB12G-ECX  
YSB12G-R, YSBF12, YSBF12G, YSE12, YSE12L  
YSM12, YSM12-J, YSM12-R, YSM12-Y

\*) Passar endast till länsypumpen för dessa motorer. Impeller till sjö-  
vattenpumpen heter 8-24003 / Does only fit the bilge pump on these  
engines. Impeller kit for the seawater pump is 8-24003

Art. nr/Part no	Ersätter/Replaces
8-24001	128176-42071



### 2GMF, 2QM, 3GMF, 3HM, 3QM

2GMF, 2GM20F, 2GM20FVE, 2QM, 2QM20  
3GMF, 3GM30F, 3GM30FVE, 3HM, 3HMF  
3HM35, 3HM35C, 3HM35F  
3QM30

Art. nr/Part no	Ersätter/Replaces
8-24003	124223-42092



### 2YM, 3YM, 2GM, 3GM

2YM15  
3YM20, 3YM30  
2GM20-YEU, 2GM20F-YEU  
3GM30-YEU, 3GM30F-YEU

Art. nr/Part no	Ersätter/Replaces
8-24007	128990-42200



### 3JH, 4JH

3JH4E  
4JH2E  
4JH3CE, 4JH3E, 4JH3-DTE, 4JH3-HTE, 4JH3-TCE, 4JH3-TE  
4JH4E, 4JH4-HTE, 4JH4-TE

Art. nr/Part no	Ersätter/Replaces
8-24004	129670-42531



## Impellersatser Impeller kits



### 4BY, 4LH, 4LHA, 6BY

4BY150, 4BY150Z, 4BY180, 4BY180Z  
4LHA-DTE, 4LHA-DTZE, 4LHA-HTE, 4LHA-HTP, 4LHA-STE, 4LHA-STP  
4LHA-STZE  
4LH-DTE, 4LH-HTE, 4LH-STE, 4LH-TE  
6BY220, 6BY220Z, 6BY260, 6BY260Z

Art. nr/Part no	Ersätter/Replaces
8-24005	119175-42650, 120650-42310, 127610-42200



### 6LP, 6LPA

6LP-DTE, 6LP-DTP, 6LP-DTZE  
6LP-DTZE1, 6LP-DTZP, 6LP-DTZP1  
6LP-STE, 6LP-STP, 6LP-STZE, 6LP-STZE1  
6LPA-DTE, 6LPA-DTP, 6LPA-DTZE  
6LPA-DTZP, 6LPA-STE, 6LPA-STP  
6LPA-STZP

Art. nr/Part no	Ersätter/Replaces
8-24008	119773-42600



### 6LY

6LY2-STE, 6LY2-STP, 6LY2A-STE  
6LY2A-STP  
6LY3-ETP, 6LY3-STP, 6LY3-UTP  
6LYA-STE, 6LYA-STP, 6LYA-UTE

Art. nr/Part no	Ersätter/Replaces
8-24006	119574-42552, 119574-42550, 119574-42551



### 6LY, 8LV

6LY-UTE, 6LY-ST, 6LY-STE, 6LY-STM, 6LY-STZY, 6LY-WSTZY, 6LY-WST,  
6LY-UT, 6LY-UTM, 6LY-UTZY, 6LY-WUTZY  
8LV350, 8LV320Z, 8LV350Z, 8LV370Z

Art. nr/Part no	Ersätter/Replaces
8-24009	119593-42201, 119593-42202



### Termostater Thermostats

**6LY3, 6LY4**

6LY3-ETP, 6LY3-STP, 6LY3-UTP  
6LY400, 6LY440

Art. nr/Part no	Ersätter/Replaces	Info
8-48590	127605-48590	71° C

**6LP, 8LV**

6LP-DET, 6LP-DTP, 6LP-STE, 6LP-STP, 6LPA-DET, 6LPA-DTP, 6LPA-STE,  
6LPA-STP  
8LV

Art. nr/Part no	Ersätter/Replaces	Info
8-49550	119773-49550	70° C

**SB8/12, YSB8/12, YSE8/12, 1GM, 2GM, 3GM**

SB8, SB12  
YSB8, YSB12  
YSE8, YSE12  
YSM8, YSM12  
1GM, 2GM, 3GM, 3GM30  
3HM  
3QM30

Art. nr/Part no	Ersätter/Replaces	Info
8-49200	105582-49200	° C

**6LY, 6LYA**

6LYA-UTE, 6LY-UTZY, 6LY-WSTZY, 6LY-WST, 6LY-WUTZY, 6LY-STZY,  
6LYM-UTEHD, 6LY-UTM, 6LY-STM, 6LY-WUT, 6LY-UTE, 6LY-STE, 6LYM-  
UTE, 6LYM-STE, 6LY-ST, 6LY-UT  
6LYA-STE(P), 6LYA-STE, 6LYA-UTE(P), 6LYA-STP  
6CZ-GT, 6CZA-GT, 6CZA-WGT

Art. nr/Part no	Ersätter/Replaces	Info
8-49551	119593-49550	76,5° C



## Termostater Thermostats



### 1GM, 2GM, 3GM, 3HM

2GM, 2GM(F), 2GM20FC-YEU, 2GM20FC-YEU, 2GM20F-YEU, 2GM20F-EU, 2GM20FC-YEU, 2GM20FVE, 2GM20F, 2GM20FVE, 2GMFL, 2GMFY, 2GMFL  
3GM, 3GMFY-E, 3GMFLE, 3GMFLE, 3GM30FC-YEU, 3GM30F, 3GM30FVE, 3GM30F-YEU, 3GM30FC-YEU, 3GM30F-YEU, 3GM30FVE, 3GMFYE-E(HE)  
3HMF, 3HM35F, 3HM, 3HMF

Art. nr/Part no	Ersätter/Replaces	Info
8-49800	121750-49800	71° C



### 2YM, 3YM

2YM15  
3YM, 3YM20, 3YM27A, 3YM30AE, 3YM30, 3YM30R

Art. nr/Part no	Ersätter/Replaces	Info
8-49802	128990-49800	71° C



### 3JH, 4JH

3JH2, 3JH2E, 3JH2-TE, 3JH3E, 3JH4E, 3JH5E  
4JH, 4JH2-HTE, 4JH2-TE, 4JH2-UTE, 4JH3, 4JH3-DET, 4JH3E, 4JH3-HTE, 4JH3-TE, 4JH45, 4JH4E, 4JH4-HTE, 4JH4-TE, 4JH57, 4JH80, 4JH-DET, 4JHE, 4JH-HTE, 4JH-T, 4JH-TE

Art. nr/Part no	Ersätter/Replaces	Info
8-49801	129470-49801	76,5° C



### 4LH

4LHA-DET, 4LHA-DTZE, 4LHA-STE, 4LHA-STZE, 4LH-DET, 4LH-HTE, 4LH-HTE, 4LH-STE, 4LH-TE

Art. nr/Part no	Ersätter/Replaces	Info
8-49811	121850-49811	71° C



### Packningsatser sjövattpumpar Gasket kits seawater pumps

**IGM, IGM10**

IGML, IGMY-C, IGM10, IGM10C, IGM10VE, IGM10L  
IGMY, IGMY-C, IGMY-EC

Passar sjövattpumpar / Fits seawater pumps OEM 128170-42200,  
128176-42000

Art. nr/Part no	Ersätter/Replaces
8-42030	N/A

**2GM, 3GM, 3HM, 2QM, 3QM**

2GM, 2GM (F), 2GM20F, 2GMFY(E)-E, 2GM20FVE, 2GMF, 2GMFL  
3GM, 3GM(F), 3GMFLE, 3GMFYE, 3GMFYE, 3GM30F, 3GM30FVE  
3HM, 3HM35, 3HM35C, 3HM35F, 3HMF, 3YM  
2QM, 2QM20, 2QM20Y  
3QM30

Passar sjövattpumpar / Fits seawater pumps OEM 121575-42000,  
724770-42700, 724770-42701, 721575-42702

Art. nr/Part no	Ersätter/Replaces
8-42020	N/A

**2GM, 3GM, 2QM**

2GM, 2GMZ, 2GML, 2GM(F), 2GM20VE, 2GM20B, 2GM20C, 2GMYE-EC,  
2GM20, 2GM20B, 2GM20C  
2QM15  
3GML, 3GM30, 3GM30VE, 3GM30B, 3GM30C, 3GMD, 3GM(F)

Passar sjövattpumpar / Fits seawater pumps OEM 728270-42002,  
128270-42000

Art. nr/Part no	Ersätter/Replaces
8-42010	N/A

**2YM, 3YM**

2YM15  
3YM20, 3YM30  
3YM27A, 3YM30AW, 3YM30R

Passar sjövattpumpar / Fits seawater pumps OEM 128990-42500,  
128990-42510, 128990-42511

Art. nr/Part no	Ersätter/Replaces
8-42040	N/A



## Sjövattenpumpar Seawater pumps



**2GM, 3GM, 2YM, 3YM**  
 2GMF, 3GMF  
 2GM20-YEU, 2GM20C-YEU, 2GM20F-YEU, 2GM20FC-YEU  
 3GM30-YEU, 3GM30C-YEU, 3GM30C-YEU, 3GM30CFC-YEU  
 2YM15  
 3YM20\*, 3YM30\*

\*) tidig variant/early type

Art. nr/Part no	Ersätter/Replaces
8-42000	128990-42500, 121575-42200

## Temperaturgivare Temperature sender



**1GM, 2GM, 3GM, 3HM**  
 1GM, 1GM10, 1GM10C, 1GM10L, 1GM10(YM1), 1GM10VE, 1GMY-EC,  
 1GMY-C, 1GML  
 2GM(F), 2GML, 2GMZ, 2GMLP, 2GM20, 2GM20B, 2GM20C, 2GM20VE,  
 2GM20-YEU, 2GM20C-YEU, 2GM20VE, 2GMYE-EC,  
 3GM(F), 3GMD, 3GM30, 3GM30VE, 3GM30VE, 3GM30C, 3GM30-YEU,  
 3GM30C-YEU, 3GMLE  
 3HM, 3HM35, 3HM35C

Art. nr/Part no	Ersätter/Replaces	Info
8-91340	128275-91340	3/8" - 18 NPTF



**2GM, 3GM**  
 2GM20, 2GM20VE, 2GM20B, 2GM20C, 2GML  
 3GMD, 3GMLE, 3GM30, 3GM30VE, 3GM30B, 3GM30C

Art. nr/Part no	Ersätter/Replaces
8-42001	128270-42001, 728270-42002



## Avgaskrökar Exhaust elbows



**2QM, 3QM30**  
2QM15, 2QM20  
3QM30

**Anslutning/connection:** 5/4" gänga  
**Vattenslang anslutning/water hose connection:** 18 mm, 3/4"  
**Avgasslang/exhaust hose connection:** 51 mm, 2"  
**Material:** Rostfritt/stainless EN 1.4404/316L

Art. nr/Part no	Ersätter/Replaces
16800	724770-13200



**4JHT, 80 & 110 hp**

4JH-TZ, 4JH-DTZA, 4JH-HTZA, 4JH-DTZ, 4JH-DTZP, 4JH-TZ1, 4JH-TZ2, 4JH-DTZP, 4JH-DTZY, 4JH-TZ, 4JH-HTZA, 4JH-HTZ, 4JH-HTZY, 4JH-HTZAE, 4JH2-DTZ, 4JH2-DTZ, 4JH3-T, 4JH3-T1

**Anslutning/connection:** Triangelfläns/triangle flange  
**Vattenslang anslutning/water hose connection:** 25 mm, 1" straight  
**Avgasslang/exhaust hose connection:** 76 mm, 3"  
**Material:** Rostfritt/stainless EN 1.4404/316L

Art. nr/Part no	Ersätter/Replaces
16820	129792-13552



**2GM, 3GM, 3YM, 3HM**

2GM, 2GM20F, 2GM(F), 2GM20FVE, 2GMFY, 2YM15, 3YM20, 3YM30, 3GM, 3GMD, 3GM(F), 3GMFY-E, 3GM30, 3GM30B, 3GM30C, 3GM30F, 3GM30FVE, 3GMFY-E-E, 3HM, 3HMF, 3HM35, 3HM35F

**Anslutning/connection:** fläns/flange  
**Vattenslang anslutning/water hose connection:** 18 mm, 3/4"  
**Avgasslang/exhaust hose connection:** 51 mm, 2"  
**Material:** Rostfritt/stainless EN 1.4404/316L

Art. nr/Part no	Ersätter/Replaces
16828	128397-13530, 128370-13530



**4JHT, 80 & 110 hp**

4JH-TZ, 4JH-DTZA, 4JH-HTZA, 4JH-DTZ, 4JH-DTZP, 4JH-TZ1, 4JH-TZ2, 4JH-DTZP, 4JH-DTZY, 4JH-TZ, 4JH-HTZA, 4JH-HTZ, 4JH-HTZY, 4JH-HTZAE, 4JH2-DTZ, 4JH2-DTZ, 4JH3-T, 4JH3-T1

**Anslutning/connection:** Triangelfläns/triangle flange  
**Vattenslang anslutning/water hose connection:** 25 mm, 1" angled  
**Avgasslang/exhaust hose connection:** 76 mm, 3"  
**Material:** Rostfritt/stainless EN 1.4404/316L

Art. nr/Part no	Ersätter/Replaces
16836	129792-13552



## Avgaskrökar Exhaust elbows



4JHE

**Anslutning/connection:** 90° vinkel/angle  
**Vattenslang anslutning/water hose connection:** 25 mm, 1"  
**Avgasslang/exhaust hose connection:** 76 mm, 3"  
**Material:** Rostfritt/stainless EN 1.4404/316L

Art. nr/Part no	Ersätter/Replaces
16823	

## Packningar till avgaskrökar Gaskets exhaust elbows



6LY

6LY-UTE, 6LY-STE, 6LYM-UTE, 6LYM-STE  
 6LYA-UTE, 6LYA-STP, 6LYA-STE  
 6LY2M-WST, 6LY2M-WDT  
 6LY3-STP, 6LY3-ETP, 6LY3-UTP

**Anslutning/connection:** fläns  
**Vattenslang anslutning/water hose connection:** 44,5 mm, 1 3/4"  
**Avgasslang/exhaust hose connection:** 124 mm, 5"  
**Material:** Rostfritt/stainless EN 1.4404/316L

Art. nr/Part no	Ersätter/Replaces
16810	119573-13500



4JHE

**Anslutning/connection:** 45° vinkel/angle  
**Vattenslang anslutning/water hose connection:** 25 mm, 1"  
**Avgasslang/exhaust hose connection:** 76 mm, 3"  
**Material:** Rostfritt/stainless EN 1.4404/316L

Art. nr/Part no	Ersätter/Replaces
16822	



Passar avgaskrök 16828 / fits exhaust elbow 16828

Art. nr/Part no	Ersätter/Replaces
8-16201	128370-13201



Passar avgaskrökar 16820, 16836, 16838 / fits exhaust elbows 16820, 16836, 16838

Art. nr/Part no	Ersätter/Replaces
8-16520	129472-13520



## Anoder Anodes



### SB8, SB12, YSE8, YSE12

SB8, SBF8  
SB12, SBF12  
YSE8, YSE12

Art. nr/Part no	Ersätter/Replaces	Info
8-41300	104211-41300	Zink/Zinc



### IGM, 6LY

IGM, IGM10, IGM10-B, IGM10C, IGM10L, IGM10VE  
6LY3AM-ETP, 6LY3AM-STP, 6LY3AM-UTP  
6LY3-ETP, 6LY3-STP, 6LY3-UTP

Art. nr/Part no	Ersätter/Replaces	Info
8-20020	27210-200200	Zink/Zinc



### 2GM, 3GM, 3HM, 3QM, YSB8, YSM8, YSB12, YSM12

2GM, 2GM20, 2GM20B, 2GM20C, 2GM20C-YEU, 2GM20VE, 2QM15, 2QM20  
3GM, 3GMD, 3GM30, 3GM30B, 3GM30C, 3GM30C-YEU, 3GM30VE,  
3HM, 3HM35, 3HM35C, 3QM30  
YSB8, YSB8-CY, YSB8-ECX, YSB8-R, YSB8G-CY, YSB8G-ECX, YSB8G-R,  
YSE8, YSM8, YSM8-J, YSM8-R, YSM8-Y  
YSB12, YSB12-CY, YSB12-ECX, YSB12-R, YSB12G-CY, YSB12G-ECX,  
YSB12G-R  
YSM12, YSM12-J, YSM12-R, YSM12-Y

Art. nr/Part no	Ersätter/Replaces	Info
8-20030	27210-200300	Zink/Zinc



### 4LH, 6LY

4LH-STE  
6LY-STE, 6LY-UTE, 6LYM-STE, 6LYM-UTE

Art. nr/Part no	Ersätter/Replaces	Info
8-20055	27210-200550, 177301-54900	Zink/Zinc



### 4LHA, 6LP, 6LY2

4LHA-HTE, 4LHA-HTP, 4LHA-DTE, 4LHA-STE, 4LHA-DTP, 4LHA-STP  
6LP, 6LY2

Art. nr/Part no	Ersätter/Replaces	Info
8-44150	119574-44150	Zink/Zinc



### 4LHA, 6LP, 6LY2

4LHA-HTE, 4LHA-HTP, 4LHA-DTE, 4LHA-STE, 4LHA-DTP, 4LHA-STP  
6LP, 6LY2

Art. nr/Part no	Ersätter/Replaces	Info
8-18790	119574-18790	Zink/Zinc



## Anoder Anodes



### 6LP

6LPA-STZP2, 6LP(A)-DTE, 6LP-STZY, 6LP-WDT, 6LP-DTZE, 6LP-STZE, 6LP(A)-STZE, 6LP-DTE, 6LP-STE, 6LP-ST, 6LP-WDTZY, 6LP-DT, 6LP(A)-DTZE, 6LP(A)-STE, 6LP-STZE1, 6LP-DTZY, 6LP-WSTZY, 6LP-STZY, 6LP-DTZE1, 6LP(A)-DTZE1, 6LPA-STZP3

Komplett sats med samtliga anoder/Complete kit with all anodes

Art. nr/Part no	Ersätter/Replaces	Info
8-92600	119773-92600	Zink/Zinc



### SD20, SD30, SD40, SD50, SD60

S-drev/Saildrive

Art. nr/Part no	Ersätter/Replaces	Info
8-02660	196440-02660	Aluminium/Aluminum
8-02660-1	N/A	Zink/Zinc
8-02660-2	N/A	Magnesium



Spare parts from Sweden

## Generatorer Alternators



**1GM, 2GM, 2QM, 3GM, 3HM, 3JH, 3QM, SB, SVE, YSB, YSE, YSM**  
 1GM, 1GM10, 1GM10L, 1GML, 1GMY  
 2GM, 2GM20, 2GMF, 2GML, 2GMFL, 2GMYEEC, 2GMZ  
 2QM  
 3GM, 3GM30, 3GMD, 3GMF, 3GML  
 3HM, 3HMF  
 3JH, 3JH2  
 3QM, 3QM30, 3QM30F, 3QM30H  
 SB8, SB12, SVE8, SVE12  
 YSB8, YSB12  
 YSE8, YSE12  
 YSM8, YSM12

**Spänning/Voltage:** 14V

**Ampere:** 35A

**Fläkt/Fan:** Utvändig/External

**Remskiva/Pulley:** Enkel/single 68 mm

**Polaritet/Polarity:** 1-polig negativ/1-pole negative

**Inbyggd regulator/Built in regulator:** Ja/Yes

**B+ Anslutning/B+ Connection:** M5

Art. nr/Part no	Ersätter/Replaces	Info
8-12408	124080-77201	35A



**1GM, 2GM, 2QM, 3GM, 3HM, 3JH, 3QM, SB, SVE, YSB, YSE, YSM**  
 1GM, 1GM10, 1GM10L, 1GML, 1GMY  
 2GM, 2GM20, 2GMF, 2GML, 2GMFL, 2GMYEEC, 2GMZ  
 2QM  
 3GM, 3GM30, 3GMD, 3GMF, 3GML  
 3HM, 3HMF  
 3JH, 3JH2  
 3QM, 3QM30, 3QM30F, 3QM30H  
 SB8, SB12, SVE8, SVE12  
 YSB8, YSB12  
 YSE8, YSE12  
 YSM8, YSM12

**Spänning/Voltage:** 14V

**Ampere:** 35A

**Fläkt/Fan:** Utvändig/External

**Remskiva/Pulley:** Enkel/single 67 mm

**Polaritet/Polarity:** 2-polig/2-poles

**Inbyggd regulator/Built in regulator:** Ja/Yes

Art. nr/Part no	Ersätter/Replaces	Info
8-12137	121370-77200	35A



**2GM, 3GM, 30GM, 3HM, 3JH, 3QM, 3YM, 4JH, 4LH, 6LY**

2GM20, 2GMFL, 2GMFY-E, 2GML, 2GMYE-EC

3GM30

3HM35

3JH2, 3JH2BE, 3JH2E, 3JH3, 3JH3E, 3JH3E-YEU, 3JH4

3YM20, 3YM30

4JH-TE, 4JH2-CE, 4JH2-DTE, 4JH2-E, 4JH2-THE, 4JH2-TE, 4JH2-UTE

4JH3-CE, 4JH3-DTE, 4JH3-THE, 4JH3-TCE, 4JH3-TE, 4JH3E

4JHE

4LH-DET, 4LH-HTE, 4LH-STE, 4LH-TE, 4LHA-DET, 4LHA-DTZ, 4LHA-

HTE, 4LHA-HTZE, 4LHA-STE, 4LHA-STZE

6LY-ST, 6LY-STE, 6LY-STM, 6LY-STZY, 6LY-UT, 6LY-UTE, 6LY-UTM, 6LY-

UTZY, 6LY2-STE, 6LYA-STE, 6LYA-UTE, 6LYM-STE, 6LYM-UTE

**Spänning/Voltage:** 14,5V

**Ampere:** 125A

**Fläkt/Fan:** Invändig/internal

**Remskiva/Pulley:** Enkel/single 72 mm

**Polaritet/Polarity:** 1-polig negativ/1-pole negative

**Plugg/Plug:** P0604

**Inbyggd regulator/Built in regulator:** Ja/Yes

**B+ Anslutning/B+ Connection:** M8

Art. nr/Part no	Ersätter/Replaces	Info
8-11957	119573-77200	125A



**2YM15, 3JH3E, 3JH4E, 3YM, 4JH3**

2YM15

3JH3E, 3JH4E

3YM20, 3YM30

4JH3-CE, 4JH3E, 4JH3-TCE

**Spänning/Voltage:** 14V

**Ampere:** 60A

**Fläkt/Fan:** Invändig/internal

**Remskiva/Pulley:** Enkel/single 74 mm

**Polaritet/Polarity:** 2-polig/2-poles

**Plugg/Plug:** P0605

**Inbyggd regulator/Built in regulator:** Ja/Yes

**B+ Anslutning/B+ Connection:** M5

Art. nr/Part no	Ersätter/Replaces	Info
8-11957	119573-77200	60A



## Generatorer Alternators



### 3JH, 3YM, 4JH, 4LH, 6LY

3JH2, 3JH2BE, 3JH2E  
3JH3, 3JH3E, 3JH3E-YEU, 3JH4E  
3YM20, 3YM30

4JH-TE, 4JH2-CE, 4JH2-DET, 4JH2-E, 4JH2-HTE, 4JH2-TE, 4JH2-UTE,  
4JH3-CE, 4JH3-DET, 4JH3-HTE, 4JH3-TCE, 4JH3-TE, 4JH3E, 4JHE  
4LH-DET, 4LH-HTE, 4LH-STE, 4LH-TE, 4LHA-DET, 4LHA-DTZ, 4LHA-  
HTE, 4LHA-HTZE, 4LHA-STE, 4LHASTZE  
6LY-ST, 6LY-STE, 6LY-STM, 6LY-STZY, 6LY-UT, 6LY-UTE, 6LY-UTM, 6LY-  
UTZY  
6LY2-STE, 6LYA-STE, 6LYA-UTE, 6LYM-STE, 6LYM-UTE

**Spänning/Voltage:** 14V

**Ampere:** 55A

**Fläkt/Fan:** Utvändig/External

**Remskiva/Pulley:** Enkel/single 72 mm

**Polaritet/Polarity:** 2-polig/2-poles

**Plugg/Plug:** P0605

**Inbyggd regulator/Built in regulator:** Ja/Yes

**B+ Anslutning/B+ Connection:** M5

Art. nr/Part no	Ersätter/Replaces	Info
8-12977	129772-77200	55A



### 3JH, 3YM, 4JH, 4LH, 6LY

3JH2, 3JH2BE, 3JH2E  
3JH3, 3JH3E, 3JH3E-YEU  
3JH4E  
3YM20, 3YM30

4JH-TE, 4JH2-CE, 4JH2-DET, 4JH2-E, 4JH2-HTE, 4JH2-TE, 4JH2-UTE,  
4JH3-CE, 4JH3-DET, 4JH3-HTE, 4JH3-TCE, 4JH3-TE, 4JH3E, 4JHE  
4LH-DET, 4LH-HTE, 4LH-STE, 4LH-TE, 4LHA-DET, 4LHA-DTZ, 4LHA-  
HTE, 4LHA-HTZE, 4LHA-STE, 4LHASTZE  
6LY-ST, 6LY-STE, 6LY-STM, 6LY-STZY, 6LY-UT, 6LY-UTE, 6LY-UTM, 6LY-  
UTZY, 6LY2-STE  
6LYA-STE, 6LYA-UTE, 6LYM-STE, 6LYM-UTE

**Spänning/Voltage:** 14V

**Ampere:** 80A

**Fläkt/Fan:** Utvändig/External

**Remskiva/Pulley:** Enkel/single 74 mm

**Polaritet/Polarity:** 2-polig/2-poles

**Plugg/Plug:** P0605

**Inbyggd regulator/Built in regulator:** Ja/Yes

**B+ Anslutning/B+ Connection:** M5

Art. nr/Part no	Ersätter/Replaces	Info
8-12947	129470-77200	80A



### 6LP

6LPA

6LP-DT, 6LP-DTE, 6LP-DTY, 6LP-DTZE, 6LP-DTZEI, 6LP-ST, 6LP-STE,  
6LP-STZE

**Spänning/Voltage:** 14V

**Ampere:** 80A

**Fläkt/Fan:** Invändig/internal

**Remskiva/Pulley:** Dubbel/Double 70 mm

**Polaritet/Polarity:** 1-polig negativ/1-pole negative

**Plugg/Plug:** P1001

**Inbyggd regulator/Built in regulator:** Ja/Yes

Art. nr/Part no	Ersätter/Replaces	Info
8-11977	119773-77200	80A



Spare parts from Sweden

## Startmotorer Starters



### IGM, 2GM, 3GM

IGM, IGM10, IGM10C  
2GM, 2GM20, 2GMF  
3GM, 3GM30, 3GMD, 3GMF

**Spänning/Voltage:** 12V

**Effekt/Power:** 1,0kW

**Kuggar/Teeth:** 9

**Rotation:** Medurs/Clockwise

**Polaritet/Polarity:** 1-polig negativ/1-pole negative

**Monteringshål/Mounting holes:** 2

**Oljetätad/Oil sealed:** Nej/No

Art. nr/Part no	Ersätter/Replaces
8-12817	128170-77010



### YSB, YSM, SB, SVE

SB8, SB12  
SVE8, SVE12  
YSB8, YSB12  
YSE8, YSE12  
YSM8, YSM12

**Spänning/Voltage:** 12V

**Effekt/Power:** 1,0kW

**Kuggar/Teeth:** 9


**Rotation:** Medurs/Clockwise

**Polaritet/Polarity:** 1-polig negativ/1-pole negative

**Monteringshål/Mounting holes:** 2

**Oljetätad/Oil sealed:** Ja/Yes

Art. nr/Part no	Ersätter/Replaces
8-10421	104211-77010

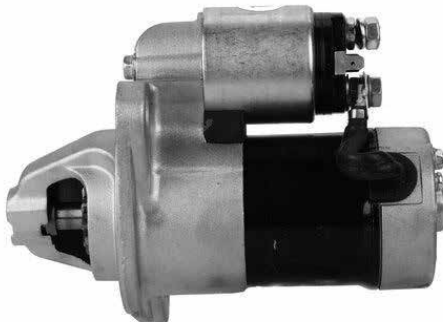

### IGM10, 2QM, 3QM, 2YM, 3JH, 4JH

IGM10L  
2QM, 2QM20  
3QM, 3QM30, 3QM30F, 3QM30H  
2YM15, 3YM20, 3YM30  
3HM35, 3HM35C, 3HM35FS12-77A  
3JH2, 3JH2E, 3JH2BE, 3JH3, 3JH3E, 3JH3E-YEU, 3JH4E  
4JH, 4JH-HT-Z, 4JH-T, 4JH-TZ, 4JHZ, 4JH2-E, 4JH2-CE, 4JH2-DTE, 4JH2-HTE, 4JH2-TE, 4JH2-THE, 4JH2-UTE, 4JH2L-HTNE, 4JH2L-TNE  
4JH3, 4JH3-CE, 4JH3-DTE, 4JH3-HTE, 4JH3-TE, 4JH3-TE-YEU, 4JH3-THE, 4JH3-TCE, 4JH3E

**Spänning/Voltage:** 12V

**Effekt/Power:** 1,4kW

**Kuggar/Teeth:** 11

**Rotation:** Medurs/Clockwise

**Polaritet/Polarity:** 1-polig negativ/1-pole negative

**Monteringshål/Mounting holes:** 2

**Oljetätad/Oil sealed:** Nej/No

Art. nr/Part no	Ersätter/Replaces
8-12969	129242-77010, 129608-77010, 129698-77010



### 6LP

6LPA  
6LP-DT, 6LP-DTE, 6LP-DTY, 6LP-DTZE, 6LP-DTZE1, 6LP-ST, 6LP-STE, 6LP-STZE

**Spänning/Voltage:** 12V

**Effekt/Power:** 2,5kW

**Kuggar/Teeth:** 12

**Rotation:** Medurs/Clockwise

**Polaritet/Polarity:** 1-polig negativ/1-pole negative

**Monteringshål/Mounting holes:** 2

**Oljetätad/Oil sealed:** Nej/No

Art. nr/Part no	Ersätter/Replaces
8-19773	119773-77010



## Startmotorer Starters



### 6LY, 6PH

6LY2-STE

6LYA-STE, 6LYA-UTE, 6LYM-STE, 6LYM-UTE

6LY-ST, 6LY-STE, 6LY-STM, 6LY-STZY, 6LY-UT, 6LY-UTE, 6LY-UTM, 6LY-UTZY

6PH, 6PH-HTZY

6PHM-THE, 6PHM-HTZ, 6PHM-TZ

6PHS-HTPS, 6PHS-TPS

**Spänning/Voltage:** 12V

**Effekt/Power:** 2,5kW

**Kuggar/Teeth:** 12

**Rotation:** Medurs/Clockwise

**Polaritet/Polarity:** 1-polig negativ/1-pole negative

**Monteringshål/Mounting holes:** 2

**Oljetätad/Oil sealed:** Nej/No

Art. nr/Part no	Ersätter/Replaces
8-12350	123500-77010



Spare parts from Sweden

11014	1218634	11560	875560	12886	3884010	13909	1378909
11019	271217	11609	861255	12887	3884015	13990	9139283
11022	271054	11610	861688	12888	3580888	13993	3582432
11025	271066	11611	465547	12889	3581889	14001	948187
11031	477026	11612	877094	12890	3580890	14031	859031
11032	463903	11613	889970	12892	3580892	14034	471034
11033	192212	11614	3581536	12960	1378960	14035	859035
11038	859038	11651	275751	12986-1	831986	14036	859036
11039	859039	11687	3586871	13008	9139284	14048	3582069
11051	271051	11799	181799	13009	419310	14057	3517857
11063	271063	11877	3586877	13024	859224	14069	876069
11081	270081	11902	463902	13025	859225	14114	955972
11082	275282	11905	463905	13039	430039	14144	1346144
11083	275283	11906	270906	13042	859042	14189	859189
11114	876114	11955	60112158	13043	859043	14250	861250
11115	270115	12005	419735	13044	859044	14251	861251
11136	270136	12006	1336763	13066	838066	14337	22057107
11137	270137	12057	20739057	13070	859151	14390	21549542
11139	875484	12058	3825723	13093	859093	14440	835440
11159	859159	12068	22691232	13094	859094	14473	861473
11161	876161	12079	1542077	13100	419678	14476	861476
11170	897170	12079	1542078	13115	840115	14490	30788490
11200	272004	12096	11096	13119	1544119	14525	3840525
11202	272002	12171	21501189	13127	859134	14556	21707132
11203	272012	12211	3183211	13136	3809167	14559	3850559
11214	271214	12292	419292	13150	859150	14603	861603
11215	271215	12306	31359568	13155	859155	14621	21549544
11238	875483	12324	3582324	13202	3584202	14634	21707134
11262	818262	12368	419368	13274	833274	14706	1218706
11271	875271	12377	463377	13287	1542287	14736	21707133
11302	875302	12383	466383	13305	468305	14741	847741
11304	875304	12384	466384	13309	3580309	14750	841750
11305	875305	12389	1542389	13316	3580316	14779	835779
11306	875306	12395	463395	13341	1306341	14807	838807
11307	875307	12472	1542472	13376	859135	14864	1378864
11308	875308	12506	855506	13399	859120	14879	22618325
11323	3885323	12513	1218630	13414	943414	14914	1378914
11330	875330	12526	463526	13453	859137	14974	423135
11331	875331	12545	23557240	13459	30713459	15011	827011
11332	875332	12546	3801757	13497	859138	15036	807036
11333	875333	12603	3547603	13498	859148	15043	11043
11337	275337	12637	838637	13531	859152	15062	3584062
11338	275338	12638	838638	13569	840569	15063	3580063
11339	275339	12650	8631650	13623	9139282	15065	11065
11347	3875347	12651	8631651	13643	419643	15067	968927
11369	275369	12652	3582606	13645	1378645	15083	1674083
11416	463416	12653	3582561	13646	1378646	15089	3583089
11498	875498	12698	861698	13647	859647	15090	21255090
11499	875499	12701	861701	13652	838652	15097	876080
11511	876511	12703	861703	13653	838653	15102	21379102
11515	876515	12767	1336767	13654	838654	15109	831009
11519	876519	12784	425784	13740	275740	15110	3839110
11531	275331	12792	1317792	13742	3583786	15115	3583115
11532	275332	12793	1317793	13749	3809167	15120	876120
11533	275333	12798	1545198	13775	838775	15134	861551
11534	275334	12861	3583679	13780	833780	15169	836169
11536	275336	12862	3583681	13781	833781	15198	3583913
11550	875550	12870	1378870	13783	857621	15207	3838207
						15223	984223



Spare parts from Sweden

15261	3840816	15756	875756	16513	855513	17509	3580509
15263	3580365	15765	183765	16532	824532	17517	3817517
15266	8149182	15779	877355	16599	825599	17535	21646645
15269	3831424	15780	875780	16633	856044	17597	840597
15288	3838288	15783	875783	16653	866653	17619	838619
15300	43957300	15784	877349	16656	3847499	17633	857633
15301	43957301	15785	875785	16673	876144	17644	3847644
15302	43957302	15787	3831425	16725	828064	17648	862393
15304	841063	15788	3831426	16730	842768	17650	3857650
15305	876305	15791	875791	16750	861906	17662	823662
15312	3829312	15796	875796	16751	834751	17663	273663
15334	21951334	15799	21212799	16804	856883	17666	237666
15335	855728	15800	21212800	16827	823770	17686	855686
15340	3858340	15801	21212801	16870	3858870	17710	850710
15354	845354	15807	3586494	16879	1378879	17732	22030848
15355	181355	15808	22222936	16894	856894	17760	3581760
15362	21951362	15811	21951346	16902	840902	17782	859782
15374	21419374	15814	875814	16912	966912	17803	856470
15376	21419376	15824	859824	16913	1378913	17811	21139810
15383	875383	15848	3886848	16963	859963	17848	897848
15384	21951302	15850	3853850	17027	3838852	17874	21624740
15413	3555413	15853	3853796	17027-30	3838852	17879	21368879
15444	809444	15874	835874	17034	859034	17897	233897
15459	3830459	15878	833878	17038	3825038	17901	22030852
15462	914462	15883	858065	17065	23686345	17913	829913
15467	858467	15886	21380886	17101	861014	17919	21196919
15475	3588475	15890	21380890	17108	1140639	17952	3838952
15509	3587508	15895	829895	17109	877767	17981	955981
15512	3854286	15918	997641	17145	3584145	17987	21492771
15533	914533	15928	838928	17161	841161	17999	21702999
15566	3856036	15952	3860703	17162	877766	18003	966903
15573	3593573	15975	271975	17179	233179	18006	872368
15574	875574	15991	3855991	17185	876185	18017	21634017
15575	21951350	16007	952980	17191	31261191	18026	21407026
15578	855578	16010	952986	17201	3581078	18028	21407028
15580	875580	16037	857037	17228	3862228	18029	3852029
15583	21951342	16061	3863061	17277	21171277	18048	853048
15584	875584	16061-1	3862627	17280	842280	18070	3853815
15587	21730348	16071	3863071	17287	838287	18077	3854077
15591	1542591	16098	859145	17292	841292	18078	807078
15593	21951356	16100	833998	17293	841293	18086	3860086
15596	21214596	16123	1542123	17297	855297	18087	3584086
15599	21214599	16140	859140	17303	1542303	18091	839091
15625	1336255	16190	861907	17305	8692305	18111	967111
15637	21141637	16191	3863191	17306	3581078	18123	967123
15639	21613426	16194	859194	17307	858268	18149	240149
15649	22994993	16200	833583	17310	3582310	18161	3854161
15654	3593654	16300	838224	17323	21134777	18169	1306169
15655	3593655	16341	806341	17353	943353	18175	853175
15660	21730344	16374	859015	17358	858358	18179	981965
15661	823661	16384	856891	17407	818407	18188	21951188
15662	21951352	16387	855387	17428	859428	18193	967193
15698	875698	16400	818359	17443	21718912	18207	829207
15714	829714	16412	3853412	17459	858459	18217	3852217
15723	21219723	16415	858481	17477	861477	18243	841243
15738	3818424	16468	3852468	17477-1	861477	18244	841244
15744	82744	16472	3852472	17488	858488	18252	31251252
15745	82745	16501	3847501	17493	826493	18254	35254



Spare parts from Sweden

18258	238258	18605	847605	19017	125017	19247	183247
18260	3854260	18624	945624	19018	852018	19249	3854249
18262	841262	18624	945624	19019	3857176	19250	183512
18263	841263	18625	3809625	19023	907023	19253	839253
18272	3852272	18656	949656	19025	907025	19255	853255
18283	966907	18657	243657	19029	876266	19256	925256
18304	835304	18658	243658	19030	814030	19258	925258
18308	835308	18669	241669	19042	21868042	19259	925259
18310	978510	18684	21314684	19044	11044	19260	925260
18311	978515	18690	870690	19051	3586765	19261	854047
18324	3888324	18696	839696	19053	17253	19267	876267
18325	3888325	18698	966698	19060	3852390	19272	183272
18326	3888326	18700	966700	19068	181268	19276	17276
18327	966933	18702	835702	19069	3850426	19278	826341
18330	966938	18704	835704	19071	969071	19279	853223
18331	3854331	18705	835705	19072	11072	19286	181286
18336	3852336	18706	852705	19075	832675	19288	181288
18354	839354	18707	966707	19080	3863080	19289	181289
18355	852904	18711	978710	19081	3855081	19294	876294
18363	875363	18716	832716	19083	3863083	19300	854300
18367	978367	18750	1324750	19084	3863084	19301	814301
18368	3853368	18797	243797	19085	3863085	19305	22651246
18382	966382	18799	243799	19087	181287	19313	977313
18383	976489	18801	243801	19091	940191	19315	897315
18385	966385	18805	966891	19093	925093	19316	3852315
18387	966387	18809	30731809	19095	967344	19329	3853329
18388	860388	18835	3857835	19097	3852352	19334	832934
18391	966391	18842	233842	19106	653190	19356	814356
18400	3854001	18843	976492	19107	682694	19357	854357
18403	3854003	18845	3853801	19115	877115	19359	814359
18404	875404	18862	872362	19116	877116	19367	897367
18424	3582424	18863	872363	19117	877117	19372	875372
18426	3854261	18900	966900	19118	877118	19374	183374
18431	3854311	18903	243903	19119	877119	19387	3862387
18454	3854548	18906	966906	19120	877120	19389	855389
18457	978457	18912	21160912	19121	877121	19390	183390
18460	3581460	18926	841926	19122	877122	19391	183391
18464	3852464	18931	966931	19123	23307656	19392	876392
18482	978482	18942	966942	19124	23307655	19395	873395
18483	976483	18975	834975	19127	23075752	19395-1	3863480
18487	973487	18978	966978	19130	3854130	19399	876392
18493	21405493	18980	966980	19133	854133	19400	3807400
18494	21405494	18981	966981	19135	3803909	19401	3807401
18498	978750	18984	3854003	19136	3843136	19403	8694630
18504	3852504	18987	21426987	19139	872139	19404	31293668
18507	855507	18990	966990	19139-1	872139	19407	851407
18532	3857168	18998	835998	19140	828140	19411	3855411
18534	973534	19000	956000	19151	985151	19413	181413
18542	977542	19003	3849006	19158	832158	19423	839423
18547	978547	19004	806620	19183	3860183	19426	897426
18548	966694	19006	181301	19190	804190	19430	993430
18549	3862014	19007	949807	19191	832191	19438	946438
18552	824552	19008	184682	19192	40005192	19448	3852548
18560	841262	19009	941809	19195	839195	19450	3863450
18563	861563	19010	876268	19201	925261	19455	889455
18564	861564	19012	22274887	19218	943218	19464	858464
18571	875571	19013	22274888	19222	984222	19475	3861575
18587	829587	19015	852868	19224	984224	19480	3854480



Spare parts from Sweden

19496	3852696	19756	851756	19913	833913	21418	876348
19497	3888491	19763	85107763	19915	833915	21422	875422
19498	3584442	19766	854031	19916	3888916	21423	876393
19499	3858399	19767	30677767	19924	951924	21427	876427
19507	872096	19778	184778	19929	838929	21430	876430
19509	3594509	19784	3889784	19932	22303438	21431	876431
19531	875531	19785	854045	19936	951936	21433	876393
19533	872533	19786	3889786	19942	3850942	21453	3582597
19534	839534	19790	3863090	19949	3850852	21500	876377
19541	854541	19791	942791	19955	858955	21553	876376
19542	853542	19793	872793	19959	3852959	21561	876341
19548	22274884	19793-1	872793	19965	832965	21569	876358
19555	3888555	19794	876794	19967	813967	21572	876380
19559	18559	19804	181804	19974	955974	21604	876422
19565	997368	19805	875805	19981	3593981	21655	876655
19566	3852866	19805-1	875805	19983	876286	21757	875757
19570	832570	19808	966808	19985	3586765	21800	877419
19591	876397	19809	875809	19989	955989	21801	3589322
19593	973593	19809-1	875809	20411	873411	21802	3883845
19595	3854595	19810	875810	20412	873412	21803	21371112
19596	860396	19810-1	875810	20413	873413	21804	3588434
19598	832598	19812	875812	20415	873415	21805	21371111
19598-1	832598	19812-1	875812	20793	876793	21813	876350
19612	3850812	19814	3888814	21023	876448	22011	876224
19613	3807613	19814-1	23164609	21054	876054	22049	36000300-0
19616	948616	19815	875815	21103	3582435	22050	833950
19617	841893	19816	941816	21104	3583787	22061	36000400-0
19618	855617	19817	3888817	21105	3583788	22062	803762
19619	3860232	19819	3852390	21300	876300	22080	832820
19620	181620	19821	875821	21301	876301	22092	941873
19624	806624	19821-1	875821	21302	876302	22093	963699
19625	3854625	19822	875822	21303	876303	22099	60114327
19630	876632	19827	875512	21304	876304	22136	877373
19638	876638	19828	876633	21306	876306	22136-2	877373
19646	3856502	19831	832831	21307	876307	22137	875769
19654	184654	19834	850834	21308	876308	22138	3582563
19656	855656	19835	852835	21309	876309	22139	3582595
19660	806660	19835-1	852835	21310	876310	22144	849170
19669	832669	19840	876840	21314	876314	22182	877386
19682	897682	19844	191844	21335	876335	22323	843323
19683	184683	19845	3853945	21349	876349	22325	858161
19686	875686	19846	832846	21357	876357	22325-45	858161
19691	184691	19848	876631	21359	876356	22384	21951384
19694	855694	19859	183859	21361	876361	22386	21951386
19700	183834	19865	3852865	21362	876774	22392	21951392
19705	855105	19867	3862867	21378	876378	22404	21951404
19707	967707	19868	853868	21379	876379	22439	21951439
19712	21752712	19870	826870	21381	876381	22453	21951453
19720	876391	19871	853871	21382	876382	22465	21951465
19724	3854624	19873	897873	21384	876384	22613	5383613
19726	897726	19875	23172849	21387	875387	22646	829646
19741	876266	19888	850888	21388	876388	22734	899734
19745	3588745	19889	850889	21389	876389	22762	270762
19745-1	3588770	19890	3807890	21394	876394	22926	833926
19746	3588746	19903	3862903	21395	3582596	22999	21418999
19746-1	3588748	19904	947904	21400	876342	23001	876639
19752	872752	19905	3852045	21401	876356	23002	3856002
19753	3588753	19906	366906	21417	876417	23005	3862178



23006	3855275	26109	861109	91527	828527
23007	3850594	26110	861110	91722	3819722
23011	3580818	26277	861277	91723	3819723
23013	3581070	26335	861335	92131	828131
23014	3583647	26336	861336	92175	827175
23020	3888822	26337	861337	92187	828187
23021	3888917	26340	861340	92914	812914
23022	3888821	26341	861341	92916	812916
23023	3859050	26404	860404		
23028	22612828	26645	860645		
23035	21951416	26828	3581065		
23041	3588435	26997	860997		
23042	876955	30031	833669		
23043	876618	30033	3817033		
23044	876623	30071	22185019		
23045	876625	30099	876099		
23046	876619	30181	874502		
23047	873992	30199	876199		
23048	3838406	30308	3862308		
23050	877063	30317	3885317		
23052	3830455	30350	275350		
23053	925278	30488	21423488		
23054	876321	30514	21302969		
23055	876438	30530	829532		
23194	877194	30548	876548		
23201	877201	30645	8676498		
23202	877202	30714	22185027		
23203	877203	30722	875722		
23380	21189380	30731	31419556		
23422	21189422	30758	3586758		
23426	21189426	30770	873770		
23842	21105842	30774	3581774		
23876	22383876	30808	834339		
23967	21704967	30834	22389354		
23968	21704968	30861	3817861		
2401-1	23211287	30965	3848965		
2401-20	23211290	41098	41100098		
2401-5	23211288	41276	41100276		
2402-1	22479638	80050	21132189		
2402-20	22479643	80100	3580100		
2402-5	22479642	90028	21165389		
2403-1	22479650	90029	21165390		
2403-20	22479647	90030	3582725		
2403-5	22479648	90032	23556421		
2404-025	85108974	900472	23557470		
2405-5	22574246	90051	21228429		
2406-1	85122800	90061	3883844		
2406-5	1161995	900612	1275549		
2407	3809449	900613	21584008		
2408-020	828250	90261	30731261		
2408-400	2618330	90262	30731262		
2413	21699860	90263	30731263		
2416-5	21699859	90380	3580380		
2418-1	3809446	90524	30731264		
2418-5	3809445	90525	30731265		
2418-20	3809444	91254	828254		
26018	861018	91422	828422		
26066	3581066	91526	828526		



Spare parts from Sweden



Spare parts from Sweden

11043	15043	271051	11051	807078	18078	833781	13781
11044	19044	271054	11022	809444	15444	833878	15878
11065	15065	271063	11063	812914	92914	833913	19913
11072	19072	271066	11025	812916	92916	833915	19915
11096	12096	271214	11214	813967	19967	833926	22926
17253	19053	271215	11215	814030	19030	833950	22050
17276	19276	271217	11019	814301	19301	833998	16100
18559	19559	271975	15975	814356	19356	834339	30808
35254	18254	272002	11202	814359	19359	834751	16751
82744	15744	272004	11200	818262	11262	834975	18975
82745	15745	272012	11203	818359	16400	835304	18304
125017	19017	273663	17663	818407	17407	835308	18308
181268	19068	275282	11082	823661	15661	835440	14440
181286	19286	275283	11083	823662	17662	835702	18702
181287	19087	275331	11531	823770	16827	835704	18704
181288	19288	275332	11532	824532	16532	835705	18705
181289	19289	275333	11533	824552	18552	835779	14779
181301	19006	275334	11534	825599	16599	835874	15874
181355	15355	275336	11536	826341	19278	835998	18998
181413	19413	275337	11337	826493	17493	836169	15169
181620	19620	275338	11338	826870	19870	838066	13066
181799	11799	275339	11339	827011	15011	838224	16300
181804	19804	275350	30350	827175	92175	838287	17287
183247	19247	275369	11369	828064	16725	838619	17619
183272	19272	275740	13740	828131	92131	838637	12637
183374	19374	275751	11651	828140	19140	838638	12638
183390	19390	366906	19906	828187	92187	838652	13652
183391	19391	419292	12292	828250	2408-020	838653	13653
183512	19250	419310	13009	828254	91254	838654	13654
183765	15765	419368	12368	828422	91422	838775	13775
183834	19700	419643	13643	828526	91526	838807	14807
183859	19859	419678	13100	828527	91527	838928	15928
184654	19654	419735	12005	829207	18207	838929	19929
184682	19008	423135	14974	829532	30530	839091	18091
184683	19683	425784	12784	829587	18587	839195	19195
184691	19691	430039	13039	829646	22646	839253	19253
184778	19778	463377	12377	829714	15714	839354	18354
191844	19844	463395	12395	829895	15895	839423	19423
192212	11033	463416	11416	829913	17913	839534	19534
233179	17179	463526	12526	831009	15109	839696	18696
233842	18842	463902	11902	831986	12986-1	840115	13115
233897	17897	463903	11032	832158	19158	840569	13569
237666	17666	463905	11905	832191	19191	840597	17597
238258	18258	465547	11611	832570	19570	840902	16902
240149	18149	466383	12383	832598	19598	841063	15304
241669	18669	466384	12384	832598	19598-1	841161	17161
243657	18657	468305	13305	832669	19669	841243	18243
243658	18658	471034	14034	832675	19075	841244	18244
243797	18797	477026	11031	832716	18716	841262	18262
243799	18799	653190	19106	832820	22080	841262	18560
243801	18801	682694	19107	832831	19831	841263	18263
243903	18903	803762	22062	832846	19846	841292	17292
270081	11081	804190	19190	832934	19334	841293	17293
270115	11115	806341	16341	832965	19965	841750	14750
270136	11136	806620	19004	833274	13274	841893	19617
270137	11137	806624	19624	833583	16200	841926	18926
270762	22762	806660	19660	833669	30031	842280	17280
270906	11906	807036	15036	833780	13780	842768	16730
						843323	22323



Spare parts from Sweden

845354	15354	858467	15467	861477	17477-I	875571	18571
847605	18605	858481	16415	861477	17477	875574	15574
847741	14741	858488	17488	861551	15134	875580	15580
849170	22144	858955	19955	861563	18563	875584	15584
850710	17710	859015	16374	861564	18564	875686	19686
850834	19834	859031	14031	861603	14603	875698	15698
850888	19888	859034	17034	861688	11610	875722	30722
850889	19889	859035	14035	861698	12698	875756	15756
851407	19407	859036	14036	861701	12701	875757	21757
851756	19756	859038	11038	861703	12703	875769	22137
852018	19018	859039	11039	861906	16750	875780	15780
852705	18706	859042	13042	861907	16190	875783	15783
852835	19835	859043	13043	862393	17648	875785	15785
852835	19835-I	859044	13044	866653	16653	875791	15791
852868	19015	859093	13093	870690	18690	875796	15796
852904	18355	859094	13094	872096	19507	875805	19805
853048	18048	859120	13399	872139	19139-I	875805	19805-I
853175	18175	859134	13127	872139	19139	875809	19809
853223	19279	859135	13376	872362	18862	875809	19809-I
853255	19255	859137	13453	872363	18863	875810	19810
853542	19542	859138	13497	872368	18006	875810	19810-I
853868	19868	859140	16140	872533	19533	875812	19812
853871	19871	859145	16098	872752	19752	875812	19812-I
854031	19766	859148	13498	872793	19793	875814	15814
854045	19785	859150	13150	872793	19793-I	875815	19815
854047	19261	859151	13070	873395	19395	875821	19821
854133	19133	859152	13531	873411	20411	875821	19821-I
854300	19300	859155	13155	873412	20412	875822	19822
854357	19357	859159	11159	873413	20413	876054	21054
854541	19541	859189	14189	873415	20415	876069	14069
855105	19705	859194	16194	873770	30770	876080	15097
855297	17297	859224	13024	873992	23047	876099	30099
855387	16387	859225	13025	874502	30181	876114	11114
855389	19389	859428	17428	875271	11271	876120	15120
855506	12506	859647	13647	875302	11302	876144	16673
855507	18507	859782	17782	875304	11304	876161	11161
855513	16513	859824	15824	875305	11305	876185	17185
855578	15578	859963	16963	875306	11306	876199	30199
855617	19618	860388	18388	875307	11307	876224	22011
855656	19656	860396	19596	875308	11308	876266	19029
855686	17686	860404	26404	875330	11330	876266	19741
855694	19694	860645	26645	875331	11331	876267	19267
855728	15335	860997	26997	875332	11332	876268	19010
856044	16633	861014	17101	875333	11333	876286	19983
856470	17803	861018	26018	875363	18363	876294	19294
856883	16804	861109	26109	875372	19372	876300	21300
856891	16384	861110	26110	875383	15383	876301	21301
856894	16894	861250	14250	875387	21387	876302	21302
857037	16037	861251	14251	875404	18404	876303	21303
857621	13783	861255	11609	875422	21422	876304	21304
857633	17633	861277	26277	875483	11238	876305	15305
858065	15883	861335	26335	875484	11139	876306	21306
858161	22325	861336	26336	875498	11498	876307	21307
858161	22325-45	861337	26337	875499	11499	876308	21308
858268	17307	861340	26340	875512	19827	876309	21309
858358	17358	861341	26341	875531	19531	876310	21310
858459	17459	861473	14473	875550	11550	876314	21314
858464	19464	861476	14476	875560	11560	876321	23054
						876335	21335



876341	21561	877118	19118	952986	16010	993430	19430
876342	21400	877119	19119	955972	14114	997368	19565
876348	21418	877120	19120	955974	19974	997641	15918
876349	21349	877121	19121	955981	17981	1140639	17108
876350	21813	877122	19122	955989	19989	1161995	2406-5
876356	21359	877194	23194	956000	19000	1218630	12513
876356	21401	877201	23201	963699	22093	1218634	11014
876357	21357	877202	23202	966382	18382	1218706	14706
876358	21569	877203	23203	966385	18385	1275549	900612
876361	21361	877349	15784	966387	18387	1306169	18169
876376	21553	877355	15779	966391	18391	1306341	13341
876377	21500	877373	22136	966694	18548	1317792	12792
876378	21378	877373	22136-2	966698	18698	1317793	12793
876379	21379	877386	22182	966700	18700	1324750	18750
876380	21572	877419	21800	966707	18707	1336255	15625
876381	21381	877766	17162	966808	19808	1336763	12006
876382	21382	877767	17109	966891	18805	1336767	12767
876384	21384	889455	19455	966900	18900	1346144	14144
876388	21388	889970	11613	966903	18003	1378645	13645
876389	21389	897170	11170	966906	18906	1378646	13646
876391	19720	897315	19315	966907	18283	1378864	14864
876392	19392	897367	19367	966912	16912	1378870	12870
876392	19399	897426	19426	966931	18931	1378879	16879
876393	21423	897682	19682	966933	18327	1378909	13909
876393	21433	897726	19726	966938	18330	1378913	16913
876394	21394	897848	17848	966942	18942	1378914	14914
876397	19591	897873	19873	966978	18978	1378960	12960
876417	21417	899734	22734	966980	18980	1542077	12079
876422	21604	907023	19023	966981	18981	1542078	12079
876427	21427	907025	19025	966990	18990	1542123	16123
876430	21430	914462	15462	967111	18111	1542287	13287
876431	21431	914533	15533	967123	18123	1542303	17303
876438	23055	925093	19093	967193	18193	1542389	12389
876448	21023	925256	19256	967344	19095	1542472	12472
876511	11511	925258	19258	967707	19707	1542591	15591
876515	11515	925259	19259	968927	15067	1544119	13119
876519	11519	925260	19260	969071	19071	1545198	12798
876548	30548	925261	19201	973487	18487	1674083	15083
876618	23043	925278	23053	973534	18534	2618330	2408-400
876619	23046	940191	19091	973593	19593	3183211	12211
876623	23044	941809	19009	976483	18483	3517857	14057
876625	23045	941816	19816	976489	18383	3547603	12603
876631	19848	941873	22092	976492	18843	3555413	15413
876632	19630	942791	19791	977313	19313	3580063	15063
876633	19828	943218	19218	977542	18542	3580100	80100
876638	19638	943353	17353	978367	18367	3580309	13309
876639	23001	943414	13414	978457	18457	3580316	13316
876655	21655	945624	18624	978482	18482	3580365	15263
876774	21362	945624	18624	978510	18310	3580380	90380
876793	20793	946438	19438	978515	18311	3580509	17509
876794	19794	947904	19904	978547	18547	3580818	23011
876840	19840	948187	14001	978710	18711	3580888	12888
876955	23042	948616	19616	978750	18498	3580890	12890
877063	23050	949656	18656	981965	18179	3580892	12892
877094	11612	949807	19007	984222	19222	3581065	26828
877115	19115	951924	19924	984223	15223	3581066	26066
877116	19116	951936	19936	984224	19224	3581070	23013
877117	19117	952980	16007	985151	19151	3581078	17306



Spare parts from Sweden

3581078	17201	3807613	19613	3852696	19496	3863071	16071
3581460	18460	3807890	19890	3852865	19865	3863080	19080
3581536	11614	3809167	13136	3852866	19566	3863083	19083
3581760	17760	3809167	13749	3852959	19959	3863084	19084
3581774	30774	3809444	2418-20	3853329	19329	3863085	19085
3581889	12889	3809445	2418-5	3853368	18368	3863090	19790
3582069	14048	3809446	2418-1	3853412	16412	3863191	16191
3582310	17310	3809449	2407	3853796	15853	3863450	19450
3582324	12324	3809625	18625	3853801	18845	3863480	19395-1
3582424	18424	3817033	30033	3853815	18070	3875347	11347
3582432	13993	3817517	17517	3853850	15850	3883844	90061
3582435	21103	3817861	30861	3853945	19845	3883845	21802
3582561	12653	3818424	15738	3854001	18400	3884010	12886
3582563	22138	3819722	91722	3854003	18403	3884015	12887
3582595	22139	3819723	91723	3854003	18984	3885317	30317
3582596	21395	3825038	17038	3854077	18077	3885323	11323
3582597	21453	3825723	12058	3854130	19130	3886848	15848
3582606	12652	3829312	15312	3854161	18161	3888324	18324
3582725	90030	3830455	23052	3854249	19249	3888325	18325
3583089	15089	3830459	15459	3854260	18260	3888326	18326
3583115	15115	3831424	15269	3854261	18426	3888491	19497
3583647	23014	3831425	15787	3854286	15512	3888555	19555
3583679	12861	3831426	15788	3854311	18431	3888814	19814
3583681	12862	3838207	15207	3854331	18331	3888817	19817
3583786	13742	3838288	15288	3854480	19480	3888821	23022
3583787	21104	3838406	23048	3854548	18454	3888822	23020
3583788	21105	3838852	17027	3854595	19595	3888916	19916
3583913	15198	3838852	17027-30	3854624	19724	3888917	23021
3584062	15062	3838952	17952	3854625	19625	3889784	19784
3584086	18087	3839110	15110	3855081	19081	3889786	19786
3584145	17145	3840525	14525	3855275	23006	5383613	22613
3584202	13202	3840816	15261	3855411	19411	8149182	15266
3584442	19498	3843136	19136	3855991	15991	8631650	12650
3586494	15807	3847499	16656	3856002	23002	8631651	12651
3586758	30758	3847501	16501	3856036	15566	8676498	30645
3586765	19051	3847644	17644	3856502	19646	8692305	17305
3586765	19985	3848965	30965	3857168	18532	8694630	19403
3586871	11687	3849006	19003	3857176	19019	9139282	13623
3586877	11877	3850426	19069	3857650	17650	9139283	13990
3587508	15509	3850559	14559	3857835	18835	9139284	13008
3588434	21804	3850594	23007	3858340	15340	20739057	12057
3588435	23041	3850812	19612	3858399	19499	21105842	23842
3588475	15475	3850852	19949	3858870	16870	21132189	80050
3588745	19745	3850942	19942	3859050	23023	21134777	17323
3588746	19746	3852029	18029	3860086	18086	21139810	17811
3588748	19746-1	3852045	19905	3860183	19183	21141637	15637
3588753	19753	3852217	18217	3860232	19619	21160912	18912
3588770	19745-1	3852272	18272	3860703	15952	21165389	90028
3589322	21801	3852315	19316	3861575	19475	21165390	90029
3593573	15573	3852336	18336	3862014	18549	21171277	17277
3593654	15654	3852352	19097	3862178	23005	21189380	23380
3593655	15655	3852390	19060	3862228	17228	21189422	23422
3593981	19981	3852390	19819	3862308	30308	21189426	23426
3594509	19509	3852464	18464	3862387	19387	21196919	17919
3801757	12546	3852468	16468	3862627	16061-1	21212799	15799
3803909	19135	3852472	16472	3862867	19867	21212800	15800
3807400	19400	3852504	18504	3862903	19903	21212801	15801
3807401	19401	3852548	19448	3863061	16061	21214596	15596



21214599	15599	21951453	22453	60112158	11955
21219723	15723	21951465	22465	60114327	22099
21228429	90051	22030848	17732	85107763	19763
21255090	15090	22030852	17901	85108974	2404-025
21302969	30514	22057107	14337	85122800	2406-1
21314684	18684	22185019	30071	36000300-0	22049
21368879	17879	22185027	30714	36000400-0	22061
21371111	21805	22222936	15808	36003000-3	22051
21371112	21803	22274884	19548		
21379102	15102	22274887	19012		
21380886	15886	22274888	19013		
21380890	15890	22303438	19932		
21405493	18493	22383876	23876		
21405494	18494	22389354	30834		
21407026	18026	22479638	183354		
21407028	18028	22479642	183474		
21418999	22999	22479643	2402-20		
21419374	15374	22479647	2403-20		
21419376	15376	22479648	2403-5		
21423488	30488	22479650	2403-1		
21426987	18987	22574246	2405-5		
21492771	17987	22612828	23028		
21501189	12171	22618325	14879		
21549542	14390	22651246	19305		
21549544	14621	22691232	12068		
21584008	900613	22994993	15649		
21613426	15639	23075752	19127		
21624740	17874	23164609	19814-1		
21634017	18017	23172849	19875		
21646645	17535	23211287	2401-1		
21699859	2416-5	23211288	2401-5		
21699860	2413	23211290	2401-20		
21702999	17999	23307655	19124		
21704967	23967	23307656	19123		
21704968	23968	23556421	90032		
21707132	14556	23557240	12545		
21707133	14736	23557470	900472		
21707134	14634	23686345	17065		
21718912	17443	30677767	19767		
21730344	15660	30713459	13459		
21730348	15587	30731261	90261		
21752712	19712	30731262	90262		
21868042	19042	30731263	90263		
21951188	18188	30731264	90524		
21951302	15384	30731265	90525		
21951334	15334	30731809	18809		
21951342	15583	30788490	14490		
21951346	15811	31251252	18252		
21951350	15575	31261191	17191		
21951352	15662	31293668	19404		
21951356	15593	31359568	12306		
21951362	15362	31419556	30731		
21951384	22384	40005192	19192		
21951386	22386	41100098	41098		
21951392	22392	41100276	41276		
21951404	22404	43957300	15300		
21951416	23035	43957301	15301		
21951439	22439	43957302	15302		



Spare parts from Sweden



Spare parts from Sweden

16800	724770-13200	8-41300	104211-41300
60000	728170-92600	8-42000	128397-42500
60001	728171-92601	8-42001	728270-42002
60002	728270-92605	8-42280	121850-42280
60003	728374-92605	8-42310	129940-42310
60004	729171-92600	8-42780	104214-42780
60005	729270-92601	8-44150	119574-44150
60006	729470-92605	8-50233	41650-502330
60007	729573-92605	8-52010	105582-52010
60008	719171-92602	8-55020	120650-55020
60009	719173-92600	8-55710	104500-55710
8-02660	196440-02660	8-55711	129574-55711
8-03000	25132-003000	8-55712	129470-55702
8-03300	25137-003300	8-55713	41650-502320
8-03700	25112-003700	8-55714	119773-55510
8-04271	104271-77350	8-55801	119802-55801
8-04300	25152-004300	8-56540	128171-12540
8-04500	25132-004500	8-56541	128270-12540
8-04514	104514-77350	8-56542	129470-12330
8-04600	25132-004600	8-56543	119593-18880
8-10421	104211-77010	8-77260	119775-77260
8-11957	119573-77200	8-77790	105582-77790
8-11977	119773-77200	8-78780	104511-78780
8-12137	121370-77200	8-91340	128275-91340
8-12185	121857-55710		
8-12350	123500-77010		
8-12408	124080-77201		
8-12540	124770-12540		
8-12817	128170-77010		
8-12827	128271-77200		
8-12947	129470-77200		
8-12969	129698-77010		
8-12977	129772-77200		
8-18790	119574-18790		
8-18880	119195-18880		
8-19593	119593-42280		
8-19773	119773-77010		
8-20020	27210-200200		
8-20030	27210-200300		
8-20055	27210-200550		
8-24001	104211-42071		
8-24002	128176-42071		
8-24003	124223-42092		
8-24004	129670-42531		
8-24005	120650-42310		
8-24006	119574-42552		
8-24007	128990-42200		
8-24008	119773-42600		
8-24009	119593-42202		
8-25132	25132-003700		
8-28670	128670-77350		
8-29671	129671-42280		
8-35100	119593-35100		
8-35113	124085-35113		
8-35150	127695-35150		
8-35151	119305-35151		
8-35152	129150-35152		
8-35153	119770-90620		



Spare parts from Sweden

104211-41300	8-41300	25112-003700	8-03700
104211-42071	8-24001	25132-003000	8-03000
104211-77010	8-10421	25132-003700	8-25132
104214-42780	8-42780	25132-004500	8-04500
104271-77350	8-04271	25132-004600	8-04600
104500-55710	8-55710	25137-003300	8-03300
104511-78780	8-78780	25152-004300	8-04300
104514-77350	8-04514	27210-200200	8-20020
105582-52010	8-52010	27210-200300	8-20030
105582-77790	8-77790	27210-200550	8-20055
119195-18880	8-18880	41650-502320	8-55713
119305-35151	8-35151	41650-502330	8-50233
119573-77200	8-11957	719171-92602	60008
119574-18790	8-18790	719173-92600	60009
119574-42552	8-24006	724770-13200	16800
119574-44150	8-44150	728170-92600	60000
119593-18880	8-56543	728171-92601	60001
119593-35100	8-35100	728270-42002	8-42001
119593-42202	8-24009	728270-92605	60002
119593-42280	8-19593	728374-92605	60003
119770-90620	8-35153	729171-92600	60004
119773-42600	8-24008	729270-92601	60005
119773-55510	8-55714	729470-92605	60006
119773-77010	8-19773	729573-92605	60007
119773-77200	8-11977		
119775-77260	8-77260		
119802-55801	8-55801		
120650-42310	8-24005		
120650-55020	8-55020		
121370-77200	8-12137		
121850-42280	8-42280		
121857-55710	8-12185		
123500-77010	8-12350		
124080-77201	8-12408		
124085-35113	8-35113		
124223-42092	8-24003		
124770-12540	8-12540		
127695-35150	8-35150		
128170-77010	8-12817		
128171-12540	8-56540		
128176-42071	8-24002		
128270-12540	8-56541		
128271-77200	8-12827		
128275-91340	8-91340		
128397-42500	8-42000		
128670-77350	8-28670		
128990-42200	8-24007		
129150-35152	8-35152		
129470-12330	8-56542		
129470-55702	8-55712		
129470-77200	8-12947		
129574-55711	8-55711		
129670-42531	8-24004		
129671-42280	8-29671		
129698-77010	8-12969		
129772-77200	8-12977		
129940-42310	8-42310		
196440-02660	8-02660		



Spare parts from Sweden





